Just for your RS-80® COLOR TDP System 100 Dragon & MC-10

August 1984

Canada $4.95 U.K. £3.35 $3.95

The RAINBOW®

THE COLOR COMPUTER MONTHLY MAGAZINE

OUR GAMES ISSUE

Find the Dragon's Gold

Take the M*A*S*H Trivia Quiz

Fly the 'Sopwith CoCo'

The Trip
A Joystick Adventure

'Byte Master'
A New ML Column For Beginners

Plus
MORE GAMES, GRAPHICS, UTILITIES, TUTORIALS AND DOZENS OF HARDWARE AND SOFTWARE REVIEWS

MAILED 07/09/84 27453 8501
Bonnie VanScherpe
3504 Day #D
SanMateo CA 94402
08
0 44254 00001

New From Tom Mix

Worlds of FLIGHT

Not A Game — A Very Realistic Flight Simulation



WORLDS OF FLIGHT (WOF) Is e "view" oriented flight simulation for the TRS-80 Color Computer, written entirely in Machine Languege. "View" oriented means that the pilot mey determine his or her position by actually viewing the surrounding landmarks as opposed to using instruments which sense, navigetionel references. This is a major departure from "instrument only" simuletions which cen be achieved through BASIC programs. Most instrument maneuvers and procedures may be practiced. The craft is a light weight, single engine airplane with low wings. A nose wheel which is both steerable and retractable is also modeled. Some aerobatics are possible including sustained inverted flight, aileron rolls, spins and stalls.

JOYSTICKS REQUIRED
32K MACHINE LANGUAGE
TAPE $29.95 DISK 32.95

The Experts Say:

C.L. — "As a pilot I found "Flight" to be an outstanding simulation."

M.H. — "No one has created a more realistic flight simulator for the Color Computer."

D. HOOPER, pilot for major airline — "An outstanding flying experience, Very realistic."

TOM MIX SOFTWARE
4285 BRADFORD N.E.
GRAND RAPIDS, MI 49506

•ADD $1.50 POSTAGE & HANDLING•TOP ROYALTIES PAID•
•MICHIGAN RESIDENTS ADD 4% SALES TAX•
LOOKING FOR NEW SOFTWARE

ARCADE ACTION GAMES

TO ORDER CALL 616/957-0444

From Computer Plus to YOU . . .

PLUS after PLUS after PLUS

Model 100 8K $495
Model 100 24K $625

Color Computer II
w/16K Ext. Basic $165
w/64K Ext. Basic $210



Model 4 16K $679
Model 4 64K
2 Disk & RS232 $1215

DMP120 $385
DMP200 $520

Color Computer Disk Drive
Drive 0 $289 Drive 1 $220



DWP210 $610

BIG SAVINGS ON A FULL COMPLEMENT OF RAOIO SHACK COMPUTER PROOUCTS

COMPUTERS

Model 4 Portable 64K w/2 Drives	1149
Model 2000 2Dr	2299
Model 12 1 Drive	2360
Model 16B 1Dr 256K	3965

MOOEMS

Hayes Smartmodem II	225
AC-3	125
DC Modem I	89
DC Modem II	160

PRINTERS

Silver Reed EXP400 D.W. Par.	309
Silver Reed EXP550 D.W. Ser.	525
CGP115	159
CGP220 Ink Jet	545
DMP110	305
Toshiba 1340 (24 wire head)	779
Gemini 10X	289
Gemini Powertype	345
Panasonic P1091	305
Smith Corona Fastext	195
Prowriter 8510	345
Okidato and Epson	CALL

ETC.

Disk Drive Controller	139
Extended Basic Kit	39.95
PBH Ser/Par Conv.	69
64K Rom Chips	62.95
Deluxe Keyboard	35.95
HJL Keyboard	79.95
CCR-81 Recorder	52
Deluxe Joystick (each)	35.95
Joysticks (pair)	22
Video Plus (monitor adapter)	24.95
Video Plus IIC	39.95
Amdek Color 1+ Monitor	299
Amdek Video 300 Green	145
Amdek Video 300 Amber	159
Taxan Color 210 Monitor	285
Taxan Green	130
Taxan Amber	139

SOFTWARE (Tape Version)

Zaxxon	34.95
The King	26.95
Trap Fall	27.95
Buzzard Bait	27.95
Devil Assault	27.95
Colorpede	29.95
Juniors Revenge	28.95
Pac Attack	24.95
Block Head	26.95
Froggie	24.95
Lunar Rover Patrol	24.95
Lancer	24.95
Typing Tutor	23.95
Galagon	24.95
Scott Adams Adventures	19.95
Sea Dragon	34.95
Colorcome	49.95
Telewriter 64	49.95
O-Pak (disk)	34.95
Key-264K	39.95
Elite-Calc	59.95
VIP Writer	59.95
VIP Calc	59.95
VIP Terminal	49.95
VIP Database (disk)	59.95

Order any 2 software pieces listed and take 10% off their listed price. All Radio Shack software 10% off list. Send for complete list.

CALL TOLL FREE
1-800-343-8124

- *LOWEST POSSIBLE PRICES*
- *BEST POSSIBLE WARRANTY*
- *KNOWLEDGEABLE SALES STAFF*
- *TIMELY DELIVERY*
- *SHOPPING CONVENIENCE*

VISA

computer plus

P.O. Box 1094
480 King Street
Littleton, MA 01460 SINCE 1973

IN MASSACHUSETTS CALL (617) 486-3193

TRS-80 is a registered trademark of Tandy Corp.

18

61

170

Under The RAINBOW

FEATURES

Surviving On Safari/*Robert Rogers* — 18
GAME *It's a jungle out there!*

Disk Files Of Data/*Bill Nolan* — 22
DISK TUTORIAL *Developing a database manager program*

Climbing The Ladder/*Charles Husak* — 25
GAME *. . .But watch out for the dragon*

Catching Those Gremlins/*H. Allen Curtis* — 61
UTILITY *An error-trapping program*

Incoming Wounded!/*Milt Tanzer* — 67
GAME *M*A*S*H trivia quiz*

CoCo Takes Flying Lessons/*William G. Franklin* — 74
SIMULATION *Flight Simulation update*

Making Sense From Your Dollars/*Leonard Hyre* — 84
FINANCE *Projecting your IRA earnings*

On The Road Again/*Jacques Bourgeois* — 90
GAME *An adventurous trip in your CoCo car*

An Addition To Your CoCo Manual/*Andy Kluck* — 109
TUTORIAL *A new series on helpful techniques*

Another 'Simulating' Lesson/*Robert K. Tyson, Ph.D.* — 119
SIMULATION TUTORIAL *On creating Simulations*

Convert Those Paddles/*Helene M. LaBonville* — 131
HARDWARE TUTORIAL *An Atari-to-CoCo paddle conversion*

Interfacing Your Own Circuits, Part II/*T. Whit Athey, Susan C. Athey* — 138
HARDWARE TUTORIAL *Circuits to add to your interface board*

Air Raid On The Keyboard/*Gil Cummings* — 148
GAME *Sharpening your reflexes is the key to this game*

Salute Our Athletes/*Bill Duke* — 156
GRAPHICS *An Olympic display*

Speed Check Your Disk Drives/*Roger Schrag* — 164
DISK UTILITY *This utility can save you repair costs*

Cooking With CoCo/*Colin J. Stearman* — 170
EXPANDING BASIC *Part II on enhancing your DOS*

Back Up Those Diskettes/*Wayne Duncan* — 229
UTILITY *Backup your disk, on cassette*

DEPARTMENTS

Advertiser Index — 273
Back Issue Information — 259
Corrections — 130
Letters To Rainbow — 6
The Pipeline — 152
Rainbow Info — 73
Received And Certified — 194
Reviewing Reviews — 198
Scoreboard — 266
Scoreboard Pointers — 268
Submitting Material To Rainbow — 230
Subscription Information — 231
These Fine Stores — 270

NEXT MONTH: September is back to school time, which means THE RAINBOW will emphasize education for students, parents, and teachers. From a lesson on how to tell time to a lesson on making Simulation games, THE RAINBOW will give you the ABCs of the classroom and the CoCo. We'll have word puzzles, a math logic program, a quiz on past presidents, two educational columns, as well as our usual colorful blend of programs, tutorials, games, utilities and reviews.

Look for the September RAINBOW for more on the Color Computer than is available from any other source.

The small cassette tape symbols beside features and regular columns indicate that the program listings with those articles are on this month's RAINBOW ON TAPE, ready to *CLOAD* and *RUN*. For full details, check our RAINBOW ON TAPE ad on Page 126.

'ER art © by Fred Crawford

The RAINBOW
August 1984 Vol. IV No. 1

COLUMNS

BASIC Training/*Joseph Kolar* — 158
Having fun with graphics characters

Bits And Bytes Of BASIC/*Richard White* — 115
A little string printing

Building August's Rainbow/*Jim Reed* — 16
A discussion of our product reviews

Byte Master/*R. Bartly Betts* — 236
A new assembly language column

CoCo Graphics/*Don Inman* — 134
Learning takes shape with Color LOGO

Earth To Ed/*Ed Ellers* — 240
Beam up those "tech" questions

Education Notes/*Steve Blyn* — 107
CoCo can be a plus in learning signed numbers

Education Overview/*Dr. Michael Plog* — 51
The microcomputer grows in the classroom

PRINT #-2,/*Lawrence C. Falk* — 12
Editor's Notes

School Is In The Heart Of A Child/ *Bob Albrecht, Ramon Zamora* — 53
Words worth learning

Turn Of The Screw/*Tony DiStefano* — 190
Clearing up popular misconceptions

Wishing Well/*Fred Scerbo* — 38
Programs to get you ready for school

Dale Peterson's "Greetings From Uncle Bert" will return next month.

RAINBOWTECH

Downloads/*Dan Downard* — 244
Answers to your technical questions

hogg_wash/*Frank Hogg* — 246
Building logical pathways

KISSable OS-9/*Dale L. Puckett* — 257
Some assembly language tips

Personable Pascal/*Daniel A. Eastham* — 250
Expressions and statements

PRODUCT REVIEWS

Product Review Contents — 193

Editor and Publisher
Lawrence C. Falk

Managing Editor James E. Reed
Senior Editor Courtney Noe
Technical Editor Dan Downard
Copy Editor Susan Remini
Submissions Editor Jutta Kapfhammer
Editorial Assistants Valarie Edwards, Wendy Falk, Suzanne Kurowsky, Lynn Miller, Shirley Morgan, Noreen Morrison, Kevin Nickols
Technical Assistant Ed Ellers
Contributing Editors Bob Albrecht, Steve Blyn, Tony DiStefano, Dan Eastham, Frank Hogg, Don Inman, Joseph Kolar, Dale Peterson, Michael Plog, Dale Puckett, Fran Saito, Paul Searby, Fred Scerbo, Richard White
Art Director Sally Nichols
Assistant Art Director Jerry McKiernan
Designers Peggy Henry, Neal C. Lauron, Kevin Quiggins
Advertising Manager Charlotte Ford
Advertising Assistant Debbie Baxter (502) 228-4492
General Manager Patricia H. Hirsch
Asst. General Manager for Finance Donna Shuck
Bookkeeper Diane Moore
Advertising Accounts Doris Taylor
Dealer Accounts Judy Quashnock
Administrative Assistant to the Publisher Marianne Booth
RAINBOWfest Site Management Willo Falk
Director of Fulfillment Services Bonnie Shepard
Asst. Customer Service Manager Deidra Henry
Customer Service Representative Sandy Apple
Word Processor Manager Lynda Wilson
RAINBOW ON TAPE Subscriptions Monica Wheat
Research Assistants Laurie Falk, Wanda Perry, Loretta Varda, Kara Volt
Dispatch Mark Herndon
Production Assistant Melba Smith

Advertising and Marketing Office for the Western states and provinces: Cindy Shackleford, director, 12110 Meridian South, Suite B, P.O. Box 73-578, Puyallup, WA 98373-0578. Phone: (206) 848-7765. Territories included: AK, AZ, CA, CO, HI, ID, MT, NV, NM, OR, UT, WA, WY, Canadian Provinces of Alberta, British Columbia, Saskatchewan.

THE RAINBOW is represented in the Eastern United States by Garland Associates, Inc., P.O. Box 314, S.H.S., Duxbury, MA 02331, (617) 934-6464 or 934-6546. Advertisers east of the Mississippi may contact them for further information. Territories included: AL, CT, DE, DC, FL, GA, IL, IN, KY, ME, MD, MA, MI, MS, NC, NH, NJ, NY, OH, PA, RI, SC, TN, VA, VT, WV, WI, Canadian Provinces of Ontario, Quebec.

THE RAINBOW is published every month of the year by FALSOFT, Inc., 9529 U.S. Highway 42, P.O. Box 385, Prospect, KY, 40059. Phone (502) 228-4492. THE RAINBOW and THE RAINBOW logotypes are ® trademarks of FALSOFT, Inc.

Second class postage paid Prospect, KY and additional offices. USPS N. 705-050 (ISSN No. 0746-4797). POSTMASTER: Send address changes to THE RAINBOW, P.O. Box 385, Prospect, KY 40059. Forwarding Postage Guaranteed. Authorized as second class postage paid from Hamilton, Ontario by Canada Post, Ottawa, Ontario, Canada.

Entire contents ® by FALSOFT, Inc., 1984. THE RAINBOW is intended for the private use and pleasure of its subscribers and purchasers and reproduction by any means is prohibited. Use of information herein is for the single end use of purchasers and any other use is expressly prohibited. All programs herein are distributed in an "as is" basis, without warranty of any kind whatsoever.

TRS-80, Color BASIC, Extended Color BASIC, Scripsit and Program Pak are ® trademarks of the Tandy Corp. CompuServe is a ® trademark of CompuServe Inc.

Subscriptions to THE RAINBOW are $28 per year in the United States. Canadian and Mexican rates are U.S. $35. Surface mail to other countries is U.S. $65, air mail U.S. $100. All subscriptions begin with next available issue.

Limited back issues are available. Please see notice for issues which are in print and costs. Payment accepted by VISA, MasterCard, American Express, Cash, Check or Money Order in U.S. currency only.

LETTERS TO THE RAINBOW

ARTS AND LETTERS

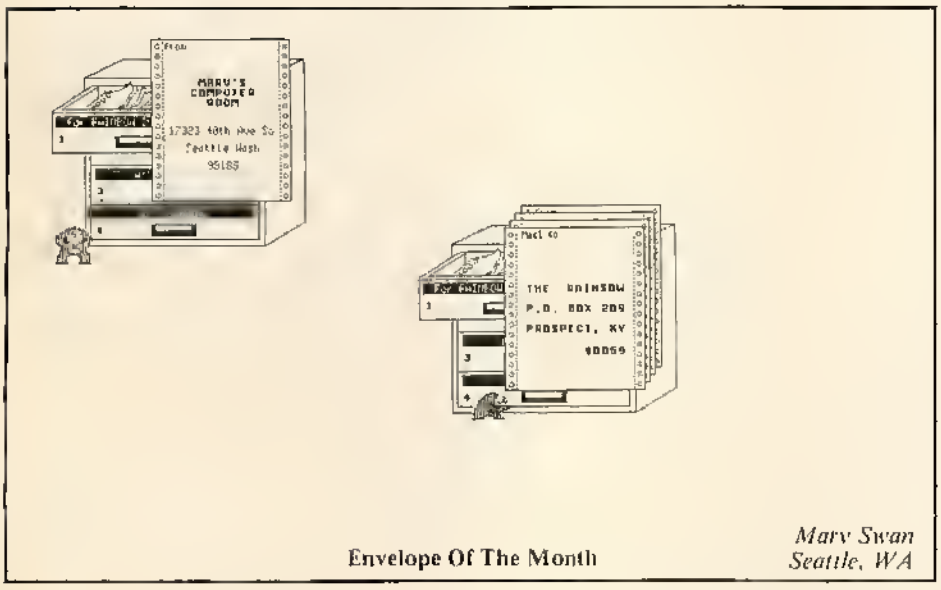

Envelope Of The Month

Marv Swan
Seattle, WA

A FLOWERY THANKS

Editor:

On behalf of the entire Garden State CoCo Users Group, we would like to thank THE RAINBOW staff for the excellent job they did with the New Brunswick RAINBOWfest. All the seminars were very helpful, the exhibitors were very friendly, and best of all, it was great meeting all the other CoCo users from around the U.S. Our group was very happy to help THE RAINBOW by manning a booth, and distributing posters and T-shirts. We are all looking forward to the Princeton RAINBOWfest.

Darren Nye, Secretary
Garden State CoCo Users Group

Editor's Note: We appreciate all your club did to make it a successful show.

HINTS AND TIPS

Editor:

If anyone ever asks you why their printer will not work on the Color Computer you can be nearly certain that the reason is that pin two on the serial I/O port is not being held high by the printer. I got the clue to this from reading the green technical manual put out by Radio Shack, which I was given at my local Radio Shack store when no one there knew the answer. For anyone making a cable, here is the way to do it.

Buy a cable with four pin connectors on each end from Radio Shack and cut it in two. Splice to one of these four-pin half cables a standard 25-pin D.B. plug and connect the following pins.

From the computer:	On the printer side:
pin 1 not used	
pin 2 green receive	pin 20 or any other +12
pin 3 red signal ground	pin 7 signal ground
pin 4 white send	pin 3 receive

The technical manual defined "high" as above three volts but I found that even an eight- or nine-volt line would not work. Most printers will have a pin 20 output which is 12 volts, and if not they generally will have another pin with +12 which will do just as well. It is a little peculiar that the computer's receive pin instead of its carrier detect pin is the one needing to be held high, but every machine has its idiosyncracies. And it took me a while to find this one, so I thought you might appreciate my passing it on.

Caution also on print speeds chosen (with the above-mentioned corrections) since the CoCo has no busy detect. So if it sends data faster than your printer can print it or buffer it, you will lose text.

Tom Lott
Savannah, GA

Editor:

You can turn your CoCo into a jukebox if you *CSAVE* the ML program generated by *Composer* or *Music+*.

1) Save each ML program to tape, leaving a short blank between them.

2) Press Reset if you have turned *AUDIO ON*. Typing *AUDIOOFF* or *NEW* or deliberately creating a SN Error won't do. The ML program will *EXEC*, but with no sound.

3) In the command mode type *FOR T=1 TO* number of tunes on the tape: *CLOADM: FOR R=1 TO* number of times to repeat each tune: *CLSRND(8) :EXEC :FOR P=1 TO 700* a short pause *:NEXT :NEXT :NEXT*.

4) Rewind tape, press *PLAY* then press ENTER.

The above can also be entered and run as a BASIC program, with an *ON T GOSUB* to some graphics routines instead of *CLSRND(8)*.

Composer music will not load into *Music+*. But all that work is not lost. *CSAVE* ML music from both programs on an all music tape. The above program will *EXEC* them all.

Now your CoCo sounds like an organ, works like a record player, with colors for flair.

I hope you will put more music in RAINBOW ON TAPE. *CTRYROAD* is number one on my Top 40.

Your magazine is the greatest!

Robert H. Little
Utica, MS

IT'S A CHECK PLUS

Editor:

I am one of your subscribers and I have been wondering for a while about a rectangle with a check mark and a lot of numbers. I have tried to unravel the mystery but I have not been albe to do so.

Will you please indicate to me if there is an explanation to what is inside the rectangle or if it is just some numbers without any explanation.

Editor's Note: Please read "Rainbow Check Plus" under RAINBOW Info on Page 73 of this issue for a full explanation.

BOUQUETS AND BRICKBATS

Editor:

I want to compliment two of your advertisers. One is Computer Plus for their super fast shipments to a very impatient CoCo owner.

The other is VIP Software. I doubt that there is anyone that has such a feature packed word processor for such a low price. To make it even more amazing, they "throw in" a 50,000 word speller at no additional cost.

Paul Frank
Buffalo Grove, IL

Editor:

I was most interested to read the letters from Joe Cain and John Spataro in the May 1984 issue, Page 206, because I have encountered some of the same problems with *VIP Terminal.*

Like Mr. Cain, I suffer from considerable loss of data when I use the default 51 characters-per-line screen which was one of the main reasons I bought *VIP Terminal.* And like Mr. Spataro, I encountered the same lack of interest on Softlaw's part when I tried to get some help.

A full month after I wrote to Softlaw, I received a form letter telling me that my question could be answered only if I would call them at an inconvenient hour of the afternoon. I found it rather difficult to understand how the manufacturer of *VIP Writer*, a truly excellent word processor, would be unable to communicate by letter. But in the interest of getting the problem solved, I managed to be near a phone at the proper hour one day and I called.

I spoke to Mr. Tom Saag of Softlaw's customer relations department. He was somewhat unsympathetic, and only moderately helpful. He suggested I ask the Bulletin Boards and databases with which I communicate to send nulls for line delay. But that is only a partial solution, because many of these services, including MCI Mail, are not equipped to send nulls.

I find it highly significant that Cer-Comp, in its advertisements for its new *Data Pack II* terminal program, puts "No lost information when using Hi-Res display on line" *first* on the list of features. On top of that, *Data Pack II* seems to have all the same bells and whistles that *VIP Terminal* has, and it has a buffer editor that *VIP Terminal* lacks — all for $15 less! Obviously, Cer-Comp found that a problem existed and did something about it. Why can't Softlaw do the same?

In its own advertising, Softlaw likes to emphasize its "professionalism," but the company is anything but professional in its treatment of its customers.

Neil Edward Parks
Beachwood, OH

GOOD SUPPORT

Editor:

I would like to publicly thank Software Support Inc. for their honesty and responsiveness in handling my disk drive order and the ROM change that was needed on it. "Support" is, in fact, their middle name. I hope all CoCo product companies follow their example.

Robert Shepard
Versailles, KY

Editor:

I recently ordered a program tape called *Custom Flashcards* from one of your advertisers, Creative Technical Consultants. After it arrived, I found that it took two or three tries to get past an I/O Error and get it loaded. I wrote the company and within two weeks I received a new *Custom Flashcard* tape, along with a 50 percent discount coupon "by way of apology for any inconvenience the defective tape may have caused me." The new tape works fine and the program is just great. I used the coupon to order another one of their programs called *Alphabet Soup*, and it worked perfectly too. (Now if I can just get my kids to quit playing *Alphabet Soup* long enough for me to study my *Flashcards*...) Anyway, it's great to deal with a company that cares about their product and my "inconvenience."

J.W. Abel
Denver, CO

SPREADING THE WORD

Editor:

Let me express my appreciation for the quality of RAINBOW. It by far outshines all other CoCo publications on the market.

I am the pastor of Grace Covenant Church in St. Louis. We are a small church, presently meeting in a home. I am writing to express a need we have for a printer. I have a 64K CoCo which I intend to use for word processing. It will be used for sermons, writing Sunday school materials, printing articles, and typesetting leaflets and tracts. Because of the size of the church, neither I nor the church can afford to purchase a printer at this time. I am hoping that one of your Christian readers might consider donating a printer to us, or selling us one at a low price. Your donation would be used for the glory of God. Please contact me at Grace Covenant Church, P.O. Box 1165, 63011 or call (314) 227-3238.

Pastor Mark S. Camp
Ballwin, MO

INFORMATION PLEASE

Editor:

I am an avid reader and user of RAINBOW magazine (the best of all the ones for the TRS-80). I've been wondering for quite some time if there is a Bible Concordance program available for disk? Write to: 7031 9th Avenue, H2A 3B5.

Dick Svendsen
Montreal, Quebec

LOOKING FOR POKE

Editor:

My friend and I are working on a computer program and we were wondering if there was a poke to disable the reset command. Also, we would really appreciate it if you knew if there was a poke to immediately make a program run after CLOADing it. Thanks for any information you can possible give us. 125 Guinea Road, 04005.

Marc Labbe
Biddeford, ME

Publisher's Clearance!

Official Version
Frogger
Leapin Lizards. Thousands sold at 24.95 **$9.95**

Avenger
Shoot'm up fun Reg sold at 24.95 **$9.95**

Scarfman
Eat em up Pac Man® Reg sold at 24.95 **$9.95**

Robot Attack
Robot, Robot, everywhere Reg sold at 19.95 **$9.95**

Happy Hurdler
Run fast and jump high. Reg. sold at 24.95 **$9.95**

Supplies Limited
603-924-9882

Carnival House
• 145 Grove Street
• Peterborough
• New Hampshire 03458
• 603-924-9882

GRAIN OF AN IDEA?

Editor:

We have a TRS-80 CoCo 2 and have found our best source of program has been your magazine. We have enjoyed the games and business programs.

There is a type of program we haven't been able to find. We are grain farmers and we would love to be able to use our computer more in our farm operations. We are looking for any program that would help us with grain farm management.

If you know of any programs or any other farmers that might know of some programs, we would like to hear from you. RT #2, 83420.

Dennis Rogers
Ashton, ID

A REAL SCOUT

Editor:

I would like to inform your readers of my experience with a program that I have not seen reviewed anywhere. A few months ago I purchased *Compu Scribe B.S.A.* from Color Connection Software. The ad states you can keep tabs on the whole troop, and create a printout by scout rank or alphabetically. This is true and looks rather impressive, especially if a scout has really worked hard. The program is rather worthless though because there are no provisions for keeping track of dates of advancement or when merit badges were earned. So, in effect, you must still keep another set of books. The program might be more effective if the 132-character format were eliminated and more space provided to allow for more information on the other half of the page.

I would like to install a video buffer and am confused about the new chip numbers in CoCo 2. I am running two Radio Shack drives, a DMP 120 printer and a modem 1.

I would be interested in hearing from readers who may have modified *Compu Scribe* or have other useful programs dealing with scouting or those who have added a video buffer to their CoCo 2. What buffer did they use? Write: P.O. Box 321, 45390.

Paul McKee, Jr.
Union City, OH

Editor:

I would like an opinion on two printers, the Okidata 92 and the Gemini 10X. I have seen both of them print and I lean toward the Okidata 92.

Could you please give me your opinion on which printer would be best suited for use with the CoCo 2 and which would be best supported by software available for each printer.

William C. Mulvey
Patchogue, NY

Editor's Note: The Okidata ML 92 was reviewed in the October 1983 (Page 227) issue of THE RAINBOW. The Gemini 10 was reviewed in June 1983 (Page 109) while the Gemini 10X review appeared in the June 1984 (Page 265) issue.

PIGGYBACK BLUES

Editor:

Help! Back in the legendary days of the "D" board, memory upgrades were mysterious and awesome. Financial and technical considerations led some of us into the realms of piggy-back 32K. By now everyone knows that this creates the obscure memory-overlay syndrome. The problem is what to do about it! Simply put, when encountering programs that combine BASIC and ML across the 16384 border in this modification, anything can happen! Some work, some don't, and some frustratingly partially work before the dreaded (most frequently) FC Error message occurs. If you stick to BASIC everything is fine, but addressing the ML seems to be up for grabs. The standard answer seems to be "get good 64K chips," but for nonelectronic types, 64K for the "D" board is fearsome, not to mention expensive for those who started with 4K and have scrimped for those chips and other needed peripherals. I find it hard to believe that the only answer for the "piggy-back" owners is "tough luck, buddy!"

Maybe the vendors of this modification have a fix, or more likely, other owners with a technical bent have found one. If so, publish! Many programs sit in my inactive box because of this glitch and I am sure there must be others in the same situation out there in CoColand. Write me: Box 28, 61426.

Richard Gordley
Castleton, IL

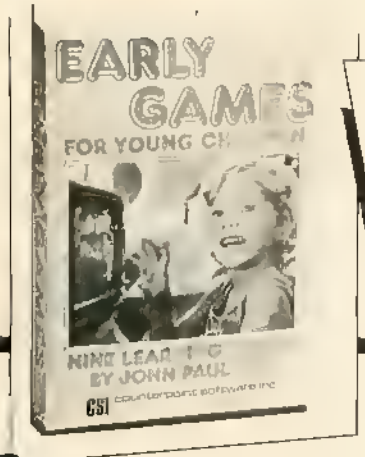

The Best Selling Program for Young Children Now Available for: TRS-80 Color Computer-16K disk or cassette and TRS-80 Models I/III-32K disk or 16K cassette

Nine fun educational games for children ages 2½ to 6

counterpoint software, inc.
4005 West Sixty-Fifth Street
Minneapolis, Minnesota 55435

Phone Orders: 800-328-1223
Minnesota: 612-926-7888

Educators Endorse: "Early Games can help children learn new concepts, information and skills, and also introduces them to the joys and benefits of home computers."
Peter Clark, Faculty
Institute of Child Development
University of Minnesota

No adult supervision required. The Picture Menu gives children control. They can:
- Match Numbers
- Count Colorful Blocks
- Add Stacks of Blocks
- Subtract Stacks of Blocks
- Draw and Save Colorful Pictures
- Match Letters
- Learn the Alphabet
- Spell their Names
- Compare Shapes

All nine games for $29.95

Yes! *Please rush me Early Games for Young Children*

Circle one:
Model I Disk Color Computer Disk Model I/III Cassette
Model III Disk Color Computer Cassette

Name

Address

City State Zip

☐ My check for $29.95 is enclosed (Minnesota residents add 6% sales tax)

☐ Charge to VISA ☐ Charge to Mastercard

Acct. No Expiration Date

Color Power II™

Expands Your CoCo to CP/M® 2.2

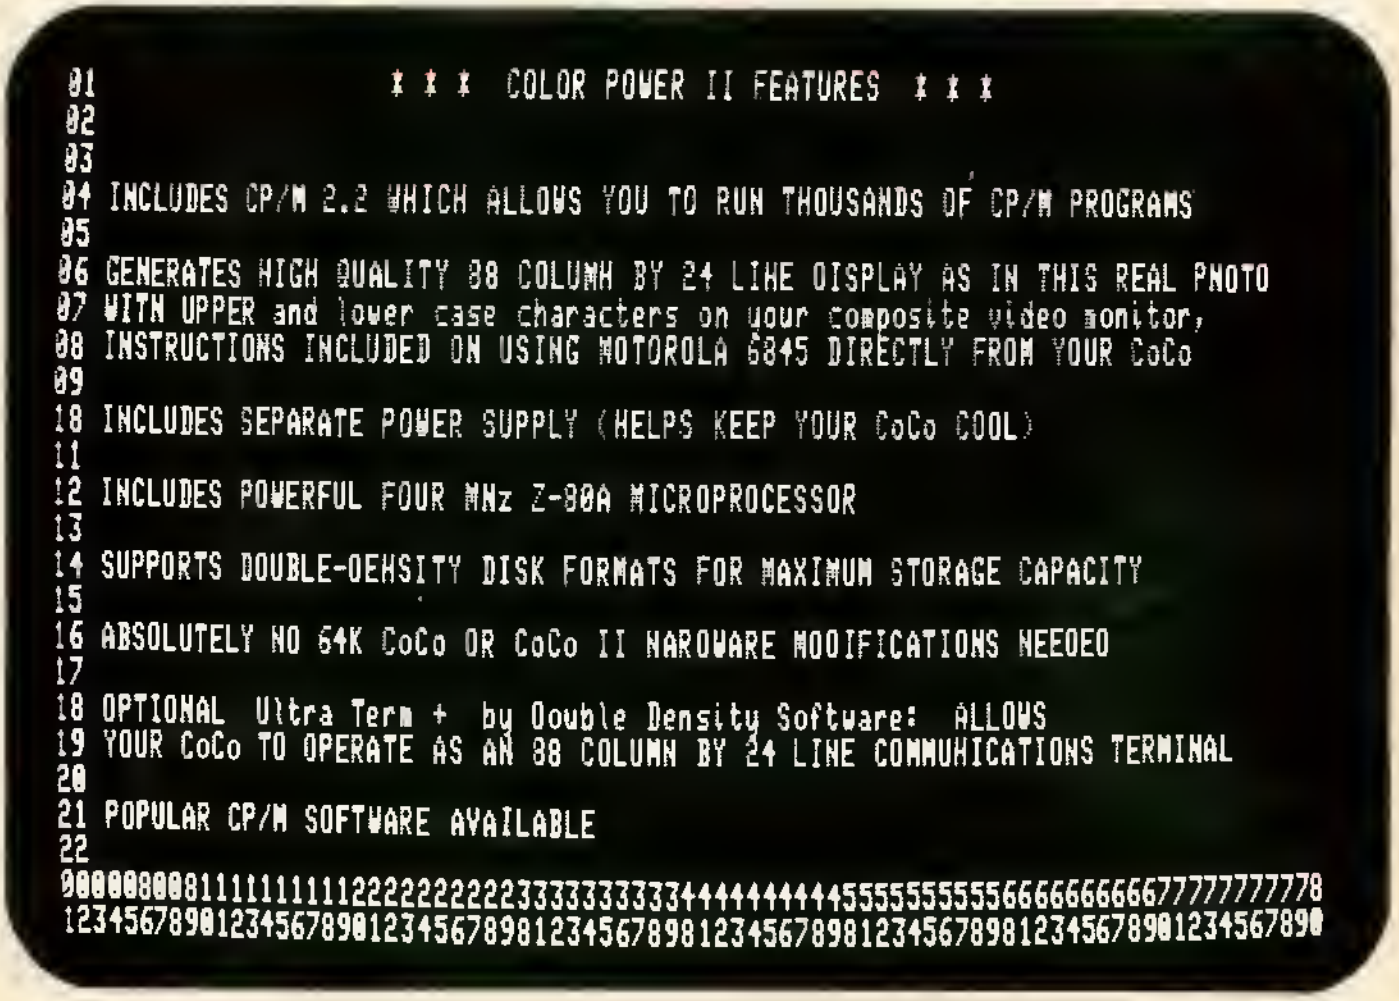

Plug Color Power II into the expansion port of your 64K CoCo or CoCo 2, plug your disk controller into Color Power II, and insert our disk into your drive. You are now ready to run thousands of CP/M programs such as WordStar®, MailMerge®, SpellStar®, and StarIndex™ and to run Ultra Term + to create an 80 column by 24 line terminal.

Your CoCo is now a CP/M compatible computer that includes CP/M 2.2 and generates an 80 column by 24 line display on your 80 column monitor with upper and lower case characters.

Introductory Prices:

Color Power II (includes CP/M 2.2)	$329.00
Add Ultra Term +	$ 55.00
Color Power II plus WordStar® & MailMerge®	$498.00
Add SpellStar® and StarIndex™ for only	$ 79.00

Call or send check, money order, Visa or MasterCard number with expiration date to the address below. N.J. residents add 6% sales tax.

Color Power Unlimited, Inc.

1260 Springfield Ave., P.O. Box 606-F, New Providence, N.J. 07974 **(201) 665-9646**

Color Power is a trademark of Color Power Unlimited, Inc.
CP/M is a trademark of Digital Research, Inc., WordStar, MailMerge, SpellStar, and StarIndex are trademarks of MicroPro International Corp.

MEGAMUNK

A fantastic strategic arcade game with animated movement. 11 different hi-res screens and several enjoyable musical selections make this game a fun but difficult challenge. Saving the forest from the evil monster spiders of Dageth can require considerable quick thinking and planning. You must avoid the spider and falling coconuts while at the same time trying to destroy the vile web, free the sacred birds, and recover the stolen treasures. 100% machine language! Joystick required.

32K cas $21.95 32K disk $23.95

★ ★ ★ ★ ★ ★ ★ ★ ★ ★

COLOR CONNECTION SOFTWARE

★ ★ ★ ★ ★ ★ ★ ★ ★ ★

NEW PUZZLER

Superb puzzle creation system with built in editor. Will create three different puzzles from any set of words that you type in. Puzzles available, word-search, wordscramble, and most surprising of all, a crossword puzzle. Great for parties, classes, or as a simple diversion. Inquire for pricing and availability.

COMING SOON: DESIGNER 64

An unbelievable and highly advanced Graphics development system! Watch for more info.

COLOR DESIGNER

Use Color Designer and you CoCo to create amazing hi-res color pictures. Many features available, including a fill command that paints the screen in over 1000 different color/texture combinations. Has machine language subroutines. April 84 Rainbow, ". . . I would not hesitate to recommend [Color Designer] to someone in the market for a graphics editor." NEW LOW PRICE!

16/32K cas $23.95 disk $25.95

QUIZ ALL

A versatile quiz program. Great for individual study or creation of a quiz for a group. Quiz can be taken on the computer or printed for others. Even has an option for the computer to generate multiple choice answers! June 1984 Rainbow, ". . . I found Quiz All to be an excellent program. . ."

cas $18.95 disk $20.95

OKI DUMP

An excellent hi-res screen dump for the Okidata 80 series without Okigraph. Printed pictures aren't miniatures! Manual includes hints on printing game screens; The King by Tom Mix is the example. 100% machine language!

16K cas $8.95 16K disk $10.95

Call or write for our free newsletter.

All cassette orders include disk version on cassette with instructions to transfer to disk. Unless otherwise specified, programs require 16K extended for cassette or 32K extended for disk. Add $2.00 shipping. Utah residents add 5 3/4 % sales tax. Orders paid by personal check allow 1-2 weeks, all others sent within 48 hours. COD add $2.00

To order, call 24 hours a day or write

COLOR CONNECTION SOFTWARE

1060 Buddlea Drive, Sandy, Utah 84070

(801) 571-5023

For Information:

Call weekdays between 6:30 pm and 10 pm MT

Editor:

Has anyone out there ever heard of the Impact Data Printer Company or know where we can get replacement ribbons for their printers? We have an Impact Data model 800 printer with its ribbon in shreads from overwork. It requires a 1-yard loop of cloth ribbon and no one we have talked to at major office and computer supply stores has ever even heard of a ribbon like that. It is getting to be a headache to slide carbon paper into the printer between the sheets of blank paper. This works fine when you run out of ribbon but gets tiresome after a while. I also would like to know: does anyone know of a screen dump for these printers? They print no graphics characters — just alpha-numerics and punctuation.

Rogers George, IV
Terrace, MN

KUDOS

Editor:

I have read the many plaudits that you receive in the "Letter's To Rainbow." You deserve every one and I can only add a job well done unless I take a different tact.

Our grandson, since receiving RAINBOW, has gone to the head of his class in typing as well as improving his grades in all other classes at least one full grade letter point and in some subjects more. His mother tells me he has gone from a C- average to a B+ average overall. His reading comprehension has improved tenfold. Your subscription rate is a small price to pay for this improvement in his overall education.

Even if you have a sore arm, pat yourselves on the back just once more for me.

Alex M. Parker
Central Valley, CA

Editor:

THE RAINBOW is tops. Every once in a while I'll glance at another, but as it's been said so many times and by so many people, there's none other that compares. THE RAINBOW is my only source of information on the CoCo.

Continue the excellent work. I am a true believer that the CoCo will never get cold!

Daryl Judd
Nampa, ID

Editor:

Thank you for producing such an informative, comprehensive magazine. Richard White's "Marrying Machine Language to BASIC" (May 1984, Page 31) was the most informative article I have ever read in any computer magazine. After becoming proficient at BASIC, the average CoCo user faces a difficult task in attempting to learn machine language.

Mr. White's contribution has provided us with a basic understanding of how machine language works and some direction in finding the proper sources for reference. More articles aimed at the machine language learner would be greatly appreciated; especially anything that would clarify the infamous "Hidden 32K" and the difference between "C" and an assembler!

Ralph M. Greco, Jr.
Providence, RI

EVALUATORS NEEDED

Editor:

I have developed a federal income tax program and would like to have it evaluated by some of your readers. In exchange, they may keep the program. All CoCo system configurations are needed. Write me at: Alpha Byte, 1008 Alton Circle, 29501.

John M. Gregg
Florence, SC

BULLETIN BOARD SYSTEMS

Editor:

I would like to inform your readers of a CoCo BBS in the 312 area code. It is called Cream De CoCo BBS. It can be reached at (312) 597-8485. Erik Thred is the Sysop of the BBS. It also has downloads for the CoCo. Call today!

Darren O'Neill
Palos Heights, IL

Editor:

It is with great pride that I announce the start of a new bulletin board service called the Next Step Board. The board supports member messages, downloads, uploads, and other general interest categories. It is a full support board for *Pro-Color-File* by Dennis Derringer. Owners of the program can contact other owners and converse at will. We also support the Pro-Color-File Users Group headed by Jorge Mir. There is a special section set aside especially for these members.

We support *Colorcom/E(C)* and *Videotex(C)*. Call (213) 690-4589. We may just have the program you have been looking for.

Paul L. Kush (SYSOP)
Yorba Linda, CA

A CLEAN DREAM

Editor:

I had a dream the other night. I was buying a washing machine. The salesman told me how powerful this machine was, the many features it had, how it could handle all sorts of tasks and how it would be the answer to all of my needs.

I was impressed until I asked about the warranty. I was told that it was sold as is. However, the manufacturer did guarantee that I would be able to load it. It was not warranted to be free from defects and it was not warranted as to whether or not it would wash clothes. I was also cautioned that before I used this machine I should make a duplicate so that if anything happened I would have a backup. I was also told that if something should happen and I needed information that there would be an additional fee.

I awoke with a start. I thought about the reason for such an odd dream when I realized that the day before I had purchased some software. Ridiculous, isn't it?

Juit M. Divet
Tacoma, WA

Don't Take Chances!

Instead use the revised

DATABASE/MAILER 64
&
LETTER WRITER 64

REVISION C

for FAST, EASY single page letters
or 1000's of form letters & labels
with our new

30 DAY MONEY-BACK GUARANTEE!*

RAINBOW CERTIFICATION SEAL

ACCOUNTS • INSURANCE • PROPOSALS • BULK MAIL • DENTAL RECALL • CHRISTMAS LISTS • CHURCHES • CLUBS • REALTORS • SALES

- Active menus guide you to valid operations.
- Won't "hang up" your system.
- 32K system allow 68 to 440 records per file
- 64K system allows 91 to 610 records per file.
- Up to 10 fields, 270 characters/record.
- All user definable with default values - easy.
- Sort any field alpha/numeric, full or partial.
- Adjusts for empty address lines - no gaps.
- Up to 9 line labels with up to 500 copies each.
- Master two column printout with field names.
- Master printout includes date, paging & filename.
- Selective printing by any field or field range.
- Accepts alpha or numeric zip codes up to 10 digits.
- Partial or whole item search by any chosen field.
- Single screen 10 record display by any field.
- Single key entry for hard copy of screen data.
- Fast single page letter writing with wordwrap.
- Embedded commands center, tab and line skip.
- Full screen edit allows delete, insert & change.
- Headings are tabbed, spaced automatically.
- No "Database Adventure" - over 50 page manual.
- Manual includes program operation flowcharts.
- Not needed, but included is user modification section.
- Access up to 4 drives in disk version.

- Create new files from all or part of old file
- Auto select "special" records for saving to new file.
- Change lengths, add or delete fields of existing files.
- Auto copy identical data to all records in file.
- Combine unfilled files to create new file from old
- Full memory sense adjusts to your system.
- Disk to tape data file transfer.
- Tape to disk data file transfer.
- Archive files to tape for security
- 1 key VERIFY ON/OFF for secure copying
- Interim save allows multiple file copies
- User friendly error checking.
- Prints sorted disk directory to printer.
- Directory printout fits on disk jacket
- Copy files/programs between disks.
- 2 key kill of old files/programs on disk
- Complete file maintenance made easy.
- Fully menu driven for fast, easy response.

DARE TO COMPARE: ☑GUARANTEE ☑FEATURES ☑PRICE

The most complete package available
for only...$99.95 plus shipping & handling.

Tired of waiting? we ship 1st Class Mail within 48 hours.

When ordering please provide:
NAME
ADDRESS
CITY/STATE
ZIP CODE
PHONE
TAPE or DISK
CREDIT CARD NO.
EXP. DATE
Master Card holders —
Include interbank no.

Call our 24 hour orderline
619-695-1385

or 619-566-6013, 9 — 5 p.m. PST weekdays
or send check or money order to:

EVS ENGINEERING

9526 Suite 35, Miramar Road
San Diego, CA 92126

"Serving the Defense and Space Industry since 1979"

Please include the following:
$3 postage and handling
U.S. funds only
CA residents add 6% tax
COD orders add $4
Amdek disk add $4

Dealer inquiries invited
Personal checks - OK
we won't make you wait.

*from date of invoice excluding non-refundable postage/handling/COD charges.

MasterCard

VISA

PRINT #-2,

I sure hope everyone's nose has recovered from our Scratch And Sniff Adventure last month. We *certainly* did get a lot of response, and all of it was good. Or, at least, most of it was good. One lady called in saying that she stayed up late typing the whole program in, caught a cold, and wasn't able to smell the scents. Well, we're easy. We told her what they are. I guess she's happy now!

We did attract some attention in the media for the Scratch And Sniff Adventure, and we plan to be doing some more "wild and crazy things" as time goes by. That, to my mind, is what is nice about CoCo — while you can use it for a whole range of significant applications, you can have a lot of fun with it, too. Perhaps this is the reason CoCo is still there and going strong while virtually all the "highly-touted" home computers have bitten the dust. It is called a "shakeout," but maybe we should call it a "Shakout," because guess who is shaking the others out of the market?

Our RAINBOWfest in Chicago was a huge success; the largest of the shows we have had — both in terms of attendance and number of firms exhibiting. Are we doing it again? You bet! And what we'd like to see is you folks in other parts of the country trying to beat the Chicago attendance record. The east held it for a time, but the midwest came storming back. And, how about you westerners? We'll be back in California in February.

I know no one cares but me, but RAINBOWfest in Princeton, N.J., (Sept. 28-30) is the week before my birthday. And, while most people who start getting a little older like I am try to forget their birthdays, I have always had this thing about the occasion. So, we're planning something a little special for what Jim Reed has dubbed as "Lonnie's Birthday at RAINBOWfest." I hope you will come and help me celebrate in Princeton.

Yes, the rumors have been flying about a new Color Computer. Will there be one? Of course. But don't expect anything anytime real soon.

We can't tell you a great deal at this point, but one of the things we *can* point out is to expect "upward" software compatibility with the new CoCo. That means that what you see running now will be able to run right away on the new machine — or will require only a little modification. Contrast that, if you will, with Commodore's dumping of the VIC-20 when the Commodore 64 became available. And, when Commodore tried to do it again a few months ago, there was such a hue and cry from users and dealers that they have gone back and looked at the whole issue again —significantly delaying the introduction of the new machine.

While *some* changes are necessary in bringing out a new model, you don't see this planned obsolescence from Radio Shack. Perhaps that's why Radio Shack is the "shaker" instead of the "shakee" in the home computer market.

Thanks to a friendly computer store in the area, I have been playing with a Macintosh computer for the past several days. I am sure most of you have seen or heard something about this one — from our friends at the Apple Computer Company.

I have seen the Macintosh — known as the Mac among friends — at three or four shows now, always with an extra-big projection TV and a lot of people looking. (In fact, at the West Coast Computer Faire in San Francisco, it was a little hard to get into the main exhibit hall because doors were narrow and the Mac exhibit was right in front of them.)

Mac addicts (at this point, mostly Apple people and dealers and the people who are planning the software for this new addition) are touting the Mac as the newest and greatest thing since sliced bread. I thought you might be interested in some observations, so here we are.

I do not see the Mac as a particularly great computer. I *do* see the software as a major innovation in user-friendliness. In fact, for the most part, the software is not only user-friendly, it is user-affectionate. Mac uses 3½-inch disks, similar to those with the AMDISK system available for the CoCo, and each one (single-sided) holds a little over 400K. That sounds fine, except the system and applications software take up a lot of space. To do word processing for instance, I can clear about 160K on my disk. Not bad, but not great, either.

The single worst thing about the Mac is the disk drive access. It is s-l-o-w. If you think *any other*

Telewriter-64™

the Color Computer Word Processor

- **3 display formats: 51/64/85 columns × 24 lines**
- **True lower case characters**
- **User-friendly full-screen editor**
- **Right justification**
- **Easy hyphenation**
- **Drives any printer**
- **Embedded format and control codes**
- **Runs in 16K, 32K, or 64K**
- **Menu-driven disk and cassette I/O**
- **No hardware modifications required**

THE ORIGINAL

Simply stated, Telewriter is the most powerful word processor you can buy for the TRS-80 Color Computer. The original Telewriter has received rave reviews in every major Color Computer and TRS-80 magazine, as well as enthusiastic praise from thousands of satisfied owners. And rightly so.

The standard Color Computer display of 32 characters by 16 lines without lower case is simply inadequate for serious word processing. The checkerboard letters and tiny lines give you no feel for how your writing looks or reads. Telewriter gives the Color Computer a 51 column by 24 line screen display with *true lower case characters*. So a Telewriter screen looks like a printed page, with a good chunk of text on screen at one time. In fact, more on screen text than you'd get with Apple II, Atari, TI, Vic or TRS-80 Model III.

On top of that, the sophisticated Telewriter full-screen editor is so simple to use, it makes writing fun. With single-letter mnemonic commands, and menu-driven I/O and formatting, Telewriter surpasses all others for user friendliness and pure power.

Telewriter's chain printing feature means that the size of your text is never limited by the amount of memory you have, and Telewriter's advanced cassette handler gives you a powerful word processor without the major additional cost of a disk.

...one of the best programs for the Color Computer I have seen...
— Color Computer News, Jan, 1982

TELEWRITER-64

But now we've added more power to Telewriter. Not just bells and whistles, but major features that give you total control over your writing. We call this new supercharged version Telewriter-64. For two reasons.

64K COMPATIBLE

Telewriter-64 runs fully in any Color Computer — 16K, 32K, or 64K, with or without Extended Basic, with disk or cassette or both. It automatically configures itself to take optimum advantage of all available memory. That means that when you upgrade your memory, the Telewriter-64 text buffer grows accordingly. In a 64K cassette based system, for example, you get about 40K of memory to store text. So you don't need disk or FLEX to put all your 64K to work immediately.

64 COLUMNS (AND 85!)

Besides the original 51 column screen, Telewriter-64 now gives you 2 additional high-density displays: 64 × 24 and 85 × 24!! Both high density modes provide all the standard Telewriter editing capabilities, and you can switch instantly to any of the 3 formats with a single control key command.

The 51 × 24 display is clear and crisp on the screen. The two high density modes are more crowded and less easily readable, but they are perfect for showing you the exact layout of your printed page, *all on the screen at one time*. Compare this with cumbersome "windows" that show you only fragments at a time and don't even allow editing.

RIGHT JUSTIFICATION & HYPHENATION

One outstanding advantage of the full-width screen display is that you can now set the screen width to match the width of your printed page, so that "what you see is what you get." This makes exact alignment of columns possible and it makes hyphenation simple.

Since short lines are the reason for the large spaces often found in standard right justified text, and since hyphenation is the most effective way to eliminate short lines, Telewriter-64 can now promise you some of the best looking right justification you can get on the Color Computer.

FEATURES & SPECIFICATIONS:

Printing and formatting: Drives any printer (LPVII/VIII, DMP-100/200, Epson, Okidata, Centronics, NEC, C. Itoh, Smith-Corona, Terminet, etc).

Embedded control codes give full dynamic access to intelligent printer features like: underlining, subscript, superscript, variable font and type size, dot-graphics, etc.

Dynamic (embedded) format controls for: top, bottom, and left margins; line length, lines per page, line spacing, new page, change page numbering, conditional new page, enable/disable justification.

Menu-driven control of these parameters, as well as: pause at page bottom, page unnumbering, baud rate (so you can run your printer at top speed), and Epson font. "Typewriter" feature sends typed lines directly to your printer, and Direct mode sends control codes right from the keyboard. Special Epson driver simplifies use with MX-80.

Supports single and multi-line headers and automatic centering. Print or save all or any section of the text buffer. Chain print any number of files from cassette or disk.

File and I/O Features: ASCII format files — create and edit BASIC, Assembly, Pascal, and C programs, Smart Terminal files (for uploading or downloading), even text files from other word processors. Compatible with spelling checkers (like Spell 'n Fix).

Cassette verify command for sure saves. Cassette auto-retry means you type a load command only once no matter where you are in the tape.

Read in, save, partial save, and append files with disk and/or cassette. For disk: print directory with free space to screen or printer, kill and rename files, set default drive. Easily customized to the number of drives in the system.

Editing features: Fast, full-screen editor with wordwrap, block copy, block move, block delete, line delete, global search and replace (or delete), wild card search, fast auto-repeat cursor, fast scrolling, cursor up, down, right, left, begin line, end line, top of text, bottom of text; page forward, page backward, align text, tabs, choice of buff or green background, complete error protection, line counter, word counter, space left, current file name, default drive *in effect*, set line length on screen.

Insert or delete text anywhere on the screen without changing "modes." This fast "free-form" editor provides maximum ease of use. Everything you do appears immediately on the screen in front of you. Commands require only a single key or a single key plus CLEAR.

...truly a state of the art word processor... outstanding in every respect.
— The RAINBOW, Jan, 1982

PROFESSIONAL WORD PROCESSING

You can no longer afford to be without the power and efficiency word processing brings to everything you write. The TRS-80 Color Computer is the lowest priced micro with the capability for serious word processing. And only Telewriter-64 fully unleashes that capability.

Telewriter-64 costs $49.95 on cassette, $59.95 on disk, and comes complete with over 70 pages of well-written documentation. (The step-by-step tutorial will have your writing with Telewriter-64 in a matter of minutes.)

To order, send check or money order to:

Cognitec
704 Nob Street
Del Mar, CA 92014

Or check your local software store. If you have questions, or would like to order by Visa or Mastercard, call us at (619) 755-1258 (weekdays, 8AM-4PM PST). Dealer inquiries invited.

(Add $2 for shipping. Californians add 6% state tax. Allow 2 weeks for personal checks. Send self-addressed stamped envelope for Telewriter reviews from CCN, RAINBOW, 80-Micro, 80-U.S. Telewriter owners: send SASE or call for information on upgrading to Telewriter-64. Telewriter-compatible spelling checker (Spell 'n Fix) and Smart Terminal program (Colorcom/E) also available. Call or write for more information.)

Apple II is a trademark of Apple Computer, Inc.; Atari is a trademark of Atari, Inc.; TRS-80 is a trademark of Tandy Corp; MX-80 is a trademark of Epson America, Inc.

RAINBOW CERTIFICATION SEAL

(Continued from Page 12)

system is slow, try Mac. Those disk drives grind and grind and grind. Oh, for some fast I/O!

Too, Mac is a black and white computer. There is no mention anywhere of color — coming or available at some future time. To some degree, this really does not upset you as much as you would think: But, given an absolutely fantastic graphics package called *MacPrint*, it is a shame that the people who pioneered color computing end up now with a one-color computer. And, the resolution in the graphics mode (and it is always in the graphics mode) is less than CoCo. Hmmmm.

One of the things which is important is the "footprint," that is, the amount of space the Mac takes on a desk. Basically, the footprint is rather small, but, if you add the need for space in which to operate the "mouse" (more on this later), it is pretty big. The disk drive is built in, but that is only for a single drive. The second has to be outside the computer. Given the small amount of available storage on a single disk after the applications are added, you almost have to have a second drive (not yet available).

If you get the idea that I am not particularly impressed with the Mac, you are right. And, at $2,500 ($500 for a C.Itoh graphics printer) that's a hefty price, in my humble opinion. You do get *MacPaint* and *MacWrite* (a word processing package) with the computer but BASIC costs extra (like, $199 extra).

As much as I *am not* impressed by the Mac, I *am* impressed by the software! This stuff is super. I do not go so far as to say it is the answer to interfacing people and computers, but it makes a giant step.

As I mentioned, everything involving the Mac is in a graphics mode. It uses a "desktop" in which your programs and/or applications are graphically represented on the screen. Your major tool is the mouse, and you can use it to select different applications, rearrange the desktop, make each "window" larger or smaller, scroll and the like.

All of this is super. It really is. One of the major assets is that you do not have to remember a bunch of commands to do things like save programs, edit letters, draw lines and the like. Instead of typing *SAVE*"LETTER" all you have to do is move a pointer controlled by the mouse to a label at the top of the screen which reads "File" and then move the pointer down (again with the mouse) until the word *SAVE* is highlighted, You press the mouse button and the save starts to take place.

Oh, oh. A screen comes up asking you what you wish to name the document. All of a sudden, you have to get to the keyboard and type it in. This means, in effect, switching from the mouse to the keyboard. To my mind, this is a fault of the system.

Let's take word processing — an application a whole lot of people use a computer for. You have to use the mouse to get yourself into the word processor, use the mouse to set margins and the like, and then go to the keyboard, just like always. It seems to me you are switching systems.

Oh, yes, the word processor is nice. It lets you type in nine different type styles, six different types (like underline, italics and so on), and in five different sizes. But, if you want to change from "regular" type to underline, you either have to "leave" the keyboard and go to the mouse to make these changes, or you have to *memorize a bunch of control keys!*

My point, exactly. Mac is billed as a computer system where you do not have to memorize things. Yet, it is abundantly easier to memorize Control-I to get italics than to take your hands off the keybaord, move the mouse around and then do some clicking of the mouse button.

I see this as a fallacy in the entire system. While the graphics program works extremely well with the mouse, you still need to go to the keyboard to label anything. In the edit mode of the word processor, you are basically going back and forth between the mouse and the keyboard. It drives you nuts.

Maybe it is me. I am used to computers and feel comfortable with the commands. I've memorized most of them so long ago that I do not realize I have memorized them. But, it does bother me to have to switch back and forth between the mouse and the keyboard. And, especially when I want to edit, it is frustrating not to have cursor keys on the keyboard itself. In word processing the keyboard is where it's at — not the mouse.

Let me suggest three things. First of all, go take a look at the Mac. I *do* think you will be impressed with the total concept. I know I am. Spend a few minutes playing. And, then, looking at things objectively, I believe you will be able to see past the gee-whiz and discover some of the problems this sort of system brings about.

Second, let me ask you to consider that the Tandy 2000 machine will soon have a mouse available, along with Microsoft's *Windows* program. The 2000 costs less than the Mac, and can do oh, so much more!

Third, and most important here, I wish to remind you that there are some applications which can use, in a very effective way, the graphics capabilities and the mouse that Apple has used in making its Mac. And, remembering that all it takes is software to do this, I believe some very excellent programs can be (and are being) developed for the Color Computer (which already has a mouse, too, along with better graphics) using this concept.

Then, you have a *truly* excellent opportunity to teach people to get friendly with a computer —using the same techniques applied by Mac — without sacrificing any of the ease flexibility necessary in keyboard-necessary applications. Just as will appear with the Mac, I foresee a whole range of programs made available to use mouse "technology." But, by using CoCo, we will have them at a fraction of the cost, in color — and on a superior computer, too!

— Lonnie Falk

$ LOTTO PLAYERS LOTTO $
LET YOUR TRS-80 COLOR COMPUTER
SELECT YOUR NUMBERS-TAPE ONLY
SEND $5.95 CHECK OR M.O. TO
RAM 1088 POPLAR TREE DRIVE
ANNAPOLIS MARYLAND, 21401
FREE WITH EACH ORDER FREE
PICK 3 & PICK 4
RAINBOW

NEW GOOD STUFF FOR EVERY COLOR COMPUTER

Turn your Color Computer into a graphic design center with the ease of a keystroke! **MagiGraph** makes it simple to create highly detailed figures up to and including an entire high-resolution screen. Designed for those with some experience in Basic and Assembly Language programming, **MagiGraph** includes lots of special features:

- **A full set of logical and pixel manipulation functions** simplifies the development of complex figures.
- **An editor** lets you zoom in and work on every detail of your design. Toggle between the "macro" and "micro" screens for perspective on your creations.
- **Nine animation buffers** allow you to preview each sequence to ensure continuity and smooth flow.
- **Versatile I/O routines** store a graphic screen on cassette or floppy disk; recall it later for use by another program or revise it with **MagiGraph**.

If you're looking for the finest graphic development utility available for your Color Computer, THIS IS IT. Maximize your machine's potential, while you push your imagination to the limit — with **MagiGraph**!

By Kevin Cooley. Cassette **$34.95** (16K required); Disk **$39.95** (32K Extended Color BASIC required); Amdisk cartridge **$44.95**.

CSPOOL
Color Computer Print Spooler

Stop Waiting Around for the Printer! **CSPOOL** allows you to use your printer and computer concurrently, takes only 26 bytes of Color Basic's memory, and gives you 32K of print buffer. It's like having two computers in one! By intercepting characters sent to the printer and storing them in the upper 32K of RAM, **CSPOOL** allows you to run other programs while your printer is doing its job. **CSPOOL** is FREE with the purchase of a 64K RAM UPGRADE KIT from The Micro Works, or it may be purchased separately on cassette or diskette for **$19.95**. Requires 64K; not for FLEX or OS9.

64K MEMORY UPGRADE KIT: For Rev. levels F, ET, NC, TDP-100s, and Color Computer II. Eight prime 64K RAM chips, instructions, and CSPOOL: **$64.95**.

SYSTEMS SOFTWARE

MACRO-80C: DISK-BASED EDITOR, ASSEMBLER AND MONITOR—With all the features the serious programmer wants, this package includes a powerful 2-pass macro assembler with conditional assembly, local labels, include files and cross referenced symbol tables. MACRO-80C supports the complete Motorola 6809 instruction set in standard source format. Incorporating all the features of our Rompack-based assembler (SDS-80C), MACRO-80C contains many more useful instructions and pseudo-ops which aid the programmer and add power and flexibility. The screen-oriented editor is designed for efficient and easy editing of assembly language programs. MACRO-80C allows global changes and moving/copying blocks of text. You can edit lines of assembly source which exceed 32 characters. DCBUG is a machine language monitor which allows examining and altering of memory, setting break points, etc.

Editor, assembler and monitor—along with sample programs—come on one Radio Shack compatible disk. Extensive documentation included. By Andy Phelps. **$99.95**

SDS-80C: SOFTWARE DEVELOPMENT SYSTEM—Our famous editor, assembler and monitor in Rompack. Like MACRO-80C, it allows the user to write, assemble and debug assembly language programs with no reloading, object patching or other hassles. Supports full 6809 instruction set. Complete manual included. **$89.95**

MICROTEXT: COMMUNICATIONS VIA YOUR MODEM! Now you can use your printer with your modem! Your computer can be an intelligent printing terminal. Talk to timeshare services or to other personal computers; print simultaneously through a second printer port; and re-display text stored in memory. Download text to Basic programs; dump to a cassette tape, or printer, or both. Microtext can be used with any printer or no printer at all. It features user-configurable duplex/parity for special applications, and can send any ASCII character. You'll find many uses for this general purpose module! ROMPACK includes additional serial port for printer. **$59.95**

MICRO WORKS COLOR FORTH

- Faster to program in than Basic
- Easier to learn than Assembly Language
- Executes in less time than Basic

The MICRO WORKS COLOR FORTH is a Rompack containing everything you need to run Forth on your Color Computer. COLOR FORTH consists of the standard Forth Interest Group (FIG) implementation of the language plus most of FORTH-79. It has a super screen editor with split screen display. Mass storage is on cassette. COLOR FORTH also contains a decompiler and other aids for learning the inner workings of this fascinating language. It will run on 4K, 16K, and 32K computers. And COLOR FORTH contains 10K of ROM, leaving your RAM for your programs! There are simple words to effectively use the Hi-Res Color Computer graphics, joysticks, and sound.

Includes a 112-page manual with a glossary of the system-specific words, a full standard FIG glossary and complete source listing.

MICRO WORKS COLOR FORTH . . . THE BEST! From the leader in FORTH, Talbot Microsystems. **$109.95**

MACHINE LANGUAGE

MONITOR TAPE: A cassette tape which allows you to directly access memory, I/O and registers with a formatted hex display. Great for machine language programming, debugging and learning. It can also send/receive RS232 at up to 9600 baud, including host system download/upload. 19 commands in all. Relocatable and reentrant. **CBUG TAPE: $29.95**

MONITOR ROM: The same program as above, supplied in 2716 EPROM. This allows you to use the entire RAM space. And you don't need to reload the monitor each time you use it. The EPROM plugs into the Extended Basic ROM Socket or the Romless Pack 1. **CBUG ROM: $39.95**

SOURCE GENERATOR: This package is a disassembler which runs on the Color Computer and generates your own source listing of the BASIC interpreter ROM. Also included is a documentation package which gives useful ROM entry points, complete memory map, I/O hardware details and more. A 16K system is required for the use of this cassette. **80C Disassembler: $49.95**

HARDWARE

PARALLEL PRINTER INTERFACE—Serial to parallel converter allows use of all standard parallel printers. PI80C plugs into the serial output port, leaving your Rompack slot free. You supply the printer cable. **PI80C: $59.95**

SUPER-PRO KEYBOARD—$69.95 (For computers manufactured after Oct. 1982, add $4.95)

ROMLESS PACKS for your custom EPROMS — call or write for information.

BOOKS

6809 ASSEMBLY LANGUAGE PROGRAMMING, by Lance Leventhal, **$18.95**

TRS-80 COLOR COMPUTER GRAPHICS, by Don Inman, **$14.95**

ASSEMBLY LANGUAGE GRAPHICS FOR THE TRS-80 COLOR COMPUTER, by Don Inman, **$14.95**

STARTING FORTH, by L. Brodie, **$17.95**

GAMES

ZAXXON—The real thing. Excellent. What more can we say? Cassette requires 32K. **$39.95**

STAR BLASTER—Blast your way through an asteroid field in this action-packed Hi-Res graphics game. Available in ROMPACK; requires 16K. **$39.95**

PAC ATTACK—Try your hand at this challenging game by Computerware, with fantastic graphics, sound and action! Cassette requires 16K. **$24.95**

HAYWIRE—Have fun zapping robots with this Hi-Res game by Mark Data Products. Cassette requires 16K. **$24.95**

ADVENTURE—*Black Sanctum* and *Califxto Island* by Mark Data Products. Each cassette requires 16K. **$19.95** each.

CAVE HUNTER—Experience vivid colors, bizarre sounds and eerie creatures as you wind your way through a cave maze in search of gold treasures. This exciting Hi-Res game by Mark Data Products requires 16K for cassette version. **$24.95**

THE MICRO WORKS

P.O. BOX 1110-A
Del Mar, CA 92014
(619) 942-2400

California Residents

Master Charge/Visa and

SIX PACK RIBBONS

SAVE 50%+ on ribbons for

Radio Shack

LP I, II, IV	2.95
LP III V	5.88
LP VI, VIII	4.92
DMP 400, 420	4.92
DW II, Nylon	7.88
DW III, Multistrike	4.98

Epson

MX 70/MX 80	5.68
MX 100	7.88

Okidata

80, 82, 92 & 93	2.07
84, 94	4.95

C Itoh

Prowriter I, II	4.95

1,000's more

Call or Write for Prices Not Listed

Get One FREE!

BUY 12 & GET ONE FREE!

Minimum Order Six Ribbons
(Mix or match with a friend)

Add $2.00 per order for shipping.

All orders are shipped promptly.

Credit Card, Check enclosed.

☐ MasterCard ☐ VISA

SIX PACK RIBBONS
119 Village Square, Louisville, KY 40243
(502) 245-0064

Name _____
Address _____
City _____
State _____ Zip _____

Card Holder Signature

Card Holder Name (Please Print)

Card Number

Master Card Interbank No

Card Expires Mo/Yr

BUILDING AUGUST'S RAINBOW

Starting Our Fourth Year . . .
The Annual Games Issue . . .
And, Some Comments on Reviews . . .

For a short but memorable tenure quite a while ago, I worked backstage at NBC Burbank as a security guard assigned to *The Tonight Show*. Both starstruck and awed by the power of network television, I reveled in my good fortune at having the opportunity to peek behind the curtains of what is probably the world's most famous TV show. Over the past two decades, Johnny Carson has developed such a following it's reported — and who would doubt it — that, at the conclusion of his monologue, the pressure in water mains across the country drops as people scramble to America's kitchens and bathrooms during the ensuing commercial break.

I was reminded of that "Johnny phenomenon" recently when one of our major advertisers told me that his sales drop conspicuously each month in the week right before THE RAINBOW comes out, then pick up noticeably when the next issue hits the mailboxes and newsstands. Also, he reports that THE RAINBOW's reviews of his company's products can bring feast or famine, depending on the reviewer's conclusions. This underlines to me the importance of THE RAINBOW review process.

Each month, we agonize over the two to three dozen reviews published in THE RAINBOW. We're not cavalier about the responsibility we have: to the software/hardware marketing company, to the reviewer, and, most importantly, to our readers. To ensure impartiality and objectivity, the review process has become quite tedious. To begin with, we do not accept unsolicited reviews; the theory being that many of these come from those with either a bone to pick, or, possibly a vested interest. Rather, we have a stable of reviewers whose qualifications and interests — and affiliations — we know. Jutta Kapfhammer, our submissions editor, makes a determined effort to match review material with those most qualified to review it. (This is more difficult than many imagine, and, if you think we need your expertise, write her.) Our reviewers do it for love, not the token expense money, and they must follow extensive guidelines under the pressure of hard deadlines. They respond like troopers and put their hearts in it. Therefore, once a given item is assigned for review, we feel a strong commitment to edit the resulting review as little as possible in order to preserve the integrity of the review process and give the reviewer his rightful say.

In recent months, however, we have elected to give companies a chance to respond — in the same issue — if we feel there may be strong exception to our reviewer's conclusions; this is the purpose of our "Reviewing Reviews" section — to state the other side of the case, so to speak, and to clear up any possible factual errors before they might cause irreparable damage. The review process can sometimes make or break a small distributor! Candidly, some of our reviewers have bristled at the idea of their review being reviewed. But, while this eventuality may cause a bit of inhibition, we feel that it encourages reviewers to do their homework when they know that someone may saw off the limb they've ventured out on.

Respondents to our "Reviewing Reviews" section have taken our reviewers to task for being both "too easy" and "too hard" on a given product. This suggests we may have achieved a delicate balance or, at least, that we can err in either direction.

This brings me to the sum and crux of what I want to share with our review audiences — the reviewers, the reviewees and our readers; the purpose of RAINBOW reviews is to provide information, to arm our readers with the facts they need to make their own decision on whether to buy a given product. This does not dictate that we always have lengthy reviews; I am amazed at how much a one-sentence description in the local paper's TV section guides me in what I select to view. It does mean a reviewer should impart as much information as needed, as concisely as possible.

I fully agree with Dale Puckett's comments in the second issue of *FHL Soft News*, the Frank Hogg Laboratory newsletter: "Reviews are meant to be used. . . . Writers are too fast to supply subjective opinions and too slow to give you objective data that backs up their position. . . . The real problem is that opinions aren't worth much and we have a surplus of them. . . . What we need is information."

Dale says it succinctly; substance is much more important than style. Hopefully, we can have both but, clearly, the prime purpose of a review is to tell the reader all one can about a product he or she may not be able to examine firsthand. We want our reviewers' opinions but, above all, we want our reviewers to tell our readers enough that they can form their own. That's when a review serves its purpose.

— Jim Reed

WHERE'S-IT

by C.E. Laidlaw

What programs are on this disk? Which disk is my WIDGET program? WHERE'S-IT will answer these questions for you and maintain disk directory index files with up to 972 programs in each. Completely user-friendly, just run WHERE'S-IT and follow the prompts to:

Create index files holding up to 972 programs

Load or save existing index files

Add, delete or update index files for a specific disk

Sort index files alphabetically with a machine language sort

List index files to screen

Print index out with 162 programs to the page

Disk only.....$19.95
(32K Extended Color BASIC)

We are also a dealer for the following companies:

Moreton Bay Software
Computerware
Spectrum Projects
Mark Data, Amdek, Epson
Pal Creations, Tom Mix
PBH Computer, Inc.
Spectral Associates,
Cognitec, Ellie Software
Prickly Pear, Botek
Cobra Software
and many more fine companies

JARB

SOFTWARE
HARDWARE

1636 D Avenue, Suite C
National City, CA 92050
After hours:
BBS 619-474-6961
Orderline:
619-474-8982

T.A.G.

THE
ADVENTURE
GENERATOR

Cassette.....$34.95
Disk/Amdisk.....$39.95

FEATURES

Creates stand-alone programs
Up to 100 rooms, 60 objects, 30 command words, and 9 conditional flags
Supports tape and disk output
Optional printer output of important sections during creation of ADVENTURE
Complete documentation
Includes sample ADVENTURE
Works with all models of the CoCo except MC-10
Requires 32K Extended Color BASIC

NEW GRAY LADY

by Terry A. Steen

Control your submarine in its efforts to destroy the enemy fleet. You must launch your sub to surface missiles while avoiding the depth charges. Five different types, hi-res graphics and spectacular sounds. Also a talking version included at no extra charge for those who have an SC01 based voice pack. Four screens and progressive difficulty make this all machine language program a real bargain.

Cassette: $19.95 Disk/Amdisk: $24.95

U.S. COD orders accepted, no charge cards please.
Shipping and handling $3.00
California residents please add 6% sales tax

A Journey

By Robert Rogers

Through The Jungle

The Jungle is a graphics game for the 4K, non-Extended BASIC Color Computer. It is in response to 4K owners who ask for programs for their machines. Having started with 4K, I understand the feeling of being lost in a sea . . . or jungle of 16K CoCos.

After upgrading to 32K and disk-printer system, I more or less forgot about my "old" programs. Then I came across a game I had written and enjoyed. So I spruced it up a bit (remembering not to use the other 29,000 bytes of memory I have). And here it is in its current state. Despite the small memory it still has quite a bit (byte?) of color, sound, graphics and action.

Upon running *The Jungle*, the title will appear. The theme song will play and then you will be given the chance to select your skill level. One is the easiest, while three is the most difficult. Next, the graphics are drawn.

The object of the game is to maneuver your man (orange, flashing cursor) through the jungle from the upper left-hand corner to the lower right. In the lower right corner is the safari camp (safe zone). In between are dozens of green trees. If too many are "walked into," you lose one man. The number of trees you are allowed to hit is determined by the skill level. On skill level one you can hit eight; two, you can hit five; three, you can hit three.

Control is through the use of the keyboard's arrow keys (see, you don't even need joysticks). Because of the use of *PEEK*s rather than *INKEY$* statements, you need not hit the key every time you want to move — just hold it down as long as you want in a particular direction. Also, you can go on diagonals, which saves time and can help you get out of some impossible situations by jumping between trees. Other obstacles include two blue lakes, yellow quicksand, purple bottomless pit, and a vertical river (blue). If you hit any of these you lose one man. The river must be crossed at "dry spots" (black) areas. Usually there are five such spots.

During each play the timer in the upper right of the screen shows how much time you have. If the timer hits zero, night falls and you can't see how to go to the camp, so you lose a man. At the completion of each screen your score is shown and you start over with a new maze of trees. Other indicators on the screen are from left to right: number of completed screens; men left; trees hit so far on current screen; and timer.

Your score is computed as follows: time left times remaining trees plus screen number times 1,000; plus other bonus points for your level. The score is always multiplied times the skill level. The highest score is displayed at the end of each game.

One thing which might cause the program to crash is if you glide your man into the timer/men-left area of the screen. For some reason, *POINT* statements give FC Errors if they are made to test text. This is an incentive for you not to go the wrong direction.

I hope 4K CoCo users enjoy *The Jungle*, although those with larger systems will enjoy it too.

Have fun!



The listing:

```
0 'COPYRIGHT (C) 1982 BY ROBERT
 T, ROGERS
1 CLS8:PRINT@224,"***** THE JUNG
LE ADVENTURE *****";:PRINT@0," R
OBERT ROGERS PRESENTS ....
2 GOSUB4000:N=4:U=0
3 CLS:PRINT@224,"SKILL LEVEL (1-
3)";:INPUTL:IFL=2THENNT=6:AT=200
:ELSEIFL=3THENNT=3:AT=100:ELSENT
=8:AT=300
9 N=N-1:IFN=0THEN2610
10 A=AT:X=0:Y=0:R=0:GOSUB8000:GO
SUB7000
```

(Robert Rogers, a junior at Forest Hill High School in West Palm Beach, Fla., has been a self-taught programmer for two years. His interests include performing professionally on the organ and model railroading.)

```
20 X=0
30 SET(X,Y,8):SET(X+1,Y,8):SET(X
,Y+1,8):SET(X+1,Y+1,8)
100 IFPEEK(341)=247 THEN Y=Y-2:I
FY<0THENY=0
110 IFPEEK(342)=247 THEN Y=Y+2:I
FY>30THENY=30
120 IFPEEK(343)=247 THEN X=X-2:I
FX<0THENX=0
130 IFPEEK(344)=247 THEN X=X+2:I
FX>62THENX=62
200 A=A-1
210 PRINT@27,A;
211 IFA<0THEN6000
300 RESET(XX,YY):RESET(XX+1,YY):
RESET(XX,YY+1):RESET(XX+1,YY+1)
650 GOTO1000
700 XX=X:YY=Y
800 GOTO30
1000 P=POINT(X,Y):PP=POINT(X,Y+1
)
1010 IF PP=1 THENGOSUB2000
1020 ON P GOSUB2000,2200,2400,26
00,700,700,2800
1030 GOTO700
2000 SOUND200,1:R=R+1:PRINT@25,R
:IF R>NT THEN 2100 ELSE RETURN
2100 CLS:PRINT@224,"YOU KNOCKED
YOURSELF OUT RUNNING INTO SO MAN
Y TREES. YOU DIED !!";
2110 FORM=1TO20:SOUNDRND(230),1:
NEXT:GOSUB9000
2120 GOTO9
2200 CLS2:PRINT@224,"***** STUCK
 IN QUICK SAND ******";
2210 FORM=1TO60:SOUNDRND(20),1:N
EXT:GOTO9
2400 CLS3:PRINT@224,"***** YOU D
ROWNED.TOO BAD! *****";
2410 FORM=1TO30:SOUNDRND(100),1:
NEXT:GOSUB9000:GOTO9
2600 U=U+1:S=S+A*INT(((R/NT)*10)
)+(U*1000):CLS2:PRINT@224,"SCORE
 SO FAR="S*L:GOSUB4000:GOTO10
2610 S=S*L:CLS2:PRINT@224,"SCORE
= "S
2620 PRINT"LEVEL="L
2630 IFS>HS THENHS=B:PRINT"NEW H
IGH SCORE!!!!":SOUND200,10
2640 PRINT"HIGH BCORE TODAY="HB
2645 GOSUB4000
2650 GOSUB9000:GOTO2
2800 CLS7:PRINT@224," YOU FELL I
N THE BOTTOMLESS PIT  -HAVE A NI
CE FALL!! HA! HA! HA!";
2810 FORM=255TO1STEP-5
```


HARDWARE PRODUCTS FOR THE TRS-80 COLOR COMPUTER®

SERIAL SWITCHERS

These bi-directional switchers allow you to expand your serial port to two or three peripherals or to connect one peripheral to two or three computers. They are a compact 2 × 3 × 1½ inches and are available with a mounted pilot light.

2 Ports $25.00
3 Ports $30.00
Add $5.00 for Pilot Light

64K FOR $75.00

Price includes expert installation, a 64K RAM Button, 64K Software (Specify disk or cass.), a 64K User Sheet, Return Shipping, and a 90-DAY UNCONDITIONAL WARRANTY. Requires 1.1 or newer BASIC ROM. Send your operating 285 (F) Series Color Computer, TDP-100, or Color Computer [illegible] or Money Order for fastest return. For D, or E Series boards, add $20.00. If necessary, add $35.00 for new ROM.

ROMs

BASIC ROM 1.1	$45.00
BASIC ROM 1.2	$35.00
F.C.B. ROM 1.1	$60.00
D.E.C.B. ROM 1.1	$35.00

RAMs

4164—64K RAM	$6.00
Set of Eight	$50.00
4116—16K RAM	$1.00
Set of Eight	$8.00

I.C.s

6809E-1 MHz MPU	$25.00
68B09E-2 MHz MPU	$30.00
6821—1 MHz PIA	$8.00
68B21—2 MHz PIA	$10.00
6883—SAM	$25.00
6847—VDG	$20.00
1 MHz Set of Four	$65.00
2 MHz Set of Four	$70.00
6822—H.D. PIA	$15.00

MISC

VT-8302 Pilot Light Kit	$7.00
VT-8401 Cooling Fan Kit	$25.00
6' T.V. Cable w/R.F.I. Filter	$15.00
40-Pin, Clip-on Heatsink	$1.00
16K, 32K, or 64K RAM Button	$3.00
16 to 24 Pin I.C. Extractor	$3.00
4, 5, or 6 Pin, M or F, Cable DIN	$1.00
4, 5, or 6 Pin, F, Chassis DIN	$2.00

TERMS: Cashier's checks and money orders for immediate delivery • Personal checks allow 2 weeks • Orders $100 to $199 save 10% • $200 and over save 15% • California residents add 6% • Orders under $25 add $2 shipping • C.O.D. add $4

4418 E. Chapman Ave., Suite 284
Orange, CA 92669
(714) 639-4070

VIDTRON T.M.

FREE CATALOG

SGS SEMIGRAPHICS SYSTEM FOR EXTENDED COLOR BASIC USERS

POWERFUL, YET EASY TO USE UTILITY TO PERFORM GRAPHIC FUNCTIONS IN THOSE SEMIGRAPHIC MODES WHICH ARE NOT SUPPORTED BY EXTENDED COLOR BASIC. USE EIGHT COLORS ON BLACK BACKGROUND, UP TO A MAXIMUM RESOLUTION OF 64 x 192 POINTS. COMBINE TEXT AND GRAPHICS.

GRAPHICS UTILITY FUNCTIONS

SET/TEST POINT — DRAW LINE — DRAW/FILL RECTANGLE
DRAW CIRCLE — PAINT AREA — TRANSFORM COORDINATES
PAGE ALLOCATION IN RAM — COPY PAGES/SELECTED AREAS
SELECT MODES/COLORS — PAGE PRINTING/SCROLLING
SAVE/LOAD IMAGE ON TAPE/DISK — DISPLAY/CLEAR PAGE

OTHER FEATURES: USER CREATED SOUNDS, ERROR CODES, COMPREHENSIVE USERS MANUAL, AND DEMO PROGRAM.

SGS is a 5.5K, position-independent Machine Language system that can be accessed from Extended Color Basic while using the standard graphics commands.

CASSETTE.....$29.95 Diskette.....$34.95

Send Check or Money Order to:

MICRO COMPUTER SYSTEMS
1404 SUNSET DRIVE
FRIENDSWOOD TX 77546

```
2820 SOUNOM,1:NEXTM
2830 CLS0:GOSUB9000:GOTO9
4000 DATA58,4,78,4,89,8,78,4,89,
4,125,8,108,16
4010 FORM=1TO3:FORZ=1TO3:READK,K
K
4020 SOUNOK,KK:NEXTZ:IFM<3THENRE
STORE:NEXTM
4030 FORM=1TO4:READK,KK:SOUNOK,K
K:NEXTM:RESTORE:RETURN
6000 CLS0:PRINT@224,"IT IS ALREA
DY NIGHT---YOU LOST!!";
6100 FORM=1TO30:SOUND99,1:SOUND8
9,1:NEXT
6200 GOTO9
7000 FORH=4TO17
7010 FORV=10TO17
7020 SET(H,V,3)
7030 NEXTV,H
7100 FORH=44TO55
7110 FORV=8TO15
7120 SET(H,V,3)
7130 NEXTV,H
7200 FORH=30TO31
7210 FORV=0TO31
7220 SET(H,V,3)
7230 NEXTV,H
7300 FORT=1TO5
7310 V=RND(30)
7315 IF INT(V/2)<>(V/2)THENV=V-1
7320 RESET(30,V)
7325 RESET(30,V+1)
7330 RESET(31,V)
7335 RESET(31,V+1)
7340 NEXTT
7400 FORH=16TO23
7410 FORV=20TO27
7420 SET(H,V,2)
7430 NEXTV,H
7500 FORH=36TO45
7510 FORV=22TO27
7520 SET(H,V,7)
7530 NEXTV,H
7600 FORH=56TO63
7610 FORV=30TO31
7620 SET(H,V,4)
7630 NEXTV,H
7900 RETURN
8000 CLS0
8010 FORT=1TO170
8030 C=RND(2)
8040 IFC=1THENC=137ELSEC=134
8050 PRINT@(RND(509)),CHR$(C);
8060 NEXT:PRINT@15,U;"MEN="N:RET
URN
9000 FORM=1TO2000:NEXT:RETURN
```


★★★ NEW ★★★

Formaker 2.0

the fastest, most complete office package yet!

Totally Menu Driven
Customize with company information & printer
Complete "on screen" instructions

FORMS
letter
invoice
quote
purchase order
mail order
confirm order
receipt

STORES
complete forms
item list
subquotes
letters
footnotes
customer info

FIGURES
quantity
list
net
discount
subtotals
tax
freight, etc.

SEPARATE CONFIGURE PROGRAM
for company info
printer options
quote & inv. #
w/auto sequencing
auto date

PRINTS
form feed
letterhead
envelope
multiple copy
emphasized

Challenger Software
3703 131st Ave N
Clearwater, FL 33520
or Call (813) 577-3998

$49 32K disc
VISA / MC
send for more information and catalog of other fine software

SOFTWARE PRODUCTS FOR THE TRS-80 COLOR COMPUTER®

EDITTRON T.M.

Full-Screen BASIC Program Editor
SAVES YOU TIME!

Let EDITTRON cut your programming time in half! You will appreciate the absolute ease at which this Full-Screen Editor allows you to **INPUT, EDIT,** and **DEBUG** your BASIC programs. EDITTRON performs these functions:

CURSOR-CONTROL
- Directional Movement
- Screen Scrolling
- Home the Cursor
- Limit the Cursor
- Down Page
- Up Page
- Search a Line
- Call a Line
- Find a String
- Repeat Find

SCREEN-EDITING
- Change Characters
- Extend a Line
- Kill a Line
- Insert Characters
- Delete Characters
- Move a Line
- Split a Line
- Copy a Line
- Merge Two Lines
- Auto-Numbering

Other features include: Auto-Repeating keys, Key Tone, User-friendly Prompts and Error Messages, and a budget of comprehensive, easy-to-read Documentation.

EDITTRON is a 3K, fully position-independent Machine Language program that requires a minimum 16K of RAM, and Extended Color BASIC.

CASSETTE.....$ 35 DISKETTE .....$ 40

4418 E. Chapman Ave., Suite 284
Orange, CA 92669
(714) 639-4070

VIDTRON T.M.

★FREE★ CATALOG

This is the second installment in a six-part series on creating a disk mailing list program.

Theory And Structure Of Direct Access Files — Part II

By Bill Nolan
Rainbow Contributing Editor

Last month we introduced this series with an article about the *INSTR* function and its use on the Color Computer. This month we will talk about the theory and structure of direct access files, and in the upcoming months we will learn about and develop a working database manager program. The particular program we will develop is a mailing list program.

When we are talking about disk files of data, we need to have some terms in common. A database is a group of related pieces of information arranged in some way. A database manager is a program designed to create, sort, search, or otherwise manipulate a database. To sort means to arrange in some order, such as alphabetically, or by ZIP code. To search means to look through the whole file and find all the data related in some way you have chosen. For example, you might search through a mailing list to find all of the people who live in Ohio.

Some additional terms we will be using are field, record, and file. A good way to illustrate these is by considering a mailing list program. This program will store information about several people. We may choose to keep track of the name, address, city, state, ZIP, and phone: six pieces of information about each person. Each one of these pieces of information is called a field. The name is a field, the address is another field, and so on. All of the information about one person is called a record, and all of the information about all of the people is called the file. Thus, we have files which are made up of records, while the records are made up of fields.

Whenever you are working with direct access files on any computer, including the Color Computer, all of the records must be the same length. That is, each record *must* have exactly the same number of characters as every other record in the file. The reason for this is that we may want to remove a record from the file and put another in its place, and if they aren't exactly the same size, the new record won't fit in the spot the computer has allocated for it.

For the same reason, you must decide ahead of time how long each field in the record will be, and that is then a fixed figure. For instance, considering the mailing list again, we might decide ahead of time to allow 30 characters for the name, 30 for the address, 15 for the city, two for the state code, nine for the ZIP code, and 13 for the phone number. This will make each and every record 99 characters in length, and even if we don't use all of those 30 spaces for the name, the record will still be 99 characters long. As you can see, it is important to decide on the length of each field very carefully.

Since names and addresses differ in length, the CoCo has a special command that will make everything fit. This command is *SET*, and it can be used in two forms, *LSET* and *RSET*. If you use *LSET*, the computer adds spaces to the beginning of your name to make it 30 characters long, while if you use *RSET*, the computer achieves equality of length by adding spaces to the end. If the name is too long, the computer just chops it off at the predetermined length. If it won't fit, don't worry, we'll make it fit.

If you allocate too much space for one of your fields, then a lot of space will be wasted on the disk, while too little space allocated will result in loss of data as the computer chops off the extra. Be sure to put a lot of thought into this when you choose your field length. In general, you must have enough space to accommodate the longest possible item, but no more. Let's consider names again. Many people have short names like Bill, John, Mary, Jill, and Bob, but the publisher of this magazine has the first name of Lawrence, and some other long first names are Archibald, Georgette, and Theodore. First names can easily be nine or 10 letters long.

Last names are also quite variable, ranging from Ho to Schlotzhauer, with a few even longer. Fifteen letters is not too many to allow for the last name. In addition to the first and last name, we have to allow for the space between the two names and also for something following the name, such

---

(Bill Nolan, who teaches "Programming In BASIC" at the college level, owns Prickly-Pear Software Co. and has written several commercially successful software packages.)

as Jr. or M.D. As you can see, 30 characters is just about right for the name. You will find the other figures I mentioned above are not too far off, either, so we will want to allocate 99 spaces for each record in our mailing list.

What we are doing right now is the sort of planning ahead you should do before you start to write any program. You first need to decide what the program will do for you. In this case, we decided that we wanted a program that would keep a mailing list on disk, sort that list, and search it for us.

We have also decided that we are going to keep track of six pieces of information about each person, and we have decided how much space to allocate for each piece of information. The next thing to be decided is what main sections we will need in our program in order to fulfill our objectives.

"The final mailing list will be a pretty nice one, with the ability to search or sort on any field, and a fairly fast sort method utilizing a temporary directory."

Most programs need a section in the beginning to set things up. This is where we can clear space for strings, set up any initial variables, and print out the main menu of the program. Our main menu will have choices on it for such things as Add Names, Search, Sort, Print List, and Print Labels. We will need a section for each of these things.

Let's start by considering some of the commands we will need to use for the disk access portion of our program.

```
10 OPEN "D", #1 "MAILLIST/DAT", 99
```

This line does several things for our program. First, the command *OPEN* creates a channel of communication between the computer and the disk drive. The *"D"* tells the computer that we will be using the direct access mode of storage. The #1 tells the computer to use buffer #1 for temporary storage of the information passing back and forth between the computer and disk drive. *"MAILLIST/DAT"* is the name of our file, and the 99 is the length of each record in the file. When this command is executed, the computer will look on the disk in the drive to see if there is already a file named *"MAILLIST"* out there, and if there isn't, the computer will create one. Try running that line, and you will see that the disk directory gets a new entry. By the way, when working with disk files it is a good idea to type the command *UNLOAD* before removing a disk from the drive. This will close all open channels, and help prevent data loss.

```
20 FIELD #1, 30 AS N$, 30 AS A$, 15 AS C$, 2 AS S$, 9
   AS Z$, 13 AS P$
```

This line tells the computer how we are going to divide up the 99 spaces into fields, and which variable names will be used to refer to which fields.

```
25 FOR R=1 TO 3
```

The *FOR* loop set up here will let us type in the information about three people and store it on the disk.

```
30 INPUT"NAME";X$:LSET N$=X$
40 INPUT"ADDRESS";X$:LSET A$=X$
50 INPUT"CITY";X$:LSET C$=X$
60 INPUT"STATE";X$:LSET S$=X$
70 INPUT"ZIP CODE";X$:LSET Z$=X$
80 INPUT"PHONE #";X$:LSET P$=X$
```

These six lines let us input the information about a person, and then "make it fit" our pre-decided field lengths by applying the *LSET* command.

```
90 PUT #1,R
```

This line puts the information on the disk. The #1 is the buffer number, and is the same as the *#1* in Line 10. The *R* is the record number. Every record in a direct access file is numbered, and the file is called a direct access file because we can go directly to the information we want if we know its number. The number is like the address of *that record.*

```
95 NEXT R
```

Line 95 sends us back to Line 25 so we can input the information for the next person. This loop will continue until we have input the information about all three people.

```
97 CLS
100 FOR R = 1 TO 3
```

Now we've re-established the loop because we are going to go out on the disk, get the information about the five people, and print it on the screen.

```
110 GET #1, R
```

The *GET* command is the opposite of *PUT*. *PUT* writes the information on the disk as the record number specified, while *GET* retrieves the information.

```
120 PRINT N$:PRINT A$:PRINT C$,S$,Z$,P$:PRINT
130 NEXT R
```

Line 120 prints out the information about one of the people in the file, and 130 completes the loop. All we have to do now is tell the computer we are finished with this file for the present. The command to do that is:

```
140 CLOSE #1
```

This tells the computer that we are finished communicating with the disk drive through buffer #1.

In the next four columns we will write each of the sections we talked about above almost as though they were separate programs, and then combine them together into our mailing list. The final mailing list will be a pretty nice one, with the ability to search or sort on any field, and a fairly fast sort method utilizing a temporary directory. Our program will be designed to handle about 400 names. Between now and next month, you start getting your names together, and I'll finish writing the mail list program. See you next month with part three.

WE CHALLENGE YOU!

WAR GAMES! WAR GAMES! WAR GAMES! WAR GAMES!

NEW!!! LEGATUS—32K COLOR EXT $29.95 DISK ONLY

LEGATUS

CLASSICAL AGE EUROPE...

The Winds of War are blowing across the northern frontier. the Emperor issues orders to his field commanders, who little realize the doubts tormenting their leader! There is too little in the treasury, too little known of the enemy, and too vulnerable are the imperial cities and their precious farm lands to pillage and capture. And if this is not enough, his armies are green as May grass. But ... JACTA ALEA EST! The die is cast. The campaign must begin... Printer recommended.

ARK ROYAL GAMES

ARK ROYAL GAMES

ARK ROYAL GAMES

ARK ROYAL GAMES

BATTLE FOR TUNIS

A 1 or 2 player game that places you in North Africa in 1943, Patton has just been recalled to Europe to help plan the invasion of Sicily; Rommel is in Berlin. You have the opportunity to replace two of history's greatest generals in this challenge for control of Tunisia. Each player controls the actual ground forces present at the time.

In the one player game, you control the Axis forces and try to do what Rommel's veterans couldn't: Hold Tunis!

Play is on a battle screen with an overall strategy map available for general reconnaissance. Intelligence and status reports, as well as air power, are also available.

NEW!!! BATTLE FOR TUNIS—32K COLOR EXT $24.95

WATERLOO 32k
CASSETTE.... $24.95

KAMIKAZE 32k
CASSETTE.... $24.95

ACROSS THE RUBICON
CASSETTE.... $24.95 32k

GUADALCANAL 32k EXT
CASSETTE.... $24.95

BOMBER COMMAND
CASSETTE.... $22.95
16k EXT

P. O. Box 14806
Jacksonville, FL 32238
904-786-8603

OTHER ARK ROYAL GAMES...

STARBLAZER — 32K	17.95
KAMIKAZE — 16K	14.95
ACROSS THE RUBICON — 16K	14.95

Prices on All games include shipping. Florida Resident add 5% tax.

All Programs require Color ComPuter™ (Tandy Corp) or TDP System 100 ComPuter™ (RCA)

We pay shipping on all prepaid orders to USA and CANADA.
Foreign orders add 10%.

32K ECB

the RAINBOW

Quest Of The Dragon's Gold

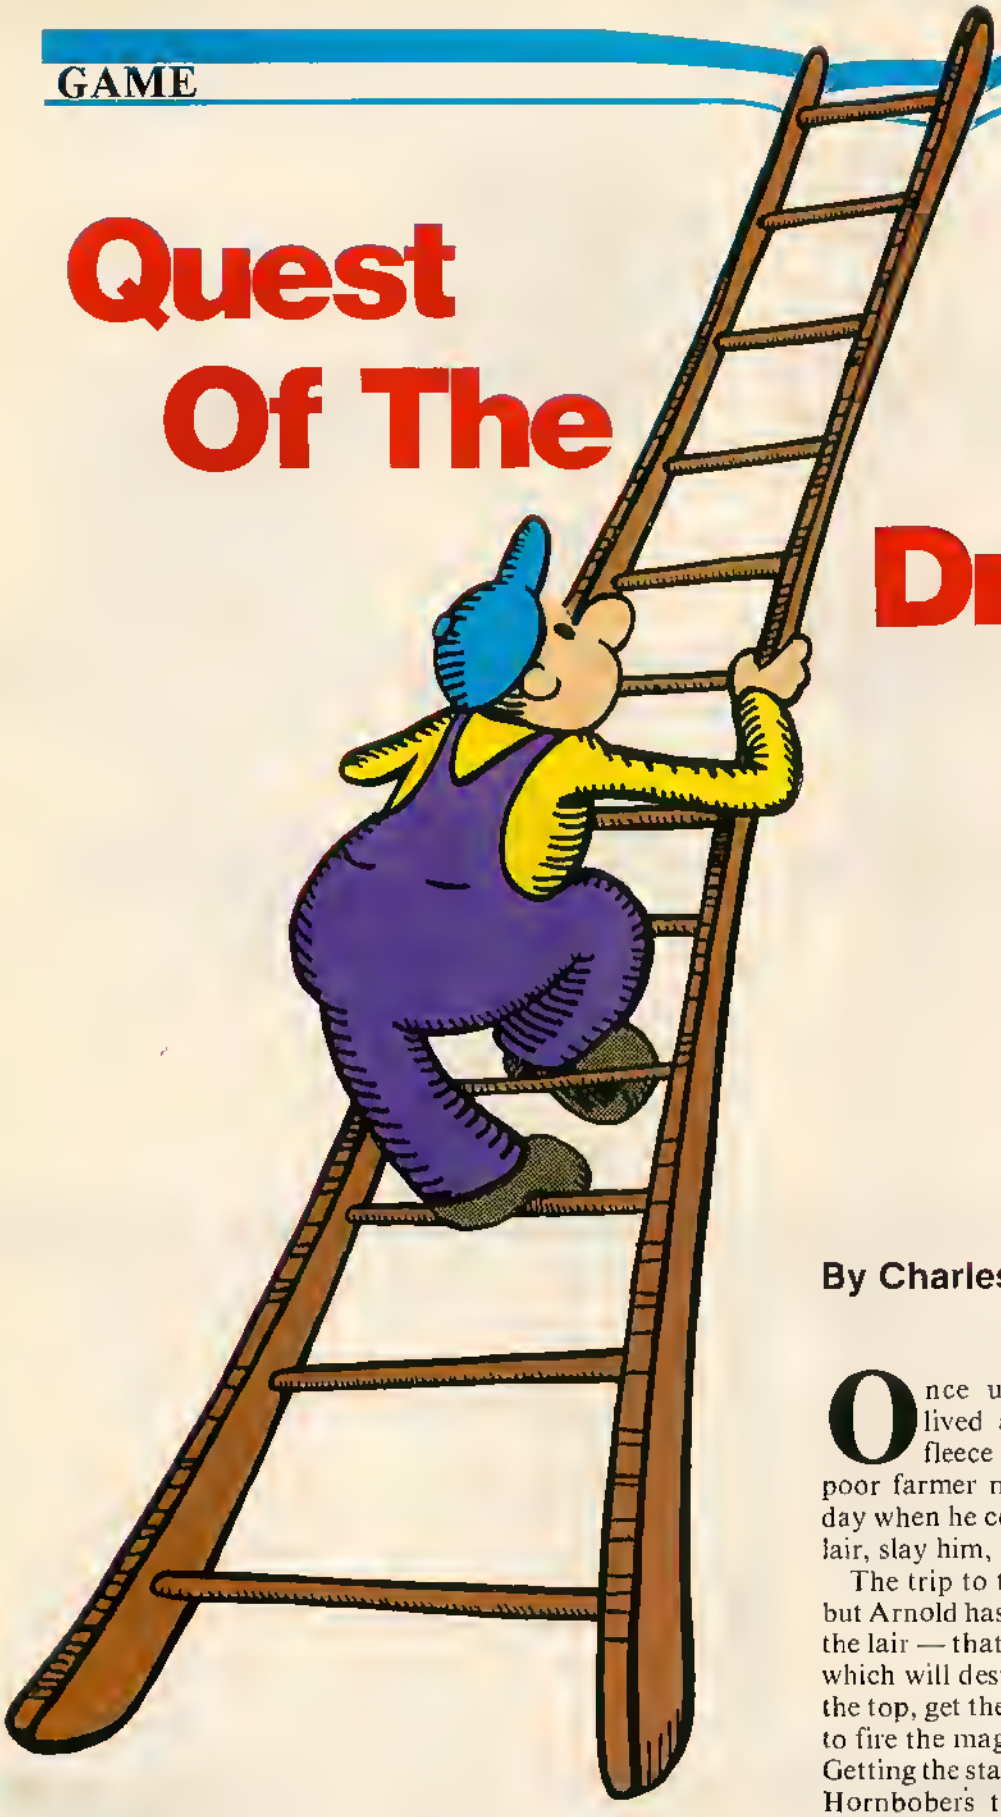

By Charles Husak

Once upon a time in a far away land lived a dragon who guarded a fabulous fleece of gold. In this land there also lived a poor farmer named Arnold, who dreamed of the day when he could climb to the top of the dragon's lair, slay him, and take his golden fleece.

The trip to the top of the lair is very dangerous, but Arnold has learned from a sorcerer the secrets of the lair — that there is a staff of Ora at the very top which will destroy the dragon. But you must reach the top, get the staff, and push your joystick button to fire the magic light that will destroy the dragon. Getting the staff is difficult. You must jump over the Hornbobers that come from under the ladders. Then you must climb the one-way ladders. Once you start you cannot climb down. Beware of the pits that open and close. You must wait till the pit closes before you can cross.

(Charles Husak, who holds a bachelor of science degree in education, is a computer technician and the author of The Little Runner.*)*

THE TOP 4 COCO GAMES...



ZAKSUND

From Elite Software comes this fantastic arcade style space action game with 3 different stages of moving 3-D graphics. You've never seen anything like this on your CoCo! Great sound too! 32K Tape: $24.95



GHOST GOBBLER

From Spectral Assoc. This "PAC" theme game has been improved several times. It is definitely the best of its type. Brilliant color, action and sound, just like an arcade. 16K Tape: $

CUBIX

By Spectral Associates. Very much like the arcade smash! Jump little Cubix around the 3D maze trying to change the color of all the squares. With Death Globes, Discs, Snakes, etc. 32K Tape: $24.95

THE KING

Previously called 'Donkey King', you simply cannot buy a more impressive game for your CoCo. With 4 different screens and loads of fun! From Tom Mix Software. 32K Tape: $25.95



COLORCADE

SUPER JOYSTICK MODULE

WITH RAPID FIRE!

ONLY $19.95

JOYSTICK INTERFACE/RAPID FIRE/6 FT. EXTENDER ALL IN ONE! The Colorcade allows connection of any Atari type joystick to your CoCo (including the Wico Red Ball). These switch type sticks are extremely rugged and have a faster and more positive response. They will improve the play of almost any action game.

An adjustable speed rapid fire circuit is built in. Press your fire button and get a great burst of fire instead of just a single shot! You get a real advantage in shooting games that do not have repeat fire.

ATARI JOYSTICK

ONLY $8.50

THE BEST YOU CAN BUY
WICO #15-9730
~~$34.95~~
$29.95

WICO FAMOUS "RED BALL"

ROM/ PROJECT/ PRODUCT CASE

Give a professional look to your project or product! High quality 3 piece injection molded plastic with spring loaded door. Designed especially for the CoCo ROM slot.

2 - 4 pcs.	$5.50 Ea.
5 - 9 pcs.	$3.50 Ea.
10 - 99 pcs.	$2.75 Ea.
100 & UP.	Call Us.

P.C. board for 27XX EPROMS... $4.00 Ea.

COLORWARE LIGHT PEN

ONLY $19.95

WITH SIX FREE PROGRAMS ON CASSETTE!

The Colorware Light Pen plugs directly into your joystick port and comes with six fun & useful programs on cassette. Easy instructions show how to use it with Basic and it's compatible with light pen software such as Computer Island's "Fun Pack." Order yours today. Only $19.95 complete.

TELEWRITER-64

DISK $59.95
CASSETTE. . . $49.95

Colorware researched the word processors available for the Color Computer. This is the best. Telewriter-64 is a truly sophisticated system that is marvelously easy to use. It works with any 16K, 32K or 64K system and any CoCo compatible printer.

TOP-RATED COCO WORD PROCESSOR

COLORWARE

VISA MasterCard

TOLL FREE ORDERING
800-221-0916

ORDERS ONLY. N.Y. & INFO CALL (212) 647-2864

'REAL TALKER'

HARDWARE Voice Synthesizer

NEW from COLORWARE.. only... $59.95

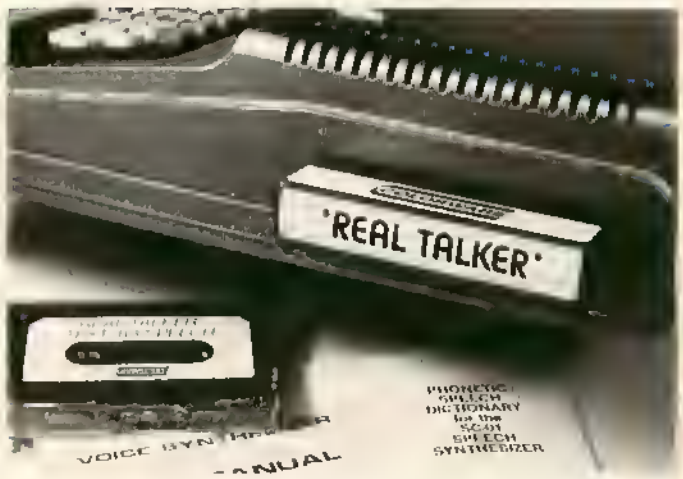

THINKING OF BUYING A COCO VOICE SYNTHESIZER?

READ THIS....

Making your computer talk couldn't be any easier! 'Real Talker' is a full featured, ready to use, HARDWARE voice synthesizer system in a cartridge pak. It uses the Votrax SC-01 phoneme synthesizer chip to produce a clear, crisp voice.

FREE TEXT-TO-SPEECH

Included free with 'Real Talker' is Colorware's remarkable Text-to-Speech program. This is a truly powerful machine language utility. What it does is automatically convert plain English to speech. And it has an unlimited vocabulary! For example, use it in the direct mode: Type in a sentence or a paragraph, even mix in numbers, dollar signs, etc., then press enter. The text is spoken. At the same time a phoneme string is generated which can be saved to cassette or disk, modified or used in a Basic program.

We originally planned to sell this major piece of programming for about $40.00 but decided it was so useful that no 'Real Talker' user should be without it. Besides, it really shows off the capability of 'Real Talker'.

Also included with 'Real Talker' is our unique Phoneme Editor program. It allows you to explore and create artificial speech at the phoneme level. Phenomes are the fundimental sounds or building blocks of word pronunciation. There are 64 different phenomes, as well as 4 inflection levels at your disposal. Creating and modifying speech at the phenome level is both fascinating and educational. The Phenome Editor may also be used to customize the pronunciation of speech produced by the Text-to-Speech program.

You don't have to use any of our utility programs though. If you write your own Basic Programs, you will find the pocket sized Votrax Dictionary (included free) is all you need to make your own Basic programs talk. This dictionary gives you quick access to the phenome sequences used to create approximately 1400 of the most used words in the English language.

How about compatibility? 'Real Talker' is compatible with any 16K, 32K, 64K, Extended or non-extended Color Computer. It works with any cassette or disk based system, with or without the Radio Shack Multi-slot expander. No other synthesizer under $100 can make this claim. Most other CoCo voice synthesizers require an expensive Multi-slot expander in order to work with the disk system. 'Real Talker' requires only an inexpensive Y-adapter. This is an important consideration if you plan on adding a disk or have one already.

'Real Talker' comes completely assembled, tested and ready to use. It is powered by the CoCo and talks through your T.V. speaker so there is nothing else to add. Price includes Text-to-Speech and other programs on cassette (may be transferred to disk), User Manual and Votrax Dictionary. ONLY $59.95

'Y-BRANCHING CABLE' For disk systems. This 40-pin, 3 connector cable allows 'Real Talker' to be used with any disk system $29.95

YOU DECIDE....

Order yours today on our Toll-Free Order Line. If you are not delighted with your 'Real Talker' system, simply return it within 30 days for a prompt, courteous refund.

COLORWARE

COLORWARE INC.
78-03F Jamaica Ave.
Woodhaven, NY 11421
(212) 647-2864

VISA MasterCard

★ ★ ★ ORDERING INFORMATION ★ ★ ★

ADD $2.00 PER ORDER FOR SHIPPING & HANDLING.
C.O.D.'S: ADD $3.00 EXTRA.
SHIPPING & HANDLING FOR CANADA IS $4.00
WE ACCEPT VISA, MASTER CARD, M.O.'S, CHECKS.
N.Y. RESIDENTS MUST ADD SALES TAX.

The Dragon's Gold, requiring 32K ECB, is a game of arcade action which I wrote for my eight-year-old daughter, Dianne. For those who can use the higher computer speed, enter *5 POKE 65495,0*. Speeding up the computer will also increase the difficulty. To start the game after the title either push the Space Bar or the joystick button. And here's a hint before you begin the quest: Keep moving because if you stop, the Hornbobers will speed up.

100	41	2756	51
195	94	3030	122
430	52	3155	1
2100	123	3240	57
2302	81	END	215

The listing:

```
6 DIM R(10),S(10)
7 TR=1
8 CLS:GOSUB3000:CLS
9 CLS:GOTO2000
10 T=&H1A:Z=1:POKE&H415A,0
11 C=183:D=162:P=0
12 POKE&H4123,&H59:POKE&H4125,&H
46:POKE&H4127,&H59
13 KL=0:POKE&H3F58,&H1A
15 PMODE4:SCREEN1,1:PMODE3
20 PCLS
30 DRAW"BM0,184;C7;R255"
40 PAINT(8,188),7,7
50 DRAW"BM0,144;C7;R255"
55 DRAW"BM0,152;C7;R200U8R18D8R3
0"
57 PAINT(250,148),7,7
60 PAINT(8,148),7,7
70 DRAW"BM0,112;C7;R33U8R18D8R21
0"
75 DRAW"BM0,104;C7;R255"
77 PAINT(250,108),7,7
80 PAINT(8,108),7,7
90 DRAW"BM0,72;C7;R200U8R18D8R30
"
95 DRAW"BM0,64;C7;R255
97 PAINT(250,68),7,7
100 PAINT(8,68),7,7
110 DRAW"BM0,44;C7;R24U4R20D8R4D
4R4D4R4D4R4D4"
120 PAINT(20,48),7,7
125 GOSUB130
126 GOTO160
130 DRAW"BM212,184;C7;U4R8D4U8L8
D4U8R8D4U8L8D4U8R8D4U8L8D4U8R8D4
U8L8D4U8R8D4"
140 DRAW"BM36,144;C7;U4R8D4U8L8D
4U8R8D4U8L8D4U8R8D4U8L8D4U8R8D4U
8L8D4U8R8D4"
150 DRAW"BM212,104;C7;U4R8D4U8L8
D4U8R8D4U8L8D4U8R8D4U8L8D4U8R8D4
```


NEW! For Your TRS-80 Color Computer

320 Full-time Audio Talk/Tutor Programs!



We're Your Educational Software Source

Course	No. of Programs
Language Arts (Spelling)	16 Programs
Reading	64 Programs
Comprehension	32 Programs
Phonics	32 Programs
English as a Second Language	32 Programs
Mathematics	64 Programs
Basic Algebra	16 Programs
Physics	16 Programs
Effective Writing	16 Programs
History	32 Programs

In Color, with Pictures and Text!

All of our TRS-80 Color programs have easy to understand professional announcer narration, not synthesized, robotic voices. All text is displayed in easy to read upper- and lower-case characters. Video clearly illustrates key concepts in each frame of the program.

Only $4.40 per program ($6.80 for 2, one on each side of a half-hour cassette). $59.90 for 16 programs (8 cassettes) in an album. Send for catalog of over 1000 programs for Atari, TRS-80, Apple, etc.

Dealer inquiries welcome

For more information, or to order call:

TOLL FREE 1-800-654-3871

IN OKLAHOMA CALL (405) 288-2301

DORSETT Educational Systems, Inc.

Box 1226, Norman, OK 73070

MasterCard VISA

```
U8L8D4U8R8D4"
155 RETURN
160 DRAW"BM8,44;C6;U4H4G2;BM10,4
4;U6E6U2;BM8,40;U3H6U2;BM10,40;U
10E3"
165 DRAW"BM18,30;C8;D6R2U6L2"
170 DRAW"BM70,63;C6;U2R6U2R6U2R6
U2R6U2R6D2R5D2R6U2R4U2R4D2R2E8R3
D2L1D2L2D2L2D2L2D2R10"
173 DRAW"BM240,63;C8;U15L3E5F5L4
D15"
180 DRAW"BM70,63;C6;R15U3F3R4U4F
4R20U2L4U2R22U2"
185 PAINT(72,62),6,6:PAINT(89,60
),6,6
187 PSET(118,55,7)
188 POKE&H3F58,&H1A:POKE&H3F59,&
H40
189 EXEC&H3F00:Y=65
190 POKE&H3F07,&H3F:POKE&H3F08,&
H5B
192 EXEC&H4099
195 A=JOYSTK(0)
200 IF A>50 THEN GOSUB2300
210 IF A<10 THEN GOSUB2330
215 B=JOYSTK(1)
220 IF B<10 AND PEEK(&H3F59)=&H5
A THEN GOSUB2650
230 IF B<10 AND PEEK(&H3F59)=&H4
4 AND C=143THEN GOSUB 2660
240 Z=Z+1
250 IF Z=8 THEN GOSUB4005
260 IF Z=20 THEN GOSUB 430
265 IF PEEK(&H3F59)>77 AND PEEK(
&H3F59)<82 THEN 266 ELSE 270
266 IF Z>8 AND Z<20 THEN GOSUB47
0
270 IF PEEK(339)=254 THEN GOSUB1
0000
272 EXEC&H4099
275 EXEC&H3F00
278 EXEC&H4130
279 IF PEEK(&H415A)=100 THEN 480
280 IF PEEK(&H3F58)=&H08 THEN 27
80
310 SC=SC+10
400 GOTO1970
405 DRAW"BM120,112;C1;U8R20D8L20
":PAINT(125,108),1,1
410 DRAW"BM120,152;C1;U8R20D8L20
":PAINT(125,149),1,1
420 RETURN
430 DRAW"BM120,112;C7;U8R20D8L20
":PAINT(125,108),7,7
440 DRAW"BM120,152;C7;U8R20D8L20
":PAINT(125,149),7,7
450 Z=0
460 RETURN
470 IF PEEK(&H3F58)<15 THEN RETU
RN
475 IF PEEK(&H3F58)>25 THEN RETU
RN
480 SR=SR+1
481 PLAY"L20;04;1;2;3;4;5;6;7;8;
9;10;11;12"
483 IF SR>2 THEN 490
484 GOTO10
490 TR=4
491 PLAY"L20;04;1;2;3;4;5;6;7;8;
9;10;9;8;7;6;5;4;3;2;1"
495 GOTO9
1000 A=PEEK(&H3F58)
1005 EXEC&H3F3C
1010 A=A-1
1020 POKE&H3F58,A
1030 EXEC&H3F1E
1033 FORX=1TO4:EXEC&H4099
1034 PLAY"O3L30;4;5":NEXTX
1035 EXEC&H3F3C
1040 A=A+1
1050 POKE&H3F58,A
1055 EXEC&H3F00
```


AUTOSTART, PROTECT & PROFESSIONALIZE YOUR PROGRAMS with HIDE-A-BASIC 1.1

AT LAST! A program that combines autostart with complete protection of your valuable basic programs.
IMPORTANT FEATURES:

- Autostarts your programs.
- A ML program that modifies your program and NOT just 'Stands Apart'.
- Option to disable Break-key, Clear key & Reset button.
- Disables LIST, LLIST, EDIT, DEL, TRON, TROFF, CSAVE(M), CLOAD(M).
- Disables POKE, PEEK, EXEC & USR to prevent 'Back-door entry' to your program.
- Disables disk functions to avoid access thru Disk System.
- Creates an 'ONERR GOTO' routine to trap errors.
- Your Basic program is loaded as a ML program - with CLOADM.
- Full documentation.

WITH HIDE-A-BASIC 1.1 THERE IS PRACTICALLY NO WAY ANYONE CAN 'GET INTO' YOUR PROGRAM.
Buy Now & Protect your Profits. For 16K ECB Cassette System - Tape - Only $24.95.
To Order: VISA, MC, Check, MO, COD ($2.50). Please add $2.00 shipping and handling. NYS Residents, please add Sales Tax. Immediate Shipment.

MICROCOM SOFTWARE
P.O. BOX 214, FAIRPORT, N.Y. 14450
(716) 425-1824
(9AM-9PM Mon-Sat)
Dealer Inquiries Welcome
VISA MasterCard

* COLOR COMPUTER DATA BASE MANAGER *

Elite•File™

THIS IS IT! ELITE•FILE is the Data Base Meneger that Color Computer users have been waiting for. ELITE•FILE is for everyone who needs to store end retrieve information. ELITE•FILE is a full-feetured reletionel Dete Base Meneger with all the editing and report formetting feetures thet ere typicelly found on much larger computer systems. Compere record structure flexibility, total record cepecity, informetion processing ability, speed of progrem response, printed output flexibility, and you'll agree that ELITE•FILE mey very well be the most powerful/useful program ever written for the Color Computer.

MAJOR feetures Include:
All mechine lenguege for speed • Flexible, user defined, dete record structures • Up to 255 characters per record field • Up to 255 fields per record • Up to 2000 charecters per record • Up to 4000 records per file • Up to 16 filea cen be open at the same time for information proceaaing • Edit, Scan, Sort, Select Record Information; all done FAST • Output reports to Screen, Printer, or ASCII Disk file • Place output data by Field Name, with Custom Text anywhere on tha printed pege • Perform math operatlona (+, —, *, /) between Field contenta • Produce tabulated reports from multiple record contenta • Generete column totala acrosa record field contenta.

Compatible with Elite•Calc and Elite•Word files • User friendly combination of Menu driven input, and single key commands • Supports up to 4 drives • Minimum 32K RAM, Disk required • Nested sub-field delinifions • Up to 8 fields in Primary Key • Copy record delinition from file to file • View/Print record definition • Input/Add records with easy to use field name format display • Edit records with full screen "type over" editor • Copy records to repeat identical data • Load Elite•Calc worksheets into random access data files • Scan mode for quick data retrieval • Locate any record by field contents • Select specitic groups of records by field content with full logic combination capabilities • Sort records in ascending or descending order by any field, or group of fields • Calculate values from combinations of field contents • Output any subset of fields in any order for printed reports • User selable print formats; Page Title, Top and Bottom Margin, Line Spacing, Page Length, Page Pause, Form Feeds and more • Output format also supports TAB, VTAB, CR, PAGE, text, HEX printer controls, and more • Join up to four sub-files to extend data record for printing • Produced detailed repetitive reports, for output on preprinted forms, using output formats written on Elite•Word • Variable Text Insert feature of Elite•Word is fully supported • Retile old record data into NEW record structures • Data, Field Definitions, Indices all stored on a single file • Memory resident, no program overlays from disk • Single program performs all features • List disk Directories and "Kill" files without leaving the program • Data files also accessible from BASIC programs.

- Disk Only
- Shipping NOW
- Add $2.50 Shipping
- PA residents add 6% sales tax
- Dealer inquiries invited

THE BEST FOR ONLY

$74.50

* COLOR COMPUTER WORKSHEET *

Elite•Calc™

ELITE•CALC is e powerful, full feetured worksheet calculator designed especially for the Color Computer. Answer "whet if" questions, prepare reports, maintain records and perform other tesks that, until now, required sophisticated business computers. ELITE•CALC is e serious tool for those who went to do more then pley gemes.

MAJOR feetures Include:
Eaae of uae • Individual cell formulas • Copy Blocka of cells • Full cell-edit capebility • Eeay 132 column pege width • Chengeable Beud retea • Greph formet for ber cherta • Sort (eacending or descending) • Semple worksheets included.

Single character commands • Help displays • 255 maximum rows • 255 maximum columns • Available memory always displayed • Rapid Entry modes for text and data • Selectable, automatic, cursor movement • Insert, Delete, Move entire rows or columns • Replicate one cell to fill a row or column with seleclable formula adjustment • All machine language for speed • Extended BASIC required for ROM routine calls • Automatic memory size detection for 16K, 32K, or 64K • > 20K bytes storage available in 32K systems • Math operators: +, —, x, /, ↑, (,) • Relation operators: =, >, <, <=, >=, <> • Logic Operations: AND, OR, NOT • Conditional Formula: IF, THEN, ELSE • Trig Functions: SIN, COS, TAN, ATN • Log Functions: LOG, EXP, SQR • Misc. Functions: INT, FX, ABS, SGN, RND • Range Functions: SUM, AVERAGE, COUNT, MIN, MAX, LOOKUP • Definable constant table • User definable printer set-up commands • Individual column width settings • Adjustable row height to insert blank lines without wasting memory • Hide columns or rows • Alternate print font selectable on a cell by cell basis • Display/Print formats set by cell, row, or column • Dollar format, comma grouping, prefix or postfix sign • Scientific notation, fixed point and interger formats • Left and Right cell contents justification • Full page formatting • All formats stored with worksheet on disk (tape) • Save/Load Disk (tape) files in compact memory form • Scan disk directories • Output ASCII file for word processor input capability • Memory resident code . . . no repeated disk calls.

THE BEST FOR ONLY

Specify: **Disk or Tape**
– Shipping from stock NOW
– Dealer inquiries invited
Add $2 Postage & Handling
PA residents add 6% sales tax

$59.95

"Elite•Calc is a great spreadsheet program! This professional quality program has the performance required for serious home applications as well as small businesses."
—Stuart Hawkinson, RAINBOW

"Truly one of the best programs I have seen."
—John Steiner, MICRO

"Elite•Calc is an extremely powerful worksheet . . ."
—Jack Lane, COLOR MICRO JOURNAL

"Bruce Cook's Elite•Calc is a very fine program indeed; potentially one of the great Color Computer Programs." ". . . a very impressive product."
—Scott L. Norman, HOT COCO

* COLOR COMPUTER WORD PROCESSOR *

Elite•Word™

Also Available On OS-9

THE SECOND GENERATION WORD PROCESSOR IS HERE! ELITE•WORD is a high performance, all machine language, Full Screen Editor which offers an ease-of-use that is simply incredible. ELITE•WORD has many powerful features not found in other word processors for the Color Computer. ELITE•WORD also offers a printed output flexibility that can handle your sophisticated home and business applications.

MAJOR features include:
Very easy to use • Top screen line reserved for HELP display/Command prompts • Excellent for BOTH program editing and word processing • TWO text entry modes; Insert or Exchange • Auto Key-Repeat • Smooth display scroll for easier proof reading • True Upper/Lower case display with lower case descenders • Hi-Res text "View" mode displays text exactly as it will be printed; including text Justification, Auto Line Centering, dynamic Margin changes, Top and Bottom Margins, Page Numbering, and Page Breaks • Include feature (disk only) permits including several file names within one output document; total document will have sequential page numbering if desired • Fast Disk I/O; no loading of overlay files to slow down operation • Variable Text (Mail Merge) capability for Form Letter generation

32K Extended Basic Required for ROM routine calls • Variable TAB stops • User definable Headers and Footers • Smooth cursor movement over text in any direction (including vertical) • Page Forward or Backward through text • Jump to beginning or end of text • Automatic text centering • Automatic text Word-Wrap if desired • True Block text Move, Delete, or Copy • Delete entire screen line • Backspace and Delete Character • Delete character above cursor • Find a string of characters • Global Replace character string • Two Hi-Res screen displays; 32 x 19 for text entry/editing, 64 x 19 for formatted text viewing • Continuous Memory display • Over 22K file size in 64K machines • Easy generation of ASCII files • Save/Load text files (in ASCII if desired) • Program remembers last File Name loaded or saved, and will write to it by default if desired • All I/O errors trapped and recoverable • Disk commands for Change Drive, Directory and Free Space • Print Format features allow user to specify Left Margin, Line Length, Line Spacing, Top and Bottom Margin, Duplicate Copies, Right-Side text Justification, Page Pause, Page Numbering, and more • Dynamically change any print Format features within text • Imbed Hex codes and printer Font changes within text.

Additional OS-9 version features:
Edit two files simultaneously • Save or Print only a portion of the text buffer • Edit files larger than memory (uses disk as buffer) • Block Copy from one file to another • Execute any OS-9 command from Editor

OS-9 is a trademark of Microware and Motorola.

— *Shipping from stock NOW*
— *Dealer Inquiries Invited.*
Add $2 Postage & Handling
PA residents add 6% sales tax

THE BEST FOR ONLY

Specify	
Tape	$59.95
RS Disk	$59.95
OS-9 Disk	$79.95
OS-9 & RS Disk	$109.95

"Elite•Word is a terrific word processor with an impressive list of features, yet it's easy to learn and use."
—Stuart Hawkinson, HOT COCO

"I was more than satisfied with Elite•Word . . . After the review, I would not hesitate to compare it with the two best selling word processors. And my comparison places it at the top of the list."
—A. Buddy Hagan, RAINBOW

★ COLOR COMPUTER DICTIONARY ★

Elite•Spel™

This program cannot spell AARDVARK or SALUBRIOUS or VICHYSSOISE, but it is very easy to use and it's FAST! All potentially misspelled words are identified in a single pass through it's 24,000 word dictionary. ELITE•SPEL is fully compatible with ELITE•WORD and supplements the best word processor for the Color Computer. By the way, if you often use the word AARDVARK, ELITE•SPEL can learn it and up to 4,000 other words that are in your common vocabulary. Dictionary maintenance for adding and deleting words is included as an integral part of the program, not as separate programs.

MAJOR features include:
Easy to use, menu commands • Single pass dictionary search • 1,000 word memory dictionary of common words • 20,000 word dictionary included • Room for 4,000 of your own words • List suspect words on screen or printer • List all words used with number of occurrences • Learn individual words that were correct in file • Learn entire files of words • Delete words from dictionary • Apply corrections to file in batch or interactive modes • Works in single or multiple drive systems • All machine language for maximum speed • 32K disk required.

- Disk Only
- Shipping NOW
- Add $2 Shipping
- PA residents add 6% sales tax
- Dealer inquiries invited

$29.95

When bought with ELITE•WORD ONLY $ 15.00

Elite Software

Productive Programs for Serious Users

All software features:

★ Superior Ease of Use
★ Cross-file Compatability
★ Printer Compatability
★ Comprehensive Manual
★ Nationwide User-group Support
★ Handsome Vinyl Binder
★ Revision Upgrade Program

MasterCard VISA

• Shipping from stock NOW •

Add $2.00 Shipping ($2.50 for Elite•File)
PA Residents add 6% Sales Tax

Dealer Inquiries Invited

Box 11224 • Pittsburgh, PA 15238 • (412) 795-8492

```
1060 RETURN
2000 SR=0
2080 FDRV=1TD8:GOSU82200:NEXT:FO
RV=1TD8:GOSU82200:NEXT
2090 FDRV=1TD8:GDSU82210:NEXT:FO
RV=1TD6:GOSU8221Ø:NEXT
2100 FDRV=1TD8:GOSU82220:NEXT:FD
RV=1TD7:GOSU8222Ø:NEXT
2105 PDKE1534,143:PDKE1535,143
2110 DEFUSRØ=16515
2120 PRINT@136,"THE DRAGDN'S GOL
D";:PRINT@207,"BY";
2130 PRINT@233,"CHARLES A HUSAK"
;
2140 IF TR=4 THEN PRINT @ 393,"S
ORRY YDU LDSE ";
2145 IF TR=5 THEN PRINT @ 389,"Y
DU HAVE WDN THE GDLD";
2170 SCREENØ,1
2172 W=1
2175 R$="CFCFCFCFGFEFGCECECECEFE
DEFCEFEDEFCAF"
2176 N$="T6D2L5"
2180 A=USRØ(Ø):IFW=36 THEN W=1
2181 M$=MID$(R$,W,1):W=W+1
2182 PLAY"XN$;XM$;"
2183 A=USRØ(Ø)
2185 IF INKEY$=" " OR PEEK(339)=
254THEN10 ELSE2180
2200 PRINTSTRING$(2,127+16*V);:R
ETURN
2210 PRINTSTRING$(2,127+16*(9-V)
)TA8(30)STRING$(2,127+16*V);:RET
URN
2220 PRINTSTRING$(2,127+16*(9-V)
);:RETURN
2300 PDKE&H3F26,&H87:PDKE&H3F08,
&H58
2302 EXEC&H3F3C:EXEC&H3F00
2304 FDRX=1TD30:NEXT
2305 EXEC&H3F3C
2306 EXEC&H3F1E
2307 GOSU8130:EXEC&H4130:IF PEEK
(&H415A)=100 THEN 480
2308 EXEC&H3F3C
2310 IF PEEK(&H3F59)=&H5C THEN19
0
2312 PDKE&H3F59,Y
2314 Y=Y+1
2315 EXEC&H3F00
2316 RETURN
2330 PDKE&H3F26,&HEF:POKE&H3F08,
&HC3
2500 EXEC&H3F3C:EXEC&H3F00
2510 FDRX=1TD30:NEXT
2515 EXEC&H3F3C
2520 PDKE&H3F59,Y
2530 EXEC&H3F1E
2535 EXEC&H4130:IF PEEK(&H415A)=
100 THEN 480
2540 GDSU8130
2550 EXEC&H3F3C
2555 IF PEEK(&H3F59)=&H40 THEN19
0
2595 Y=Y-1
2598 EXEC&H3F00
2600 RETURN
2650 C1=210:D1=225
2655 GDTD2700
2660 C1=35:D1=48
2700 IF C1=210 ANO P=10 THEN RET
URN
2702 IF C1=210 ANO P=30 THEN RET
URN
2705 POKE&H3F07,&H40:PDKE&H3F08,
&H28
2710 EXEC&H3F00
2715 GET(C1,C)-(O1,D),R,G
2730 PDKE&H3F08,&H57
2740 EXEC&H3F00
2745 GET(C1,C)-(O1,D),S,G
2751 PUT(C1,C)-(D1,D),R,PSET
2752 GOSU8130:C=C-2:D=O-2:EXEC&H
4099
2753 LINE(C1,C+2)-(O1-2,D+2),PRE
SET,8F
2754 PUT(C1,C)-(D1,O),S,PSET
2755 FDRX=1TD40:NEXT:C=C-2:O=O-2
2756 LINE(C1,C+2)-(D1,D+2),PRESE
T,8F
2757 DRAW"8M30,104;R22"
2758 ORAW"8M206,64;R22"
2759 DRAW"8M206,144;R22"
2760 P=P+1:IF P=10 THEN 2765
2762 IF P=20 THEN 2765
2763 IF P=30 THEN 2765
2764 GDTD2751
2765 POKE&H3F07,&H3F:PDKE&H3F08,
&H58
2767 T=T-5
2768 PDKE&H3F58,T
2770 RETURN
2780 XX=220
2782 IF KL=9 THEN 2900
2783 EXEC&H4099
2784 A=JDYSTK(Ø):KL=KL+1
2785 IF A>50 THEN GOSU82300
2786 IF A<10 THEN GDSU82330
2787 IF PEEK(&H3F59)>&H5A THEN G
DSU8 2850
2788 IF PEEK(&H3F59)<82 AND KL<1
6 THEN GDSU8480
2790 IF PEEK(&H3F59)=&H48 THEN 2
930
```

GRAPHICOM

The hit of the Pasadena Color Expo, GRAPHICOM is the best graphics program ever written for the COCO! GRAPHICOM was three years in the making, and you can see every minute in its quality and ease of use. GRAPHICOM has features you would expect from systems costing hundreds of times more!

**Powerful drawing tools: "rubber band" graphics, "stamps", rotating pictures, mirrored, masked, and reversed images, and lots more!

**Easy to use: Uses two joysticks, or one joystick and koala pad, to operate a big, simple picture-based menu.

**Incredible output capacity: Transmit pictures over modems or ameteur radio! GRAPHICOM even has a screen dump function that works with over 20 different printers!

GRAPHICOM is simple enough that anyone can use it, yet it's so powerful that a seasoned artist can use it to explore new frontiers of creativity.

Requires 64K and disk drive ..... Only $29.95

ART MAN: THE POOR MAN'S GRAPHICOM?

ART MAN has a remarkable resemblence to GRAPHICOM; they're almost the same! The biggest difference is that ART MAN will run on a 32K system! Tape or Disk..... $29.95

GRAPHICOM PICTURE DISKS

Marvel at the wonders of computer aided art with the amazing gallery of picture disks for use with GRAPHICOM:

Picture Disk #1: Features drawings, and tutorials for GRAPHICOM.

Disk #2: Features Elvira, mistress of the dark, and friends (great drawings and digitized photos).

Disk #3: Excellent drawings, tutorials, and examples of use of the "X-PAD".

Disk #4: Electronic circuits and symbols.

GRAPHISET - More than 16 font screens: Roman, Greek, Cursive, special symbols and more!

Picture Disks are $19.95 for one, and $10.00 for each additional disk, or $39.95 for all five.

NEWBASIC

This impressive package will save you hundreds of tedious hours trying to do those "impossible" little things in BASIC. NEWBASIC adds over 30 commands to regular BASIC: expanded directory, text "window", inverse video, keyboard click, BREAK on or oft, underline, word "wrap", ten definable function keys, ON ERROR GOTO, text screen dump, a function to help you type in programs from RAINBOW magazine, and MUCH, MUCH MORE!

Requires 64K and disk drive $49.95

COMPUTER
PROGRAM DATA
RECORDER

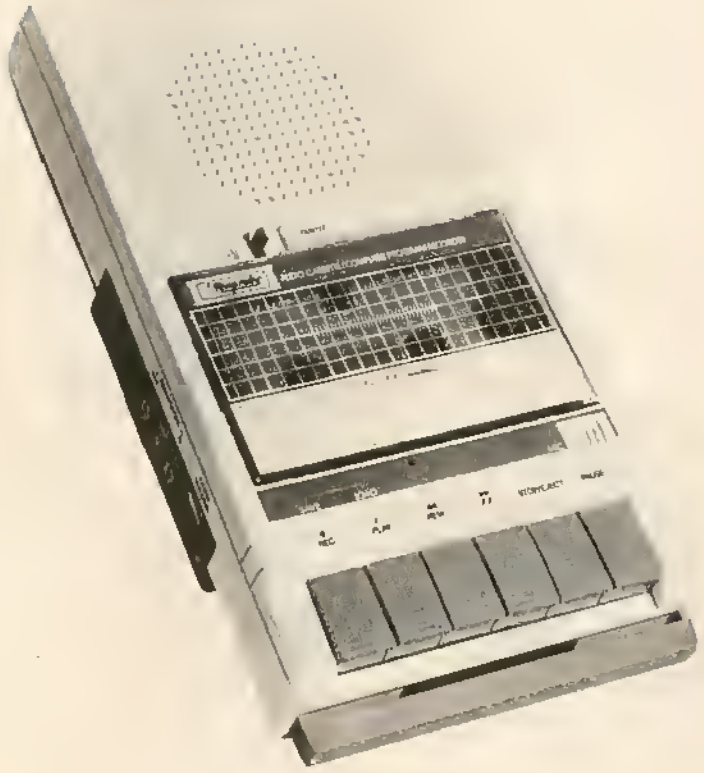

ALARON INC. RY-295

DON'T REPAIR YOUR TAPE RECORDER!
Buy a new one
at this special price of only $39.95.
Get a new Computer Data Recorder.

Disk Drive and Controller only $329.95. This may not be the lowest price you will find in the Rainbow, but we can guarantee it will be the best disk drive you can buy. Most special prices are for big, old, outdated full size drives. We are offering you the newest design, Slim Line TEAC disk drives. These are exceptional quality 40 track disk drives. They are guaranteed for 6 months, twice as long as most disk drives. For a controller we will offer the J & M with gold plated contacts. As a special bonus with each disk drive, we will include a dual power supply and case. Now or at a later date you can add a second disk drive for very little money:

1 TEAC 40 Track Slim Line Disk Drive and Controller — $339.95
2 TEAC 40 Track Slim Line Disk Drives and Controller — $499.95
1 TEAC 40/40 With Case Power Supply — $239.95



MichTron

6655 Highland Road • Pontiac, MI 48054
Orders & Information **(313) 666-4802**

Master Charge and VISA OK. Add $3.00 for shipping in the USA · $5.00 in Canada. Dealer Inquires invited.

```
2840 IF XX<200 THEN 2783
2845 GOTO 2782
2850 IF PEEK(339)=254 THEN 2852
ELSE RETURN
2852 XX=220:YY=57
2853 CIRCLE(XX,YY),4,8:CIRCLE(XX
,YY),4,1
2854 XX=XX-3
2855 IF PPOINT(XX-4,YY)=6 THEN 2
857 ELSE 2853
2857 LINE(70,63)-(136,44),PRESET
,BF
2858 RETURN
2900 XS=136:YS=57
2905 CIRCLE(XS,YS),4,6:CIRCLE(XS
,YS),4,1
2907 XS=XS+3
2910 IF XS=220 THEN GOSUB480 ELS
E GOTO 2905
2920 GOTO2780
2930 T=T-1
2932 EXEC&H3F3C
2935 POKE&H3F58,T
2936 GOSUB2330
2947 FORX=1TO100:NEXTX
2948 IF PEEK(&H3F58)=&H08 THEN 2
955
2950 GOTO2930
2955 GOSUB2330
2956 TR=5
2957 FORE=1TO1000:NEXTE
2960 GOTO9
3000 PRINT @232,"ONE MOMENT PLEA
SE"
3001 FOR A=16128 TO 16730
3005 READ D$
3010 V=VAL("&H"+D$)
3015 POKE A,V
3020 NEXT
3025 RETURN
3030 DATA 86,16,87,3F,56,10,8E,3
F
3035 DATA 58,8E,3F,58,C6,02,A6,A
0
3040 DATA A7,80,5A,26,F9,30,88,1
E
3045 DATA 7A,3F,56,26,EF,39,86,1
4
3050 DATA 87,3F,5A,10,8E,3F,87,8
E
3055 DATA 3F,58,C6,03,A6,A0,A7,8
0
3060 DATA 5A,26,F9,30,88,1D,7A,3
F
3065 DATA 5A,26,EF,39,86,16,87,3
F
3070 DATA 57,8E,3F,58,86,00,C6,0
3
3075 DATA A7,80,5A,26,F8,30,88,1
D
3080 DATA 7A,3F,57,26,F1,39,FF,0
0
3085 DATA 1A,5E,FF,0A,80,0A,80,2
A
3090 DATA A8,0F,C0,28,70,28,FC,A
8
3095 DATA FC,A8,C0,0F,F0,0F,F0,3
E
3100 DATA 80,3E,80,3E,80,3E,A0,3
F
3105 DATA 88,3F,08,0F,08,0A,A0,0
A
3110 DATA 80,0A,80,0F,F0,0F,FC,0
0
3115 DATA A8,00,00,A8,00,02,AA,8
0
3120 DATA 00,FC,00,02,87,00,02,8
F
3125 DATA C0,0A,8F,C0,0A,8C,00,0
0
3130 DATA FF,00,00,FF,00,3F,AF,0
C
3135 DATA 3F,AF,FC,00,AF,FC,00,A
A
3140 DATA 00,00,AA,0C,0E,AA,8C,0
E
3145 DATA AA,AC,0E,A0,AC,0C,00,A
C
3150 DATA 0C,00,00,02,A0,02,A0,2
A
3155 DATA A8,03,F0,0D,E8,3F,E8,3
F
3160 DATA EA,03,EA,0F,F0,0F,F0,0
2
3165 DATA 8C,02,8C,02,8C,0A,8C,2
2
3170 DATA FC,20,FC,20,F0,0A,A0,0
2
3175 DATA A0,02,A0,0F,F0,3F,F0,0
0
3180 DATA 2A,00,00,2A,00,02,AA,8
0
3185 DATA 00,3F,00,00,DE,80,03,F
E
3190 DATA 80,03,FE,A0,00,3E,A0,0
0
3195 DATA FF,00,00,FF,00,30,FA,F
C
3200 DATA 3F,FA,FC,3F,FA,00,00,A
A
3205 DATA 00,30,AA,00,32,AA,B0,3
A
3210 DATA AA,80,3A,0A,80,3A,00,3
0
```

```
3215 DATA 00,00,30,02,A0,02,A0,0
A
3220 DATA A8,03,F0,02,A0,02,A0,3
A
3225 DATA A8,3A,A8,33,F0,3F,8C,3
F
3230 DATA 8C,02,AC,02,AC,02,AC,0
2
3235 DATA A0,02,A0,02,A0,03,20,0
F
3240 DATA 20,00,20,00,30,00,3C,0
2
3245 DATA A0,02,A0,0A,A8,03,F0,0
2
3250 DATA A0,02,A0,0A,A8,0A,A8,0
3
3255 DATA F3,0F,8F,0F,8F,0E,A0,0
E
3260 DATA A0,0E,A0,02,A0,02,A0,0
2
3265 DATA A0,02,30,02,3C,02,00,0
3
3270 DATA 00,0F,00
3280 DATA 8E,03,FF,30,01,A6,84,2
C,04
3290 DATA 88,10,8A,80,A7,80,8C
3300 DATA 06,01,2F,F1,39
3310 DATA 12,8E,41,22,30,01,8F,4
1,28,8D,56,8E,41,24,30,1F,8F,41
3320 DATA 28,8D,4C,8E,41,26,30,0
1,8F,41,28,8D,42,8E,41,22,8C,12
3330 DATA 41,27,4D,8D,1A,30,1F,8
F,41,22,8E,41,24,8D,10,30,01,8F
3340 DATA 41,24,8E,41,26,8D,06,3
0,1F,8F,41,26,39,10,8E,41,2A,8F
3350 DATA 41,28,C6,06,A6,A0,A7,8
0,30,88,1F,5A,26,F6,A6,9F,41,22
3360 DATA 87,41,21,8E,41,28,39,8
E,41,28,86,0,C6,06,A7,80,30,88
3370 DATA 1F,5A,26,F8,8E,41,28,3
9,8E,12,59,8F,41,22,8E,17,46,8F
3380 DATA 41,24,8E,1C,59,8F,41,2
6,7E,40,99,0,12,59,17,46,1C,59
3390 DATA 12,5D,41,41,14,14,55,5
5
3400 DATA 8E,41,22,30,01,8D,0F,8
E,41,24,30,1F,8D,08,8E,41,26
3410 DATA 30,01,8D,01,39,A6,84,8
1,41,26,07,39,86,64,87,41,5A
3420 DATA 39,A6,84,81,00,26,F4,3
9,0
```


GRAPHICOM has established itself as the premium graphics program for the Color Computer. One of the outstanding features of this program is its ability to use a picture disk with lots of designs on it, to incorporate these pictures into other designs such as greeting cards, business announcements, school projects, electronics, etc.

At the last two RAINBOWfests, demand for the picture disks has been overwhelming. We at MichTron are now going to come out with a new picture disk every month. If you would like to subscribe to this service for a year, it will be at a substantial savings. Picture disks are normally $19.95 each, plus $3.00 shipping and handling. A one year subscription is only $199.95. You can save over 100 dollars by subscribing now!

Join now, and you can pick any TWO disks from our ad on Page 35 for your first month's subscription!

MichTron

6655 Highland Road
Pontiac, Michigan 48054
Orders & Info: (313) 666-4802

Master Charge and VISA OK. Add $3.00 for shipping in the U.S.A. $5.00 in Canada. Dealer inquires invited

Computer rules to live by, programming, and educational shortcuts in . . .

Getting Ready For The Fall

By Fred B. Scerbo
Rainbow Contributing Editor

Editor's Note: If you have an idea for our "Wishing Well," send it directly to Fred or c/o THE RAINBOW. *We don't promise that any given wish will be granted, but you may be lucky if a certain program looks like a challenge or is educational. All programs developed from your ideas are for your use, but remain the property of the author.*

Here we are in the middle of summer vacation and what does the "Wishing Well" have in store for you? What else, but a set of programs which will help you when you go back to school in the fall.

Actually, spending the summer months in preparation for school is not that unusual. Quite often the summer is the only time teachers have to actually try any type of curriculum development. (There is a reason for this. Can you imagine trying to map out your navigational route halfway through a journey? It is the same with teaching. Advance planning is essential.) Since a large number of responses and phone calls have been from educators and parents who want to help their children with their Color Computers, I decided to dip into the "Wishing Well" to come up with two programs which I have used quite often in my classroom during the last three years. (These programs are not three years old, but have evolved. In fact, I must have had at least two dozen variations on these programs. What you will see here are the most current refinements.)

Over the most recent articles, some of you may have been able to discern what my philosophy of computers is. (A philosophy of computers?) To sum it up in just a few words, the Scerbo Rules of Computer Use go something like this:

1) Never do by hand what can be done more easily by computer.
2) Never do by computer what can be done more easily by hand.

Sound logical? Sound like something that nearly every computer user would take for granted?

You would be amazed to discover that many computer users do not readily subscribe to this philosophy. (Note that I said users and not programmers.) Quite often when a person gets a new computer, he or she will want to do nearly every simple task imaginable with the computer. One request which I receive at least twice a week is for a program to pick random numbers for our state lottery, "The Megabucks." Sure, writing a program like this is simple, but I have yet to hear of anyone writing one which regularly picked the winning numbers. (Don't you think that if I could write such a program I would have written it months ago and stopped writing columns and teaching?)

On other occasions, people have asked me to help develop filing programs to keep track of names and phone numbers of clients in small businesses. My argument is always the same. Why do this with a computer when the same task can be done much more easily with a simple set of file cards? Who really wants to waste time loading files if a file card can be more quickly looked up? Such computer efforts are often a waste of time. If a computer is needed for this type of work and we are talking about massive numbers of clients, then we can talk about getting a database program which will let us sort by a number of different factors. (Example: Give me the names of all clients in a given town who are left-handed, etc.) Since there are a number of programs on the market that can

(Fred Scerbo is a special needs instructor for the North Adams Public Schools. He holds a master's in education and published some of the first software available for the Color Computer through his software firm, Illustrated Memory Banks.)

do these tasks, why bother to re-invent the wheel? This brings us to the third Scerbo rule:

3) Never rewrite a program that already exists unless you can make it better and the improvements warrant the extra time invested.

Some of the programs which I have listed in the first few "Wishing Wells" have been exactly that, such as the *Screen Quiz* programs, which were inspired by other programs. Improvements were made in those programs which made the programs much more flexible for those wanting to use them, thus justifying the time spent.

The first two rules which I discussed have actually come to play recently as well as in the development of the two programs you see listed here. I'll get to those recent developments by the end of the article, but for now, let us get down to the business at hand: the two programs listed here.

Remember my first rule: Never do by hand what can be done better by computer. Well, this rule can be especially well suited in the teaching of math. Some of my students come to my resource room for math remediation. Since some of them may be operating on a third or fourth grade math level, I often use my Color Computers for addition and subtraction remediation. However, not all of my students respond well to just sitting at a computer. No matter how much time a student spends learning from a computer, the actual skills still have to be applied to paper.

In most cases, this is simple. There are countless math workbooks available which have the problems a student needs to master in order to improve his or her math skills. There is one catch, however. Most commercially available books will only spend a single chapter on a given skill. Add to that a page or two with examples and then it's on to the next chapter. Nearly all these books assume that the skill will be mastered in a single chapter.

This is rarely the case when working with students who need math remediation. It might take months to master a single skill, such as borrowing in subtraction.

What is a parent or teacher to do in such cases? They do what teachers have done for decades: they create math worksheets and problem papers by hand. Believe me, this can be very time consuming. Just try to sit down and think up a pattern of random numbers that you haven't used before. After a short period of time, this task becomes complicated if not tiring when done manually.

If you had to name the one thing that a computer does easily, what would you say it was? The answer would most likely be — select random numbers, right? Therefore, if we want to use this function to help create our own math sheets, the task should be relatively simple.

(We do have one caution to consider, however. All computers do not generate true random numbers. Instead, they generate a sequence of numbers which appear to be random. Therefore, to avoid a repeat of the same sequences, we can solve this problem by making a random number equal to the value of *-TIMER*, a negative *TIMER* value. Since we can never predict that value of the *TIMER* at any given point, the effect will be to reset our random number generator.)

Both programs listed will generate these worksheets. The first is called *Super Math Worksheet Generator* and will generate, on an 8½ by 11-inch sheet of plain or tractor feed paper, a problem sheet of 18 math problems equally spaced on the page. The program naturally requires a line printer. One that works with a Color Computer should be suitable unless you are using the color pen plotter or thermal printer. (The results with these would tend to be too small to be of any use.) The page prints out the problems in the enlarged print *CHR$(31)* mode. The largest digit any problem will contain will be four digits wide.

"Super Math Worksheet Generator *. . . is the one program which I have used every day of teaching for over the last two years.*"

The first rule also comes to play in the special feature of the program: it creates a coded answer sheet. When I first started creating these random sheets, there was no answer sheet. Instead, I would often spend time correcting my students' papers either by hand or with a pocket calculator. This was once again a foolish waste of time since the computer had the ability to create the answers as well as the problems. The special feature of the answer section is also contained in the fact that it gives each set a random sheet identification number which can be matched with the answer sheet.

This feature can be used in several ways. Sometimes I will print the answers at the bottom of the sheet and fold the bottom of the paper so that they are not visible to the student. The bottom can even be torn off. In other cases where the student might not be so trustworthy, I would let the program save the answer sheets for up to six different problem sheets. These can then be printed up on a separate sheet of paper which is held until you choose to print them, or until you have made a total of six worksheets. The program will hold the answers and the corresponding identification numbers so they can be matched up later.

On running the program, you will be presented with a menu which includes addition, subtraction, multiplication, division and the exit program. When you select subtraction, the program will ask for a maximum digit up to 999. This will in fact create a four digit problem when a three digit number is entered, insuring that the minuend is always larger than the subtrahend. If we select addition or multiplication, we can enter up to 9999 as our maximum number. Any larger number will not be accepted and pressing ENTER with no number will return us to the menu. When we use division, we will be asked to select a number between 99 and 999. This will generate division problems from a low of two or three digits to a maximum of four digits. Playing around with these input numbers will help you to select the type of problems you wish to generate.

How successful or valuable is *Super Math Worksheet Generator*? Let me give you a hint. It is the one program which I have used every day of teaching for over the last two years. I begin every day by creating the worksheets that I need for my students. I am never at a shortage of math materials since I can always load in *MATHGEN* (its disk filename) and create what I need at the learning level I need. Try it and let me know what your comments are on it.

Now let's take a look at Listing 2 which is titled *Written Math Problem Generator*. This program is very different from *MATHGEN* in that it creates verbal problems along the lines of "If Johnny has three dollars and wants to

REAL TIME CLOCK

RTC-10

Full featured, yet very easy to use. RTC-10 is a quartz-based, Time/Date clock contained in a compact ROM case. RTC-10 makes it simple to access the time and date with just a few Basic PEEKS. A 2-year + replaceable battery (included) keeps time accurate when the computer is off and even when the cartridge is unplugged.

ONLY $89.00

Compatible with any 16K or greater, Extended or non-extended Color Computer, RTC-10 may be used with or without a Radio Shack or any other Multi-Slot unit. To use it with a disk, without a Multi-Slot, order the Y-cable below.

Completely assembled, tested and ready to plug-in and use, with programs included for clock setting and for continuosly displaying the Time/Date in the upper right corner of the video screen. ONLY..... $89.00

COCO CABLES

Top quality cable and connectors with all gold plated contacts.....

Y-CABLE- 40 conductor, 1 ft. long, 1 Male, 2 Females. Allows you to connect your disk controller pack and the RTC-10 Clock or most voice synthesizers, etc. **ONLY** $29.95

DISK PACK EXTENDER CABLE- 40 Conducter, 2 ft. long, 1 Male, 1 Female. Lets you place your disk controller pack where you want it, out of your way. **ONLY** $22.95

CUSTOM FLAT CABLES- Call-in or send us your requirement. We will quote a reasonable price for the cable you need.

Custom Computer Products
6 Dogwood Court
Goshen, NY 10924
(914) 469-9780

ccp

ADD $3.00 PER ORDER FOR SHIPPING & HANDLING
FOR C.O.D. INCLUDE AN ADDITIONAL $3.00
NY RESIDENTS MUST INCLUDE SALES TAX

buy . . ." etc. The program is designed to write 12 problems on two sheets of paper. It is designed so that the computer prints the first six problems and then waits for a prompt while you prepare the second sheet, or, if you choose, to reverse the paper so as to print on the reverse side of the same sheet. Printing on the reverse side can be a wise idea if you are using a line printer which accepts single sheets. It can help save paper, which is in increasingly short supply in many school systems.

If you check the *DATA* statements, you will notice many names listed. I have included these names to be used, at random, for the creation of these written problems. You may wish to substitute the names of your own children or students so that they will enjoy working with the worksheets that much more. (Just keep most names around eight or nine letters long.) You will also find the names of products (tapes, food, etc.) which you may wish to alter. Just be sure you change the number of data items or you will get an OD Error.

MATHPROB, as it is called, will create an answer sheet, but will not store successive sheets like *MATHGEN* will. You may wish to print the sheet at the bottom of the second side, or put it on another sheet. The choice is yours.

Both programs should be immense time savers for you and should prove valuable if you do teach. I have mentioned that some of my educational programs have been translated to Apple or Pet BASIC. These programs would be very difficult to translate into APPLESOFT because there is no *PRINTUSING* command in APPLESOFT. The next time one of your friends tries to tell you that the Apple IIe is a better computer, ask that person if the Apple can print numbers with decimals for dollars and cents. The answer will be no. You would have to write an algorithm to work around this deficiency. Good luck if you want to try! Just thank your CoCo that you don't have to do the same as the Apple owners.

Once again, I want to thank you for your suggestions and wishes. I hope these two programs have granted some of your wishes. Keep those ideas coming.

I did mention earlier that there was one more development which had to do with my rule about using the computer to save time with things you would normally have to do by hand. If you remember my articles from recent months, I have mentioned that the members of my high school wrestling team were wondering when I would write a sports program that had to do with wrestling.

Well, the task was finally completed, but not in the way that I originally had intended. The normal high school wrestling season ends in late February. However, during the spring and summer months, many high school wrestlers participate in freestyle wrestling sponsored by the USA Wrestling Federation or under AAU tournaments. Since the start of the freestyle season, I have gone to a tournament with our wrestlers nearly every week. At these tournaments, fellow coach Brian Collins and I have helped with the pairings and bout sheets which have to be completed before any wrestling starts (usually an hour and a half before!).

After trying this time consuming process by hand, it didn't take long for me to realize that the computer could do the same task more easily. As a result, my program for pairing and bout sheets was used recently at the Northeastern Regional Kids Freestyle Tournament in Easton, Pa., as well as the New England Regional Junior Freestyle Tournament at the University of New Hampshire in Durham, N.H.

If things go as planned, by the time you read this, I may have actually had the opportunity to use this program as part of the selection of the June USA Olympic Wrestling Team in Michigan as well as the actual event this summer in Los Angeles. There are still many details to be worked out as of the time of this writing, but the thrill of just being asked to help out the USA Wrestling Federation in this big event was just too much not to share.

Therefore, in an upcoming "Wishing Well," I will try to share an off-shoot of these programs which can be used for any sport or any type of competition. Since these would be much more useful than strictly a wrestling program, I'll share the more general versions that would be of greater interest to more of you.

Just keep in mind that when you set a goal with your CoCo, great things can often come of it. With a little luck, by the time you read this I may have gotten a summer vacation in Los Angeles using my computer for a once-in-a-lifetime opportunity.

I'll keep you posted. In the meantime, keep those letters coming.

Your College Future Starts Today

RAINBOW CERTIFICATION SEAL

RAINBOW CERTIFICATION SEAL

```
TYPE Node = RECORD
  Next : ^Node;
  NodeName : String(15);

TYPE Month = (Jan, Feb,..

MthDys : ARRAY [Month] OF 28..31;
```

```
WITH ThisNode DO
  Next := Next^.Next;

READ (A,B);
WRITELN ('RESULT', 3.2E5*SIN(A));

CASE ThisMonth OF ...
```

The *Education Testing Service* (*ETS*, famous for managing the SATs) have based the college computer science *advanced placement* (*AP*) test on **Pascal**.

DEFT Pascal $79.95

DEFT Pascal *Compiler*
complete Pascal language
generates machine language object

DEFT Linker
combines multiple program objects
into one binary program

DEFT Pascal Workbench $119.95

(DEFT Pascal And DEFT Bench Together)

DEFT Bench $49.95

DEFT Debugger
debug Pascal machine programs
symbolically

DEFT Macro/6809
supports entire 6809 instruction set
lets you define your own instructions

DEFT Edit
Full screen editor

DEFT Linker
(see DEFT Pascal)

DEFT Lib
create and maintain program object
libraries

DEFT Products are available through these fine dealers:

THE PROGRAM STORE
computer plus
DELKER
OWL-Ware
Follett Library Book Co.

All **DEFT** software and programs developed with **DEFT** software *are* BASIC ROM independent and **use all** of the **memory** in your Color Computer **without OS-9.** All you need is **DEFT** software and a TRS-80 Color Computer with Extended Disk BASIC, at least 32K of RAM and One Disk Drive. All orders are shipped UPS within 24 hours of receipt. Add 3% for shipping and handling; Maryland residents add 5% for State Sales Tax; add $2.00 for COD. Software licensing arrangements are available for schools. Dealer Inquiries welcome.

For Product Questions Call
1-301-253-1300
For Credit Card Orders Call Toll Free 24Hrs
1-800-368-3238 Operator 8
In Virginia
1-800-542-2224 Operator 8
Or Fill Out Our Order Coupon And Mail To:
DEFT Systems, Inc.
Suite 4, Damascus Centre
Damascus, MD 20872

Quantity of Each: _ DEFT Pascal _ DEFT Bench
_ DEFT Pascal Workbench

Method of Payment (check one) ☐ Check Enclosed ☐ VISA
☐ Master Card ☐ COD

Account Number ☐☐☐☐ ☐☐☐☐ ☐☐☐☐ ☐☐☐☐
Card Expiration Date ☐☐ / ☐☐
Signature _____
Name _____
Street _____
City _____ State ☐☐ Zip ☐☐☐☐☐

DEFT is a Trademark of DEFT Systems, Inc
TRS-80 is a Trademark of TANDY Corporation



Listing 1:

```
1 '*****************************
2 '* SUPER MATH WORKSHEET GEN *
3 '* BY FRED B.SCERBO (C)1984 *
4 '* 149 BARBOUR ST.  N.ADAMS *
5 '* MASSACHUSETTS  -   Ø1247 *
6 '* ILLUSTRATED MEMORY BANKS *
7 '*****************************
1Ø DIM U(6,36),D(6,36),SN(3Ø),QK
$(3Ø)
2Ø CLS3:SCREENØ,1:LC$=CHR$(175)+
CHR$(17Ø):RC$=CHR$(165)+CHR$(175
):E8$=CHR$(175)+CHR$(175):GOSUB3
Ø:GOTO4Ø
3Ø CLS5:PRINTSTRING$(32,172);:PO
KE1Ø56,32:PRINT@33,"super";:POKE
1Ø62,32:PRINT@39,"math";:POKE1Ø6
7,32:PRINT@44,"worksheet";:POKE1
Ø77,32:PRINT@54,"generator";:POK
E1Ø87,32:PRINT@64,STRING$(32,163
);CHR$(175);:RETURN
4Ø FORI=ØTO8:PRINT@127+(I*32),EB
$;:NEXT:PRINT@133,CHR$(175);CHR$
(174);STRING$(18,172);CHR$(173);
CHR$(175);
5Ø PRINT@165,LC$;" (A)DDITION
    ";RC$;:PRINT@197,LC$;" (S)UB
TRACTION    ";RC$;:PRINT@229,LC$
;" (M)ULTIPLICATION ";RC$;:PRINT
@261,LC$;" (D)IVISION       ";RC
$;:PRINT@293,LC$;" (E)XIT PROGRA
M   ";RC$;
6Ø PRINT@325,CHR$(175);CHR$(171)
;STRING$(18,163);CHR$(167);CHR$(
175);
7Ø PRINT@384,STRING$(32,172);:PO
KE1449,32:POKE1441,32:POKE1442,3
2:POKE1443,32:POKE1444,32:PRINT@
421,"press";:POKE1450,32:PRINT@4
27,"desired";:POKE1458,32:PRINT@
435,"category";:POKE1467,32:POKE
1468,32
8Ø POKE1469,32:POKE1470,32:POKE1
471,32:PRINT@448,STRING$(32,163)
;STRING$(31,128);:POKE1535,128:I
F NC=>6 THEN 75Ø
9Ø X$=INKEY$:KE=RND(-TIMER):IFX$
="S"THENGOSUB12ØELSEIFX$="A"THEN
GOSU8290ELSEIFX$="M"THENGOSUB43Ø
ELSEIFX$="D"THENGOSUB56ØELSEIFX$
="E"THEN73ØELSE9Ø
1ØØ GOTO2Ø
11Ø REM SUBTRACTION SECTION
12Ø NC=NC+1:GOSUB83Ø:FORI=127TO19
1STEP32:PRINT@I,E8$;:NEXT:PRINT@
192,STRING$(32,172);
13Ø QK$(NC)="S":PRINT@132," SUBT
RACTION WORKSHEETS ";:PRINT@224,
"       INPUT NUMBER SPAN":PRIN
TSTRING$(32,32);:PRINT@256,"   (
3 DIGITS-MAX.999)";:INPUTWW:IF W
W>999THEN13ØELSEIF WW=ØTHEN NC=N
C-1:GOTO2Ø
14Ø SN(NC)=TIMER:L=1:W=1:GOSUB815
Ø:GOTO18Ø
15Ø PRINT#-2,CHR$(31);"NAME";STR
ING$(24,&H5F);"DATE";STRING$(7,9
5);CHR$(3Ø)
16Ø PRINT#-2,"SHEET IDENTIFICATI
ON NO.";SN(NC):PRINT#-2," "
17Ø PRINT#-2,CHR$(31);:RETURN
18Ø FORK=1TO6
19Ø FORS=ØTO2:PRINT#-2,USING"##.
";S+L;:PRINT#-2,"           ";:NE
XTS:PRINT#-2,""
2ØØ FORI=1TO3:A=RND(WW)+(RND(8)*
(WW+1)):U(NC,L)=A:PRINT#-2,"
 ";:PRINT#-2,USING"####";A;:PRIN
T#-2,"    ";:L=L+1:NEXTI:PRINT#-
2,""
21Ø FORI=1TO3:A=RND(WW):D(NC,W)=
A:PRINT#-2,"    -";:PRINT#-2,USI
NG"####";A;:PRINT#-2,"    ";:W=W
+1:NEXTI:PRINT#-2,""
22Ø GOSUB823Ø:GOTO24Ø
23Ø FORI=1TO3:PRINT#-2,"   -----
--   ";:NEXTI:PRINT#-2,"":RETURN
24Ø FORI=1TO4:PRINT#-2," ":NEXTI
,K
25Ø GOSUB69Ø
26Ø GOTO77Ø
27Ø RETURN
28Ø REM ADDITION SECTION
29Ø NC=NC+1:GOSUB3Ø:FORI=127TO19
1STEP32:PRINT@I,E8$;:NEXT:PRINT@
192,STRING$(32,172);
3ØØ QK$(NC)="A":PRINT@133," ADDI
TION  WORKSHEETS ";:PRINT@224,"
       INPUT NUMBER SPAN":PRINTS
TRING$(32,32);:PRINT@256,"   (4
DIGITS-MAX.9999)";:INPUTWW:IF WW
>9999THEN3ØØELSEIF WW=ØTHEN NC=N
C-1:GOTO2Ø
31Ø SN(NC)=TIMER:L=1:W=1
32Ø GOSUB815Ø
33Ø FORK=1TO6
34Ø FORS=ØTO2:PRINT#-2,USING"##.
";S+L;:PRINT#-2,"           ";:NE
XTS:PRINT#-2,""
```

THE COLORSOFT™ BUSINESS SYSTEM

INTEGRATED BUSINESS SOFTWARE DESIGNED FOR THE COLOR COMPUTER
WRITTEN FOR USE BY THE NON-ACCOUNTING ORIENTED BUSINESSMAN
CONCISE USERS MANUAL WITH SAMPLE TRANSACTIONS TUTORIAL
PROFESSIONALLY WRITTEN AND FULLY TESTED
HIGHLY USER FRIENDLY AND MENU DRIVEN
AFTER THE SALE SUPPORT

SMALL BUSINESS ACCOUNTING (Version 2.0) This sales-based accounting package is designed for the non-accounting oriented businessman. It also contains the flexibility for the accounting oriented user to set up a double entry journal with an almost unlimited chart of accounts. This package includes Sales Entry, transaction driven Accounts Receivable and Accounts Payable, Journal Entry, Payroll Disbursement, and Record Maintenance programs. Screen and hardcopy system outputs include Balance Sheet, Income Statement, Customer and Vendor Status Reports, Accounts Receivable and Payable Aging Reports, Check Register, Sales Reports, Account Status Lists, and a Journal Posting List. The number of accounts is limited only by the number of disk drives. $89.95

ACCOUNTS RECEIVABLE (Version 2.0) This package is designed to meet the requirements of most small business users. The system includes detailed audit trails and history reports for each customer, prepares invoices and monthly statements, mailing labels, aging lists, and an alphabetized customer listing. The user can define net terms for commercial accounts or finance charges for revolving accounts. This package functions as a standalone A/R system or integrates with the Small Business Accounting package to build a complete accounting/receivables system. $59.95

PAYROLL (Version 2.0) This integratable package is designed for maintaining personnel and payroll data for up to 200 hourly and salaried employees with 8 deductions each. This system calculates payroll and tax amounts, prints checks and maintains year-to-date totals. These amounts can be automatically transferred to the SBA package for financial reporting. It computes each pay period's totals for straight time, overtime, and bonus pay and determines taxes to be withheld. Additional outputs include mailing list, listing of employees, year-to-date federal and/or state tax listing, and a listing of current misc. deductions. This system is suited for use in all states except Oklahoma and Delaware. $69.95

All programs require a minimum of 32K and 1 disk drive but will take advantage of 64K and multiple drives. Each package features a hi-res 51 x 24 black on green screen. 16K versions available without hi-res screen. Specify 16K or 32K versions when ordering. Future integrated packages will include: Inventory Control, Sales Analysis, Accounts Payable.

INCLUDE $5.00 Shipping/Handling Per Order **Write for Free Catalog**

BRANTEX, INC.

COLOR SOFTWARE SERVICES DIV.

BUSINESS SOFTWARE GROUP
P.O. BOX 1708
GREENVILLE, TEXAS 75401

TELEPHONE ORDERS
(214) 454-3674
COD/VISA/MASTERCARD

ATTENTION DEALERS: WE OFFER THE BEST DEALER PLANS AVAILABLE

```
350 FORI=1TO3:A=RND(WW):U(NC,L)=
A:PRINT#-2,"      ";:PRINT#-2,USI
NG"####";A;:PRINT#-2,"     ";:L=L
+1:NEXTI:PRINT#-2,""
360 FORI=1TO3:A=RND(WW):O(NC,W)=
A:PRINT#-2,"     +";:PRINT#-2,USI
NG"####";A;:PRINT#-2,"     ";:W=W
+1:NEXTI:PRINT#-2,""
370 GOSUB230
380 FORI=1TO4:PRINT#-2," ":NEXTI
,K
390 GOSUB690
400 GOTO770
410 RETURN
420 REM MULTIPLICATION SECTION
430 NC=NC+1:GOSUB30:FORI=127TO19
1STEP32:PRINT@I,EB$;:NEXT:PRINT@
192,STRING$(32,172);
440 QK$(NC)="M":PRINT@130," MULT
IPLICATION  WORKSHEETS ";:PRINT@
224,"       INPUT NUMBER SPAN":P
RINTSTRING$(32,32);:PRINT@256,"
  (4 DIGITS-MAX.9999)";:INPUTWW:
IF WW>9999THEN440ELSEIF WW=0THEN
 NC=NC-1:GOTO20
450 SN(NC)=TIMER:L=1:W=1:GOSUB15
0
460 FORK=1TO6
470 FORS=0TO2:PRINT#-2,USING"##.
";S+L;:PRINT#-2,"          ";:NE
XTS:PRINT#-2,""
480 FORI=1TO3:A=RND(WW):U(NC,L)=
A:PRINT#-2,"      ";:PRINT#-2,USI
NG"####";A;:PRINT#-2,"     ";:L=L
+1:NEXTI:PRINT#-2,""
490 FORI=1TO3:A=RND(WW):O(NC,W)=
A:PRINT#-2,"     X";:PRINT#-2,USI
NG"####";A;:PRINT#-2,"     ";:W=W
+1:NEXTI:PRINT#-2,""
500 GOSUB230
510 FORI=1TO4:PRINT#-2," ":NEXTI
,K
520 GOSUB690
530 GOTO770
540 RETURN
550 REM DIVISION SECTION
560 NC=NC+1:GOSUB30:FORI=127TO19
1STEP32:PRINT@I,EB$;:NEXT:PRINT@
192,STRING$(32,172);
570 QK$(NC)="D":PRINT@133," DIVI
SION WORKSHEETS ";:PRINT@224,"
     INPUT NUMBER SPAN":PRINTSTR
ING$(32,32);:PRINT@256," ENTER '
999' FOR EASY OR '9999'":PRINT@2
```


Metric Industries

For the color computer and TDP100

Model 101 Interface $54.95

- Serial to Parallel Interface
- Works with any Centronics Compatible Printer including Radio Shack, TDP, Gemini, Epson, Gorillia and many others
- Six switch selectable baud rates (300 to 9600)
- 90 day warranty
- Power Supply Included

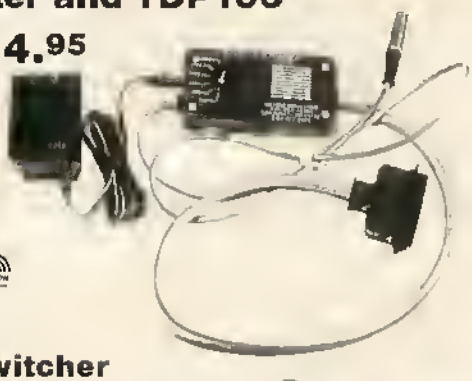

Model 102 RS-232-C Switcher $35.95

- Switches all three data lines
- Indicator lights let you know computer is on
- 3 position switch has silver plated contacts for high reliability
- Color coded lights indicate switch position
- Color coded labels for your printer, modem etc., supplied

Cassette Label Program $6.95

- Prints five lines of information on pin-feed cassette labels
- Menu driven — easy to use

- Uses special features of your printer for standard, expanded and condensed characters
- 24 free labels included with program
- Auto centering features for each line of text
- 16K ECB required

General Items

- Gemini 10X Printer **$319.00**
- Special Save — Printer & Interface **$360.00**
- C-10 Cassettes **$7.50/dozen**
- Hard plastic boxes **$2.50/dozen**
- Pin-feed Cassette labels **$3.00 per 100**
- Free shipping on all orders over $50.00
- Add $3.00 for shipping on orders under $50.00
- Ohio residents add 5.5% sales tax
- Phone order line for VISA and MASTERCARD, orders accepted 24 hrs. a day, call **513-677-0796** or send check or money order to:

Metric Industries
Department R
P.O. Box 42396
Cincinnati, OH 45242

Dealer Inquiries Invited

VIP™ Library

Personal Productivity Tools for Modern Times

RAINBOW CERTIFICATION SEAL

The Library Concept

State of the Art, Quality, Integrity, Compatibility and Affordability. Five things good software must possess. Five things that epitomize the **VIP Library™**. Each program is the diamond of its class, true excellence. These programs are first in features, first in power, first in memory, and all are affordably priced. And for your convenience all disk programs can be backed up.

State Of The Art

All **Library** programs are written in machine code specifically for the Color Computer, to work without the interference of a separate operating system such as FLEX. From this comes speed and more workspace for you. Unlike other programs for the Color Computer which are said to be 64K compatible, **VIP Library™** programs are not limited to between 24 and 30K of workspace in 64K. **Library** programs have Memory Sense with BANK SWITCHING to fully use all 64K, thus giving up to 51K with a disk version and up to 53K with a tape version.

Easy To Use

Each **Library** program was carefully designed to be extremely easy to use. Built-in on-screen help tables are at your fingertips, as are menus of all kinds. Every effort is made to use logical, intuitive and easy-to-remember commands. The manuals have been thoughtfully prepared to cover every aspect of the program, and they have complete tutorials to get you going right away. We set the standard!

Lowercase Displays

State-of-the-Art graphics allow instant use of four display colors, and eight lowercase displays featuring descending lowercase letters. You can select from 51, 64 or 85 columns by 21 or 24 lines per screen, with wide or narrow characters in the 64 display. These screens provide a pleasant and relaxing way to perform your tasks, with as much text on the screen as is possible. Each program is easy to learn and a joy to use. We take pride in the stringent testing done to make these programs perform flawlessly. Every feature, every convenience, sleek, simple and elegant.

". . . PICTURE getting your instantaneous investment report over the phone, using it in your spreadsheet calculation, generating a report, and writing a memo including that report and data from your database with your word processor, and all this with VIP Library™ programs . . ."

Total Compatibility

All **Library** programs are compatible. Transfer and use of files between programs is easy and carefree. What's better, when you have learned one program the others will come easy. And every program is the best of its kind available.

The Library Programs

For your writing needs is the **VIP Writer™**, and its spelling checker, the **VIP Speller™**. For financial planning and mathematical calculations you can use the **VIP Calc™**. To manage your information and send multiple mailings there is the **VIP Database™**. For sending all these files to and from home or the office and for talking to your friends you can have the **VIP Terminal™**. Finally, to fix disks to keep all your **Library** files in good repair we offer the **VIP Disk-ZAP™**.

Mini Disk Operating System

The Disk versions each have a Mini Disk Operating System which will masterfully handle from 1 to 4 drives. It offers smooth operation for such features as the ability to read a directory, display free space on the disk, kill files, save and automatically verify files, and load, rename and append files. **Library** programs simply do not have the limitations of BASIC.

Professionalism

The **Library** will grace your work area with the professionalism it deserves. Welcome the **VIP Library™** into your home and office.

©1983 by Softlaw Corporation

VIP Writer™

Includes VIP Speller at no additional cost!!

(Formerly Super "Color" Writer II)
By Tim Nelson

RATED TOPS IN RAINBOW, HOT COCO, COLOR COMPUTER MAGAZINE & COLOR COMPUTER WEEKLY

The most powerful and easy-to-use word processor is available in the showpiece and workhorse of the **Library: The VIP Writer™**. Because of its undisputed superiority over all Color Computer word processors, it was selected by Dragon Data Ltd. of England and TANO in the U.S., to be the Official Word Processor for their line of Dragon microcomputers.

The result of two years of research, the **VIP Writer™** offers every feature you could desire from a word processor. It is the most powerful, fastest, most dependable and most versatile. With the hi-res display, workspace and compatibility features built into the **Library** the **Writer** is also the most usable.

"... Nearly every feature and option possible to implement on the Color Computer. The design of the program is excellent; the programming is flawless ... Features for the professional, yet it is easy enough for newcomers to master ... Certainly one of the best word processors available for any computer ..." October 1983 "Rainbow"

"Word processing with VIP Writer is like driving a high-performance vehicle ... This Ferarri of a package has more features than Telewriter, Easywriter (for the IBM PC), or Applewriter," October 1983 "Hot CoCo"

The **Writer** will work with you and your printer to do things you always wanted to do. Every feature of your printer can be put to use, every character set, every graphics capability at any baud rate, EVEN PROPORTIONAL SPACING. All this with simplicity and elegance. You can even automatically print multiple copies.

Although all versions feature tape save and load, the disk version provides the Mini Disk Operating System common to the whole **Library**, plus disk file linking for continous printing.

Professional features of particular note:

- Memory-Sense with **BANK SWITCHING** to fully utilize 64K, giving not just 24 or 30K, but up to 61K of workspace with the rompak version and 50K with the disk version.
- TRUE FORMAT WINDOW allowing you to preview the printed page ON THE SCREEN BEFORE PRINTING, showing centered lines, headers, FOOTNOTES, page breaks, page numbers, & margins in line lengths of up to 240 characters. It makes HYPHENATION a snap.
- A TRUE EDITING WINDOW in all 9 display modes for those extra wide reports and graphs (up to 240 columns!).
- FREEDOM to imbed any number of PRINTER CONTROL CODES anywhere, **EVEN WITHIN JUSTIFIED TEXT.**
- Full 4-way cursor control, sophisticated edit commands, the ability to edit any BASIC program or ASCII textfile, SEVEN DELETE FUNCTIONS, LINE INSERT, LOCATE AND CHANGE, wild card locate, up to TEN SIMULTANEOUS block manipulations, word wrap around, programmable tabs, display memory used and left, non-breakable space, and headers, footers and FOOTNOTES.
- Automatic justification, automatic pagination, automatic centering, automatic flush right, underlining, superscripts, subscripts, pause print, single-sheet pause, and print comments.
- Type-ahead, typamatic key repeat and key beep for the pros, ERROR DETECTION and UNDO MISTAKE features, 3 PROGRAMMABLE functions, auto column creation, and an instant on-screen HELP TABLE.

32K (Comes with tape & disk) $59.95
(Includes VIP Speller)

RAINBOW

NEW

VIP Speller™

RAINBOW

WITH A 50,000 WORD INDEXED DICTIONARY!
By Bill Argyros

Gone are the eyestrain, boredom and fatigue from endless proof-reading. **VIP Speller™** is the fastest and most user-friendly speller for your CoCo. It can be used to correct any ASCII file — including **VIP Library™** files and files from **Scripsit™** and **Telewriter™**. It automatically checks files for words to be corrected, marked for special attention or even added to the dictionary. You can even view the word in context, with upper and lowercase. **VIP Speller™** comes with a specially edited 50,000 word dictionary which, unlike other spellers for the CoCo, is indexed for the greatest speed. The shorter your file, the quicker the checking time. And words can be added to or deleted from the dictionary or you can create one of your own. **VIP Speller™** also comes with the **Library's** mini disk operating system for easy disk manipulation.

32K DISK ONLY $39.95
Lowercase displays not available with this program.

VIP Library™

VIP Calc™

RAINBOW

(Formerly Super "Color" Calc)
By Kevin Herrboldt

You can forget the other toy calcs — The real thing is here! No other spreadsheet for the Color Computer gives you:

- **20 ROWS BY 9 COLUMNS ON THE SCREEN AT ONCE**
- **LOWERCASE LETTERS WITH DESCENDERS**
- **UP TO 16 CONCURRENT DISPLAY WINDOWS**
- **FLOATING-POINT MATH**
- **CHOICE OF SINGLE AND DOUBLE PRECISION**
- **WORKS WITH BASE 2, 10, AND 16 NUMBERS**
- **UP TO 512 COLUMNS BY 1024 ROWS**
- **USER DEFINABLE WORKSHEET SIZE FOR MORE MEMORY**
- **LOCATE FUNCTION TO FIND CHECK NUMBERS, NAMES, ETC.**
- **COLUMN/ROW MULTIPLE SORTS**
- **PROGRAMMABLE FUNCTIONS**
- **IMBEDDABLE PRINTER CONTROL CODES**
- **21 ALTERABLE PRINT FORMAT PARAMETERS**
- **ON-LINE HELP TABLES**
- **DOES NOT REQUIRE FLEX OR BASIC**

VIP Calc™ is truly the finest and easily the most powerful electronic worksheet and financial modeling program available for the Color Computer. Now every Color Computer owner has access to a calculating and planning tool better than VisiCalc™, containing all its features and commands and then some, WITH USABLE DISPLAYS. Use Visicalc templates with **VIP Calc™!**

There's nothing left out of **VIP Calc™**. Every feature you've come to rely on with VisiCalc™ is there, and then some. You get up to **5 TIMES** the screen display area of other spreadsheets for the Color Computer and Memory-Sense with **BANK SWITCHING** to give not just 24, or 30, but **UP TO 33K OF WORKSPACE IN 64K!!!** This display and memory allow you the FULL SIZE, USABLE WORKSHEETS you require. You also get; User definable worksheet size, up to 512 columns by 1024 rows! * Up to **SIXTEEN VIDEO DISPLAY WINDOWS** to compare and contrast results of changes! * **16 DIGIT PRECISION** * Sine, Cosine and other trigonometric functions, Averaging, Exponents, Algebraic functions, and **BASE 2, 8, 10 or 16** entry * Column and Row, Ascending and Descending **SORTS** for comparison of results * **LOCATE FORMULAS OR TITLES IN CELLS** * Easy entry, replication and block moving of frames * Global or Local column width control up to 78 characters width per cell * Create titles of up to 255 characters per cell * Limitless programmable functions * Typamatic Key Repeat * Key Beep * Typeahead * Print up to 255 column worksheet * Prints at any baud rate from 110 to 9600 * Print formats savable along with worksheet * Enter PRINTER CONTROL CODES for customized printing with letter quality or dot matrix printer * Combine spreadsheet tables with **VIP Writer™** documents to create ledgers, projections, statistical and financial reports and budgets.

Both versions feature Tape save and load, but the disk version also has the Mini Disk Operating System of the entire **Library.**

32K (Comes with tape & disk) $59.95
32K has no hi-res displays, sort or edit.

Check These Library Prices:

- Fully CoCo 2 Compatible
- Nine Display Formats: 32 by 16 51, 64, 85 by 21 or 24
- True Lowercase & Descenders
- Four Different Display Colors
- 32 & 64K Compatible
- Memory Sense - Bank Switching
- Up to 51K Disk, 53K Tape
- Mini Disk Operating System
- Compatible With All Printers

VIP Terminal™

(Formerly Super "Color" Terminal)

RATED BEST IN JANUARY 1984 "RAINBOW"

By Dan Nelson

From your home or office you can join the communication revolution. The **VIP Terminal™** opens the world to you. You can monitor your investments with the Dow Jones Information Service, or broaden your horizons with The Source or Compuserve, bulletin boards, other computers, even the mainframe at work.

For your important communication needs you've got to go beyond software that only lets you chat. You need a smart termnal so that you can send and receive programs, messages, even other **VIP Library™** files. **VIP Terminal™** has "more features than communications software for CP/M, IBM and CP/M 86 computers." Herb Friedman, Radio Electronics, February 1984:

FEATURES: Choice of 8 hi-res lowercase diplays * Memory-Sense with BANK SWITCHING for full use of workspace * Selectively print data at baud rates from 110 to 9600 * Full 128 character ASCII keyboard * Automatic graphic mode * Word mode (word wrap) for unbroken words * Send and receive **Library** files, Machine Language & BASIC programs * Set communications baud rate from 110 to 9600, Duplex: Half/Full/Echo, Word length: 7 or 8, Parity: Odd/Even or None, Stop Bits: 1-9 * Local linefeeds to screen * Save and load ASCII files, Machine Code & BASIC programs * Lowercase masking * 10 Keystroke Multiplier (MACRO) buffers to perform repetitive pre-entry log-on tasks and send short messages * Programmable prompt or delay for send next line * Selectable character trapping * Send up to ten short messages (KSMs), each up to 255 characters long, automatically, to save money when calling long distance.

All versions allow tape load and save of files and KSMs, but the disk version also has the Mini Disk Operating System common to the **Library**.

32K (Comes with tape & disk) $49.95

(Tape comes in 16K but without hi-res displays)

VIP Database™

(Formerly Super "Color" Database)

INCLUDES MAIL MERGE CAPABILITIES TOO!

By Tim Nelson

This high speed MACHINE LANGUAGE program fills all your information management needs, be they for your business or home. And it does so better than any other database program for the Color Computer, featuring machine code, lowercase screens and mailmerge capabilities. Inventory, accounts, mailing lists, family histories, you name it, the **VIP Database™** will keep track of all your data, and it will merge **VIP Writer™** files.

The **VIP Database™** features the **Library** Memory Sense with BANK SWITCHING and selectable lowercase displays for maximum utility. It will handle as many records as fit on your disk or disks. It is structured in a simple and easy to understand menu system with full prompting for easy operation. Your data is stored in records of your own design. All files are fully indexed for speed and efficiency. Full sort of records is provided for easy listing of names, figures, addresses, etc., in ascending or descending alphabetic or numeric order. Records can be searched for specific entries, using multiple search criteria. With database form merge you may also combine files, sort and print mailing lists, print "boiler plate" documents, address envelopes - the list is endless. The math package even performs arithmetic operations and updates other fields. Create files compatible with the **VIP Writer™** and **VIP Terminal™**. Unlimited print format and report generation with the ability to imbed control codes for use with all printers.

As with all other **Library** programs, the **Database** features the powerful Mini Disk Operating System.

32K DISK $59.95

64K Required for math package & mail merge

VIP Disk-ZAP™

(Formerly Super "Color" Disk-ZAP)

RAVED ABOUT IN THE APRIL 1983 "RAINBOW!"

By Tim Nelson

Your database file disk, form letter disk, or BASIC program disk goes bad. An I/O error stops loading, or even backing up of the disk. Weeks, even months of work sit on the disk, irretrievable. Now catastrophic disk errors are repairable, quickly and with confidence, using the **VIP Disk-ZAP™**. It is the ultimate repair utility for simple and quick repair of all disk errors. Designed with the non-programmer in mind, the **VIP Disk-ZAP™** will let you retrieve all types of bashed files, BASIC and Machine Code programs.

This high-speed machine code disk utility has a special dual cursor screen display to look at the data on your disk. You are able to: Verify or modify disk sectors at will * Type right onto the disk to change unwanted program names or prompts * Send sector contents to the printer * Search the entire disk for any grouping of characters * Copy sectors * Backup tracks or entire disks * Repair directory tracks and smashed disks * Full prompting to help you every step of the way * 50-plus page Operators Manual which teaches disk structure and repair.

16K DISK $49.95

Lowercase displays not available with this program.

For Orders ONLY — Call Toll Free —

1-800-328-2737

Order Status and Software Support call (612) 881-2777

Available at Dealers everywhere.

If your Dealer is out of stock ORDER DIRECT!

In Canada distributed by Kelly Software Distributors, LTD. P.O. Box 11932, Edmonton, Alberta T5J 3L1 (403) 421-8003

MAIL ORDERS: $3.00 U.S. Shipping ($5.00 CANADA; $10.00 OVERSEAS). Personal checks allow 3 weeks.

All Disk Programs are also available on 3" Diskettes for the Amdek Color AMDISK-III Micro-Floppy Disk System for an additional $3.00 each.

Softlaw

8072 Lyndale Avenue So. 612/881-2777

Minneapolis, Minnesota 55420 U. S. A.

TRS-80 is a trademark of Tandy Corp. VisiCalc is a trademark of VisiCorp.

©1983 by Softlaw Corporation

```
88,STRING$(32,32);
580 PRINT@288,STRING$(32,32);:PR
INT@288,"      FOR DIFFICULT";:I
NPUTWW:IF WW>9999THEN570ELSEIF W
W=0THEN NC=NC-1:GOTO20
590 SN(NC)=TIMER:L=1:W=1
600 GOSUB150
610 FORK=1TO6
620 PRINT#-2," ";:FORS=0TO2:PRIN
T#-2,USING"##.";S+L;:PRINT#-2,"
        ";:NEXTS:PRINT#-2," "
630 PRINT#-2,"       ";:FORI=1TO3
:FORYY=1TO6:PRINT#-2,CHR$(&H5F);
:NEXTYY:PRINT#-2,"       ";:NEXTI
640 FORI=1TO3:IN=RND(INT(WW/100)
):A=RND(INT(WW/100)):B=A*IN:U(NC
,L)=B:D(NC,L)=A:PRINT#-2,USING"#
###";A;:PRINT#-2,")";:PRINT#-2,U
SING"####";B;:PRINT#-2,"    ";:L=
L+1:NEXTI:PRINT#-2,""
650 FORI=1TO5:PRINT#-2," ":NEXTI
,K
660 GOSUB690
670 GOTO770
680 RETURN
690 PRINT" PRESS <ENTER> FOR ANS
WER SHEET    OR <M> FOR MORE WOR
KSHEETS"
700 'RETURN
710 X$=INKEY$:IFX$="M" THEN20ELS
EIFX$=CHR$(13)THENRETURN ELBEIFX
$=" "THENPRINT#-2," " ELSE 710
720 GOTO710
730 PRINT@384,STRING$(32,172);"
PRESS <E>ND OR <A>NSWER SHEETS":
PRINTSTRING$(32,163);STRING$(31,
128);:POKE1535,128
740 X$=INKEY$:IFX$="E"THEN850ELS
EIFX$="A"THEN770ELSEIFX$=CHR$(13
)THEN20ELSE740
750 CLS5:PRINT@192,STRING$(32,17
2);CHR$(128)"ready";:POKE1254,32
:PRINT@231,"printer";:POKE1262,3
2:PRINT@239,"then";:POKE1267,32:
PRINT@244,"press";:POKE1273,32:P
RINT@250,"enter"CHR$(128)STRING$
(32,163);
760 X$=INKEY$:IFX$=CHR$(13)THEN7
70ELSE760
770 CLS5:PRINT@192,STRING$(32,17
2);"now";:POKE1251,32:PRINT@228,
"printing";:POKE1260,32:PRINT@23
7,"coded";:POKE1266,32:PRINT@243
,"answer";:POKE1273,32:PRINT@250
```


HARDWARE FOR YOUR CO-CO

KEYBOARDS

HJL

MICRONIX

$79.95

$399.

WICO

Atari to CO-CO Adapter $17.95

PBH CORDLESS JOYSTICK

$99.

PBH JOYSTICK

$49.95

DRIVE 0 $379.

DRIVE 1 $229.

TANDON DISK DRIVES

Perfect for replacement or add on drive for any 5" drive system

TM100-1 40 Track Single Sided	$179.
TM100-2 40 Track Double Sided	$279
TM50-1 6ms Ink-Ink Single Sided Thinline	$169
TM50-2 6ms Ink-Ink Double Sided Thinline	$219
Single case with extenders with drive above	$49.95
Dual case with extenders for drives above	$79.95
Two Drive Cable	$24.95

NEW! HARD DRIVE SPECIALIST

COCO HARD DRIVE COMING SOON!

a Serial/Parallel Interface for the Radio Shack* Color Computer. Our interface allows your CoCo to connect with most currently manufactured printers and others such features as

- Switch selectable baud rates from 300 to 9600
- Switch selectable printer or modem operations
- Elimination of recabling if comes cabled with standard "DIN" connectors for CoCo and Modem Also "Centronics" standard 36 pin connector for printer
- Self contained Power Supply and Cord

$74.95

64K COCO KIT $62.95

SS/DD $25.95

NEW! Verex SS/DD $19.95

COMPUKIT CORPORATION

orderline 1-800-231-6671

local orders and shipping info 1-713-480-6000

16206D Hickory Knoll Houston, Texas 77059

```
,"sheets";STRING$(32,163);:IF NC
=ØTHEN85Ø
78Ø NW=NC:FOR NC=1 TO NW
79Ø IF QK$(NC)="S"THEN81ØELSEIF
QK$(NC)="A"THEN82ØELSEIF QK$(NC)
="M"THEN83ØELSEIF QK$(NC)="O"THE
N84Ø
8ØØ FOR JK=1TO3:PRINT#-2," ":NEX
T JK:NEXT NC:RUN
81Ø PRINT#-2,CHR$(3Ø)"SHEET #";S
N(NC):FORI=1TO13STEP6:FORL=ØTO5:
PRINT#-2,TA8(2+(L*12));:PRINT#-2
,USING"##.";I+L;:PRINT#-2," ";U(
NC,I+L)-O(NC,I+L);:NEXTL:PRINT#-
2,"":NEXTI:GOTO8ØØ
82Ø PRINT#-2,CHR$(3Ø)"SHEET #";S
N(NC):FORI=1TO13STEP6:FORL=ØTO5:
PRINT#-2,TA8(2+(L*12));:PRINT#-2
,USING"##.";I+L;:PRINT#-2," ";U(
NC,I+L)+O(NC,I+L);:NEXTL:PRINT#-
2,"":NEXTI:GOTO8ØØ
83Ø PRINT#-2,CHR$(3Ø)"SHEET #";S
N(NC):FORI=1TO16STEP3:FORL=ØTO2:
PRINT#-2,TA8(9+(L*2Ø));:PRINT#-2
,USING"##.";I+L;:PRINT#-2,USING"
###,###,###";U(NC,I+L)*O(NC,I+L)
;:NEXTL:PRINT#-2,"":NEXTI:GOTO8Ø
Ø
84Ø PRINT#-2,CHR$(3Ø)"SHEET #";S
N(NC):FORI=1TO13STEP6:FORL=ØTO5:
PRINT#-2,TA8(Ø+(L*13));:PRINT#-2
,USING"##.";I+L;:PRINT#-2,USING"
#,###,###";U(NC,I+L)/O(NC,I+L);:
NEXTL:PRINT#-2,"":NEXTI:GOTO8ØØ
85Ø CLS0:SCREEN0,Ø:END
```



Listing 2:

```
1 '*******************************
2 '* WRITTEN MATH PROBLEMMAKER *
3 '* BY FRED B. SCERBO (C)1983 *
4 '* ILLUSTRATED MEMORY BANKS  *
5 '*******************************
6Ø CLS
7Ø DIM A$(5Ø),B$(2Ø),G(12,7)
8Ø FORI=1TO5Ø:READ A$(I):NEXT
9Ø FORI=1TO2Ø:READ B$(I):NEXT
1ØØ FORI=1TO12:G(I,1)=RND(5Ø):G(
I,2)=RND(9)+1:G(I,3)=RND(2Ø):G(I
,4)=(RND(49)+5Ø)/1ØØ:NEXTI
11Ø FORI=1TO11STEP2:G(I,5)=RND(1
Ø):G(I,6)=RND(1Ø):G(I,7)=(RND(49
)+5Ø)/1ØØ:G(I+1,5)=(RND(4)+2)*5:
```


RETIRE EARLY? WHY NOT!

HOW? PRACTICE THRIFT AND PLAN WISELY. THE THRIFT IS UP TO YOU, BUT FOR PLANNING . . .

YOU NEED THE

RETIREMENT PLANNING MODEL

★ ★ ★ ★ ★ ★ ★ ★ ★

ABOUT RETIREMENT PLANNING
By the year 2010, today's $8800 auto will cost $40,000 if inflation averages 6%. Inflation makes retirement planning essential. Proper retirement planning requires a complex year-by-year analysis which must consider these factors:

* Your investment program
* Tax-deferred savings
* Social Security
* Inflation
* Pension
* Taxes

START NOW
Start your planning now. Try different retirement ages and vary your investment program goals. The objective is to develop a plan for early retirement which eases doubt regarding your future financial security.

WHAT THE MODEL DOES
First, the model helps you organize your present assets. The model then projects these assets, along with estimated pension and social security, to the retirement age you select. Based on this projection, a detailed cash flow analysis is conducted for each year of your retirement.

The factors listed above are considered in all calculations. Each analysis stops when your funds deplete or when the analysis carries to the age of 100. The model is designed for "what if" analysis and optional printer output.

AN ESSENTIAL TOOL FOR COMPREHENSIVE RETIREMENT PLANNING

* * * *

FULLY DOCUMENTED

ABOUT THE AUTHOR
From the author of "Real Estate Investment," "Bond Analysis," "Owner Financed Real Estate" and "Homeowner Selling Analysis" as featured by Petrocci Freelance Associates.

REQUIRES 16K EXTENDED COLOR BASIC

ILL. RESIDENTS ADD 8% SALES TAX

SEE RAINBOW REVIEW JULY 1984

"...RPM does exactly what it says it will do in fine style."

TAPE $34.95
DISK $39.95

A&P SOFTWARE
P.O. Box 202
Glenview, IL 60025

RAINBOW CERTIFICATION SEAL

```
NEXTI
120 PRINTSTRING$(32,"=");" WRITT
EN MATH PROBLEM GENERATDR.
 BY FRED B. SCERBD          ";STRI
NG$(32,"="):PRINT@164,"PREPARE P
APER AND PRESS":PRINT@204,"<ENTE
R>."
130 IFINKEY$=CHR$(13)THEN140ELSE
130
140 PRINT#-2,"NAME.............
.....................................
.............DATE..........":PR
INT#-2," ":FDRI=1TO11STEP2:ZZ=RN
D(-TIMER)
150 PRINT#-2,USING"##.";I;:PRINT
#-2," ";A$(G(I,1));" NEEDS TO PU
RCHASE";G(I,2);B$(G(I,3));" DN S
ALE AND PRICED AT A COST OF"
160 PRINT#-2,"     ";:D=(G(I,4)):
PRINT#-2,USING"$.##";D;:PRINT#-2
," EACH. HOW MUCH WILL THE TOTAL
 BILL BE IF";G(I,5);B$(G(I,6));"
 ARE ALSO"
170 PRINT#-2,"     PURCHASED AT A
 COST OF ";:D=(G(I,7)):PRINT#-2,
USING"$.##";D;:PRINT#-2," EACH?"
180 FOR J=1TO6:PRINT#-2," ":NEXT
J
```


STOCK & FUND INVESTING

with the

TRS-80* COLOR COMPUTER

USE FUNDGRAF AND FUNDFILE

FUNDGRAF is a stock market analysis program that not only graphs and analyzes funds or stocks, but also makes decisions on when to BUY and SELL. Improve market timing using your COCO.

GRAPHS fund's progress (up to 200 weeks). SUPERIMPOSES for comparison; a line of constant percent growth or a graph of any other fund (or stock). CALCULATES over any time span: the percent price change and the moving average (any span). INDICATES BUY and SELL signals. FUNDGRAF requires 16 K ECB min.

16/32 K Tape $49.95
16/32 K 5 in. Disk $69.95
ADD $2 handling on all orders.



FUNDFILE is a portfolio and account management program for securities. Manage single or multiple portfolios of stocks, mutual funds, bonds, money market funds, etc. FUNDFILE allows easy maintenance of all your records for accurate portfolio evaluation. NEW 32 K VERSION of FUNDFILE summarizes all transactions (dividends, interest, purchases and sales) between any two dates of your choice - weekly, yearly, etc. Categorizes interest and dividends paid as to tax liability (tax free, etc.) and capital gains as long or short term. Great for tax reports.

FUNDFILE REQUIRES 16 K ECB min. and 80-COL. PRINTER.

5-in. Diskette only for 16 K ECB $27.95
5-in. Diskette only for 32 K ECB $37.95
ADD $2 handling on all orders.

RAINBOW

Write for free brochure for details. Dealer inquiries invited.

PARSONS SOFTWARE, DEPT. G
118 WOODSHIRE DRIVE
PARKERSBURG, WV 26101


```
190 SN=G(I+1,1):PRINT#-2,USING"#
#.";I+1;:PRINT#-2," ";A$(SN);" W
ANTS TO PURCHASE";G(I+1,2);B$(G(
I+1,3));" AT A SALE COST OF JUST
 ";:D=(G(I+1,4)):PRINT#-2,USING"
$.##";D
200 PRINT#-2,"     EACH. HOW MUCH
 MONEY WILL ";A$(SN);" HAVE LEFT
 FROM ";:H=(G(I+1,5)):PRINT#-2,U
SING"$##.##";H;:PRINT#-2," ?"
210 IF I+1=12 THEN 250
220 IF I=5THEN240
230 FORJ=1TO7:PRINT#-2," ":NEXTJ
240 IF I=5 THENGOSUB330
250 NEXTI
260 FOR T=1TO8:PRINT#-2," ":NEXT
 T:Z=0:FOR Y=1TO7STEP6
270 FORI=Y TO Y+5STEP2
280 PRINT#-2,TAB((I-Z)*12-9);:PR
INT#-2,USING"##.";I;:PRINT#-2,US
ING"$###.##";(G(I,2)*G(I,4))+(G(
I,5)*G(I,7));
290 PRINT#-2,TAB((I+1-Z)*12-9);:
PRINT#-2,USING"##.";I+1;:PRINT#-
2,USING"$###.##";(G(I+1,5)-(G(I+
1,4)*G(I+1,2)));
300 NEXTI:Z=6:PRINT#-2:NEXTY
310 PRINT:PRINT"     ANDTHER SHE
ET (Y/N) ?"
320 IFINKEY$="Y"THEN RUN ELSE IF
 INKEY$="N"THEN6000ELSE320
330 PRINT:PRINT" PREPARE SECOND
 SIDE AND PRESS    <ENTER> TO PR
INT REMAINDER."
340 X$=INKEY$:IFX$=CHR$(13)THEN3
50ELSE340
350 RETURN
1000 DATA HARRY,SAM,DEBRA,SALLY,
BILL,BOBBY,RHONDA,LUCY,WADE,DALE
1010 DATA DARLENE,MILTON,NOREEN,
JANET,BARBARA,RUSTY,LARRY,JOE,MA
RK,DEREK,JAY,GLEN,TERRY,JIM,TORY
1020 DATA RAY,STEVE,DONNA,ADAM,J
ENNIE,BRENDA,JOHN,PETE,LEE,PAUL,
MARYANN,ROSE,ANNIE,KAY,FLO,IRVIN
G,DICK,ROGER,CHRIS,TIM,ERIC,GORD
ON,DAN,TOM,DARRIN
1030 DATA CARROTS,CANDY APPLES,S
PICE CAKES,CANDY BARS,LETTUCE HE
ADS,BATTERIES,PAPERBACK NOVELS,B
OXES OF TISSUES,PAPER TOWELS,CAR
PET LINERS,COFFEE ROLLS,BARS OF
SOAP
1040 DATA ORANGES,TV DINNERS,BAG
S OF CHIPS,LUNCH SNACKS,CUPS OF
YOGURT,BLANK TAPES,MAGAZINES,VIT
AMIN PACKS
6000 CLS:END
```

The Rise Of The Microcomputer

By Michael Plog, Ph.D.
Rainbow Contributing Editor

Congratulations to South Dakota and Minnesota! Those states have a higher microcomputer per student ratio than any other state in the nation. In South Dakota, there are 62 students for every microcomputer in a school. In Minnesota, there are 63 students for each microcomputer. Nationwide, each school microcomputer is "shared" by 136.7 students (Did you ever wonder about that "point seven" student?) The poor state of Hawaii has only 156 microcomputers in the entire school system in the state, with 1,072 students for each microcomputer. Hawaii has less than one micro per school, while Jefferson County, Colo., has 15 microcomputers per school.

There are nine states with less than 100 students per microcomputer: Colorado, Iowa, Kansas, Minnesota, Montana, South Dakota, Utah, Vermont, and Wyoming. Seven states have between 200 and 400 students per microcomputer; all are in the southeast part of the country: Alabama, Georgia, Louisiana, Mississippi, North Carolina, South Carolina, and Tennessee. Thirty-four states (including the District of Columbia) have between 100 and 200 students per microcomputer.

These facts are brought to you by a research study conducted by Quality Education Data, Inc., located in Denver, Colo. They conducted a telephone survey of every school district in the country. This is a massive undertaking, and the company has provided invaluable information to people interested in microcomputer research. Of course, by the time you read this, the numbers will have changed; schools are purchasing microcomputers every day.

Across the nation, about two-thirds (66.5 percent) of schools have microcomputers. Across all school types, student enrollment is an extremely strong predictor of microcomputer use. The larger the enrollment, the more likely the school is to have microcomputers. Also, the grade level of the school is a strong predictor of microcomputer use. Senior high schools are more likely to have microcomputers than junior high schools, which are more likely to have microcomputers than elementary schools. For example, 91.1 percent of senior high schools with enrollment over 1,500 students have microcomputers. About a third (33.9 percent) of elementary schools with less than 100 students have microcomputers.

Use of microcomputers has increased at all school levels during the past three years. The following table shows the percentages of schools in each category having microcomputers during each of three years:

	Elementary	Junior High	Senior High
1982	9.4%	20.3%	42.6%
1983	27.4%	46.2%	62.5%
1984	61.0%	72.2%	78.5%

The growth of microcomputers in elementary schools is phenomenal! Of course, all school levels show an increase, even a rapid increase, in microcomputer use. But in just two years, this country has gone from less than one out of 10 elementary schools having microcomputers to more than three out of five elementary schools with microcomputers.

What are elementary schools doing with all those microcomputers? Well, we can find out from a survey of members of the National Association of Elementary School Princi-

(Michael Plog received his Ph.D. degree from the University of Illinois. He has taught social studies in high school, worked in a central office of a school district, and currently is employed at the Illinois State Board of Education.)

pals. The results of that survey showed that 29 percent use the school's microcomputer exclusively for management purposes; while 50 percent use the equipment to teach computer literacy and drill in other subjects. I do not know how many elementary principals are members of this organization, nor what type of school is most represented by this group. I would hazard a guess that the members of the organization would be more likely to have microcomputers in their schools than elementary principals who are not members.

Let's get back now to the research study by Quality Education Data, Inc. One of their findings related to the school's community type. Urban and suburban schools are more likely to have microcomputers than rural schools. Nationwide, 72.6 percent of suburban schools have micros; 69.1 percent of urban schools; and 59.5 percent of rural schools. Typically, suburban and urban school districts have more funds to spend than rural school districts. Also, parents in suburban and urban areas will be more likely to work in a job requiring some knowledge of microcomputers than parents in rural areas. This is probably changing quickly, however. There is a large increase in computer software for farming and related industries.

Microcomputer use is also related to ethnic minority enrollment of a school. The greater the percentage of black students in a school, the less likely that school is to have microcomputers. The same is true of Hispanic students —the smaller the percentage of Hispanic enrollment, the more likely the school will own microcomputers. The report did not cover other ethnic groups, such as Asians and American Indians.

After considering the data, it is easy to conclude that microcomputers in schools is not a passing fad. Purchases of microcomputers are increasing in all areas, even though inequities still exist (and probably will in the future). Schools are spending money on microcomputers, and every indication is that educational leaders will continue to invest funds for this type of educational aid.

The report also contained information about brands of microcomputers. The predominant brand is Apple, but we knew that already. The different Radio Shack types of computers were not differentiated. A total of 35.1 percent of school districts in the country own Radio Shack computers, including Models I, II, III, and our favorite, the Color Computer.

School districts are not the only educational institutions interested in microcomputers. Several organizations involved with education have taken an interest in microcomputers, and are using electronic technology to help their members. Probably the most prestigious educational group is the American Education Research Association (AERA). The AERA includes educational leaders from all over the world, not just the United States. While membership includes teachers, the organization is mostly composed of superintendents, university-type people, and researchers. Recently, a Special Interest Group (SIG) for microcomputers in education was founded. This SIG has just started a teleconferencing network for members to share resources and ideas.

Another group, the Midwestern AERA, has a SIG for microcomputers, available to members through CompuServe. Of course, CompuServe has a SIG devoted to education, which anyone can access.

Researchers are not the only people interested in using microcomputers. It is difficult these days to attend any type of educational conference without seeing a session on microcomputers. Many educational special interest groups have networks which use microcomputers to share information. The field of special education (education for the handicapped) has an electronic communication system called SpecialNet. The bilingual community supports the network BLNG (pronounced "bling"). Vocational education has a similar electronic "board" for interested parties.

What use are all these special interest electronic communication systems? Well, take just one example to illustrate the possibilities. A bill affecting one of these groups is scheduled for debate and voting in Congress. Representatives in Washington put this notice on the electronic system. People all over the country read the notice that same day. They can immediately call their representatives and express their views. Now, if you were a representative, and suddenly received a few hundred telephone calls urging passage of that bill, plus possibly a thousand telegrams, would that not help you decide to support the bill? It has apparently worked in the past, and every indication is that such activities are extremely powerful.

A second, more mundane (but not less important) example can be given. A special education director in a local school needed to change the budget provided by the state education agency. The director composed a letter requesting this change, and sent it via electronic mail to the state education agency. The next day, the state agency sent approval of the change, also via electronic mail. The normal procedure would have been to send the request through the postal service, requiring several days (or weeks) for the entire process. As a result, a teacher can be hired and serving students in the same amount of time that would be taken just to get approval to open a new position.

As a third example, consider children of migrant workers, and their schooling. These children move around the country with the different harvest seasons. Their parents work for a while in one area, then move on to another job. Migrants usually cover several states during the course of a year. Migrant children can receive education in many school districts during any single year. In fact, the family may have moved on to another job before past school records are received. Well, no longer, thanks to electronic communication. There is a central repository of records of migrant school children, which any local district (or state education agency) can contact. The date after a child enters a new school, past school records can be printed for the local teacher to view. This means the teacher knows what subjects the child was taking last week, what level of achievement the child demonstrated, and what special handling may be required. Information like this is invaluable for a teacher.

Educational use of microcomputers covers a lot more than just classrooms. Our current technology is valuable for many facets of education, including (but not limited to) classroom instruction.

There is really no point, no editorial stand, to the column this month. The purpose of the article is to share information with you; information you may be able to use in your local area or just for your own store of knowledge. I hope the information is worthwhile to you. If you can use it, please let me know. My address is 829 Evergreen, Chatham, IL, 62629.

Letters, Books And Dreams Of The Future

By Bob Albrecht and Ramon Zamora
Rainbow Contributing Editors

"School Is In The Heart of a Child" is for parents of quite young children. We want to help you work and play with your three- to eight-year-old child and learn to use computers as a joyful family experience. We want to suggest ways to incorporate the home computer as another means to encourage your child's independence, growth, and control over his own life. See the pride on her face as she directs the computer to do what she with deliberation selects. See her head gears switch to "on" as she progresses step-by-step with your presence and caring direction.

We will explore (we hope, with *your* help) the following:

- Specific "teaching" techniques so that the discovery can be the child's own.
- Critical evaluation of software based on extensive playtesting in family and related environments.
- Additional resources to consult: books, magazines, software publishers, networks, etc.
- Suggestions for interludes and fun times away from the computer (a must): call the librarian for specific information; watch a TV program together and discuss it; work together as volunteers in a community project; take a spring (or fall or winter or summer) awareness walk . . .
- Whatever we learn from families we work with in Menlo Park or from you, our readers. Let's pool our knowledge. Let's share our experiences as we all learn from our children.

We also provide small programs you can type in and use right now.

Copyright© 1984 by DragonQuest, P.O. Box 310, Menlo Park, CA 94026.

(Well-known author Bob Albrecht also writes the "Game Master's Apprentice" feature for The Rainbow each month. Ramon Zamora is author and co-author of several books, co-founder of ComputerTown USA!, *and currently designing computer games for kids at Child Ware Corp. in Menlo Park, Calif.)*

Farewell, Fran and Hello, Ramon

Fran's blithe spirit has decided against jousting with monthly deadlines, so she has turned over her lance to Ramon Zamora. Fran and Mariko will still be around, however, to lend help and inspiration to all of us in the "School Is In the Heart of a Child" project.

Ramon is author or co-author of several books, co-founder of ComputerTown, USA!, and currently designing computer games for kids at ChildWare Corporation in Menlo Park, Calif. Welcome, Ramon, to RAINBOW's computer sandbox.

We love the letters!

Thanks again, people, for sending us letters about your experiences with your kids and your CoCo. More, please. If it is okay for us to reprint all or part of your letter, please include permission when you write to us. Here is a letter from Denise Lambird sharing her experiences in CoCo play with her 18-month-old son!

Dear Fran and Bob:

As the parent of a very young child, I would like to say that I found your column in THE RAINBOW March issue to be one of the greatest interest to me.

We just recently purchased the TRS-80 Color Computer, having decided that, since my son will be growing up in a world of computers, it would be a good idea to begin learning myself to be able to help him learn. Although you refer to your column as being designed for the age group from three to eight, my son David, who is only 18 months old, finds the computer to be thoroughly fascinating. Previous to purchasing the

computer, we had gotten him several books designed for his age group and attempted to read to him, showing him the pictures as we went. However, being a very active little boy, he did not find this the least bit interesting. But he thoroughly enjoys sitting at the keyboard and watching on the TV the various things that appear when he pushes the keys. As a matter of fact, you almost have to fight him to get to use it yourself.

I know 18 months may seem a little early for a child to start using one, but we purchased the software *Early Games for Young Children* and use it quite often. He finds the *Draw* program to be great fun and I have found that, with a lot of patience pointing at the picture and then at the top row of numbers, he is learning to distinguish the difference between numbers in the "match the numbers" program. He may only get three or four right out of 10 attempts, but when he gets one right, I clap and tell him that was very good, which makes him laugh with delight and he wants to try again. You can see the concentration on his face as he keeps looking back and forth for the right one — yet he really enjoys doing it.

David is my first child and I am only now realizing just how much they really can learn at such young ages and wish that there were more programs designed with colors and sounds to interest and teach the very young.

I like your idea of a bulletin board for sharing children's programs and think it would be wonderful. We don't have a modem and honestly, since I am just learning, I don't know how to use one. But, if such a project were to come into existence I would buy a modem and learn how to use it.

Please let me know of any programs that my son and I might find helpful. Also, please encourage more parents of the very young to let them use the CoCo, too. Even though they haven't developed much speaking skill yet, they still understand, learn and like to be a part of what the older children and parents are doing.

Thanks again for the wonderful column and any information you can give will be gratefully appreciated. As I said, my son and I are both just learning.

Denise A. Lambird

Thanks, Denise. We covered *Early Games* in the July 1984 issue of THE RAINBOW. It is from Counterpoint Software, Inc., Suite 218, 4005 West Sixty-Fifth Street, Minneapolis, Minn., 55435.

Denise, since you are "just learning," we will send you a copy of Bob's beginner's book, *TRS-80 Color BASIC*, and for David, a friendly, cuddly stuffed dragon.

Setting The Standards

CANDY CO.

Graphics and sound effects like never before on the CoCo. An exciting original arcade action game. Control your hero through a maze of moving conveyor belts. Outsmart bad guys and save Q.P. Over 1,000 frames of increasing difficulty.

Hi Res graphics, exciting sound effects, joystick or keyboard input, pause feature, 8 digit scores and high score name entry. For 32K CoCo and TDP-100.

Cassette-34.95 Disk-34.95

intracolor Grand Prix

Strap yourself into the ultra responsive Formula I car and rev the throttle to the 500 screaming horses to life. Your heart pounds in anticipation of the race. The green flag drops and you are slammed back into your seat as the field thunders off in a deafening roar.

An exciting racing game in colorful Hi Res graphics with realistic sound effects. Joystick or keyboard input. Joystick input is compatible with all joysticks. Many different tracks to choose from. For 32K CoCo and TDP-100.

Cassette-34.95 Disk-34.95

Willy's WAREHOUSE © 1984



Another exciting original arcade action game. Help Willy stock the warehouse while keeping up with incoming orders. Watch out for the antagonists who intend to make your day long.

Excellent graphics and sound effects. 100% ML, 1 or 2 players, demonstration mode, selectable difficulty, joystick or keyboard input, pause feature and high score list with name entry. For 32K CoCo and TDP-100.

Cassette-34.95 Disk-34.95

COLORPEDE

RAINBOW CERTIFICATION SEAL

Truly outstanding engineer designed, 100% ML game with [illegible] Hi Res characters and fast action will challenge the most avid arcade buff. 1 or 2 players with joysticks or keyboard. COLORPEDE slithers through the load stools. Demonstration mode with [illegible] scores. Pause feature. For 16K CoCo and TDP-100.

Casssette-29.95 Disk-34.95

Ignitront of the track ... RAINBOW, Dec. '82

ROBOTTACK

You are the super human who must fight off the attacking robots and save the remaining humans from destruction. You have super human powers, can shoot in any direction and move anywhere on the screen to accomplish your vital mission.

Engineer designed, 1 or 2 players and top 5 scores displayed. Pause feature. For 16K CoCo and TDP-100 with joysticks.

Cassette-24.95 Disk-27.95

AT YOUR DEALERS NOW.

From INTRACOLOR: VISA, MASTERCARD, Money Order. Please allow 2 weeks for checks. Add 1.50 for shipping, 3.00 outside U.S. 4% tax in MI.

intracolor

P.O. Box 1035, East Lansing, MI 48823 (517) 351-8537

DEALER INQUIRIES INVITED

QUALITY PROGRAMS SOLICITED

DragonSmoke

An important new book, hot off the press: *Parents, Kids, and Computers* by Lynne Alper and Meg Holmberg — 145 pages of good information for only $4.95. Lynne is a math and computer teacher who has been sharing computer fun and learning with her own children since 1980, when her kids were five, seven, and nine years old. Meg is a technical writer and editor who works closely with educators who are developing new ways for children to learn with computers.

From the Preface:

> This book is for parents who want their kids to know about computers, but aren't sure where to begin learning about them. It's also for parents who have already purchased a home computer and wonder what more their children could be doing with it than playing arcade-like games.
>
> Some parents want to know how their children can use a computer on their own [Bob: *Solo* mode]. Others might also want to know how they can work with their children on the computer [Bob: *Dual* mode]. This book is for both.

Here are a few chapter titles:

1) The Computer: Opportunity for Learning
2) Simulations — Windows on the World
3) Learning Games
4) Programming Is Kid Stuff
5) Computers and Writing
6) Working With Your Child
7) Girls and Computers
10) Where to Find Good Programs
13) Computers in the Schools

We recommend this book. Get it at your local bookstore or from the publisher: SYBEX, Inc., 2344 Sixth Street, Berkeley, CA , 94710, $4.95. *Parents, Kids, and Computers* is dedicated: "To the first generation of children to grow up with computers."

Since we began this department in your favorite CoCo magazine, we have mentioned an assortment of books for you to read. Would you like an up-to-date list? If so, send a self-addressed, stamped envelope to School, P.O. Box 310, Menlo Park., CA , 94026. If you do, please include a note.

Your Dream Machine

The next generation of home computers is coming.

— From the Apple tree, an almost-clone and a mutation. The Apple IIc bundles a lot of old stuff into one neat package. Will there someday be an Apple IIz? The Macintosh brings the creative ideas of Doug Englebart and Alan Kay, for the first time, to we, the people. Read *InfoWorld*, June 11, 1984. The cover story is "Alan Kay: Portrait of a High-Tech Dreamer."

— The Japanese are coming out with part or all of the home computer built-in to the TV and the MSX machines, with 80K and 32 sprites.

— What if Radio Shack had included the TI sprite chip in the CoCo? We sure wish they had done so. Imagine: 32 sprites carrying shapes of your choice, in colors of your

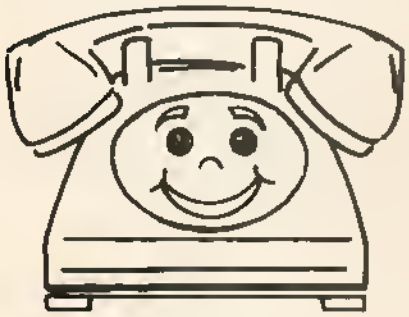

AUTOTERM
TURNS YOUR COLOR COMPUTER INTO THE
WORLD'S SMARTEST TERMINAL!
YOU'LL ALSO USE AUTOTERM FOR SIMPLE WORD PROCESSING & RECORD KEEPING

EASY TO USE

ON-SCREEN EDITING via cursor. Full prompting and error checking. Key Beep and Error Beebop. Scroll bkwd/fwd while on line. Save/load files while on line. Maintain a disk copy of session. Automatic graphics. True lower case. Screen widths of 32, 40, 42, 50, 64. No split words on screen/printer. Print all or part of text. Search for strings. Well written manual goes step-by-step and has many KSM examples. Back cover is a cheat sheet.

RECOMMEND 32K to 64K
EASY UPGRADE
Price Difference +$13

PLEASANTLY POWERFUL

Total communications ability, 128 ASCII chars, 1200 baud, etc. Send text, graphics, BASIC, ML. Scan/Edit current data while receiving more data. Any modem. Fully supports D.C. Hayes and others. Any printer, page size, margins, etc. Override narrow text width of received data. Examine/change parameters, KSMs and disk directories at any time. Handles files which are larger than memory.

CASSETTE $39.95
DISKETTE $49.95
Add $3 shipping and handling
MC/VISA/C.O.D.

TRULY AUTOMATIC

Create, edit, print, save and load Keystroke Multipliers (KSMs). KSMs automate almost any activity. Dial via modem, sign-on, interact, sign-off. Perform entire session. Act as a message taker. KSM may include parameter changes, disk operations, editing, time delays, looping, execution of other KSMs, waiting for part-specified responses, branching based upon responses.

PXE Computing
11 Vicksburg Lane
Richardson, Texas 75080
214/699-7273

choice, *without* using the "computer" in your CoCo. Then little kids could learn to do animation in a few minutes, even if they had never before touched a computer!

How many people read this magazine? 100,000? 200,000? More? Are you getting your Dream Machines? No? You can, if you put out a little energy. Send your wants to THE RAINBOW. Together, we can be a GIANT SQUEAKY WHEEL. Next time, we will squeak a bit and tell you what we would like for children, dragons, and others.

Wordsworth

In May 1984, we challenged you to answer a bunch of Wordsworth problems, using the *Sesame Street Dictionary*. Only one kid responded! Thanks, Justin Wireman, who is 4½ years old. Did your parents help you? We hope so. Thanks, Justin's parents. Here are our questions and Justin's answers.

1) What three-letter word has the smallest Wordsworth?
   BAD
2) What three-letter word has the largest Wordsworth?
   TRY
3) What four-letter word has the smallest Wordsworth?
   FACE
4) What four-letter word has the largest Wordsworth?
   YOYO
5) What is the first word (alphabetically) to have a Wordsworth of exactly 100?
   CARPENTER
6) In the entire dictionary, what word has the largest Wordsworth?
   HIPPOPOTAMUS
7) What is the longest word (most letters) having a Wordsworth of exactly 100?
   CARPENTER, LIGHTNING, TELEPHONE

Again, thanks, Justin and his parents. *Please* (Wordsworth = 58) write to us and tell us how you and Justin did this. In the meantime, we will send Justin a friendly, cuddly, stuffed dragon.

Why only one problem-solver? Probably because we picked a dictionary only a few of you have. So, let's make it easy for all of you out there who want to play Wordsworth.

1) Tell us what children's dictionary you have.

2) Invest in an inexpensive paperback dictionary. This one: *The American Heritage Dictionary of the American Language*, paperback edition, published by Dell Publishing Co., Inc., 1 Dag Hammarskjold Plaza, New York, NY, 10017, $3.95. From now on, we will base all Wordsworth problems on this inexpensive paperback dictionary.

So, here are two programs called *Wordsworth #1 (WW1)* and *Wordsworth #2 (WW2)*. *WW1* asks for a word, assigns a letter score (LS) from one for A to 26 for Z, adds the letter scores and tells you the total score. *WW2* asks for a word, assigns a letter score (one to 26), multiplies the letter scores, and tells you the total score —well, maybe it's called the product score.

Here is *Wordsworth #1*, almost as you might have seen it in the May 1984 issue.

```
100 REM**WORDSWORTH #1 SCH 7-1
110 CLS
200 REM**ASK FOR A WORD
210 PRINT
220 INPUT "YOUR WORD"; WRD$
300 REM**WL IS LENGTH OF WORD
310 WL = LEN(WRD$)
400 REM**START WORDSWORTH AT 0
410 WW = 0
500 REM**ADD LETTER SCORES
510 FOR L=1 TO WL
520 : L$ = MID$(WRD$,L,1)
530 : IF L$<"A" THEN 570
540 : IF L$>"Z" THEN 570
550 : LS = ASC(L$) - 64
560 : WW = WW + LS
570 NEXT L
600 REM**PRINT THE WORDSWORTH
610 PRINT "THE WORDSWORTH IS" WW
700 REM**GO FOR ANOTHER
710 GOTO 210
```

Use this program to check out some of Justin's answers.

YOUR WORD? BAD
THE WORDSWORTH IS 7



YOUR WORD? TRY
THE WORDSWORTH IS 63



***** HARVARD DESIGN PRESENTS: *****

The Disk File Duplicator: This disk utility will make copying files from one disk to any number of other disks a snap. 16K..... $17.95 disk

The Disk Utility: This package contains three utilities - Disk Repair, Disk+ (text movement), and Disk Inventory. 16K..... $24.95 disk

The Directory Alphabetizer: Alphabetize disks which have hard-to-follow directories. 16K..... $15.95 disk

Lettering Services: This banner generator allows stretching of letters, printing both across and down the paper. Any printer. 32K.....$17.95 cass / $20.95 disk

Shandria and Pemdicadia: This adventure is for one who appreciates real challenges, not useless frustration. First in a trilogy. 32K.....$14.95 cass / $17.95 disk

The Waxen Furnace: A multi-scene, high-res graphics adventure based on underground prison escapes. Available July 30, 1984. 32K..... $24.95 disk

We accept personal checks and money orders. Foreign orders must be in US funds. Dealer and author inquiries invited. Catalog for $1.50, deductible from next purchase. Send orders to HARVARD DESIGN, P.O. Box 40, Harvard, MA, 01451

****

YOUR WORD? . . . and so on

That's *WW1*. Most of the work and play in answering our questions is *people play*: browsing a dictionary, thinking about what to do, creating strategies — most enjoyable! People are well-equipped to do this kind of work/play.

Some of the work is grungy stuff: looking up letter scores, adding numbers. Let the CoCo do that. Now, on to *Wordsworth #2 (WW2)*. Note changes in Lines 100, 400, 410, 500, and 560.

```
100 REM**WORDSWORTH #2 SCH 7-2
110 CLS
200 REM**ASK FOR A WORD
210 PRINT
220 INPUT "YOUR WORD"; WRD$
300 REM**WL IS LENGTH OF WORD
310 WL = LEN(WRD$)
400 REM**START WORDSWORTH AT 1
410 WW = 1
500 REM*MULTIPLY LETTER SCORES
510 FOR L=1 TO WL
520 : L$ = MID$(WRD$,L,1)
530 : IF L$<"A" THEN 570
540 : IF L$>"Z" THEN 570
550 : LS = ASC(L$) - 64
560 : WW = WW*LS
570 NEXT L
600 REM**PRINT THE WORDSWORTH
610 PRINT "THE WORDSWORTH IS" WW
700 REM**GO FOR ANOTHER
710 GOTO 210
```

In *Wordsworth #2*, the letter scores are multiplied instead of added.

— The *WW2* of BAD is 2*1*4 = 8.
— The *WW2* of TRY is 20*18*25 = 9000.

If a word is in *your* children's dictionary, it is probably also in the *American Heritage Dictionary*. So you and your child first browse your dictionary, then perhaps also look it up in the one we recommend. Work together, play together to answer these questions for *Wordsworth #2*.

In the *American Heritage Dictionary*, paperback edition:

1) Pick any number of letters, two, three, four, your choice. Find the words having this many letters with the smallest *Wordsworth #2* and largest *Wordsworth #2*.

2) What is the first word (alphabetically) to have a *Wordsworth #2* exactly equal to 100, 1000, 5040, or any number *you* pick.

3) A party game. Select a number. Everyone gets 15 minutes (or 12 or 20 or . . .) to find a word whose *WW* is close to the chosen number. Winner is the one who comes closest. Try this with both *WW1* and *WW2*.

4) The numbers 2, 3, 5, 7, 11, 13, and so on are called prime numbers. The numbers 4, 6, 7, 9, 10, and so on are called composite numbers. For each composite number up to 100, find a word whose *Wordsworth #2* is equal to the composite number. For example, 50 is a composite number. Here's a word: BEE. The *WW2* of BEE is 2*2*5 = 50.

NEW

Parents!
Teachers!

WANT TO GET A KID HOOKED ON COMPUTERS?

Send for our **LOGO STARTER** program. Use it with your 16K Color Computer and Color LOGO from Radio Shack (Cat. No. 26-2722).

LOGO is the best way to introduce children to computers. With **LOGO STARTER** you won't have to read a book or instruction manual. Just load the **LOGO STARTER** tape.

Your child will draw exciting designs right from the start. You won't waste your time on a lot of tedious typing. And your child will be on the way to computer literacy.

Only $13.95

SPEED READING

Busy executives! Students! Increase your reading speed dramatically.

Best available speed reading program for the CoCo. Reading material appears on the TV screen at the speed you select, training you to read faster. You can even change the speed while reading.

Complete with 6 different text selections. Plus a drill to improve visual span and perception.

$17.95

RAINBOW CERTIFICATION SEAL

WILD PARTY

A naughty, sexy computer game for 2 to 6 couples. RAINBOW: "Would definitely liven up most parties."

~~$35.00~~ **$27.95**

RAINBOW CERTIFICATION SEAL

All programs on cassette tape for 16K Color Computer, Extended BASIC not required. Send SASE for FREE copy of instructions for any program. Prices include postage (PA resid. add 6%). Send check to P.O. Box 210, Jenkintown, PA 19046.

b & b software

Good News for CoCo Users

Computerware is a federally registered trademark of Computerware — Box 668 • Encinitas, CA 92024 • (619) 436-3512

New OS-9 Utilities from Brian Lantz Computerware offers "Text Tools"

Noted OS-9 programmer and author **Brian Lantz** has joined with leading OS-9 vendor Computerware to offer an impressive group of **OS-9 utilities** called **"Text Tools"** which sells for **$29.95**. Review the list of powerful commands that follow and you will see why every OS-9 user will be adding the **Text Tools** to his library! You'll see similar "Unix-type" commands from other companies with prices of up to $50. But why pay more than Computerware's $29.95 when you can get top quality from real experts? Order the OS-9 Text Tools today!

CAT	FGREP	LOWER	LS	PACK	PR
QSORT	RPL	SPLIT	TAIL	TIME	TR
UNIQ	UNPACK	UPPER	UPS	WC	

New Ruler Crowned in Middle Kingdom - Ending Fierce Battles and Bloodshed

Sanctuary - Finally, a brave adventurer returned the three golden rings to the Sanctuary and was crowned ruler of the **Middle Kingdom**. This ends the gruesome carnage of warriors, merchants, and magicians that have been murdered and maimed by all varieties of monsters as they searched the dangerous Catacombs, Temple, and Pyramid for the precious rings. This Middle Kingdom **adventure** can be replayed in **graphics** for $24.95 on cassette or $27.95 on disk. Could you be crowned ruler? (Req. 32K)

JDOS - Available Separately

Computerware announced they have a limited supply of JDOS (rom and manual) sets available for $39.95. JDOS is the new J & M disk operating system which supports double sided drives and has many other attractive features.

The Sourcerer Reveals All. . .

If you like to take things apart to see how they tick - if you want to see the hows and whys of assembly language programs - the **Sourcerer** is your tool! It's an easy-to-use, menu-driven **disassembler** that produces symbolic source code that can be assembled by most of the popular editor/assemblers. (Yes, OS-9 users, it will disassemble the mysterious OS-9!) It's available on cassette or disk; disk versions for RSDOS, FLEX, & OS-9. So anyone can take a closer look! At $39.95 on disk or $34.95 on tape, you owe it to your curiosity!

Disk System Specials!

Disk systems included top quality drives, J & M controller, cable, & manual. (Add $15 for RSDOS.)

Single drive, single-sided	$400
Single drive, double-sided	$435
Dual drives, single-sided	$595
Dual drive, double-sided	$650
Amdisk System	$595
Amdisk drives only	$475
J & M controller, w/JDOS	$135
J & M controller, w/RSDOS	$155
JDOS w/manual	$39.95

Bio Detector Results Not Admissable In Court

The truths and untruths have been exposed. The suspect's inner mind has been tapped through the "galvanic skin response" sensors of the **Bio Detector**. The reaction to every question was displayed with color and sound on the CoCo screen for everyone to see. Yet the culprit is freed on a technicality - Bio Detector results were not admissable in court. But at least the truth is out! You too can tap into the truth by hooking up your family, friends, and "others" to Computerware's **Bio Detector** and your CoCo. Just ask questions and watch the graphic screen. The truth will come out! (Just $29.95 for all hardware, software, and fun. Req. 16K)

Programmers Applaud New Basic Utilities and Print Spooler

A new aid to the serious Basic programmer released by Computerware has proven to be essential. It gives the 32K system a 2K print buffer and the 64K system a **32K print buffer**. WOW! Other utilites include a Basic **cross reference program**, a dump for values of all Basic program variables, a 51 x 24 screen display for 64K users and more. At $19.95 for cassette or $24.95 for disk, every programmer should have one!

Computerware® Disk System Breakthrough!

Buyers Worried About:

- buying pieces from several different vendors & having to assemble them together - if something's wrong, who do you go to?
- reliability!!
- getting the most advanced features like fast step rates, extended tracks, slim line size
- adequate power supply
- technical documentation

Computerware® Offers Solutions like:

- **complete** systems assembled & tested by **expert technicians**. We've been selling disk systems since **1977** so we know what you need & we make sure you get it!
- highest quality components including **TEAC & Hitachi** drives, **J & M** Systems controller, all **GOLD** connectors, **heavy duty** cabinet, power supply, & cable.
- totally adequate power supplies to insure reliability. We know dual drives need heavier power supplies!
- all TEAC & Hitachi drives with **6 ms** step rate, full **40 tracks**, **slim** line, & 1 year warranty.
- In addition to the DOS manual, a 20 page **technical manual** documenting every detail of disk drive performance & specification.

from Computerware®

CoCo Owners Use Video Plus to Interface Monitors



CoCo users can now take advantage of the crisp display of a ***composite video monitor*** by installing one of Computerware's ***Video Plus*** interfaces. They are inexpensive, completely assembled, and easy to install. It also provides audio output for monitors with audio. There are three models depending on the kind of monitor and whether you have the original CoCo or CoCo II.

Video Plus (original CoCo & either color or monochrome monitor)	$24.95
Video Plus IIM (CoCo II & monochrome monitor)	$26.95
Video Plus IIC (CoCo II & either color or monochrome monitor)	$39.95

New NAP Monitors Have Built-In Audio Speaker!

Computerware has made special arrangements with North American Phillips (familiar for Magnavox & Sylvania brands). Their green and amber composite video monitors are the only monochromes on the market with built-in audio. And they are still very affordable! Check out Computerware's full line of monitors.

NAP green	$109.95
NAP amber	$119.95
Color (Comrex or Amdek)	$265.00

Flexi Filer Price Slashed -Now Only $54.95!!!

Computerware's popular data base system now includes the powerful file manager, making ***Flexi Filer*** a super buy at the new reduced price. It comes with a useful personal inventory format as a starter and has been used for such applications as sales analysts, sophisticated mailing lists, property locator & descriptor, business inventory - the lists goes on! Flexi Filer can be tailored to meet almost any need and is now affordable to all. (Req. 32K & disk)

PASCAL Price Reduced!!!

Now anyone can explore the advanced language of Pascal with Computerware's affordable 32K subset of standard ***Pascal***. Though it omits floating point and some sophisticated data structures, the user can enjoy learning the basics of this popular language and accomplish virtually any programming task. The cassette version ($39.95) includes compiler, P-code interpreter, supervisor, editor and sample programs. The disk version ($54.95) has added features like graphics, joystick, sound and directed I/O and includes compiler, P-code interpreter, supervisor and samples. The disk version with the Advanced Editor is available at $74.95. Finally, an **affordable Pascal!**

OS-9 Users Turn To Computerware®

OS-9 users are finding quality products at Computerware! The ***Advanced Editor*** is a much needed, comprehensive program editor. The ***Disk Fix & OS-9 Utilities*** package allows full use of drives like double sided, extended track, and fast step rates plus some very powerful and useful utilities. To explore how things "tick" the ***Sourcerer disassembler*** is a handy tool! ***Random Basic*** offers some significant advantages like extended precision and graphics. Computerware also carries Elite Word, O-Pak, and C-Compiler. Write for a complete ***catalog*** from the OS-9 experts!

Advanced Editor	$39.00
Disk Fix & Utilities	$29.95
Sourcerer	$39.95
Random Basic	$75.00
Elite Word	$72.95
O-PAK	$34.95
C-Compiler	$59.95

Synther 77 Users Form Band - Play Tunes Right From Their Keyboards

With ***Synther 77*** you can tune your keyboard to any of a hundred different voices (or instruments) then play music right on the keyboard. Some users groups have formed CoCo bands, playing familiar tunes together and saving their favorites to disk or tape. The pro musicians love the technical fine tuning factors like vibrato, bender, boing, attack, sustain, and decay. While the novices can enjoy just playing along and expertmenting. ***Synther 77*** requires 32K and costs only $24.95 on cassette or $27.95 on disk. It will bring hours of listening and playing enjoyment to all.

Hardware SALE!

Volksmodem — 300 baud, direct connect, with CoCo cable	$89.95
WICO adapter — Interfaces 2 Atari-type joysticks	$18.95
Kraft Joystick	$29.95
Video Clear — reduces RF interference from CoCo to TV	$16.95
CCP-1 Printer Interface — parallel to serial interface with selectable baud rates	$59.95
CCP-2 Printer & Modem Interface — CCP-1 plus extra connection for modem & switch for printer modem selection	$79.95

Call or Write to:

COMPUTERWARE®

(619) 436-3512

Box 668 • Encinitas, CA • 92024

Name _____

Address _____

City _____ State _____ Zip _____

Yes! Send me your FREE catalog! ☐

VISA MasterCard

Card # _____ Exp. _____

Signature _____

Item	Format	Price

Shipping: Surface — $2 minimum. 2% for orders over $100. Air or Canada — $5 minimum. 5% for orders over $100.

6% Calif. Sales Tax

COD Add $3

Shipping*

TOTAL

Checks are delayed for bank clearance

Okay, how about another contest? Send us answers to these four questions.

Q1) What magic word has a *Wordsworth #1* equal to the number of weeks in a year?
Q2) What five-letter word has the smallest *Wordsworth #2*?
Q3) What five-letter word has the largest *Wordsworth #2*?
Q4) What is the longest word (most letters) that has a *Wordsworth #2* less than 20,000?

We'll put all answers received by August 31, 1984, in a box, shake 'em up, and draw a winner. The winner will receive, of course, a stuffed dragon. If we get lots of answers, we'll draw for more stuffed dragons and perhaps some other prizes.

Simulations — Powerful Learning!

Schools use computers primarily to preserve old ways of teaching. So they use computers mostly as automated flashcards and for mundane drills and practice. These uses blend easily into traditional lesson plans. They can be done in one- to 10-minute chunks once or twice a day without disturbing 19th century teaching methods. No creative thinking is required on the part of the teacher. As always, the kids learn to memorize and regurgitate facts.

The most powerful computer tools for learning are Simulations, Simulation games, and Adventure games. Unfortunately, these take time, sometimes lots of time. In fact, an unpredictable amount of time. Of course, that doesn't fit in with the rigid scheduling of schools. Do you know any school that lets kids spend hours in creative problem-solving?

Earlier, we recommended the book *Parents, Kids, and Computers* by Lynne Alper and Meg Holmberg. This book is subtitled: *Learning Adventures Beyond the Classroom.* Chapter Two, "Simulations — Windows on the World" is the best concise description we have seen of Simulations as learning tools.

"The most powerful computer tools for learning are Simulations, Simulation games, and Adventure games."

WANTED!

Young men and women seeking adventure, excitement and thrill-a-minute action. No experience necessary—just you and your Color Computer. See below:

FOR THE 32K THRILLSEEKER

	TITLE	DISK	CASS.
NEW!	MR. DIG	$27.95	$25.95
NEW!	CANDY CO.	29.95	29.95
NEW!	WILLIE'S WAREHOUSE	29.95	29.95
NEW!	ICE HOCKEY	——	21.95
	ZAXXON	29.95	——
	PROTECTOR II	——	29.95
	DESERT PATROL	——	21.95
	ICEMASTER	——	21.95
	FOODWAR	——	22.95
	WACKY FOOD	——	19.95
	CASHMAN	——	24.95
	CHOPPER STRIKE	——	24.95
	TIME BANDIT	——	24.95

LOTS OF PLAY FOR 16K

MOONSHUTTLE	——	$26.95
FROG TREK	16.95	14.95
3-D TIC-TAC-TOE	18.95	16.95

Interested applicants send check or m/o to:

OELRICH PUBLICATIONS, INC.
4040 N. NASHVILLE
CHICAGO, IL 60634

Credit card orders call: 800-621-0105
(In Illinois call: 312-545-9286)
NO SHIPPING CHARGES!!!

We especially like text Adventure games. We can think of no better way to encourage a kid to learn several skills: reading, reasoning, learning by trial-and-error, map-making, problem-solving, and working together.

Wanted: Adventure games suitable for general audiences or okay with PG (parental guidance). We want games with these characteristics:

— Mostly non-violent. Focus on exploration, story-telling, and problem-solving instead of "kill monster, get treasure."
— Difficulty range from easy to moderately difficult. How about some easy games for beginners, parent and child?
— Reading level suitable for younger kids.
— Good documentation showing how to make maps and other ways of organizing information.
— Creative ways of imbedding things to learn in the game without sacrificing fun or playability.

We have received Adventure games from Prickly-Pear Software and Owls Nest Software. Look for their ads in this issue of THE RAINBOW. We are playtesting these games with parent and child playing together.

Help!

If your home has a kid, three to eight years old, and a CoCo, please share your experiences in using your CoCo with your child. If you write to us, please tell us if it is okay to print all or part of your letter in this column. ComputerKid, P.O. Box 310, Menlo Park, CA, 94026.

Trap That Error

By H. Allen Curtis

When the Color Computer is compared with the TRS-80 Model III by those who have used both, usually the Color Computer is favored. However, it is generally agreed that the Color Computer's keyboard and character set (no true lowercase) are inferior to the Model III's. Use of kits can eliminate the keyboard inferiority. Use of software can give the Color Computer a high resolution character set with a true lowercase. Sometimes the Color Computer is criticized because of its lack of BASIC commands for error trapping. The purpose of this article is to overcome this criticism.

The vehicle for overcoming the criticism is a program that adds to the Color Computer's repertoire of BASIC command analogs of the Model III's *ON ERROR GOTO*, *ERROR*, *ERL*, *ERR/2+1* and *RESUME* commands. Before the program called *Trapperr* is presented, a brief description of the new commands will be given. Then, after the presentation of *Trapperr*, there will follow a set of examples illustrating in detail the workings and applications of the new commands.

The *ETRAP* command is analogous to the Model III's *ON ERROR GOTO*. The format of *ETRAP* is simply as follows:

ETRAP line number

With *ETRAP* you provide a means of entry to an error-trapping routine which will permit your program to analyze an error when it occurs, take suitable action, and continue the program without any break in execution. The error-trapping routine starts at the line specified in the *ETRAP* command.

The next command, *ER#*, allows you to simulate a specified error. Its format is *ER# code* where code is any integer from one through 27 for Extended Color BASIC or from one through 38 for Disk BASIC. Associated with each code is a

---

(H. Allen Curtis resides in Williamsburg, Va. He is interested in 17th and 18th century history and enjoys biking through the colonial capital. He balances past and present with his computer work.)

NEW

E.T.T.
ELECTRONIC TYPING TEACHER
by
CHERRYSoft

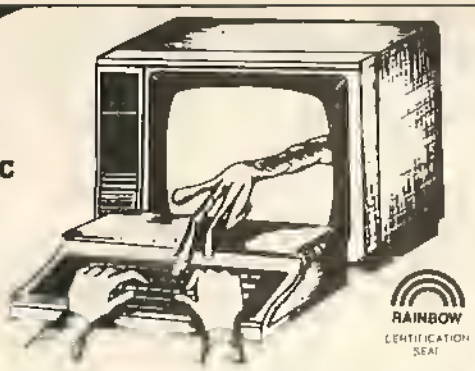

RAINBOW CERTIFICATION SEAL

Learning to type the right way can save you hours of tedious work when entering programs into your CoCo, and this is just what ETT was designed to do. Devote a little time every day practicing with ETT and before you know it you will be typing with confidence. Entering those programs will no longer be the chore it used to be.

ETT's video keyboard lets you practice with all the keys lebeled, all the keys blank or only the "home" keys labeled. The visual cues guide you while you learn to type without watching your fingers. ETT shows your accuracy, response time, and words per minute. You will quickly see that you are improving with practice.

With the sentences provided by ETT learning to type can be fun. Over 1000 variations chosen because they include every letter in the alphabet. You can also create your own practice sets. This outstanding program was written by a certified teacher and professional programmer and comes with a ten page student manual-study guide. Requires 16K Extended Basic.

Cassette **$21.95**

ETT NOW AVAILABLE FOR COMMODORE 64
CASSETTE $24.95 DISK $29.95

NEW

MASTER CONTROL II

The best doesn't always cost more and MASTER CONTROL II is a good example. What would you be willing to pay for a program that would cut your typing time by more than 50% and eliminate hours of debugging because you misspelled a command word? For example the command STRING$ (requires nine strokes! with MASTER CONTROL II you only require two strokes, just hit the down arrow key twice and it's done, and no mistakes. That is just one of the 50 pre-programmed commands available to you. If that isn't enough you also have the ability to customize your own key to enter a statement or commend correctly, automatically every time. But that's not all, how about automatic line numbering. Just enter the starting number and the increment you want and MASTER CONTROL II will do it for you. You also have direct control of MOTOR, AUDIO and TRACE plus a direct RUN key. Sounds great? Well, thousands of color computer owners have been enjoying these feetures for years. But now the new MASTER CONTROL II also has the following feetures:

*New plastic overlay that can be removed when you are not using MASTER CONTROL II.
*New documentation, to help you get the most from the program.
*New repeating keyboard.

Cassette **$21.95**

Include $2.50 Shipping and Handling in U.S.-$5.00 Foreign

CoCo Warehouse
Where Shopping By Mail is "USER FRIENDLY"
500 N. DOBSON · WESTLAND, MI 48185
Phone (313) 722-7957

FREE CATALOG
•
DEALER INQUIRIES INVITED

distinct type of error. Table 1 shows the codes and their associated errors. Execution of the *ER#* command will cause the computer to react as though the associated error had occurred. This command is a handy tool in the composition and testing of error-trapping routines. The *ER#* command is not generally used in your program once it has been completely developed.

The *ERL* command of the Color Computer is a function that returns the line number in which an error has occurred. *ERL* is primarily used in an error-trapping made accessible by an *ETRAP* command. If an error occurs in the direct mode, *ERL* returns -1.

The *ERR* command is the Color Computer analog of the *ERR/2+1* command of the Model III. *ERR* is a function that returns the code number (see Table 1) associated with the error that occurred. *ERR*, like *ERL*, is primarily used in an error-trapping routine accessed by an *ETRAP* command.

The final error handling command to be added to BASIC's command repertoire is *RESUME*. *RESUME* is used to terminate an error-trapping routine by specifying where normal execution is to resume. *RESUME* followed by a line number causes the computer to resume execution at the specified line. *RESUME* without a following line number causes the computer to return to the statement in which the error occurred. *RESUME NEXT* causes the computer to go to the statement directly after that in which the error occurred. If a programming bug causes the error-trapping routine to be reached without the occurrence of an error, you will receive an ID Error message. The ID Error message in such a case is intended to inform you that a *RESUME* has been executed without the occurrence of any of the errors in Table 1.

Trapperr, the program that adds *ETRAP, ER#, ERL, ERR* and *RESUME* to the BASIC command repertoire of your computer is shown in Listing 1. *Trapperr* employs a combination of two languages — BASIC and machine language. Each value in the *DATA* statements of Lines 90 through 500 is a byte of the machine language portion of *Trapperr*. This machine language routine consists of two distinct sections. The first section, found in Lines 90 through 190, initializes the mechanism that adds the error-trapping commands to the computer's command repertoire. The second section, found in the rest of the *DATA* statements, acts as an extension of the BASIC ROM and executes each error-trapping command when issued.

The purpose of the BASIC portion of *Trapperr* is to generate the machine language routine, reserve and protect high RAM, and transfer the routine to the reserved memory area. Lines 10 and 20 take care of the reservation and protection of the high 336 bytes of RAM. Lines 30 through 60 generate and transfer the machine language routine to the protected RAM. Line 70 provides a check on the accuracy of your typing the *DATA* statement values. Line 80 causes the execution of the initialization section of the machine language routine. This section is no longer needed after its completion and return to BASIC. Therefore, its 90 bytes are released from protection. The addition of the five error-trapping commands comes at a memory cost of only 246 bytes. There is an additional cost for those *without* Disk BASIC; you may no longer employ the first three *USR* functions *USR0, USR1* and *USR2*.

After you have correctly keyed in *Trapperr*, run it; it takes about five seconds. Then save *Trapperr* on tape or disk.

Table 1

Code	Error	Description
1	NF	NEXT without FOR
2	SN	Syntax error
3	RG	RETURN without GOSUB
4	OD	Out of DATA
5	FC	Illegal function call
6	OV	Overflow
7	OM	Out of memory
8	UL	Undefined line
9	BS	Bad subscript
10	DD	Redimensioned array
11	/0	Division by zero
12	ID	Illegal direct
13	TM	Type mismatch
14	OS	Out of string space
15	LS	String too long
16	ST	String formula too complex
17	CN	Can't continue
18	FD	Bad file data
19	AO	File already open
20	DN	Device number error
21	IO	Input-Output error
22	FM	Bad file mode
23	NO	File not open
24	IE	Input past End of file
25	DS	Direct statement
26	UF	Undefined function
27	NE	Can't find file
28	BR	Bad Record Number
29	DF	Disk full
30	OB	Out of Buffer space
31	WP	Write Protected
32	FN	Bad filename
33	FS	Bad file structure
34	AE	File already exists
35	FO	Field Overflow
36	SE	Set to non-field string
37	VF	Verification
38	ER	Past End of Record

Erase *Trapperr* by typing and entering *NEW*. Now, you are ready to become more familiar with the error-trapping commands via illustrative examples.

Example 1: Type and enter the following:

```
10   ETRAP1000
900  STOP
1000 PRINT"TEST"
```

Then type *RUN* and press ENTER. The result is the message, BREAK IN 900. In Line 10 the entry Line 1000 is established for the error-trapping routine. Because no error occurred in Lines 10 and 900, the error-trapping routine was never reached.

Try typing and entering *RUN2000*. Ordinarily, you would receive a UL Error message, but because of the previous execution of the *ETRAP* command, the occurrence of the UL Error caused entry to the routine at Line 1000 and the subsequent printing of the word TEST on the screen.

Again, type and enter *RUN2000*. This time the message UL Error is indeed displayed. This illustrates that once an error has occurred, another *ETRAP* command must be issued in order to trap the next error.

Example 2: Add to the Example 1 program the following:

```
20   PRINT"THIS IS A ";:ER#16:STOP
```

Then change Line 1000 to:

```
1000 PRINT"TEST":RESUME
```

Displayed on the screen as a result of running this program is:

```
THIS IS A TEST
?ST ERROR IN 20
```

This display shows that after the completion of the *PRINT* statement of Line 20, the *ER#16* command simulated an ST Error that caused an interruption of the execution of Line 20 and an entry to the routine at 1000. At Line 1000 following the printing of TEST on the screen, the *RESUME* command brought about a return to the *ER#16* command in Line 20. Because there was no second execution of an *ETRAP, ER#16* this time produced the message, ?ST ERROR IN 20. Change Line 1000 to *1000 PRINT "TEST":RESUMENEXT* and then run the program again. Now, you should get printed on the screen the following:

```
THIS IS A TEST
BREAK IN 20
```

Because of the *RESUMENEXT* in Line 1000, the return was made to the *STOP* statement just after and *next* to the *ER#16* command. Thus, *ER#16* was only executed once in the changed version of the example program. The *STOP* in Line 20 accounted for the "BREAK IN 20" message.

Example 3: In the program of Example 2 change Line 1000 to:

```
1000 PRINT"TEST":PRINTERL:PRINTERR:
RESUMENEXT
```

Running this program yields the display:

```
THIS IS A TEST
20
16
BREAK IN 20
```

The execution of *PRINT ERL* and *PRINT ERR* in Line 1000 caused the printing of 20 and 16, respectively, before the execution of the *STOP* command in Line 20. The printed

What Does Dugger's Growing Systems Grow?

We grow C Compilers ($120 value)
generate fast, efficient code
longs, floats, most operators
FLEX* $75.00
new OS-9* $59.95
COCO DOS $49.95

We grow Relocatable Macro Assemblers
($150 value)
Assembler, linker, library builder
symbols up to 32 characters
"fortran-like" common
FLEX* $75.00
new OS-9* $75.00
COCO DOS $49.95

We grow Orchids
Odontoglossums
write for catalog and price list

We grow HI RES OS-9 "Windows"
52 x 24 hi-res display
new cursor control
multi-window displaying
OS-9* $34.95

We grow Orchids
intergeneric hybrids
write for catalog and price list

We grow OS-9 Experts
Over 6 years experience with OS-9
Used in development of major project
Experts in both levels 1 and 2

Quality
quality at an affordable price
all products tested and proven

Solid Authorship Royalties
royalties up to 20% of selling price
Only quality products accepted

ORDER NOW! YOU OWE IT TO YOURSELF

All orders add $3.00 for shipping
VISA and MC welcomed
Foreign orders add 15%
California orders add 6%

For more information write or call:

DUGGER'S GROWING SYSTEMS

Post Office Box 305
Solana Beach, Calif. 92075
(619) 755-4373
Technical information 6 am to 8 am PDT only
Dealer inquiries welcome

* Flex—trademark of TSC, OS-9 trademark of Microware

number 20 is the line in which the error occurred and 16 is the code number of the error.

Now, add the following line: *30 ER#5* and change Line 20 to *20 PRINT"THIS IS A ";:ER#16*. As you would now expect, running this program should produce the following display:

```
THIS IS A TEST
20
16
?FC ERROR IN 30
```

Change Line 1000 to:

```
1000 ETRAP1000:PRINT"TEST":PRINTERL:
PRINTERR:RESUMENEXT
```

Running this program yields the following:

```
THIS IS A TEST
20
16
TEST
30
5
BREAK IN 900
```

The insertion of *ETRAP1000* in Line 1000 permitted the trapping of the error produced by the *ER#5* command in Line 30. The printing of 30 and 5 announced that the error occurred in Line 30 and was of the type having a code number 5.

Delete Line 900. Now the program has a bug: the error-trapping routine can be reached without the occurrence of an error. Run the program to get the following:

```
THIS IS A TEST
20
16
TEST
30
5
TEST
30
5
TEST
1000
12
```

The first half of the display is not surprising. The second printing of *TEST*, 30 and 5 is explained as follows: After the *ER#5* error at Line 30, the *RESUMENEXT* caused a return to the statement, immediately after *ER#5*, which happens to be the *ETRAP 1000* statement of Line 1000. The *ERL* and *ERR* values did not have a chance to change; hence, 30 and 5 were again printed after *TEST*. Because the error-trapping routine was reached illegally, an ID Error resulted. The occurrence of the ID error caused a legal entry to the error-trapping routine and thus the printing of 1000 and 12 after *TEST*. The error was at Line 1000 and was an error with code number 12. The final *RESUMENEXT* set up a return to the statement following the final statement of Line 1000. Since no line follows 1000, the program ended.

Example 4: Using *NEW*, erase the program of Example 3. Then key in the program of Listing 2. After you respond to the program's request to enter a message, the program forms

a string consisting of a repetition of your message. The string formation continues until the program consumes all the string space allotted. Then the string is printed on the screen. This example illustrates the *ERL* function in an *IF . . . THEN* statement; it also demonstrates the use of a *RESUME* followed by a line number.

Example 5: Erase the program of Listing 2 and type the program of Listing 3. The *ER#s* in Lines 20 through 50 are included for illustrative and testing purposes only and would be deleted in an actual working program. Have you ever wished that the Color Computer provided more than abbreviated error messages? This example indicates how you can go about replacing the abbreviated error messages with descriptive ones.

Before the conclusion of this article, there is an important comment which should be made. *Trapperr* must be loaded and run before you load and run any program containing error-trapping commands. Furthermore, it is a good policy to load and run *Trapperr* before keying in any program using error-trapping commands. *Trapperr* must be present to permit the error-trapping commands to be tokenized. If you should start composing a program containing error-trapping commands without *Trapperr* residing in the computer, all is not lost. Merely save the program in ASCII format. When you wish to use that program, load and run *Trapperr* first; then the error-trapping commands will be automatically tokenized upon the loading of your program.



Listing 1:

```
10 CLS:X=256*PEEK(116)-81
20 CLEAR100,X
30 X=256*PEEK(116)-80
40 FORZ=X TOX+335
50 READA$:A=VAL("&H"+A$):W=W+A
60 POKEZ,A:NEXT
70 IFW<>36869THENPRINT"DATA ERROR":STOP
80 EXEC X:CLEAR200,X+89
90 DATA CE,1,34,F6,1,92,C1,C2,26
100 DATA 17,30,8C,6C,86,E4,A7,81
110 DATA 86,E1,A7,8,86,52,A7,D
120 DATA 86,50,30,F,A7,4,33,4A
130 DATA 30,8C,28,C6,8,8D,A5,9A
140 DATA E7,44,DC,74,33,56,A7,C1
150 DATA A7,C1,A7,41,A7,43,30,8C
160 DATA 34,C6,5,A7,81,5A,26,F8
170 DATA CE,1,8E,A7,41,86,7E,A7
180 DATA C4,86,7A,A7,42,39,3,3F
190 DATA 10,3F,28,2,3F,A,3F,37,0
200 DATA 45,52,CC,45,52,D2,45,52
210 DATA A3,45,54,52,41,D0,52,45
220 DATA 53,55,4D,C5,3F,45,3F,4D
230 DATA 3F,53,3F,5D,3F,A7,81,D1
240 DATA 25,3,7E,82,77,30,8C,F0
250 DATA 80,CE,7E,AD,D4,C1,46,23
260 DATA 2,20,EF,C0,44,30,8C,DC
270 DATA 7E,82,CE,30,8C,58,EC,84
280 DATA 7E,84,F4,30,8C,50,7E,87
290 DATA 52,9D,A5,8D,AF,67,5A,58
300 DATA 7E,AC,46,DC,A6,34,6,8D
310 DATA AE,A4,33,8C,3E,AF,C4,35
320 DATA 6,DD,A6,9D,9F,27,4,81
330 DATA 3A,26,F8,C6,1,E7,59,39
340 DATA 34,12,30,8C,1F,A6,84,26
350 DATA 2,35,92,6F,80,A7,80,57
360 DATA 5C,E7,80,DC,A6,ED,81,DC
370 DATA 68,ED,81,EC,81,DD,A6,9E
380 DATA 21,32,1D,39,0,0,0,0,0,0
390 DATA 0,0,0,30,8C,F5,A6,84,27
400 DATA 46,6F,81,9D,A5,27,1A,81
410 DATA 3A,27,16,81,88,27,3,7E
420 DATA AE,A6,8D,38,A6,C0,27,4
430 DATA 81,3A,26,F8,33,5F,DF,A6
440 DATA 39,8D,29,9E,19,30,2,EC
450 DATA 84,10,93,68,27,4,AE,1E
460 DATA 20,F3,30,2,9F,28,11,93
470 DATA 28,27,8,A6,C2,81,3A,26
480 DATA F5,20,D8,33,18,20,D7,C6
490 DATA 16,7E,AC,46,EE,81,EC,84
500 DATA DD,68,39
```

Listing 2:

```
5 CLEAR500
10 ETRAP1000
20 CLS:PRINT@259,"ENTER A MESSAGE"
30 LINEINPUTA$
40 B$=" "+A$
50 IFI<101THENA$=A$+B$:I=I+1:GOTO50
60 PRINT@288,A$
900 STOP
1000 IFERL=50THENRESUME60ELSERESUME
```

Listing 3:

```
10 ETRAP2000
20 ER#2
30 ER#3
40 ER#1
50 ER#10
900 STOP
1000 PRINT"NEXT without FOR":RETURN
1010 PRINT"SYNTAX error":RETURN
1020 PRINT"RETURN without GOSUB":RETURN
2000 ON ERR GOSUB1000,1010,1020
2010 IFERR>3THENRESUMEELSEETRAP2000:RESUMENEXT
```

SUPER SCREEN

- A big 51 character by 24 line screen.
- Full upper and lower case characters.
- Easily combine text with hi-res graphics.
- PRINT @ is completely functional on the big screen.
- The powerful ON ERROR GOTO is fully implemented.
- Auto-key repeat for greater keyboard convenience.
- Control codes for additional functions.
- Works with 16K, 32K or 64K computers.
- Available on disc or cassette.
- Works with extended and/or disc BASIC.

51 CHARACTERS BY 24 LINE DISPLAY

Super Screen is a powerful, machine language program that significantly upgrades the performance and usefulness of 16K or greater, Extended and Disc Basic Color Computers. The standard Color Computer display screen is totally inadequate for serious, personal or business applications so Super Screen replaces it with a brand new, 51 character wide by 24 line screen including full upper and lower case characters. Instead of a confusing checkerboard appearance, you now have true lower case letters along with a screen that is capable of displaying 1224 characters. The difference is startling! Your computer takes on new dimensions and can easily handle lines of text that were simply too long and complex to display on the old screen.

COMBINE TEXT WITH HI-RES GRAPHICS

You can now write truly professional looking programs that combine text with hi-res graphics. Super Screen allows you to create graphics displays with the Basic LINE, DRAW and CIRCLE statements and then notate the graphics with descriptive text. You can even use PRINT @ if you wish for greater programming convenience. Super Screen's versatility will amaze you.

PRINT @ IS FULLY IMPLEMENTED

The PRINT @ statement is a valuable asset to the programmer when formatting text on the screen. The standard Color Computer will report an error if you specify a location higher than 511 but Super Screen allows locations all the way to 1223! You get a big screen and a powerful formatting tool as well. Of course, Super Screen also supports the CLS command allowing you to clear the big screen using standard Basic syntax.

ON ERROR GOTO

That's right! Super Screen gives you a full implementation of ON ERROR GOTO including the ERR and ERL functions. Now you can trap errors and take corrective action to prevent crashed programs and lost data using the same standard syntax as other computers. The ON ERROR GOTO capability overcomes a serious deficiency of Color Computer Basic and greatly improves your capability to handle sophisticated tasks. All well written, 'user friendly' programs use error trapping techniques and yours can too! Now that's power!

AUTO KEY REPEAT

No more frustration as you edit a long line in your Basic program; just hold the space bar down and automatically step to the desired position in the line. Need a line of asterisks? Hold the key down and auto repeat will give them to you. Those of you who spend many hours at your keyboard will appreciate this outstanding addition to Super Screen's long list of impressive capabilities.

CONTROL CODES FOR ADDITIONAL FUNCTIONS

Super Screen recognizes several special control code characters that allow selection of block or underline, solid or blinking cursor and other functions. You can 'Home Up' the cursor or you may erase from the cursor to the end of a line or to the end of the screen just like many other computers. These special codes give you an extra dimension of versatility and convenience that put Super Screen in a class by itself.

AND MORE GOOD NEWS...

Super Screen comes with complete, well detailed instructions and is available on cassette or disc. It adjusts automatically to any 16K or greater, Extended or Disc Basic Color Computer or TDP-100 and uses only 2K of memory in addition to the screen memory reserved during power up. Guaranteed to be the most frequently used program in your software library...once you use it, you won't be without it! Super Screen's low price will really please you, only $29.95 on cassette or $32.95 on disc!

64K Memory Expansion Kit

All parts and complete instructions

$64.95

NEW! SUPER BUG

Mark Data Products SUPER BUG is a powerful, relocatable machine code monitor program for your Coco. If you are a beginner, the program and documentation are an indispensable training aid, helping you to gain a better understanding of your Color Computer and machine code programming. If you are an accomplished computerist, SUPER BUG's capabilities, versatility and convenience will prove invaluable during programming and debugging.

SUPER BUG offers so many outstanding features that we are unable to list them all in this limited space. hex and alpha numeric memory display, modify, search and test; full printer support with baud rate and line feed select; up to 220 breakpoints; mini object code disassembler; 64K mode setup; decimal, hex and ascii code conversion routines and extensive documentation. Only $29.95 on cassette or $32.95 on disc.

ORDER ENTRY SYSTEM

The Mark Data Products sales order processing system will give a fast, efficient means to enter orders, print shipping papers and invoices, prepare sales reports, and monitor receivables. The system automatically enhances the monitor screen to a 51 character by 24 line display. 32K of memory is required along with an 80-column printer, and one or more disc drives.

The MDP order entry system is a family of programs which operate interactively by means of a "menu" selection scheme. Up to 900 products may be defined and a single disc system can hold over 600 transactions. When the operator selects a task to be performed, the computer loads a program designed to handle that task from the system disc. The system disc contains all of the programs required to create, update and maintain data files and prepare the necessary paperwork including shipping and invoice forms, daily sales reports, a monthly (or other period) sales report and a receivables report.

The MDP system:

- Is accurate, user friendly and simple to use.
- Is easy to customize for specific user requirements.
- Produces a traceable invoice.
- Handles receivables as well as closed orders.
- Is capable of future expandability.

This accounting software equals or exceeds higher priced packages for other computers and includes a detailed operating manual. For just $99.95.

ACCOUNTING SYSTEM

The Mark Data Products accounting system is ideal for the small businessman needing a fast, efficient means to process income and expenses, prepare detailed reports and maintain most of the information required at tax time. The system is a family of programs which operate by means of a "menu" selection scheme. When the operator selects a task to perform, the computer loads a program designed to handle that task from the system disc. The system disc contains all of the programs required to create, update and maintain data files and prepare the necessary accounting reports including a transaction journal, a P&L or income report, an interim or trial balance and a balance sheet.

Up to 255 separate accounts may be defined and a single disc system can hold over 1,400 transactions. This system automatically enhances the monitor screen to a 51 character by 24 line display. 32K of memory is required along with an 80-column printer and one or more disc drives.

The MDP system:

- Is accurate, user friendly and simple to use.
- Is easy to customize for specific user requirements.
- Immediately updates the chart of accounts.
- Provides an audit trail.
- Includes end of period procedures.
- Is capable of future expandability.

This order entry software equals or exceeds higher priced packages for other computers and includes a detailed operating manual. For just $99.95.

IMPORTANT NEW BOOKS

"Your Color Computer" by Doug Mosher. Over 300 pages of detailed information—A CoCo encyclopedia. $16.95

"Programming the 6809" by Rodnay Zaks and William Labiak. One of the best 6809 machine language texts available—required reference material. $15.95.

WE STOCK SOFTLAW PRODUCTS

The VIP WRITER Text Processor is rated tops by Rainbow, Hot CoCo and Color Computer Magazine. After evaluation we rate it tops too. **Disc $59.95.**

MD

Mark Data Products

24001 ALICIA PKWY., NO. 207 • MISSION VIEJO, CA 92691 • (714) 768-1551

All Orders: Please add $2.00 shipping and handling in the continental U.S. All others, add air shipping and $3.00 handling. California residents add 6% sales tax. Foreign, orders please remit U.S. funds. Software authors—Contact us for exciting program marketing details. We accept MasterCard and VISA. Distributed in Canada by Kelly Software.

*"M*A*S*H" Trivia Quiz*

But, Who Was Colonel Potter's Horse?

By Milt Tanzer

For several years (I won't say how many because that is one of the questions) the TV series *M*A*S*H* stayed at the top of the charts as one of the most watched programs on TV. It even topped the Super Bowl game on viewing audience.

One evening, after the series had ended, our family sat reminiscing about the program. "Remember how Hawkeye and B.J. used to pick on Frank Burns?" someone said. "Sure, it started with the pilot episode when they put him in a full body cast," someone else answered. "That wasn't B.J. He wasn't on the show yet. That was Hawkeye and Trapper." Before we knew it, we were totally involved in testing each other's memory about the many characters and happenings at the M*A*S*H unit. Over the next few months we made a list of 200 trivia questions and answers about the series, spanning the entire 11 years the show ran. (Oh, I just gave you one answer.)

I decided to write a program for the CoCo that would give all *M*A*S*H* fans the opportunity to share the fond memories of everyone's favorite TV series.

Since I could not find a way to have the computer accept a correct answer that varies slightly from the data line answer, I suggested to the player in the instructions not to take a missed question too seriously . . . after all, it's only a game.

The listing which follows is the 16K version of the game and can be found on this month's RAINBOW ON TAPE. Additionally, a longer (32K) version with many more *M*A*S*H* trivia questions is also on RAINBOW ON TAPE.

(Milt Tanzer, a commercial/investment realtor and author of three books on real estate investing, uses his CoCo primarily for word processing book manuscripts. This is his first venture into game programming.)

```
135..... 152
245..... 2
370..... 47
465..... 84
540..... 70
END ..... 43
```

The listing:

```
1 '8Y MILT TANZER
2 ' 2921 NE 46TH ST.
3 ' LIGHTHOUSE POINT, FLA. 33064
5 CLEAR 1000
10 CLS:PMODE 3,1
15 PCLS:SCREEN1,1
20 DRAW"C3;BM44,156;D18;R12;U18"
25 CIRCLE(38,168),10,4,1,.25,.85
30 CIRCLE(32,164),16,4,1,.12,.90
35 LINE(44,156)-(120,156),PSET
40 LINE(56,171)-(120,160),PSET
45 DRAW"BM48,137;D18;R3;U18;L3"
50 DRAW"BM1,140;R100;U1;L100"
55 DRAW"BM12,182;F4;R60
60 CIRCLE(122,158),9,4
65 DRAW"BM37,184;E9;R8;F9
70 DRAW"BM56,171;E14;F10;E10;F7;
E7;F5;E5"
75 DRAW"BM20,181;F2;R52"
80 PAINT(47,165),3,3
85 FORT=1TO1000:NEXT
90 DRAW "BM16,10;D40;R8;U28;F12;
E12;D28;R8;U40;L8;G12;H12;L8"
95 PLAY"D;L7;C;L4;D;C;D;C;P4"
100 LINE(92,52)-(76,92),PSET
```

HARDWARE & PROGRAMS

MONITORS

BMC MEDIUM-RES COLOR

13" BMC w/ sound $303.95
14" USI w/ sound 324.95
12" Taxon Composite & RGB.. 335.95

COMREX HI-RES MONOCHROME

12" Amber or Green..... 140.95
9" Amber or Green..... 125.95

Sorry, no C.O.D. on monitors.

COMPOSITE MONITOR INTERFACES

Double Driver..... 24.95
Video Plus..... 24.95
Both work great with color or monochrome on CoCo I.

Coco Double Driver..... 28.95
Video Plus II M 26.95
Video Plus II C..... 39.95
For CoCo II Only

JARB DISK DOUBLER

Why spend twice as much as you need to for double sided diskettes? With our doubler, you can make your own and pay for it with the first box you double. A must for disk drive users.
5¼" size only 12.95

BASF DATA CASSETTES

	C-05	C-10
1-10	.60 ea.	.65 ea.
11-20	.55 ea.	.60 ea.

Soft Poly Cases..... Ea. $.20
Hard Shelled Cases..... Ea. $.22
Cassette Labels (12)..... Sh. $.36
Cassette Labels Tractor (1000).... $21.95

MEMORY UPGRADE KITS

16K RAM CHIPS ..... 1.50 ea.
5V, CoCo II 16K ..... 1.95 ea.

*64K RAM CHIPS

Eight 200 NS Factory Prime 64K RAM Chips. Allows you to upgrade 'all' board easily. No soldering needed..... $52.50

*16K/32K

Eight 200 NS Factory Prime Chips with Piggy Backed Sockets, Sam Socket, Bus Wire, Comprehensive Instructions. Recommended for "D" or earlier, but may be used on "E". Only 9 simple solder connections to kit. None to computer. $25.95
NOT FOR CoCo 2

THE GUNFIGHTER

BY Tracy A. Sarra

An excellent hi-res, arcade quality game program for two players. Joysticks and 32K are required in this all machine language program.
Cassette . $19.95 Disk/Amdisk . $24.95

JUNGLE TREK

Lost in a jungle with wild animals lurking; your only survival is to find a safe compound before you are lunch for lions; high resolution; multi-color.
16K EXT..... $14.95

BIORHYTHM/PSYCHIC APT.

1) Prints biorhythm charts of nearly unlimited length; attractively formatted for use on most printers. 16K

2) Your psychic ability is determined through questions evaluating your psychic experiences
16K Ext ..... Both for $15.95

PROGRAMS FOR THE SPECTRUM PROJECTS VOICE-PAK OR SPEECH SYSTEMS VOICE

TALKING FINAL COUNTDOWN

(by Bill Cook)

For 32K EXT $19.95
Standard cassette
FINAL COUNTDOWN..... $14.95

TALKING SPELL-A-TRON

The program allows the user to build a dictionary of words. During testing, the words are spoken. If an incorrect response is given, the word is spoken again and spelled. Tape (32K EXT) $22.95

TALKING SCORE E-Z

A yahtzee type program. Up to six players can compete. All scoring and record keeping is done by the computer. Tape (32K EXT)..... $19.95
Standard SCORE E-Z..... $15.95

TALKING COLOR MATH

The perfect educational game to aid the student in learning addition, subtraction, multiplication and division. Allows one to specify difficulty level.
Tape (32K EXT) $22.95

TALKING SHIP HUNT

by Cobra Software

Play Battleship against your computer. 32K w/ joystick needed. Graphics and sound. Can be played without voice.
Cassette $10.95

SCHEMATIC DRAFTING PROCESSOR (disk) can draw large scale schematics in hi-res (has six overlapping screens) and then print them out to any of several popular printers, fast!! A must for serious hardware computerist.
Now only..... $49.95

CoCo Chips

Sam, Pia, CPU, Ext, Basic

We carry products from many manufacturers. If you don't see it, ask.

JARB SOFTWARE HARDWARE
1636 D Avenue, Suite C
National City, CA 92050

COD orders accepted, no charge cards please.
Shipping and handling $3.00
California residents please add 6% sales tax

Order Line
(619) 474-8982

After Hours BBS
(619) 474-8981

```
105 LINE(76,92)-(84,92),PSET
110 LINE(84,92)-(88,84),PSET
115 LINE(88,84)-(104,84),PSET
120 LINE(104,84)-(108,92),PSET
125 LINE(108,92)-(116,92),PSET
130 LINE(116,92)-(100,52),PSET
135 LINE(100,52)-(92,52),PSET
140 LINE(96,64)-(88,76),PSET
145 LINE(88,76)-(104,76),PSET
150 LINE(104,76)-(96,64),PSET
155 PLAY"L6;C;L4;O;L6;C;L4;O;C;O
;C;P4"
160 DRAW"BM144,96;G8;O8;F8;R26;D
8;L32;F8;R24;E8;U8;H8;L24;U8;R32
;H8;L24"
165 PLAY"L4;C;O2;A;L4;O3;C;O;F"
170 DRAW"BM196,140;O4O;R8;U16;R2
4;O16;R8;U40;L8;O16;L24;U16;L8"
175 PLAY"L4;GFOC;L2;O"
180 PAINT(20,12),4,3:PAINT(96,54
),4,3
185 PAINT(148,98),4,3:PAINT(200,
144),4,3:FOR X=1TO500:NEXT
190 COLOR4,3
195 LINE(64,52)-(76,64),PSET
200 LINE(76,52)-(64,64),PSET
205 LINE(64,58)-(76,58),PSET:FOR
X=1TO500:NEXT
210 LINE(120,88)-(132,100),PSET
215 LINE(132,88)-(120,100),PSET
220 LINE(120,94)-(132,94),PSET:F
OR X=1TO500:NEXT
225 LINE(180,132)-(192,144),PSET
230 LINE(192,132)-(180,144),PSET
235 LINE(180,138)-(192,138),PSET
:FORX=1TO500:NEXT
240 PLAY"L4;C;O2;A;O3;COFGFOC;L1
;O"
245 DRAW"BM180,16;O16;L16;O20;R1
6;D16;R20;U16;R16;U20;L16;U16;L2
0"
250 PAINT(188,24),4,4
255 FOR T=1TO1000:NEXT
260 PRINT@71,"WELCOME TO..."
265 PRINT@138, "M*A*S*H"
270 PRINT@202, "TRIVIA"
275 PRINT@385,"DO YOU WANT INSTR
UCTIONS?(Y/N)":INPUT I$
280 IF I$="Y" THEN GOTO450
285 CLS:PRINT@165,"PLEASE BE PAT
IENT"
290 PRINT@322,"I'M THINKING UP 0
UESTIONS"
295 PLAY"D;L6;C;L4;O;C;D;C;P4"
300 DIM Q$(20),A$(20)
305 FORX=1TO20
310 READ Q$(X),A$(X)
315 NEXTX
320 CLS:C=0
325 FOR Y=1TO20
330 CLS:PRINT@64," * * * * * * *
 * * * * * * * * *"
335 PRINTQ$(Y):INPUT Z$
340 IFZ$=A$(Y) THEN GOTO375
345 SOUND100,10
350 IF Z$<>A$(Y) THEN PRINT@266,
"MY ANSWER IS:  "
355 PRINT@320,A$(Y)
360 FOR T=1TO2500:NEXT
365 NEXTY
370 GOTO415
375 R=RND(5):PRINT""
380 FORX=1TO5:SOUND50,1:SOUND150
,1:NEXT
385 IFR=1 THEN PRINT"THAT'S RIGH
T..YOU'RE PRETTY GOOD"
390 IFR=2 THEN PRINT"HEY,YOU'RE
OK"
395 IF R=3 THEN PRINT"TERRIFIC..
.RIGHT AGAIN"
400 IFR=4 THENPRINT"YOU DID IT A
GAIN
405 IFR=5 THENPRINT"RIGHT...YOU
SURE KNOW MASH"
410 C=C+1:FOR T=1TO1500:NEXT:GOT
O365
```


NOW COMPLETE DISK DRIVES from $159.

INCLUDING CASE & POWER SUPPLY

35 TRACK $159.

40 TRACK $174.

Drives $35. Less Without Case & Power Supply.

DOUBLE SIDED 40 TRACK ½ HGT...$244. (Panasonic)

2 DOUBLE SIDED 40 TRACK ½ HGT...$434. (Panasonic)

All drives unused. 35 Track Drives are manufacturers overstock. 6 month warranty.

M.C. & VISA Accepted

OWL-WARE
P.O. Box 116-B
Mertztown, PA.
19539

PA. Res. Include 6% Tax
(215) 682-6855

Sugar Software

Tired of the same old utilities?

Proven effective against the popular CoCo piracy-cracking copy programs

Would you like to protect your disk software from unauthorized copying, but still allow your users to make back up copies? Then

PIRATECTOR!™

is for you!

$99.95 - Disk

Don't waste your valuable time and effort concocting anti-piracy schemes. Spend your time developing new programs and then Piratect™ them. Piratector will protect your Basic or ML programs using many different sophisticated techniques, while still allowing your users to create (non-executable) backups that can be used to recover a "crashed" master disk.

Piratector offers much more than just software protection. Several ML utilities are provided including:

COMBINER - appends ML subroutines with your Basic program.

SEMIGRAF - full featured high-resolution 8 color semigraphic graphic editor to build title screens for your programs.

GETLIN - keyboard input subroutine for easy development of MENU oriented software (Basic or ML)

PIRATECTOR features:

- Protects Basic or ML programs
  - — Encryption
  - — ML AUTO Loader
  - — Basic Break Disabler
  - — Error catcher
  - — Reset Button Disable
- Utility subroutines included
- Automate your duplication if multiple drives are used
- Each copy will be "finger printed" with incrementing serial numbers

SEMIGRAF Graphics Editor

Tape - $19.95
Disk - $24.95

- Graphics editor to create and modify your own pictures
- Pictures can be used as a title screen for a program
- Create a series of pictures to make a slide show
- Both Extended and non-Extended Basic versions on the same tape
- High Resolution
- Semigraphic modes 8, 12, and 24 (64 x 64, 64 x 96 and 64 x 128)
- 8 colors
- Combine text with graphics
- Auto-repeat and "magic" delete
- Requires 16K

$19.95

AUTO RUN 64 $24.95

Software that you design and sell can be enhanced by using the Auto Run Loader. Sugar Software will allow you to do this without requesting royalties.

- Starts up your Basic or ML program automatically — no need to type EXEC or RUN
- Locate your program anywhere in memory
- Graphics editor helps you create attractive title screens for your program
- Gives your program the professional touch
- Provides an audio introduction for your program
- Create "slide shows" with a series of title screens
- Used by many CoCo software houses
- Requires 16K ECB

A complete catalog of other sweet Sugar Software products is available.

SUGAR SOFTWARE
2153 Leah Lane
Reynoldsburg, Ohio 43068
(614) 861-0565

MasterCard VISA

Add $1.00 per tape for postage and handling. Ohioans add 5.5% sales tax. COD orders are welcome. CIS orders EMAIL to 70405, 1374. Dealer inquiries invited

Sugar Software

Something New!

How far out in the Pacific Ocean can you see Mt. St. Helens? Could you talk via VHF radio between 2 airplanes flying 1,000 feet off the ground if they were 100 miles apart? Answer these questions with

Radio System Design Calculations



For the amateur radio enthusiast! For radio technicians or engineers who design or maintain systems! For the electronics, radio, engineering or physics student! For the pilot!

Radio System Design Calculations does 14 different calculations commonly used in the design or evaluation of a land mobile radio system, satellite TV or satellite data acquisition systems, TV and Broadcast FM systems, microwave systems and aircraft radio systems.

$29.95 - Tape
$32.95 - Disk
32K ECB

SUGAR SOFTWARE
2153 Leah Lane
Reynoldsburg, Ohio 43068
(614) 861-0565

MasterCard VISA

Add $1.00 per tape for postage and handling. Ohioans add 5.5% sales tax. COD orders are welcome. CIS orders EMAIL to 70405, 1374. Dealer inquiries invited.

A complete catalog of other sweet Sugar Software products is available.

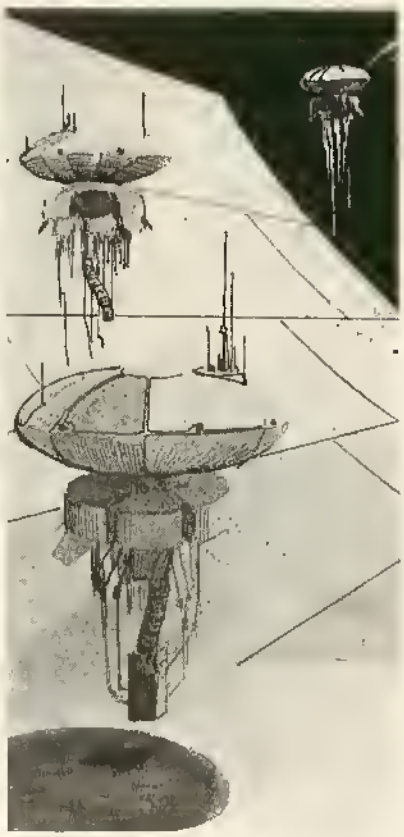

Flying Tigers

16K Tape - $24.95
32K Disk - 27.95
Joystick required

Somewhere in the far future, while flying home from an alien skirmish, your squadron of Warhawk II's is ambushed by aliens from hyperspace. In the battle that follows, all 10 of your wingmates are shot down. They eject to relative safety on a small asteroid. ***YOU*** are their only defense as the aliens close in for the kill!

- 100% ML
- Arcade quality
- 5 levels of difficulty
- Super hi-res graphics and animation
- Sensational space sound effects
- Skill and strategy needed

The CoCo Calligrapher

32K ECB Tape - $24.95
32K ECB Disk - $29.95

Turn your CoCo into a calligrapher's quill. Three separate print styles! Upper and lower case!

Gay Ninety
7890ABCD
NOPQRSTU
efghijklmnop
wxyz.,!?-:;"'()

Requires a Bit Mode Printer. Works with Epson, Okidata, Gemini 10X, R.S. Line Printer VII, DMP 100 or equivalent.

Old English
abcdefghijkl

36 point (1/2 inch) letters are variably spaced — great for flyers, invitations, signs, etc. Input up to 17 lines of text at a time; save and retrieve data.

Cartoon
7890ABCDEF
RSTUVWXYZa

```
415 CLS:PRINT:PRINT"THAT'S 2Ø QU
ESTIONS"
42Ø PLAY"O;L6;C;L4;DCOC;P4"
425 PRINT:PRINT"YOU GOT ";C;"RIG
HT OUT OF 25"
43Ø RESTORE:PRINT"CARE TO TRY MO
RE?(Y/N)":INPUT C$
435 IFC$="Y"THEN GOTO32Ø
44Ø PRINT:PRINT"THANKS FOR PLAYI
NG."
445 PLAY"L4;C;O2;A;L4;O3;COF;L3;
GFOC;L2;O":END
45Ø 'INSTRUCTIONS
455 CLS:PRINT:PRINT:PRINT"YOU WI
LL BE ASKED 2Ø TRIVIA      QUES
TIONS ABOUT THE TV SERIES
     M*A*S*H
46Ø FOR T=1TO25ØØ:NEXT:CLS
465 PRINT:PRINT"TYPE IN YOUR ANS
WER AND <ENTER>"
47Ø PRINT:PRINT"HINT: EXCEPT WHE
RE ASKED TO      GIVE FULL NAMES
USE ONLY THE     CHARACTER'S NICK
NAME (RADAR,     HAWKEYE,ETC.)
475 PRINT"IF THE CHARACTER HAS N
O NICKNAME USE THEIR LAST NAME O
NLY          (POTTER,MULCAHY,ETC.)
48Ø PRINT@41B,"PRESS <ENTER> TO
CONTINUE":INPUT C
485 CLS
49Ø PRINT"AT TIMES, THE COMPUTER
 MAY TELL YOU YOUR ANSWER IS NOT
 CORRECT  JUST BECAUSE YOUR WORD
ED IT     DIFFERENTLY.
495 PRINT"PLEASE DON'T TAKE A MI
SS TOO    SERIOUSLY":PRINT
5ØØ PRINT"AFTER ALL...IT'S ONLY
A GAME!!"
5Ø5 PRINT:PRINT"...SO IF YOU'RE
READY TO RELIVE       YOUR MEMOR
IES OF"
51Ø PRINT@362,"M*A*S*H
515 PRINT@41B,"PRESS<ENTER> TO S
TART":INPUT C
52Ø CLS:GOTO2B5
525 DATA H.Q.PHONE OPERATOR,SPAR
KY
53Ø DATA POTTER'S HOBBY,PAINTING
535 DATAWHO PLAYED TRAPPER,WAYNE
 ROGERS
54Ø DATAMULCAHY'S SISTER'S OCCUP
ATION,NUN
545 DATANEIGHBORHOOD BAR, ROSIE'
S
55Ø DATAWHAT DOES MASH STAND FOR
,MOBILE ARMY SURGICAL HOSPITAL
555 DATANAME AND RANK OF INTELLI
GENCE   OFFICER,COLONEL FLAGG
56Ø DATAWHO QUIT DRINKING WHEN H
E SAW   HIS BAR BILL,HAWKEYE
565 DATARADAR'S GUINEA PIG,DAISY
57Ø DATAONLY ACTOR TO STAR BOTH
IN THE  TV SERIES AND THE MOVIE,
GARY BURGHOFF
575 DATANAME AND RANK OF THE SHR
INK,MAJOR SIDNEY FREEDMAN
5BØ DATAPOTTER'S HOMETOWN AND ST
ATE,"HANNIBAL,MISSOURI"
5B5 DATAWHAT DID B.J. DO THAT BU
GGED    HAWKEYE,COMBED HIS MUSTA
CHE
59Ø DATABURNS' FAVORITE DRINK,SH
IRLEY TEMPLE
595 DATANAME AND RANK OF NURSE W
HO WAS  PRIZE IN A RAFFLE,LT. DI
SH
6ØØ DATAWHO KEPT BOMBING THE MAS
H UNIT,FIVE O'CLOCK CHARLIE
6Ø5 DATAHOW DID BURNS PASS HIS M
EDICAL  EXAMS,BOUGHT THE ANSWERS
61Ø DATAKLINGER'S FAVORITE TEAM,
TOLEDO MUD HENS
615 DATAWHERE DID BLAKE'S PLANE
CRASH,SEA OF JAPAN
62Ø DATANAME OF BARBECUE RIB PLA
CE IN   CHICAGO, ADAM'S RIB
```


The

ORACLE II

NEW

The Ultimate CoCo Monitor.

The ORACLE II is not a rehashed monitor program adapted to the CoCo, but a state of the art monitor designed to compliment the CoCo and its unique abilities.

Compare some of our features:

- 64K Compatible - the ORACLE II can relocate itself and its monitor screen above disk basic.
- Single Stepper - a single variable speed stepper that allows you to step bolh rom and ram.
- Disassembler -
- Graphics Support - allows you to step a program while walching any graphic screen, in any graphic mode, and toggle between the monitor screen and back, with one key.
- ASCII/hex search-up to a 10 byte search.
- Full screen display and editing of memory.
- Over 40 commands.

CoCo disk or tape (both versions included)	$35.95
Spectral or FHL Flex version	45.95

(+ $2.00 shipping and handling)

MICRO MAGIC

P.O. BOX 142, SUMNER, WA 98390
(206) 863-8762
(24 Hours)

master charge

VISA

RAINBOW Info

How To Read Rainbow

Please note that all the BASIC program listings you will find in *the Rainbow* are formatted for a 32-character screen — so they will show up just as they do on your CoCo screen. One easy way to check on the accuracy of your typing is to compare what character "goes under" what. If the characters match — and your line endings come out the same — you have a pretty good way of knowing that your typing is accurate.

We also have "key boxes" to show you the *minimum* system a program needs. But, *do* read the text before you start typing.

Finally, the little cassette symbol on listings indicates that program is available through our *Rainbow On Tape* service. An order form for this service is on the insert card bound in the magazine.

RAINBOW
CERTIFICATION
SEAL

The Rainbow Seal

The Rainbow Certification Seal is our way of helping you, the consumer. The purpose of the Seal is to certify to you that any product which carries the Seal has been physically seen by us and that it does, indeed, exist.

Manufacturers of products — hardware, software and firmware — are encouraged by us to submit their products to *the Rainbow* for certification. We ascertain that their products are, in actuality, what they purport to be and, upon such determination, award a Seal. This lets you know that we have seen the product and that it does, indeed, exist.

The Seal, however, is not a "guarantee of satisfaction." The certification process is different from the review process. You are encouraged to read our reviews to determine whether the product is right for your needs.

There is absolutely no relationship between advertising in *the Rainbow* and the certification process. Certification is open and available to any product pertaining to CoCo. A Seal will be awarded to *any* commercial product, regardless of whether the firm advertises or not.

We will appreciate knowing of instances of violation of Seal use.

Using Machine Language

Machine Language programs are one of the features of *the Rainbow*. There are a number of ways to "get" these programs into memory so that you can operate them.

The easiest way is by using an Editor-Assembler, a program you can purchase from a number of sources.

An editor-assembler allows you to enter mnemonics into your CoCo and then have the editor-assembler assemble them into specific instructions that are understood by the 6809 chip that controls your computer.

When you use an editor-assembler, all you have to do, essentially, is copy the relevant instructions from *the Rainbow's* listing into CoCo.

Another method of getting an assembly language listing into CoCo is called "hand assembly." As the name implies, you do the assembly by hand. This can *sometimes* cause problems when you have to set up an ORIGIN statement or an EQUATE. In short, you have to know something about assembly to hand assemble some programs.

Use the following program if you wish to hand assemble machine language listings:

```
10 CLEAR200,&H3F00:I=&H3F80
20 PRINT "ADDRESS:";HEX$(I);
30 INPUT "BYTE";B$
40 POKE I,VAL("&H"+B$)
50 I=I+1:GOTO 20
```

This program assumes you have a 16K CoCo. If you have 32K, change the &H3F00 in Line 10 to &H7F00.

What's A CoCo

CoCo is an affectionate name which was first given to the TRS-80 Color Computer by its many fans, users and owners. As such, it is almost a generic term for three computers, all of which are very much alike.

When we use the term CoCo, we refer to the TRS-80 Color Computer, the TDP System-100 Computer and the Dragon-32 Computer. It is easier than using the three "given" names throughout *the Rainbow*.

In most cases, when a specific computer is mentioned, the application is for that specific computer. However, since the TDP System-100 and TRS-80 Color are, for all purposes, the same computer in a different case, these terms are almost always interchangable.

Rainbow Check PLUS

The small boxes that you see accompanying programs in the *Rainbow* "Check system," which is designed to help you type in programs accurately.

Rainbow Check PLUS will count the number and values of characters you type in. You can then compare the numbers you get to those printed in *the Rainbow*. On longer programs, some benchmark lines are given. When you reach the end of one of those lines with your typing, simply check to see if the numbers match.

To use *Rainbow Check PLUS*, type in the program and *CSAVE* it for later use, then type in the command *RUN* and press [ENTER]. Once the program has run, type *NEW* [ENTER] to remove it from the area where the program you're typing in will go.

Now, whenever you press the down arrow key, your CoCo will give you a checksum based on the length and content of the program in memory. This is to check against the numbers printed in *the Rainbow*. If your number is different, check the listing carefully to be sure that you typed in the correct BASIC program code. For more details on this helpful utility, refer to H. Allen Curtis' article on page 21 of the February 1984 *Rainbow*.

Since *Rainbow Check PLUS* counts spaces and punctuation, be sure to type in the listing exactly the way it's given in the magazine.

```
10 CLS:X=256*PEEK(35)+178
20 CLEAR25,X-1
30 X=256*PEEK(35)+178
40 FOR Z=X TO X+77
50 READ Y:W=W+Y:PRINT Z,Y;W
60 POKE Z,Y:NEXT
70 IF W=7985 THEN 80 ELSE PRINT
   "DATA ERROR":STOP
80 EXEC X:END
90 DATA 182,1,106,167,140,60,134
100 DATA 126,183,1,106,190,1,107
110 DATA 175,140,50,48,140,4,191
120 DATA 1,107,57,129,10,38,38
130 DATA 52,22,79,158,25,230,129
140 DATA 39, 12, 171,128,171,128
150 DATA 230,132,38,250,48,1,32
160 DATA 240,183,2,222,48,140,14
170 DATA 159,166,166,132,28,254
180 DATA 189,173,198,53,22,126,0
190 DATA 0,135,255,134,40,55
200 DATA 51,52,41,0
```

An instrument flight simulation 'up' date

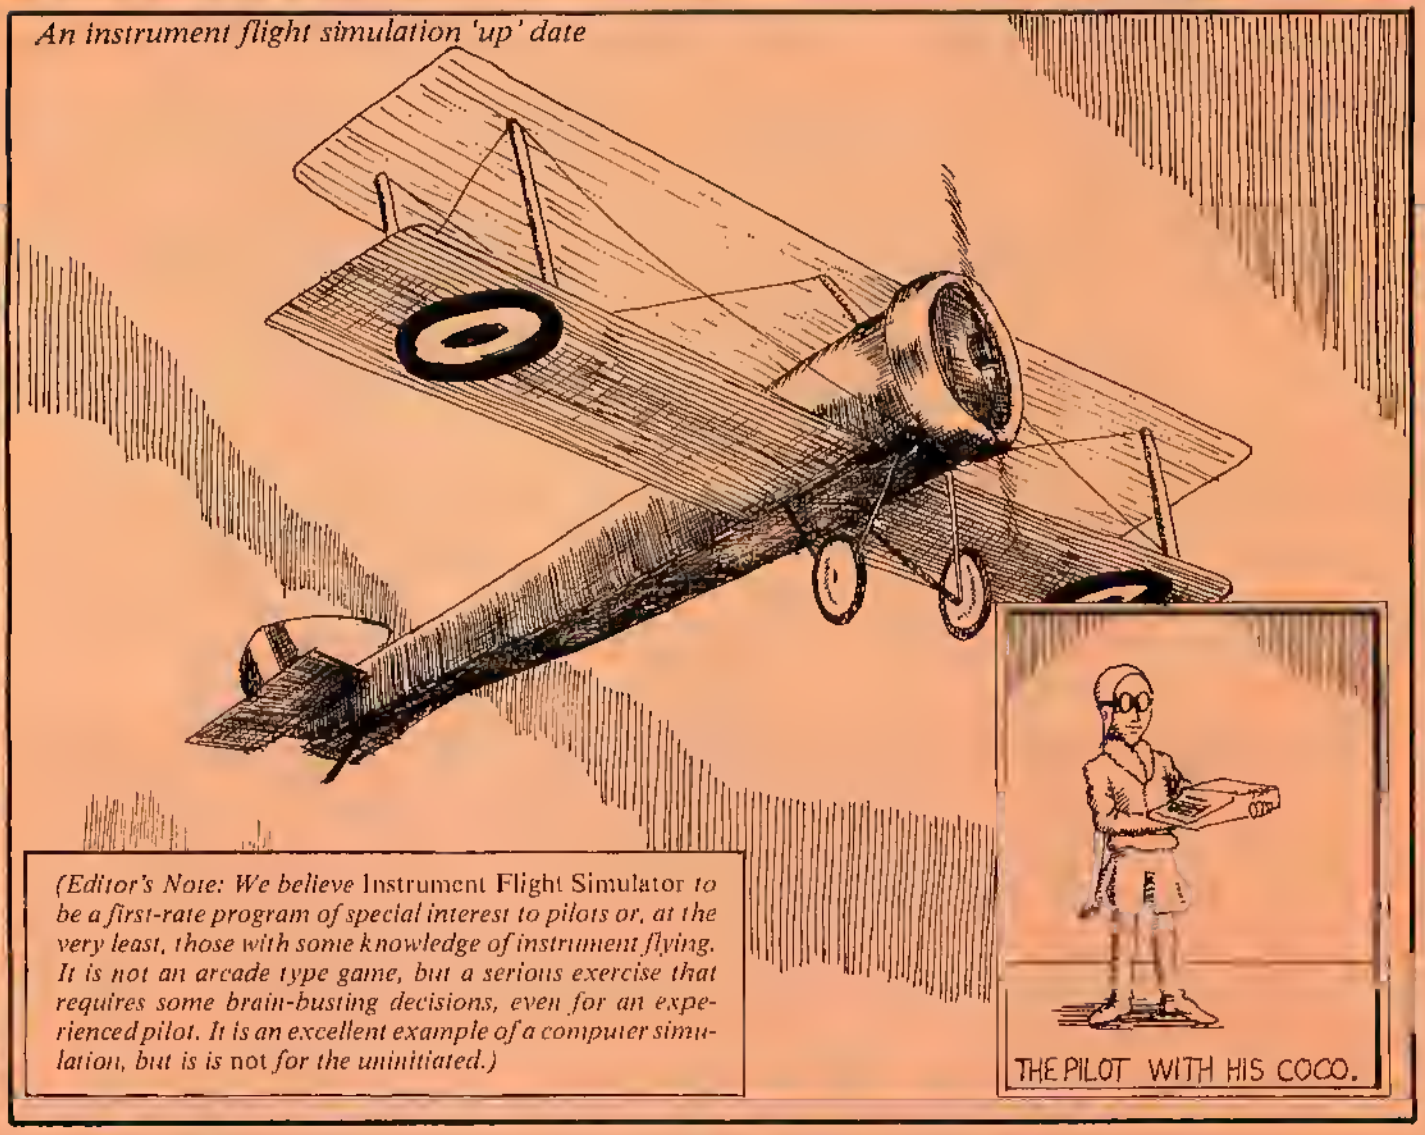

(Editor's Note: We believe Instrument Flight Simulator *to be a first-rate program of special interest to pilots or, at the very least, those with some knowledge of instrument flying. It is not an arcade type game, but a serious exercise that requires some brain-busting decisions, even for an experienced pilot. It is an excellent example of a computer simulation, but is is* not *for the uninitiated.)*

'SOPWITH COCO' FLIES AGAIN!

By William G. Franklin

For all you Sopwith flyers who have stuck with it, we are going to clean up a little and then really get serious about navigational aids.

If you had trouble in Line 170 of the *Instrument Flight Simulator* in the June 1983 issue, check the data statements carefully in the 7000 series lines to see that you have not inserted a semicolon in place of a comma. These are *DRAW* strings and the letters must be correct or you will get a Function Call Error when the program attempts to draw the character in error. Disk system users please note that the variable *A$* in Lines 390, 400, 405, 410, 1190, 1510, and 8030 should be changed to some other designation, i.e., AV or VQ. Finally, if you remove the semicolons altogether in the 7000 series data statements you should be able to run the 16K version without having to *CLEAR 100* prior to running.

This update will: allow 26 stations to be input, install a course deviation indicator (CDI) feature coupling the path deviation indicator to TACAN and ADF stations; require a field elevation input when entering ILS location data (this means you will no longer be landing at 0 on the altimeter, but at the barometric altitude, or field elevation, you set in). It will also give you some instrument labels if you wish, and clean up some of the techniques.

The increase to 26 stations now uses the alphabet to identify the stations: A through F for ILS, G through P for TACAN, and Q through Z for ADF. A significant difference is that when entering station data, the letter identifying the station need only be pressed. The rest of the information must still be entered. However, if you make a mistake, the information still may be re-entered the next time as only the last data entered for a particular station is valid. You will also be entering a field elevation — more on this later.

The CDI feature includes a read out in the window just above the DME window, a dot indication on the outside of the D/F dial, and an indication by the path deviation pointer if you are within ±15° of the selected course.

Course selection is made with the '1', '2', and '3' keys. The '1' key increments the hundreds digit, the '2' key increments the tens digit, and the '3' key increments the ones digit. Values above 360° are not allowed. For example, if the current course selected is 276° and the hundreds digit is incremented, the tens digit will reset to 0. This should not present any difficulty so long as the operation is understood. As a new course is selected, the dot on the outside of the D/F dial will be placed accordingly, representing the course selected.

If you are *inbound* to a station and want to fly a particular radial, the course selected must be the reciprocal, 180° opposite, of the radial you wish to fly. Example 1: You are flying inbound on the 44° radial, the selected course should be 224°. Example 2: You are inbound on 286° radial, the course selected should be 106°. If you are outbound, the selected course should be that of the radial. Example: You are flying away from a station on the 318° radial, select course 318. In all of these cases the path deviation pointer will indicate where the correct path is and you must fly toward that path — operation of this indicator is the same as in the ILS mode. As a course deviation indicator the calibration is 5° per division up to ±15°. Greater than 15° deviation from the selected course disconnects the CDI and removes the pointer.

The CDI indicates the selected path, left or right of your airplane, regardless of the aircraft heading. Therefore, it is important that you understand the inbound/outbound and course select relationship so that you can properly interpret the CDI movement when flying *across* a radial and using that station to cross check your position.

When an ILS station, for which you have input a position, is selected, the runway heading will be displayed in the course set window and the indicator on the D/F dial will be set accordingly. Course select can not be changed while an ILS station is selected.

The field elevation feature allows you to insert a 0 to 2000 foot field elevation and, when landing, the ILS glideslope will indicate properly so that you will touch down with an altimeter reading of the field elevation. If you are not using

(Bill Franklin has worked in communications and electronics for over 26 years. He is currently a flight simulator technician at Little Rock Air Force Base.)

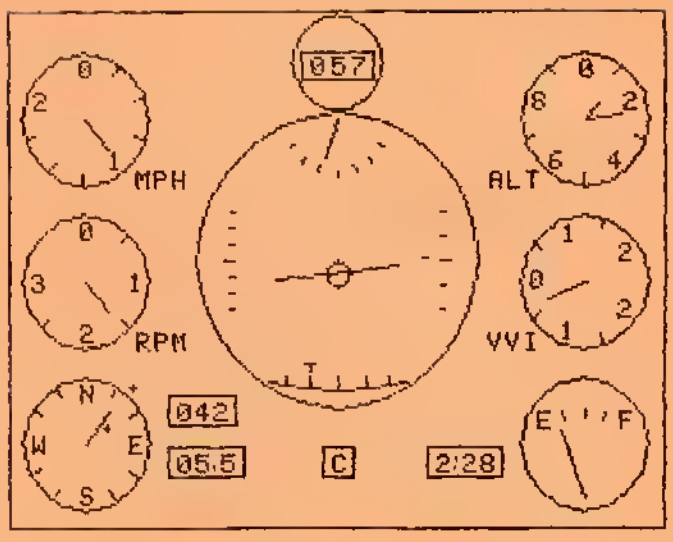

an ILS, the terrain elevation reverts to 0. *Important:* If you enter an ILS airspace at below the field elevation, then punch up the ILS station, the program will pause with a reminder of your error. You may continue by pressing ENTER. The ILS station will be turned off and you should climb to above the field elevation before reselecting that station. The "aircraft elevation" input allows you to place the airplane "on the field" at the beginning. However, as soon as you are airborne and select a valid nav-aids station, terrain elevation reverts to 0 or to that input for an ILS if you are in range.

The three features just described should enable you to use the FAA low-level charts and let-down plates to realistieally simulate instrument flying techniques. These charts are available at FAA flight stations. Correspondence I have received from pilots has been enthusiastic about the Sopwith CoCo and these improvements are the ones most frequently requested.

Finally, the change in step 5670 puts the turn rate indicators close to the four minute and two minute turn rates, and Line 5810 will label the top two instruments on each side. More efficient methods are used in Lines 50, 60, and 1835; some interesting input techniques in Lines 56 and 1610-1625; and the course set control in lines 1660-1700.

If you do not wish to key in the program yourself, you may send $7 to William G. Franklin, 31 Preston Ct., Jacksonville, AR 72076 for a tape of the complete updated Sopwith CoCo. Likewise, if anyone wants the original version for 16K, the same offer applies and please specify you want the 16K version.

72	207	2039	203
145	190	3005	18
380	73	5300	169
560	192	5540	126
1510	23	5810	26
1685	245	7010	101
1830	154	END	224

The listing:

```
1 PRINT"COPYRIGHT WILLIAM G. FRA
NKLIN 1983"
2 'SIM 16A1  JUL 1983
2Ø DIMN$(26):DIMN(26):DIMSX(26):
```

```
DIMSY(26)
3Ø FDR X=Ø TD 26:READ N$(X):N(X)
=Ø:NEXT
4Ø GDTD 55
5Ø CLS:PRINT"YDU HAVE ENTERED CD
DRDINATES FDRTHE FDLLDWING STATI
DNS:"
53 FDR S=1 TD 26: IF N(S)=1 THEN
PRINTCHR$(S+64);CHR$(32);
54 NEXT
55 PRINT:PRINT"WHAT STATIDN NUM8
ER (A-Z)? ";
56 S$=INKEY$: IF S$=""THEN 56 ELS
E S=ASC(S$)-64: IF S=-16 THEN 11Ø
58 IF S<1 OR S>26 THEN 56
59 PRINTS$
6Ø IF S>16 THEN 9Ø ELSE IF S>6 T
HEN 8Ø
7Ø PRINT:PRINT"STATIDN ";CHR$(S+
64);" IS AN ILS": INPUT"STATIDN 8
EARING (Ø-36Ø)";A:A=A/57.29: INPU
T"STATIDN DISTANCE (MILES)";D:D=
D*528Ø:SX(S)=D*CDS(A):SY(S)=D*SI
N(A): INPUT"RUNWAY HEADING (Ø-36Ø
)";X:R8(S)=INT(X)/57.29:N(S)=1
72 INPUT"FIELD ELEV. (Ø-2ØØØ FEE
T)";X: IF X<Ø DR X>2ØØØ THEN 72 E
LSE FE(S)=X
74 GDTD 5Ø
8Ø PRINT:PRINT"STATIDN ";CHR$(S+
64);" IS A TACAN":GDTD 1ØØ
9Ø PRINT:PRINT"STATIDN ";CHR$(S+
64);" IS AN ADF"
1ØØ INPUT"STATIDN BEARING (Ø-36Ø
)";A:A=A/57.29: INPUT"STATIDN DIS
TANCE (MILES)";D:D=D*528Ø:SX(S)=
D*CDS(A):SY(S)=D*SIN(A):N(S)=1:G
DTD 5Ø
11Ø CLS:PRINT: INPUT"AIRCRAFT 8EA
RING (Ø-36Ø)";A:A=A/57.29: INPUT"
AIRCRAFT DISTANCE (MILES)";D:D=D
*528Ø:TX=D*CDS(A):TY=D*SIN(A): IN
PUT"AIRCRAFT HEADING (Ø-36Ø)";X:
CS=INT(X)
112 INPUT"AIRCRAFT ELEV.(Ø-2ØØØ
FT)";X: IF X<Ø OR X>2ØØØ THEN 112
 ELSE AL=X
12Ø PRINT: INPUT"GALLONS DF FUEL
(MAX 24,USES 6  GPH @ 2ØØØ RPM)"
;X: IF X>24 THEN FR=12 ELSE IF X<
Ø THEN FR=-12 ELSE FR=X-12
13Ø PRINT: INPUT"WIND DIRECTIDN (
Ø-36Ø)";X:WA=INT(X)+18Ø: INPUT"WI
ND VELOCITY (MPH)";X:WS=INT(X)
135 CLS:PRINT:PRINT
14Ø Z=JOYSTK(Ø):X=JOYSTK(1): IF X
<63 THEN PRINT@64,"PLEASE PULL T
HRDTTLE 8ACK":GDTD 14Ø
145 CLS
15Ø PRINT:PRINT:PRINT"PLEASE STA
ND BY. AIRCRAFT IS    BEING SERV
ICED."
17Ø S=Ø:DIMA$(1Ø):FDR X=Ø TO 1Ø:
READ A$(X):NEXT X
21Ø PMDDE4,1:PCLSØ:GDSU85ØØØ
29Ø RX=3Ø:RY=1ØØ:AX=3Ø:AY=4Ø:VX=
224:VY=1ØØ:L1=224:L2=4Ø:LX=224:L
Y=4Ø:FX=224:FY=18Ø:SX=3Ø:SY=16Ø:
IX=128:IY=4Ø
3ØØ Q7=1:Q6=1:Q5=1:Q8=.Ø1:H=Ø:AZ
=AL:C7=9:C6=9:C5=9:LR=4Ø:P1=1:TI
MER=Ø
32Ø H=TIMER:TIMER=Ø:TH=TH+H
33Ø Z=JOYSTK(Ø):R=63-JDYSTK(1):8
=JDYSTK(2)-31:EP=(JDYSTK(3)-31)/
188
34Ø IF B<>81 DR EP<>PE THEN GDSU
B 8ØØØ
36Ø IF AL>AZ DR R>12 THEN R=126Ø
+R*2Ø ELSE R=R*116
365 IF FR=-12 AND AL>AZ THEN R=7
ØØ ELSE IF FR=-12 AND AL=AZ THEN
 R=Ø
367 IF R1<3Ø THEN R1=Ø
37Ø R=R1+((R-R1)*.6):R1=R:X=3Ø+(
SIN(R/636.6)*15):Y=1ØØ-(CDS(R/63
6.6)*15):LINE(3Ø,1ØØ)-(RX,RY),PR
ESET:LINE(3Ø,1ØØ)-(X,Y),PSET:RX=
X:RY=Y
38Ø AP=(SIN(6*((R-2ØØØ)/4488)+.5
7)-.54)/6
39Ø AS=(R*(1-AP)*(1-EP))/16.66:A
S=A1+((AS-A1)*.1): IF AS<1Ø THEN
AS=Ø
4ØØ X=3Ø+(SIN(AS/39.46)*15):Y=4Ø
-(CDS(AS/39.46)*15):LINE(3Ø,4Ø)-
(AX,AY),PRESET:LINE(3Ø,4Ø)-(X,Y)
,PSET:AX=X:AY=Y:A1=AS
4Ø5 IF AS<5Ø THEN EP=-1
41Ø IF SGN(VV)=-1 THEN VV=((AP+E
P)*AS)/15 ELSE VV=(1-AL/1ØØØØ)*(
(AP+EP)*AS)/15
42Ø IF AL=AZ AND SGN(VV)=-1 THEN
 VV=Ø
43Ø V1=V5+((VV-V5)*.3):X=224-(CD
S(V1)*15):Y=1ØØ-(SIN(V1)*15):LIN
E(224,1ØØ)-(VX,VY),PRESET:LINE(2
24,1ØØ)-(X,Y),PSET:VX=X:VY=Y:V5=
V1
44Ø Z=JDYSTK(Ø):B=JDYSTK(2)-31:E
P=(JOYSTK(3)-31)/188:P=INT(1ØØ*(
EP+(SIN(6*AP-.57)+.54)/6)): IF 8<
```

HARD DISK for the CO CO

5 meg $1295 *10 meg $1595*

COMPLETE SYSTEM - JUST PLUG IN

HARD DISK - OPERATING SYSTEM features

- FULLY INTEGRATED INTO COLOR DISK BASIC
- TAPE TO HARD DISK
- DISK TO HARD DISK
- HARD DISK TO TAPE
- HARD DISK TO DISK
- DUPLICATE
- COLD START
- M-RUN
- ALL EXTENDED DISK BASIC COMMANDS



without hard drive ... operating system only
INTERFACE CARD & H-DOS $425.00

PERIPHERAL *H-DOS UTILITY PACK* $129.00
BOOT STRAPS OS-9 OR FLEX, MDIR (master directory)

128 K - RAM CARD

INCREASE YOUR 64 K Co-Co OR Co-Co II TO 128 K RAM

- ☐ FITS COMPLETELY INSIDE YOUR COMPUTER.
- ☐ SWITCHES TWO NEW 32 K BANKS OF RAM IN AND OUT OF MEMORY.
- ☐ BANKS CAN BE MAPPED IN THE UPPER HALF OR LOWER HALF, OR CAN ALSO BE A SECOND COMPLETE 64 K BANK.
- ☐ SWITCH TABLES INCLUDED.
- ☐ SIMPLE INSTALLATION AND DOCUMENTATION.
- ☐ A MUST FOR OS-9 USERS.
- ☐ COMPLETE WITH 8 (4164) RAM CHIPS.
- ☐ PAL CHIP HANDLES ALL BANKING COMMANDS.



$149.95

DISK DRIVES for the CoCo

TANDON DISK DRIVES
40 track - 6 ms trk-trk
FULLY COMPATIBLE

TEAC *DISK DRIVES*

FD-55 Series

- Smallest of 5-1/4" floppy disk drives
- 1/2 the height of conventional drives
- Choice of capacity from 125 KBytes to 1.6 MBytes
- New TEAC LSIs reduce power consumption, increase reliability
- Brushless DC direct drive motor
- High-speed data access

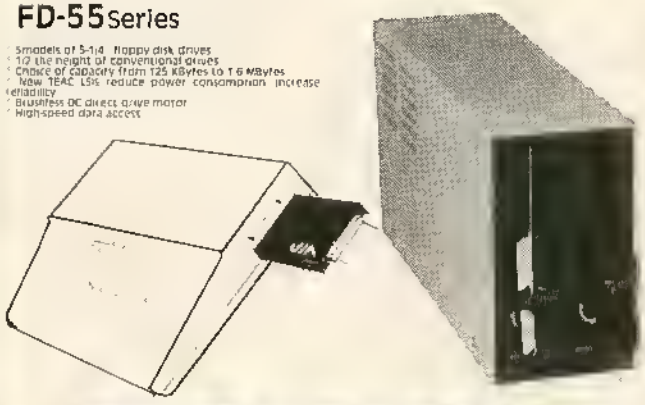

Super Sale on New Disk Drives

Distributor for - SOFTWARE SUPPORT, INC. Framingham, MA.

MODEL III & 4 DISK CONTROLLER KIT

- ☐ AVAILABLE FOR FULL HIGHT OR SLIM LINE DRIVES
- ☐ EASY INSTALLATION
- ☐ FULLY TESTED AND ASSEMBLED
- ☐ COMPLETE WITH EASY INSTRUCTIONS
- ☐ J & M SYSTEMS CONTROLLER

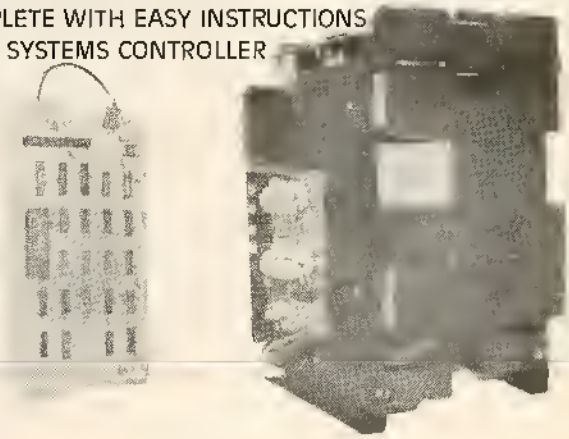

U5A
RGS MICRO INC.
MAIN STREET
DERBY LINE, VERMONT
ZIP 05830
TEL: 802-873-3386
ORDER LINE 800-361-4970

RGS MICRO INC.

CANADA
RGS MICRO INC.
759, VICTORIA SQUARE 405
MONTRÉAL H2Y 2J3
TEL: (514) 287-1563
ORDER LINE ONLY ★ ★ ★
QUEBEC - ONTARIO - MARITIMES
800-361-5338
WESTERN CANADA 800-361-5155

TERMS: VISA - MASTER CARD - AMERICAN EXPRESS

HOURS: MONDAY - SATURDAY 10:00 AM - 6:00 PM

```
>B1 OR EP<>PE OR P<>P1 OR AS<4Ø
THEN GOSUB BØØØ
45Ø AL=AL+(VV*H)/4.6:IF AL<=Ø TH
EN AL=Ø ELSE IF AL<=AZ THEN AL=A
Z
46Ø X=224+(SIN(AL/159)*15):Y=4Ø-
(COS(AL/159)*15):LINE(224,4Ø)-(L
X,LY),PRESET:LINE(224,4Ø)-(X,Y),
PSET:LX=X:LY=Y
47Ø X=224+(SIN(AL/1592)*B):Y=4Ø-
(COS(AL/1592)*B):LINE(224,4Ø)-(L
1,L2),PRESET:LINE(224,4Ø)-(X,Y),
PSET:L1=X:L2=Y
56Ø FR=FR-((R*H)/72ØØØØØ):IF FR
=<-12 THEN FR=-12
57Ø X=224+SIN(FR/25.2)*26:Y=1BØ-
COS(FR/25.2)*26:LINE(224,1BØ)-(F
X,FY),PRESET:LINE(224,1BØ)-(X,Y)
,PSET:FX=X:FY=Y
5BØ Z=JOYSTK(Ø):B=JOYSTK(2)-31:E
P=(JOYSTK(3)-31)/188:IF B<>B1 OR
 EP<>PE THEN GOSUB 8ØØØ
119Ø IF AS<=Ø THEN 131Ø
12ØØ BC=-1Ø*(COS((B/31)+1.57Ø796
3)):CS=CS+BC:IF CS>36Ø THEN CS=C
S-36Ø ELSE IF CS<=Ø THEN CS=CS+3
6Ø
131Ø C=INT(CS+.5):IF C=C1 THEN 1
35Ø ELSE C2=INT(C/1ØØ):C3=INT(C/
1Ø)-(1Ø*C2):C4=C-(1ØØ*C2)-(1Ø*C3
):C1=C:DRAW"C0;BM134,23;XA$(C7);
C1;XA$(C4);":C7=C4
132Ø IF C3=C6 THEN 135Ø ELSE DRA
W"C0;BM126,23;XA$(C6);C1;XA$(C3)
;":C6=C3
133Ø IF C2=C5 THEN 135Ø ELSE DRA
W"C0;BM118,23;XA$(C5);C1;XA$(C2)
;":C5=C2
135Ø X=3Ø+SIN(C/57.2)*1Ø:Y=16Ø-C
OS(C/57.2)*1Ø:CIRCLE(CX,CY),1,Ø:
CIRCLE(X,Y),1,1:CX=X:CY=Y
136Ø Z=JOYSTK(Ø):B=JOYSTK(2)-31:
EP=(JOYSTK(3)-31)/188:IF B<>B1 O
R EP<>PE THEN GOSUB BØØØ
151Ø IF AS=Ø THEN 161Ø ELSE CD=(
AS*5.28*H)/216:A=CS/57.29:X=CD*C
OS(A):Y=CD*SIN(A):TX=TX+X:TY=TY+
Y
152Ø IF AL=AZ OR WS=Ø THEN 161Ø
ELSE WD=(WS*5.2B*H)/216:A=WA/57.
29:X=WD*COS(A):Y=WD*SIN(A):TX=TX
+X:TY=TY+Y
161Ø S$=INKEY$:IF S$="" THEN 164
Ø
1615 X=VAL(S$):IF X>Ø AND X<4 AN
D S>6 OR S<1 THEN ON X GOSUB 166
Ø,167Ø,16BØ
162Ø X=ASC(S$)-64:IF X=-16 THEN
X=Ø
1625 IF X<Ø OR X>26 THEN 164Ø EL
SE GOSUB 171Ø
163Ø DRAW"C0;BM126,17Ø;XN$(S);C1
;XN$(X);":S=X:GOSUB 171Ø
1635 IF S<7 AND N(S)=1 GOSUB 174
Ø
164Ø IF S=Ø OR N(S)=Ø THEN GOSUB
 171Ø ELSE GOSUB 181Ø
1645 Z=JOYSTK(Ø):B=JOYSTK(2)-31:
EP=(JOYSTK(3)-31)/18B:IF B<>B1 O
R EP<>PE THEN GOSUB BØØØ
165Ø GOTO 21ØØ
166Ø F=F+1:IF F>3 THEN F=Ø
1665 DRAW"C0;BM66,151;XA$(FS);C1
;XA$(F);":FS=F:GOTO 169Ø
167Ø G=G+1:IF G>9 THEN G=Ø
1675 DRAW"C0;BM73,151;XA$(GS);C1
;XA$(G);":GS=G:GOTO 169Ø
168Ø I=I+1:IF I>9 THEN I=Ø
16B5 DRAW"C0;BMBØ,151;XA$(IS);C1
;XA$(I);":IS=I
169Ø J=(F*1ØØ)+(G*1Ø)+I:IF J>36Ø
 THEN G=-1:GOTO 167Ø
1695 J8=J/57.2
17ØØ X=3Ø+SIN(JB)*2B:Y=16Ø-COS(J
B)*2B:CIRCLE(FA,FB),1,Ø:CIRCLE(X
,Y),1,1:FA=X:FB=Y:RETURN
171Ø IF D7=1Ø AND N(S)=Ø THEN RE
TURN ELSE LINE(3Ø,16Ø)-(SX,SY),P
RESET:DRAW"C0;BM83,17Ø;XA$(D7);B
M-1Ø,Ø;XA$(D6);BM-7,Ø;XA$(D5);C1
;XA$(1Ø);BM+7,Ø;XA$(1Ø);BM+1Ø,Ø;
XA$(1Ø);":LINE(12B,4Ø)-(IX,IY),P
RESET:CIRCLE(162,92+GX),1,Ø,.1:D
7=1Ø:D6=1Ø:D5=1Ø
1712 IF AZ<AL THEN AZ=Ø
173Ø SCREEN1,Ø:RETURN
174Ø F=INT(RB(S)*.5729):G=INT(RB
(S)*5.729)-(1Ø*F):I=INT(RB(S)*57
.29)-(1ØØ*F)-(1Ø*G):DRAW"C0;BM66
,151;XA$(FS);BM+7,Ø;XA$(GS);BM+7
,Ø;XA$(IS);C1;XA$(I);BM-7,Ø;XA$(
G);BM-7,Ø;XA$(F);":FS=F:GS=G:IS=
I:JB=RB(S):GOTO 17ØØ
1B1Ø BX=SX(S)-TX:BY=SY(S)-TY:SD=
SQR(BX^2+BY^2)
1811 IF BX=Ø THEN BX=.ØØ1
1B12 IF BY=Ø THEN BY=.ØØ1
1B2Ø X=BY/BX:IF BX<Ø THEN 183Ø E
LSE SB=ATN(X):GOTO 1B35
1B3Ø SB=ATN(X)-3.1416
1835 IF S>16 THEN 2Ø39 ELSE IF S
>6 THEN 1939
1839 IF SD/528Ø>1Ø THEN 171Ø
184Ø CA=SB-(RB(S)-1.57Ø8):D8=COS
(CA):IF ABS(DB)>.258B THEN 171Ø
ELSE IF DB>.Ø523 THEN D8=.Ø523 E
```

MORETON BAY SOFTWARE

DOUBLE DRIVER

The BEST monitor driver available, unlike some monitor drivers the Double Driver provides TRUE monochrome and color composite output. Audio Output. Solderless installation. $24.95

RESET YOUR COMPUTER

A REAL Improvement

Move the power switch and reset where they belong. An LED power on light too! High quality parts. Totally solderless kit.

CoCo I $24.95
CoCo II $27.95

64K UPGRADES

Instantly access 64K via M/L Totally solderless kit to upgrade E Boards. Kit includes eight 4164 prime chips and chips U29 and U11 already soldered. E Board Kit $69.95
Color Computer II kit requires soldering. $64.95

GRAPHICOM

The Ultimate Graphic Utility

You must see this program to believe it! Create pictures and text on the same screen. Now you can create pictures as good as any graphic you have seen on the color computer. Write graphic adventures or educational programs. Requires 64K EXB, Disk Drive and Joy Sticks $29.95

MORETON BAY SOFTWARE

A Division of Moreton Bay Laboratory

316 CASTILLO STREET
SANTA BARBARA,
CALIFORNIA 93101
(805) 962-3127

Ordering Information

Add $2.00 shipping and handling per order. We ship within 24 hours on receipt of order. Blue Label Service available. California residents add 6% sales tax.

BUSINESS UTILITIES

MORE BUSINESS -Ver 3.12 The *preferred* business package. Completely interactive. General Ledger. Accounts Receivable. Accounts Payable. Customer Statements. Mailing Labels. Profit/Loss. Balance Sheet Statements. Our most powerful business package. Buy the best!

32K Disk R/S DOS $99.95

MORE INVENTORY - Maintain an inventory of more than 1000 items. Know when to order, what has been ordered, quantity and value of any item. Calculate inventory value with single keystroke.

32K Disk R/S DOS $44.95

UTILITIES FOR EVERYONE

COCOWRITER II — Powerful and full featured. An excellent word processor at an affordable price. 32, 51, 64 or 85 characters per line, justify right, left, center, insert, delete, move blocks. Menu driven printing and formatting. Tabs, etc. One of the best values in word processing today!

16 K EXB Cassette $34.95, 16K EXB Disk $44.95

THINKING GAMES

TRIVIA — THE EINSTEIN EDITION - A one to four player trivia game. More than 1900 challenging questions. Great for parties or family fun.

16K Non Extended $19.95 Cassette, $21.95 Disk

CUT-N-GLUE

A Companion to the Coco-Writer II
Super User Friendly **100% Machine Language**

Graphic windows and icons guide you every step of the way. Small pictures show you what exactly is happening, or what steps you can do next. Up to seven text windows on the same screen!

You can now have a filing cabinet in the computer's memory with up to six file folders. Each folder can contain a word processor document or part of a document. The document(s) being edited can be cut up, glued together in any way you wish, swapped between folders and the edit memory and ultimately saved. You will now have 17,664 characters of edit memory and 29,183 characters of file cabinet memory (for the six folders). More than 46K of document space!

Requires: 64K Extended and the CoCo Writer II. A disk drive is strongly recommended but not essential.

CUT-N-GLUE Disk $26.95, Tape $24.95

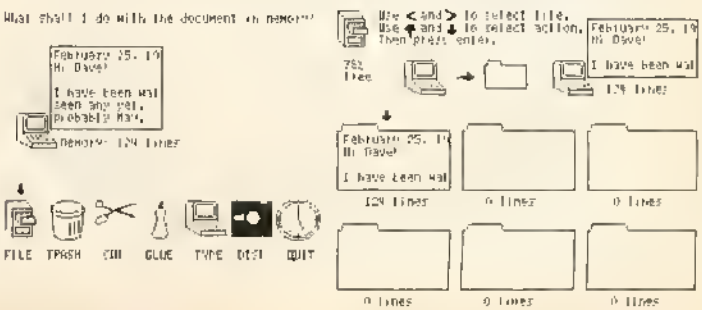

```
LSE IF D8<-.0523 THEN D8=-.0523
1850 X=128-SIN(D8*20)*15:Y=40+CO
S(D8*20)*15:LINE(128,40)-(IX,IY)
,PRESET:LINE(128,40)-(X,Y),PSET:
IX=X:IY=Y
1855 AZ=FE(S):AR=AL-AZ:IF AR<0 T
HEN 3000
1860 X=((AR/(SD-1000))-.04366)*1
000:IF X>18 THEN X=18 ELSE IF X<
-18 THEN X=-18
1870 CIRCLE(162,92+GX),1,0,.1:CI
RCLE(162,92+X),1,1,.1:GX=X:GOTO
1940
1939 IF SD/528>999 THEN 1710
1940 X=30+SIN(S8)*15:Y=160-COS(S
8)*15:LINE(30,160)-(SX,SY),PRESE
T:LINE(30,160)-(X,Y),PSET:SX=X:S
Y=Y:IF S>6 GOSUB 2050
1950 SD=INT(SD/528):IF SD=D1 THE
N RETURN ELSE D2=INT(SD/100):D3=
INT(SD/10)-(10*D2):D4=SD-(100*D2
)-(10*D3):D1=SD:DRAW"C0;BM83,170
;XA$(D7);C1;XA$(D4);":D7=D4
1960 IF D3=D6 THEN RETURN ELSE D
RAW"C0;BM-10,0;XA$(D6);C1;XA$(D3
);":D6=D3
1970 IF D2=D5 THEN RETURN ELSE D
RAW"C0;BM-7,0;XA$(D5);C1;XA$(D2)
;":D5=D2:RETURN
2039 IF SD/528>1999 THEN 1710
2040 X=30+SIN(S8)*15:Y=160-COS(S
8)*15:LINE(30,160)-(SX,SY),PRESE
T:LINE(30,160)-(X,Y),PSET:SX=X:S
Y=Y
2050 CA=SB-(J8-1.5708):D8=COS(CA
):X=128-SIN(DB*4)*15:Y=40+COS(D8
*4)*15:LINE(128,40)-(IX,IY),PRES
ET:IF ABS(D8)>.2588 THEN RETURN
ELSE LINE(128,40)-(X,Y),PSET:IX=
X:IY=Y:RETURN
2100 Q1=INT(TH/3600):IF Q1=Q8 TH
EN 320 ELSE Q2=INT(TH/216000):Q3
=INT(TH/36000)-(6*Q2):Q4=Q1-(10*
Q3)-(60*Q2):Q8=Q1:DRAW"C0;BM184,
170;XA$(Q7);C1;XA$(Q4);":Q7=Q4
2130 IF Q3=Q6 THEN 320 ELSE DRAW
"C0;BM-7,0;XA$(Q6);C1;XA$(Q3);":
Q6=Q3
2140 IF Q2=Q5 THEN 320 ELSE DRAW
"C0;BM-10,0;XA$(Q5);C1;XA$(Q2);"
:Q5=Q2:GOTO 320
3000 CLS:PRINT:PRINT"YOUR ALTITU
DE IS LESS THAN        TERRAIN ELE
VATION.  YOU MAY       CONTINUE BY
 PRESSING <ENTER>.     THE ILS STA
TION SELECTED WILL     BE TURNED O
FF AND YOU SHOULD BE ABOVE";FE(S
);"FT. BEFORE SELECTING"
3005 PRINT"STATION '";CHR$(S+64)
;"' AGAIN."
3010 INPUT"";X:SCREEN1,0
3020 DRAW"C0;BM126,170;XN$(S);C1
;XN$(0);":S=0:D7=0:AZ=0:TIMER=0:
GOTO 1710
5000 FOR X=30 TO 224 STEP 194:FO
R Y=40 TO 160 STEP 60:CIRCLE(X,Y
),25,1:NEXT Y:NEXT X
5010 CIRCLE(128,92),55,1
5020 LINE(84,92)-(88,92),PSET:FO
R X=74 TO 110 STEP 6:LINE(86,X)-
(88,X),PSET:NEXT X
5030 LINE(168,92)-(172,92),PSET:
FOR X=74 TO 110 STEP 9:LINE(168,
X)-(170,X),PSET:NEXT X
5040 FOR Z=1 TO 3:GOSUB 5060:NEX
T Z
5050 FOR Z=5 TO 7:GOSUB 5060:NEX
T Z:GOTO 5100
5060 X=SIN((6.2832/10)*Z):Y=COS(
(6.2832/10)*Z)
5070 XA=30+(20*X):XB=30+(24*X):Y
A=40-(20*Y):Y8=40-(24*Y)
5080 LINE(XA,YA)-(X8,YB),PSET:RE
TURN
5100 DRAW"BM28,24;XA$(0);BM39,58
;XA$(1);BM10,36;XA$(2);"
5200 FOR Z=1 TO 9 STEP 2
5210 X=SIN((6.2832/10)*Z):Y=COS(
(6.2832/10)*Z)
5220 XA=224+(20*X):X8=224+(24*X)
:YA=40-(20*Y):Y8=40-(24*Y)
5230 LINE(XA,YA)-(X8,Y8),PSET:NE
XT Z
5250 DRAW"BM222,24;XA$(0);BM239,
36;XA$(2);BM233,58;XA$(4);BM210,
58;XA$(6);BM204,36;XA$(8);"
5300 FOR Z=2 TO 8 STEP 2:X=COS((
6.2832/10)*Z):Y=SIN((6.2832/10)*
Z)
5320 XA=224+(20*X):X8=224+(24*X)
:YA=100+(20*Y):YB=100+(24*Y)
5330 LINE(XA,YA)-(X8,Y8),PSET:NE
XT Z
5340 DRAW"BM237,113;XA$(2);BM215
,121;XA$(1);BM203,102;XA$(0);BM2
15,85;XA$(1);BM237,92;XA$(2);"
5350 LINE(114,15)-(142,25),PSET,
8:CIRCLE(128,19),18,1
5400 FOR Z=1 TO 5 STEP 2
5410 X=SIN((6.2832/8)*Z):Y=COS((
6.2832/8)*Z)
5420 XA=30+(20*X):XB=30+(24*X):Y
A=100-(20*Y):Y8=100-(24*Y)
5430 LINE(XA,YA)-(X8,YB),PSET:NE
XT Z
5450 DRAW"BM28,84;XA$(0);BM47,10
```

```
3;XA$(1);BM2B,122;XA$(2);BM9,103
;XA$(3);"
5500 FOR Z=2 TO 11 STEP 3:GOSUB
5510:NEXT
5505 FOR Z=1 TO 10 STEP 3:GOSUB
5510:NEXT:GOTO 5540
5510 X=SIN((6.2832/12)*Z):Y=COS(
(6.2832/12)*Z)
5520 XA=30+(20*X):XB=30+(24*X):Y
A=160-(20*Y):YB=160-(24*Y)
5530 LINE(XA,YA)-(XB,YB),PSET:RE
TURN
5540 DRAW"BM2B,144;XN$(14);BM47,
163;XN$(5);BM2B,182;XN$(19);BM9,
163;XN$(23);"
5600 FOR Z=-1 TO 1
5610 X=SIN((6.2862/24)*Z):Y=COS(
(6.2862/24)*Z)
5620 XA=224+(30*X):XB=224+(33*X)
:YA=180-(30*Y):YB=180-(33*Y)
5630 LINE(XA,YA)-(XB,YB),PSET:NE
XT
5650 DRAW"BM206,154;XN$(5);BM23B
,154;XN$(6);"
5660 CIRCLE(128,0),140,1,1,.23,.
29
5670 DRAW"BM128,135;ND5;BM+11,0;
ND3;BM+9,0;ND2;BM-31,0;ND3;BM-9,
0;D2;"
56B0 LINE(62,142)-(BB,153),PSET,
B:LINE(62,161)-(91,172),PSET,B:L
INE(163,161)-(192,172),PSET,B:LI
NE(122,161)-(134,172),PSET,B:DRA
W"BMB0,169;U1;BM+94,0;N;D1;BU2;U
1;"
5705 FOR Z=-3 TO 3:A=Z/57.29:X=S
IN(A*20):Y=COS(A*20):XA=12B-(19*
X):XB=12B-(21*X):YA=40+(19*Y):YB
=40+(21*Y)
5710 LINE(XA,YA)-(XB,YB),PSET:NE
XT
5B00 DRAW"BM126,170;XN$(0);BM66,
151;XA$(0);BM+7,0;XA$(0);BM+7,0;
XA$(0);"
5B10 DRAW"BM50,65;XN$(13);BM+7,0
;XN$(16);BM+7,0;XN$(B);BM+0,+60;
XN$(13);BM-7,0;XN$(16);BM-7,0;XN
$(1B);BM+151,0;XN$(9);BM-7,0;XN$
(22);BM-7,0;XN$(22);BM+0,-60;XN$
(1);BM+7,0;XN$(12);BM+7,0;XN$(20
);"
5900 RETURN
6000 DATA BU1U4E1R2F1NG4D4G1L2H1
BD1,U5E1R2F1D2NL4D3BL4,U6R3F1D1G
1NL3F1D1G1L3,BU1U4E1R2F1BD4G1L2H
1BD1,U6R2F2D2G2L2,U6R4BD3BL1L3D3
NR4
6010 DATA U6R4BD3BL1L3D3,BU1U4E1
R3BD4NL1D2L3H1BD1,U6BR4D3NL4D3BL
4,BU6BR1R2L1D6NR1L1BL1,BU6BR4D5G
1L2H1BD1,U6D3R1NE3NF3BD3BL1
6020 DATA NU6NR4,U6F2ND1E2D6BL4,
U6D1F4NU5D1BL4,BU1U4E1R2F1D4G1L2
H1BD1,U6R3F1D1G1L3D3,BU1U4E1R2F1
D3G1NH1NF1G1L1H1BD1
6030 DATA U6R3F1D1G1L3R1F3BL4,BU
5BR4H1L2G1D1F1R2F1D1G1L2H1BD1,BU
6R4L2D6BL2,BU1U5BR4D5G1L2H1BD1,B
U6BR4D2G1D1G1ND1H1U1H1NU2BD4,NU6
E2NU1F2NU6BL4
6040 DATA BU6D1F2E2NU1BD4ND1H2G2
D1,BU6BR4D1G2ND3H2NU1BD5,BU6R4D1
G4D1NR4
7000 DATA BU1U4E1R2F1NG4D4G1L2H1
BD1,BU6BR2NG1D6R1L2BL1,BU5E1R2F1
D1G1L1G2D1NR4,BU5E1R2F1D1G1NL1F1
D1G1L2H1BD1,BU2NR4U1E3D6BL3
7010 DATA BU6NR4D3E1R2F1D2G1L2H1
BD1,BU6BR2NR2G2D3U2R3F1D1G1L2H1B
D1,BU6R4D1G3D2BL1,BU1U1E1NR1H1U1
E1R2F1D1G1NL1F1D1G1L2H1BD1,BU4NF
1U1E1R2F1D2NL3D1G2L2
7020 DATA BU6D1F2E2NU1BD4ND1H2G2
D1
B000 TR=INT(B*COS(B/41)+.5):IF T
R=LR THEN B020
B010 LINE(126+LR,130)-(130+LR,13
0),PRESET:LINE(12B+LR,130)-(12B+
LR,133),PRESET:LINE(126+TR,130)-
(130+TR,130),PSET:LINE(12B+TR,13
0)-(12B+TR,133),PSET:LR=TR
B020 P=INT(100*(EP+(SIN(6*AP-.57
)+.54)/6)):IF P>20 THEN P=20 ELS
E IF P<-20 THEN P=-20
B025 IF AL<5+AZ THEN AL=AZ
B030 IF AL=AZ AND AS<50 OR AL=AZ
 AND SGN(P)=-1 THEN P=0
B040 IF P=P1 AND B=B1 THEN RETUR
N
B050 BB=B/93:IF AL=AZ THEN BB=0
B060 X=INT(COS(BB)*25):Y=SIN(BB)
*25
B070 LINE(12B+PX,92-P1+PY)-(12B-
PX,92-P1-PY),PRESET:CIRCLE(12B,9
2-P1),5,0
B0B0 LINE(12B+X,92-P+Y)-(12B-X,9
2-P-Y),PSET:CIRCLE(12B,92-P),5,1
:P1=P:PX=X:PY=Y:B1=B:PE=EP:RETUR
N
```

COLOR TERM +PLUS+

If you're looking for the finest terminal software you can buy, look no further! And now we've added a **high-res screen** display that gives you 32 by 16, 42, 51, or 64 by 24 lines.* And you can switch between the high-res screen and the normal screen ***without*** destroying what you have in the buffer! **+PLUS+** we have a buffer editor, complete up and down load support, on-line cassette or disk reads and writes, off-line and on-line scrolling, pre-entry of data before calling, word wrap, buffer printing, selective printing, change any parameter so you can communicate with **any** other computer. You can send and receive Basic programs, ASCII file, as well as machine code, **+PLUS+** you can save your buffer to tape (Tape or Rom version) or disk (Disk version). You can communicate with the local **BBS**, **Compuserve™**, **The Source™**, the main frame at work or school, other color computers, Apples, IBM PC'S, TRS-80 Model I, II, III, IV, 12, 16, 100, or any other computer via RS-232.

Compare these features with ***any*** other terminal program:

32×16, 42, 51, 6×24 Screen
Communications BAUD Rate: 110-19200
Printer Baud Rate: 600-9600
Select Half or Full Duplex.
Select Odd, Even, or no Parity.
Select 7 or 8 Bit Words.
Send Control Characters.
Send a True Line Break.
Separate Keys for Escape and Rubout.
Select All Caps If Needed.
Word Wrap — Eliminate Split Words. (32 Character Mode)
Selectable Reverse or Normal Video. (32 Character Mode)

NOW WITH 42, 51 OR 64 CHARACTERS BY 24 LINES!

Scroll Protect Up to 9 Lines.
Automatic Capture of Incoming Files, Send One Line At a Time From Your Buffer.
Has Programmable Prompt for "Send Next Line!!"
Buffer Size Indicator.
Complete Up and Down Load Support.
Improved Buffer Editor.
On/Off Line Scrolling of Buffer.
On/Off Cassette or Disk Reads and Writes.
Pre-Enter Data Before Going On-Line.
Save/Load Machine Code, Basic Programs or Files.
Select Printer Line Feeds If Needed or Ignore All Line Feeds in Buffer.

*Disk and Rom Pack only (not on tape). PRICE: $29.95 (TAPE) $30.95 (ROM PACK) $39.95 (DISK)

BBS 817-387-8381

NEW AND IMPROVED

HARDWARE

SUPER PRO KEYBOARD — Mark Data replacement . . $64.95
DOUBLE SWITCH I — This is our original switch box. Two **LEDs** show you which port is being used, 1 or 2. High quality parts, and a new great looking yellow face plate $29.95
DOUBLE SWITCH II — Same as the above switch box, but we have added three RCA jacks, and a switch which allows you to switch between your 80 column board output, and your computer output at a touch instead of unplugging. $39.95
VIDEO SWITCH — Switch between your 80 column board, and your computer's output. Two **LEDs** display the device $19.95
DOUBLE CABLE — If you don't have a lot of money to spend, you can hook a modem and a printer up at the same time using this Y-Cable. Works with most printers. $14.95
WORD PAK (80 Column Board) — This is one of the finest pieces of hardware to come along since the CoCo. Allows you to display a real 80 column screen, not the graphics that are sometimes difficult to read. Comes with a software driver that will interface basic into the 80 column board. $139.95
Y-CABLE — Used with the **WORD PAK** when disk drives are being used. Not needed if you own some type of multi-port device, the Multi-Pak interface for instance. $29.95
DOUBLE DRIVER — Best video driver available for the Color Computer. Made by our friends at Moreton Bay Software. Specify regular CoCo or CoCo II. $24.95
DOUBLE SPEAKER — This plug-in device gives you sound with a monitor. Plugs right in, nothing to solder. $19.95
HARD DISK DRIVE FOR THE CoCo WITH CONTROLLER:
5 MEG HARD DISK DRIVE. $1299.95
10 MEG HARD DISK DRIVE. $1599.95

$2.00 shipping and handling on all orders. $3.00 charge on C.O.D. orders. Mastercard and VISA accepted. Texas residents add 5% sales tax. Allow two weeks for personal checks.

Send 20 cent stamp for free catalog.

Double Density Software

[illegible] Swift Street
Denton, Texas 76205
Phone 817/566-2004

DOUBLE DOS II

NEW AND IMPROVED!! Double Dos II is an enhanced version of our original **DOUBLE DOS** program. The original Double Dos was so well received that we decided to add even more capabilities, and fix some of the limitations in the original program. With Double Dos you can use 35, 40 or 80 track (double and single sided) drives all on one system, all at the same time. (The use of double sided drives will limit you to three drives.) Works with all types of 5¼ or 3 inch drive systems and All commands are supported in Double Dos! Double Dos is totally transparent to your basic programs! If your system selection is 80 tracks, a **FREE** command will return 158 granules! Compare this to the 68 granules your system now returns. You get 78 granules with a 40 track drive, 10 more than the 35 track system. **EVERY** command in basic is supported by Double Dos. There is only one limitation, you can only open any number of files to one drive at a time, otherwise everything else is the same. Plus you get some great new commands!! Look at what Double Dos will allow as new disk basic commands:

BAUD 1-6 ... change the **BAUD** rate with a command, no pokes!
TRACK 35,36,40,80 ... change the number of tracks.
DOUBLE ... enable the double sided option.
PDIR ... print your directory to the printer.
DUMP ON/OFF ... send a basic program to a friend without using a terminal program!
RATE 6,35 ... change the head stepping rate.
VIDEO ON/OFF ... will give you a reverse screen without a hardware modification.
SCROLL 1-255 ... change the screen scrolling speed.
COMMAND ... will list all new commands.
DUPE 0-2 ... will allow copy & backup from one side of a disk to the other side on double sided systems!
DATE ... you can enter the month, day, and year which will be stored in the directory of your disk each time you save a program or file, and you can see it when you use the *DIR* command! Very useful when looking for the most current file or program!

AND, all commands can be used inside basic programs because they have been added to disk basics list of commands! You also get full reset protection, which means that you will stay in the 64K mode until you power-down.

PRICE: $29.95 (DISK ONLY) 64K Required

NEW

REAL EIGHTY-COLUMN DISPLAY!

ULTRA TERM +

NEW

PROFESSIONAL PROFESSIONAL PROFESSIONAL PROFESSIONAL

This program is the **ultimate** in coco communicating!! ***Ultra* Term +** is used with a plug-in 80 column board* that gives you **True** 80 columns, not the graphics display that is unreadable at 80 columns. This is truly a ***Professional*** Package that is so easy to use that once you have used it, you'll wonder why other packages are so difficult to use, (except for Color Term + Plus + that is!) After using a terminal program that cannot give you **True** mainframe terminal emulation, you will find ***Ultra* Term +** indispensable! ***Ultra* Term +** even has a host mode that allows you to echo characters like full duplex mainframes do! There are also 10 macro keys which will allow you to save passwords, phone numbers, modem programming information, etc. + PLUS + you can save them to disk. Also, like all ***Professional*** terminal programs you can save your current parameters. This saves you set up time when moving from one system to another. +Plus+ when used with the parallel printer port** you can print what is coming in. And what about documentation? Every feature is explained in detail and indexed for fast look up! There is also a comprehensive help section to aid those unfamiliar with telecommunications. Although this program was designed for the Professional a total novice can use it with ease. Check all the features listed below and then you decide who has the world's smartest terminal!

Baud Rates: 110-4800 (communicate)
600-9600 (printer).
Screen Format: 80 x 25 w/true upper & lower case.
Select half, full duplex or echo
Select odd, even, mark, space or no parity.
Send all 128 characters from keyboard.
Select 7 or 8 bit words.
Select 1 or 2 stop bits.
Send a true line break.
Select all caps if needed.
Automatic capture of incoming files.
X on/X off capabilities.
Merge text or programs in buffer.
53,000 character buffer (64K).
Send and receive BASIC, FILES and machine code.
10 macro keys.
Four buffer send modes (dump, prompted, manual & time delay).
Buffer size indicators (bytes used & bytes remaining).
Buffer editor w/auto key repeat.
Scroll forward & reverse to view buffer & print viewed screen option.
Selectable printer formats (line feeds, etc.).
Selectable trapping of incoming characters.
Print while receiving data*
Buffer editor has these features:
Move forward and reverse through buffer. Insert, type over, delete lines or characters.
Block deletion or start to end of buffer delete.
Save and load macros.
Save and load parameters.
Use 1-4 disk drive (w/SAVE, LOAD, DIR & granule display).
Easy to use MENU driven format
Comprehensive users manual.
Works with **ALL** Radio Shack™ Disk Systems and **all** models of color computers.
Still not convinced? How about a 15 day, money back guarantee? If you don't like the package for any reason, we will refund your money upon return of a like-new package.† Who but there is offering you this kind of deal? And customer support was never better. Simply fill out your registration card and send it back to us and you will be notified when new features, improvements, etc. become available because all registered owners will receive **Free** upgrades for a $5.00 shipping and handling fee).

As with all good Professional programs, ***Ultra* Term +** is **all machine code.** This program has been tested by those both familiar and unfamiliar with communications programs. And when you call for some technical support, you **won't** get an answering machine during our business hours (10-5 CST M-Sat.) under normal circumstances. Technical help is usually available all day.

PRICE: ***Ultra* Term +** — $55.95 (Disk)
Word-Pak (80-column board; includes a software driver so you can use your basic programs with no modification in most cases!) . . **$139.95** + $3.00 S&H
Y-Cable. $29.95 (Required if expansion port not used with disk drives)
Complete Package ***Ultra* Term +**, Word Pak & Y Cable [subtract $20.00 if not needed] is only **$210.00**

**Ultra* Term +* supports the 80 column board made by PBJ, Inc. If you already have the board, simply order the program, but those of you who don't can get a good deal.

**Parallel Printer Port from PBJ, Inc.
†Less $10.00 restocking charge.

DOUBLE SPOOLER

Tired of waiting for your listings? printouts? etc.? This Is THE Spooling Program!! No need to save your programs in ASCII. You can also spool your files and you can spool **ANYTHING** you print on the screen while a program is running! Requires a minimum of 32K **AND** the 64K computer can spool really **LARGE** files!! Plus more!! PRICE: $19.95 (Tape) $21.95 (Disk)

DOUBLE MAILER

At last a powerful, easy to use, mailing list program for a reasonable price. Up to 200 names can be held in memory for you to change, modify, search or print as you like. Plus, you can print out up to 1800 names without touching the keyboard. Save **thousands** of names on each disk. The machine language sort routine will sort 200 names in as little as 6 seconds! Supports single or double wide labels. Three and four line labels can be intermixed without leaving gaps in your listings! All menu driven, and easy to use. Printer support gives 600-9600 **BAUD** selection, and different print sizes if you wish. 16K Extended

NEW

Double 80 Plus

NEW

Announcing a **BREAK-THROUGH!** Now you can own an 80 column board for $99.95. And you can choose the software you want to buy instead of being charged for something you don't want. Y-Cable available for use with disk drives. Look at these features and compare:

TRUE 80 COLUMN OUTPUT
BUILT IN SWITCH FOR COCO OR DOUBLE 80 PLUS
ADJUSTABLE VIDEO OUTPUT
GOLD PLATED EDGE CONNECTOR
DRIVERS AVAILABLE FOR BASIC, OS9 and FLEX
DISPLAY ALL ASCII CHARACTERS
ALTERNATE CHARACTER SETS AVAILABLE
METAL CASE (not cheap plastic)
ULTRA TERM+ available for this board
BACKED BY A 90 DAY PARTS AND LABOR WARRANTY

PRICES: **DOUBLE 80 PLUS** (80 column board) $99.95
Y-CABLE 29.95
BASIC DRIVER 12.95
OS9 DRIVER 12.95
FLEX DRIVER (available soon) 12.95
ULTRA TERM+ (disk only) 55.95

Watching it all add up + with . . .

The IRA Projection

By Leonard Hyre

One of the best ideas the federal government has had in the last decade has to be the Individual Retirement Account (IRA). It gives the average person the chance to build a future retirement fund without paying the price of taxation now on the money he puts away. People who are considering such accounts invariably wonder about just how it all adds up, and rightly so! I love to plug in the various figures and watch the theoretical interest come pouring in. You can get some practical use out of my *IRA Projection* program and, at the same time, kick around lots of figures just to be sure you are making the right choice of planning or financial institution.

One of the reasons I bought the CoCo is that it is a *Color* Computer. So why does a practical program have to be blah? It doesn't! Programs can be colorful, have lots of bells and whistles, and still perform a quality service for the user. I've tried to emphasize this theme with *IRA Projection.*

A nifty looking title screen is always a big plus to me when I *RUN* or *EXEC* a program. It doesn't have to eat up 6K of memory and require two or three machine language subroutines to be effective. The screen should have a little color, be theme oriented (to the program) and possibly make a bit of noise. Now let's see about the screen for this program. Color? Well, IRAs are money and money is traditionally green in the United States, so that kind of takes care of itself. It is green and black. (Take a look, it really has more color than you might think.)

Theme? Once again, IRAs go with money so a big dollar sign will do nicely. Now put the title on the screen by popping the letters into place with a tiny blip of noise and the deed is done. Tell the folks who wrote the program, "I used a single *DATA* statement to list the letters needed and then used several loops to put them in place." These are at Lines 110-180 in the listing.

Now we get down to business. Line 200 changes the screen to the alternate red/orange color set. Data to be required of the user is now gathered with a few simple *INPUT* commands. The screen is cleared and the formula applied to the data to give us the required figures. A loop made up of the number of years required is set up in 350. When the calculation is done, we have our answer for the year represented by the value G at that time. The formula is standard, which can be obtained from any financial institution.

After getting the data, we need to display it. Here is where the CoCo can shine. The *PRINT USING* command makes these things easy for CoCo users. Owners of many other machines can't even tell the computer where or how to print without writing major subroutines. If you skipped over this one in *Going Ahead With Extended Basic,* do yourself a favor and go back and learn to use it. It's one of my favorites. (Do you have to be nuts to have a favorite BASIC command?) Anyway, we have it all on the screen.

Only one thing left to do now, let those with printers have an option to obtain hard copy of the information. Lines 430-670 deal with the printer routine and may be totally left out by those of you who do not own a printer. Just take the

---

(Leonard Hyre, employed by the Social Security Administration as a claims representative, is the author of Harness Handicapper, Thoroughbred Handicapper, *and* Greyhound Handicapper, *from Federal Hill Software. He is also the author of several* RAINBOW *articles and other published programs)*

ENDICOTT
COMPUTER SOFTWARE AND ACCESSORIES

PRINTERS
(SEE PRINTER INTERFACE BELOW)

SPIRIT (SAME AS MX80) $319.00
OKIDATA 92P (160 CPS) $445.00
CORRESPONDENCE QUALITY
★ NEW! ★ NEW! ★
ABATI LO-20P (PARALLEL) $389.00
18 CPS-DAISY WHEEL-LETTER QUALITY
TRACTOR FEED $79.00

MONITORS
(SEE MONITOR INTERFACE BELOW)
ALL WITH NONGLARE SCREEN.

NEW PRICE BY AMDEK
COLOR 1+ (INCLUDES HEAD PHONES) $299.00
VIDEO 300(G) $149.00
VIDEO 300(A) $164.00
GORILLA (GREEN) $ 99.00
GORILLA (AMBER) $109.00

ENDICOTT JOYSTICK
$19.95... EACH $37.95.... FOR TWO
ANALOG TYPE — PLUGS RIGHT IN!

"In use, we found the ENDICOTT JOYSTICK to be smooth and responsive ..built to last, the Endicott model is a solid buy" *the RAINBOW, October 1982*

"...provided the best feel of all the joysticks tested. ...(a) rugged unit at an affordable price."
-80 micro, March 1983

"NEW" "PRICES"

PRINTER INTERFACE
pbh SERIAL/PARALLEL

SWITCHABLE: 300 TO 9600 BAUD PRINTER *AND* MODEM CONNECTIONS. NOTHING ELSE REQUIRED.

~~$89.95~~ $74.95
PURCHASED WITH PRINTER ~~$84.00~~

MONITOR INTERFACE
VIDEO PLUS $24.95
(COLOR OR MONOCHROME)
PURCHASED WITH MONITOR $20.95
VIDEO PLUS IIM $26.95
(MONOCHROME FOR COLOR III)
PURCHASED WITH MONITOR $22.95
VIDEO PLUS IIC $39.95
(COLOR FOR COLOR II)
PURCHASED WITH MONITOR $33.95

"NEW" BLANK MEDIA "PRICES"
ELEPHANT SSSD $20.95
ELEPHANT SSDD $22.95
ELEPHANT DSDD $26.95
BASF QUALIMETRIC SSDD $23.95
BASF QUALIMETRIC DSDD $28.95
C-10 CASSETTES (ONE DOZ.) $7.50

WICO
ATARI JOYSTICK ADAPTER
$17.95

MEDIA STORAGE TAPE
TAPE CAROUSEL (HOLDS 25) $13.00

DISKETTE
FLIP'N'FILE 10 $ 5.45
FLIP'N'FILE 50 $33.95

SUPER-PRO KEYBOARD
"NEW" BY: MARK DATA "PRICES"
ADAPTER REQUIRED ON COMPUTER BOUGHT AFTER 10/82
KEYBOARD ~~$64.95~~ $56.95 ADPT. $4.95

VOLKSMODEM
BY: ANCHOR AUTOMATION
300 BAUD, DIRECT CONNECT
MANUAL ANSWER, MANUAL DIAL
INCLUDES CABLE $74.95

WICO JOYSTICK
BIG BAT HANDLE
SPRING RETURN OR FREE FLOAT
ANALOG TYPE — PLUGS RIGHT IN!
$38.95 EACH

Look at These Discounts and Compare...Remember WE PAY SHIPPING!
SOFTWARE PRICES SHOWN ARE **20% OFF** *LIST PRICE!*

SPECTRAL ASSOCIATES

	T	D
▷ GALGON	$19.95	$23.15
▷ PENGON	$19.95	$23.15
▷ COLOR PANIC	$19.95	$23.15
▷ CUBIX	$19.95	$23.15
▷ LANCER	$19.95	$23.15
▷ MS GOBBLER	$19.95	$23.15
WHIRLYBIRD RUN	$19.95	$23.15
STORM ARROWS	$19.95	$23.15
LUNAR ROVER PATROL	$19.95	$23.15

COMPUTERWARE

	T	D
▷ MR. DIG	$22.35	$24.75
▷ JUNIOR'S REVENGE	$23.15	$25.55
RANDOM BASIC (OS-9)		$60.00
▷ COLOR BASIC COMPILER		$31.95
64K SCREEN EXPANDER (64K)	$19.95	$22.35
* THE SOURCERER (R DOS)	$27.95	$31.95
THE SOURCERER (OS-9)		$31.95
▷ MACRO ASSEMBLER & XREF (R DOS)		$39.95
MACRO ASSEMBLER & XREF (OS-9)		$39.95
▷ COLOR EDITOR	$19.95	$23.95
▷ COLOR MONITOR	$19.95	$22.35
▷ MOON HOPPER	$19.95	$22.35
BLOC HEAD (CUBER TYPE)	$21.55	$23.95
DOODLE BUG (LADY BUG)	$19.95	$22.35

SOFT LAW
T & D INCLUDED

☐ VIP WRITER (INC. SPELLER!)	$47.95	— — —
☐ VIP SPELLER	$31.95	— — —
☐ VIP CALC	$47.95	— — —
☐ VIP TERMINAL	$39.95	— — —
☐ VIP DATA BASE	$47.95	(DISK)
☐ VIP OS-9 ZAP	$35.95	(DISK)
WRITER/SPELLER-CALC-DATA BASE	$139.00	— — —
ENTIRE LIBRARY	$210.00	— — —

ELITE SOFTWARE

	T	D
☐ ELITE-WORD	$47.95	$47.95
☐ ELITE-CALC	$47.95	$47.95
☐ ELITE-FILE	$59.60	
ENTIRE LIBRARY (DISK)	$145.00	

PROGRAMMERS INSTITUTE

	T	D
▷ COMPLETE PERSONAL ACCOUNTANT — (1,2,&3)	$59.95	$63.95

SPECIAL SALE!
30% OFF

PRICKLY-PEAR SOFTWARE

	T	D
▷ MUSIC READER	$24.45	$27.95
* ERLAND	$17.45	$20.95
▷ TRAVELIN' TOAD	$17.45	$20.95
▷ OCKYWOKY	$17.45	$20.95
▷ ADVENTURE IN WONDERLAND	$17.45	$20.95
THE DISK MANAGER		$20.95
THE DISK MASTER		$17.45
* VIKING	$13.95	$17.45
* GANGBUSTERS	$13.95	$17.45
COLORKIT	$24.45	$27.95
FLIGHT	$13.95	$17.45

COGNITEC

	T	D
☐ TELEWRITER 64	$39.95	$47.95

TOM MIX

	T	D
▷ QUIX	$19.95	$22.35
elec'TRON	$19.95	$22.35
▷ WORLDS OF FLIGHT	$23.95	$26.35
SKRAMBLE	$19.95	$22.35
▷ SR-71	$23.15	$25.55
▷ CU'BER	$22.35	$24.75
▷ BUZZARD BAIT	$22.35	$24.75
▷ AIR TRAFFIC CONTROLLER	$23.15	$25.55
▷ SPACE SHUTTLE	$23.15	$25.55
▷ THE KING	$21.55	$23.95
▷ COLOR GOLF	$14.35	— — —
TAPE TO DISK	$14.35	— — —
DISK TO TAPE	$14.35	— — —
SCREEN PRINT ROUTINE	$15.95	$17.55

ADVENTURE INTERNATIONAL

	T	D
* FIRE COPTER	$19.95	— — —
* SAIGON: THE FINAL DAYS	$19.95	— — —
* EARTHQUAKE	$19.95	— — —
* AIRLINE	$19.95	— — —
▷ SEA DRAGON	$27.95	— — —
▷ TRIAD	$27.95	— — —
▷ DISKEY (Disk Access & Repair Kit and Computer Diagnostics)		$39.95

B5 SOFTWARE

	T	D
MONEY	$15.95	— — —
BORROW	$15.95	— — —
CARRY	$15.95	— — —
MATH FACT	$13.55	— — —
ABC'S	$ 7.95	— — —
ALL	$64.00	— — —

NOTE: ALL SALES FINAL. NO RETURNS UNLESS DEFECTIVE. ADDITIONAL LISTINGS IN OUR FREE CATALOG — CALL OR WRITE.

*Requires 16K Ext. Basic Minimum. ▷Requires 32K Ext. Basic Minimum ☐We Recommend 32K or 64K. Others 16K Ext. Std. Basic Minimum.

WE PAY SHIPPING TO U.S.A., CANADA, AND MEXICO. C.O.D. ADD $2.00 (U.S.A. ONLY). ALLOW 2 WEEKS FOR CHECKS TO CLEAR. NO P.O. BOXES! MUST HAVE STREET ADDRESS. SHIPPING — OTHER COUNTRIES: ADD $2.00 EACH SOFTWARE ITEM AND EACH JOYSTICK. ADD $5.00 EACH ALL OTHER ITEMS (NO MONITORS OR PRINTERS SHIPPED OUTSIDE U.S.A.). ITEMS TO BE SHIPPED AIR MAIL. PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

ENDICOTT
Computer Software And Accessories
2806-A S. MEMORIAL PARKWAY
HUNTSVILLE, ALABAMA 35801
VISIT OUR STORE
PRICES IN AD ARE MAIL ORDER ONLY.

PHONE ORDERS
205/536-4400
(PHONE OPEN 7 DAYS A WEEK)
MasterCard **WE PAY SHIPPING!** VISA

'P' option out of Line 400 and modify 420 to read: *420 GOTO 200.*

I often use the same routine for screen and printer format using a *Print #-X* type of style. However, the display of the information given here requires a different display for the printout if we want it to be attractive. Notice that 'A' and 'B' values are reset to 0 in Line 570. Data input earlier is then used to recalculate and print out the year by year accumulation.

IRA Projection is a relatively short program and should not present much of a typing challenge to you. I believe you will find the program worthwhile.



The listing:

```
10 '*****************
20 '*IRA PROJECTION*
30 '*    (C) 2/84    *
40 '*     L.HYRE     *
50 '* CAMBRIDGE MD  *
60 '*****************
70 '
80 '
90 ' 16K EXTENDED BASIC REQUIRED
100 DATA I,N,D,I,V,I,D,U,A,L,R,E
,T,I,R,E,M,E,N,T,A,C,C,O,U,N,T,S
,b,y,,l,e,o,n,a,r,d,,h,y,r,e
110 CLS0:A1$=STRING$(5,143):A2$=
CHR$(143)
120 POKE359,126:SCREEN0,1
130 PRINT@16,A2$;:PRINT@43,A1$+A
2$+A1$;:PRINT@75,A2$+STRING$(4,1
28)+A2$+STRING$(4,128)+A2$;:PRIN
T@107,A2$+STRING$(4,128)+A2$;:PR
INT@139,A2$+STRING$(4,128)+A2$;:
PRINT@171,A1$+A2$+A1$;:PRINT@208
,A2$+STRING$(4,128)+A2$;
140 PRINT@240,A2$+STRING$(4,128)
+A2$;:PRINT@267,A2$+STRING$(4,12
8)+A2$+STRING$(4,128)+A2$;:PRINT
@299,STRING$(11,143);:PRINT@336,
A2$;
150 PR=34:FORI=1TO10:READA$:PRIN
T@PR-1,CHR$(143)+A$+CHR$(143);:P
R=PR+32:PLAY"T25504CE05CE":NEXT
I
160 PR=62:FORR=1TO10:READA$:PRIN
T@PR-1,CHR$(143)+A$+CHR$(143);:P
R=PR+32:PLAY"T25504CE05CE":NEXTR
170 PR=428:FORAT=1TO8:READA$:PRI
NT@PR,A$;:PR=PR+1:PLAY"T25504CE0
5C3":NEXTAT
180 FOR DL=1TO300:NEXT:PR=456:FO
RNA=1TO15:READA$:PRINT@PR,A$;:PR
=PR+1:PLAY"04CC":NEXT NA
190 FORDL=1TO700:NEXT
200 POKE359,57:SCREEN0,1:CLS
210 PRINT:PRINTSTRING$(32,205);:
PRINT"  INDIVIDUAL RETIREMENT AC
COUNT ";:PRINTSTRING$(32,203);:P
LAY"V31T2003C04C05C"
220 A=0:B=0
230 INPUT"YOUR NAME:";N$:IF LEN(
N$)>12 THEN PRINT"SHORTER PLEASE
":PLAY"T801ECE":GOTO 230
240 PLAY"T2004CE"
250 INPUT"TOTAL DEPOSIT PER YEAR
";C
260 PLAY"T2004CE"
270 INPUT"ANTICIPATED % INTEREST
";D
280 PLAY"T2004CE"
290 INPUT"NO.TIMES COMPOUNDED/YR
";E
300 PLAY"T2004CE"
310 INPUT"NO.YEARS TO PROJECT...
";F
320 PLAY"T2004CE"
330 CLS:GOSUB430
340 FOR G=1TO F
350 A=(1+D/(100*E))^E*(A+C)
```


Quality Christian Software

MONEY BACK GUARANTEE

If for any reason you are not fully satisfied with any program you purchase from Quality Christian Software just return the original program (Cassette or Diskette) and we will refund the purchase price of the program.

★ ★ ★ ★ ★ 4 NEW PROGRAMS ★ ★ ★ ★ ★

PILGRIM'S PROGRESS: An interactive adaptation of Pilgrim's Progress in the form of an adventure game. Your progress is directed away from the city of destruction and towards the Celestial City. Important Biblical Doctrines are grasped as the player proceeds. Requires 16k E.C.B. — $17.99 Cassette

CHURCH TIME: A light hearted non-theological adventure for the whole family. You're almost late for church and to top it off you forgot your Bible. Rushing back into your house you find that the sticky front door has bolted behind you. The object is to find your Bible and get outside so that you won't be late for church. 32k E.C.B.—$10.99 Cassette.

BIBLE REFERENCE PROGRAM: Topographical Bible Reference Program covering 27 Topics with 60 Biblical References. 16k E.C.B. not required—$10.99 Cassette.

3-GAME PACK #3: Reversed Sword Drill game #2, "Who Did That" Game #2 & "Who Said That" Bible Quote game #2.—16k E.C.B.—$10.99 Cassette.

JUDE: A full text commentary and reference study on the Epistle of St. Jude. See the review in the December 1983 issue of RAINBOW. Page 286. Requires 32k E.C.B. Cassette $13.99 Disk $16.99

3-GAME PACK #1: Books of the Bible Game, Bible Character Word Scramble game & "Who Said That" Bible quote game. Requires 16k E.C.B. — Cassette $10.99

3-GAME PACK #2: Reversed Sword Drill game, "Who Did That" game & Bible Places Word Scramble game. Req. 16k E.C.B.—Cassette Version $10.99.

VISA

Please Add $2.00 for freight
C.O.D.'s add $4.00
Overseas add $6.00

QCS
P.O. Box 1899
Duncan, OK 73534
405/255-5696

24 Hour Phone Service

RAINBOW

MasterCard

SUPER PRO KEYBOARD*

- Original layout—no unsupported keys.
- No special software required.
- Fast, simple installation—no soldering.
- Individually boxed with full instructions.
- Professional, low profile, finished appearance.
- U.S. made—highest quality, go
- Smooth, responsive "Touch Typist" feel.
- Fits all 'D', 'E', and 'F' board models.

*Computers produced after approximately October 1982 require an additional plug adapter. Please add $4.95.

More Super Pro keyboards have been sold than any other brand for good reason. . .It is the best looking, best feeling keyboard available anywhere! The best buy for your money. Read what the reviewers have said:

Color Computer News, June '83

Mark Data Products is well known to us "longtimers"... Every bit as finished as if Tandy had done it...The Mark Data Super-Pro is your best buy...The one that is in my CoCo to stay...

Color Computer Magazine, June '83

The installation procedure is well detailed and quite simple...Has a professional feel, reacts well to the touch..., has held up to some purposeful pounding...

Hot CoCo, August '83

Like putting leather upholstery in your Volkswagen...Very impressed with the appearance and performance...Could easily pass as original equipment...Installation is very simple...

Rainbow, April '83

A fine piece of hardware from Mark Data Products...It is super and it is professional too...If you are searching for a replacement keyboard, it is an excellent buy...

Mark Data Products

24001 ALICIA PKWY., NO. 207 • MISSION VIEJO, CA 92691 • (714) 768-1551

All Orders: Please add $2.00 shipping and handling in the continental U.S. All others, add air shipping and $3.00 handling. California residents add 6% sales tax. Foreign orders please remit U.S. funds. Software authors—contact us for exciting program marketing details.

```
360 B=FIX((100*A)+.5)/100
370 PRINTUSING"##";G;:PRINTUSING
"  $########.##";B:PLAY"T250V3101
CE"
380 IF G/10=INT(G/10) GOSUB 440
390 NEXT G
400 PRINT:PRINT"   [ PRESS 'P' F
OR PRINTOUT ]":PRINT"[ANY OTHER
= ANOTHER PROJECTION]":FORS=1TO3
:PLAY"T50V3103C05C":NEXTS
410 AN$=INKEY$:IFAN$=""THEN 410
420 IF AN$="P"THEN 480 ELSE 200
430 PRINTSTRING$(32,133);"IRA PR
OJECTION FOR ";N$:PRINTSTRING$(3
2,133);:RETURN
440 PRINT" [   PRESS ANY KEY TO
CONT.   ] ";
450 AN$=INKEY$:IFAN$=""THEN 450
460 CLS:GOSUB430
470 RETURN
480 POKE359,126:SCREEN0,1:CLS
490 PRINT:PRINTSTRING$(33,159);"
PRINTING OPERATION IN PROCESS ";
STRING$(33,159);
500 PRINT:PRINT:PRINT:PRINT"
   ONE MINUTE PLEASE"
510 PRINT#-2,STRING$(80,"=")
520 PRINT#-2,"INDIVIDUAL RETIREM
ENT ACCOUNT PROJECTION FOR: ";N$
530 PRINT#-2,"BASED ON DEPOSITS
OF $";C;" OVER ";F;" YEARS"
540 PRINT#-2,"ANTICIPATED INTERE
ST RATE IS ";D;"% COMPOUNDED ";E
;" TIMES/YEAR"
550 PRINT#-2,STRING$(80,"-")
560 H=0
570 A=0:B=0
580 FOR G=1 TO F
590 A=(1+D/(100*E))^E*(A+C):B=FI
X((100*A)+.5)/100
600 PRINT#-2,TAB(25);
610 PRINT#-2,"YEAR # ";:PRINT#-2
,USING"##";G;:PRINT#-2,"     ";:P
RINT#-2,USING"$#######.##";B
620 NEXT G
630 PRINT#-2:PRINT#-2,TAB(13);"T
OTAL DEPOSITS=";:PRINT#-2,USING"
$#######.##";C*F;:PRINT#-2," FOR
NET INCREASE OF ";:PRINT#-2,USIN
G"$#######.##";B-(C*F)
640 PRINT#-2:PRINT#-2,STRING$(80
,"=")
650 PRINT:PRINT:PRINT"       OPER
ATION COMPLETE":FORS=1TO3:SOUND
225,1:NEXTS
660 FOR DL=1TO400:NEXT
670 POKE359,57:SCREEN0,1:CLS:PRI
NTSTRING$(32,207):GOTO 400
```


Sonburst Software

233 S.E. ROGUE RIVER HWY,
GRANTS PASS, OR 97527 1-503-476-5977

We are proud to announce our new utilities for the 64K Disk Color Computer, featuring . . . . . .

- Full use of 64K RAM
- 100% Machine Language
- Parameters easily changeable in basic loader
- No ROM calls
- "Cold start" exit to basic
- Easy-to-read, informative documentation
- Keyklik
- Selectable drive stepping rate
- Support 1-4 drives
- Easy to use, with menu selected functions

To make life with your disks easier, may we suggest . . .

1. **The Sector Inspector** — Alphabetize, backup, and printout directory; repair crashes, LLIST basic programs, name disks, read in and edit 23+ grans, 3-swap backups, and more. Has 35-page manual and gran table print program . . . **$29.95**
2. **The Deputy Inspector** — Alphabetize, re-sort, and backup directory; **fast** 3-swap backups, copy files or programs to same or other disks, can auto-reallocate granules during backup for **faster loading**, and more **$21.95**
3. **The Archivist** — Make long-lasting tape backups of your valuable disks, erase and format disks **$14.95**
4. **The Chief Inspector** — Save 10%! Order all 3 . . . . . **$59.95**
5. **EDT** — **effortless** full (51x24) screen editing w/2 way cursor, disk commands allow easy save/backup/append. Text files to 48K+. Copy, save, move, delete or print blocks. Much more. Normally $39.95, now only . . . . . **$35.95** (10% OFF)

RAINBOW

• *Please add $1.50 for shipping, $2.50 for C.O.D.*

THIS MONTH: APO's/FPO's — FREE SHIPPING

Hint . . .

Simplified Saves

For disk users:

```
3 GOTO 10
5 KILL "PROGRAM/BAS" : SAVE"PROGRAM" :
END
10 ' THIS IS FIRST LINE OF PROGRAM
```

To use, first *SAVE"PROGRAM"* (your program name) in the usual fashion. Thereafter, just type *RUN 5* ENTER. This is especially handy during debugging.

For cassette users, change Line 5 to read:

```
5 FOR S = 1 TO 3: CSAVE"PROGRAM": MOTORON
: FOR DL* 1 TO 460 *3 : NEXT DL : MOTOROFF :
SOUND 200,1 : NEXT S : END
```

To use, set the recorder to record mode, then type *GOTO5* ENTER or *RUN5* ENTER. Line 5 will then *CSAVE* the program three times, putting a three second "rewind gap" between each of the saves and after the last save. The *SOUND* command may be deleted, but it's a handy signal which reminds you to jot down the tape counter number.

A special note to *Worksaver* users, cassette or disk: store the applicable Line 5 from the above as a key definition, then to do a whole save routine it takes only two (at most three) keystrokes!

Chris W. Brown
Siloam Springs, AR

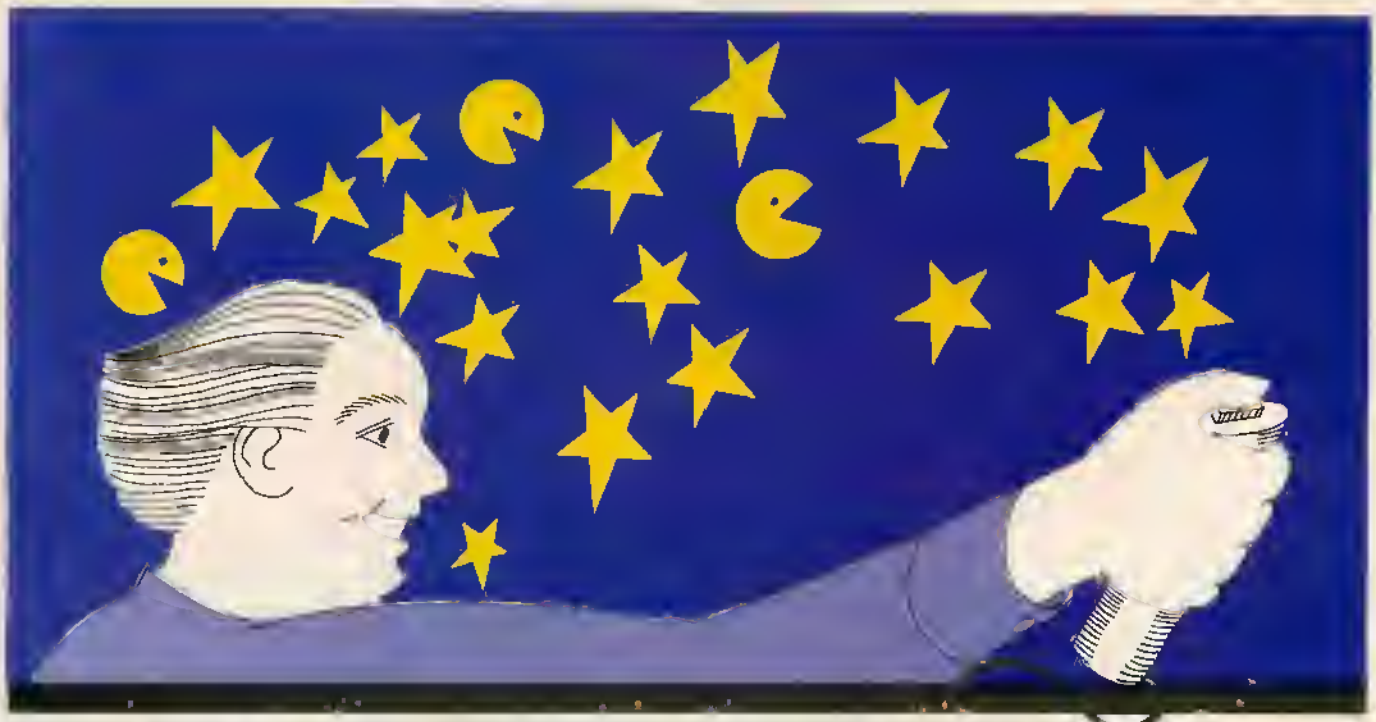

The Joystick that sets you free!

The one-hand operation of this fantastic new joystick will truly set you free and increase the pleasure of playing your favorite video games. The smoothness and responsiveness of this unique joystick that operates completely without a base is something to be experienced. Available direct from us or from your independent computer retail store. (See below)

$49.95 suggested retail

STOP changing Printer and Modem Cables! Our **Parallel Printer Interface** provides **Switch Selectable Printer** or **Modem** operations for both CoCo and MC10. It features switchable baud rates from 300 to 9600. It comes complete with power supply, modem cable and **"Centronics"** type printer cable. For Basic 1.1 and later revisions.

Available direct from us or from your independent computer retail store. (See below)

Only $89.95 suggested retail

pbh Computer Products, Inc.
P. O. Drawer 55868
Houston, Texas 77055
713/956-0207

When ordering direct from **PBH** please enclose $3.00 per item for shipping.

Stocking Distributors

Compukit
Houston, TX. 77059

Spectrum Projects
Woodhaven, N.Y. 11421

Authorized Dealers

Endicott Computer
Software & Accessories
Huntsville, AL. 35801

The Computer Store
Jasper, IN. 47456

The Software Connection
Ft. Lauderdale, FL. 33319

Colorware, Inc.
Woodhaven, N.Y. 11421

TRS TECH
Computer Services
Houston, TX. 77033

Computers & More
Huntsville, TX. 77340

The Photo Shop Radio Shack
Wilmar, MN. 56201

Patterson Electronics
Mountain View, AR. 72560

Computers, Etc.
Austin, TX. 78745

Cinsoft
Cincinnati, OH. 45237

EDC Industries
Los Angeles, CA. 90042

Sound Center Radio Shack
Whiterock, N.M. 87644
& Los Alamos, N.M. 87544

Chips, Incorporated
Atlanta, GA. 30340

Computer Associates
West Fargo, N.Dak. 58078

Computer Plus, Inc.
Littleton, MA. 01460

Turtle Micro Ware
East Lime, CT. 06333

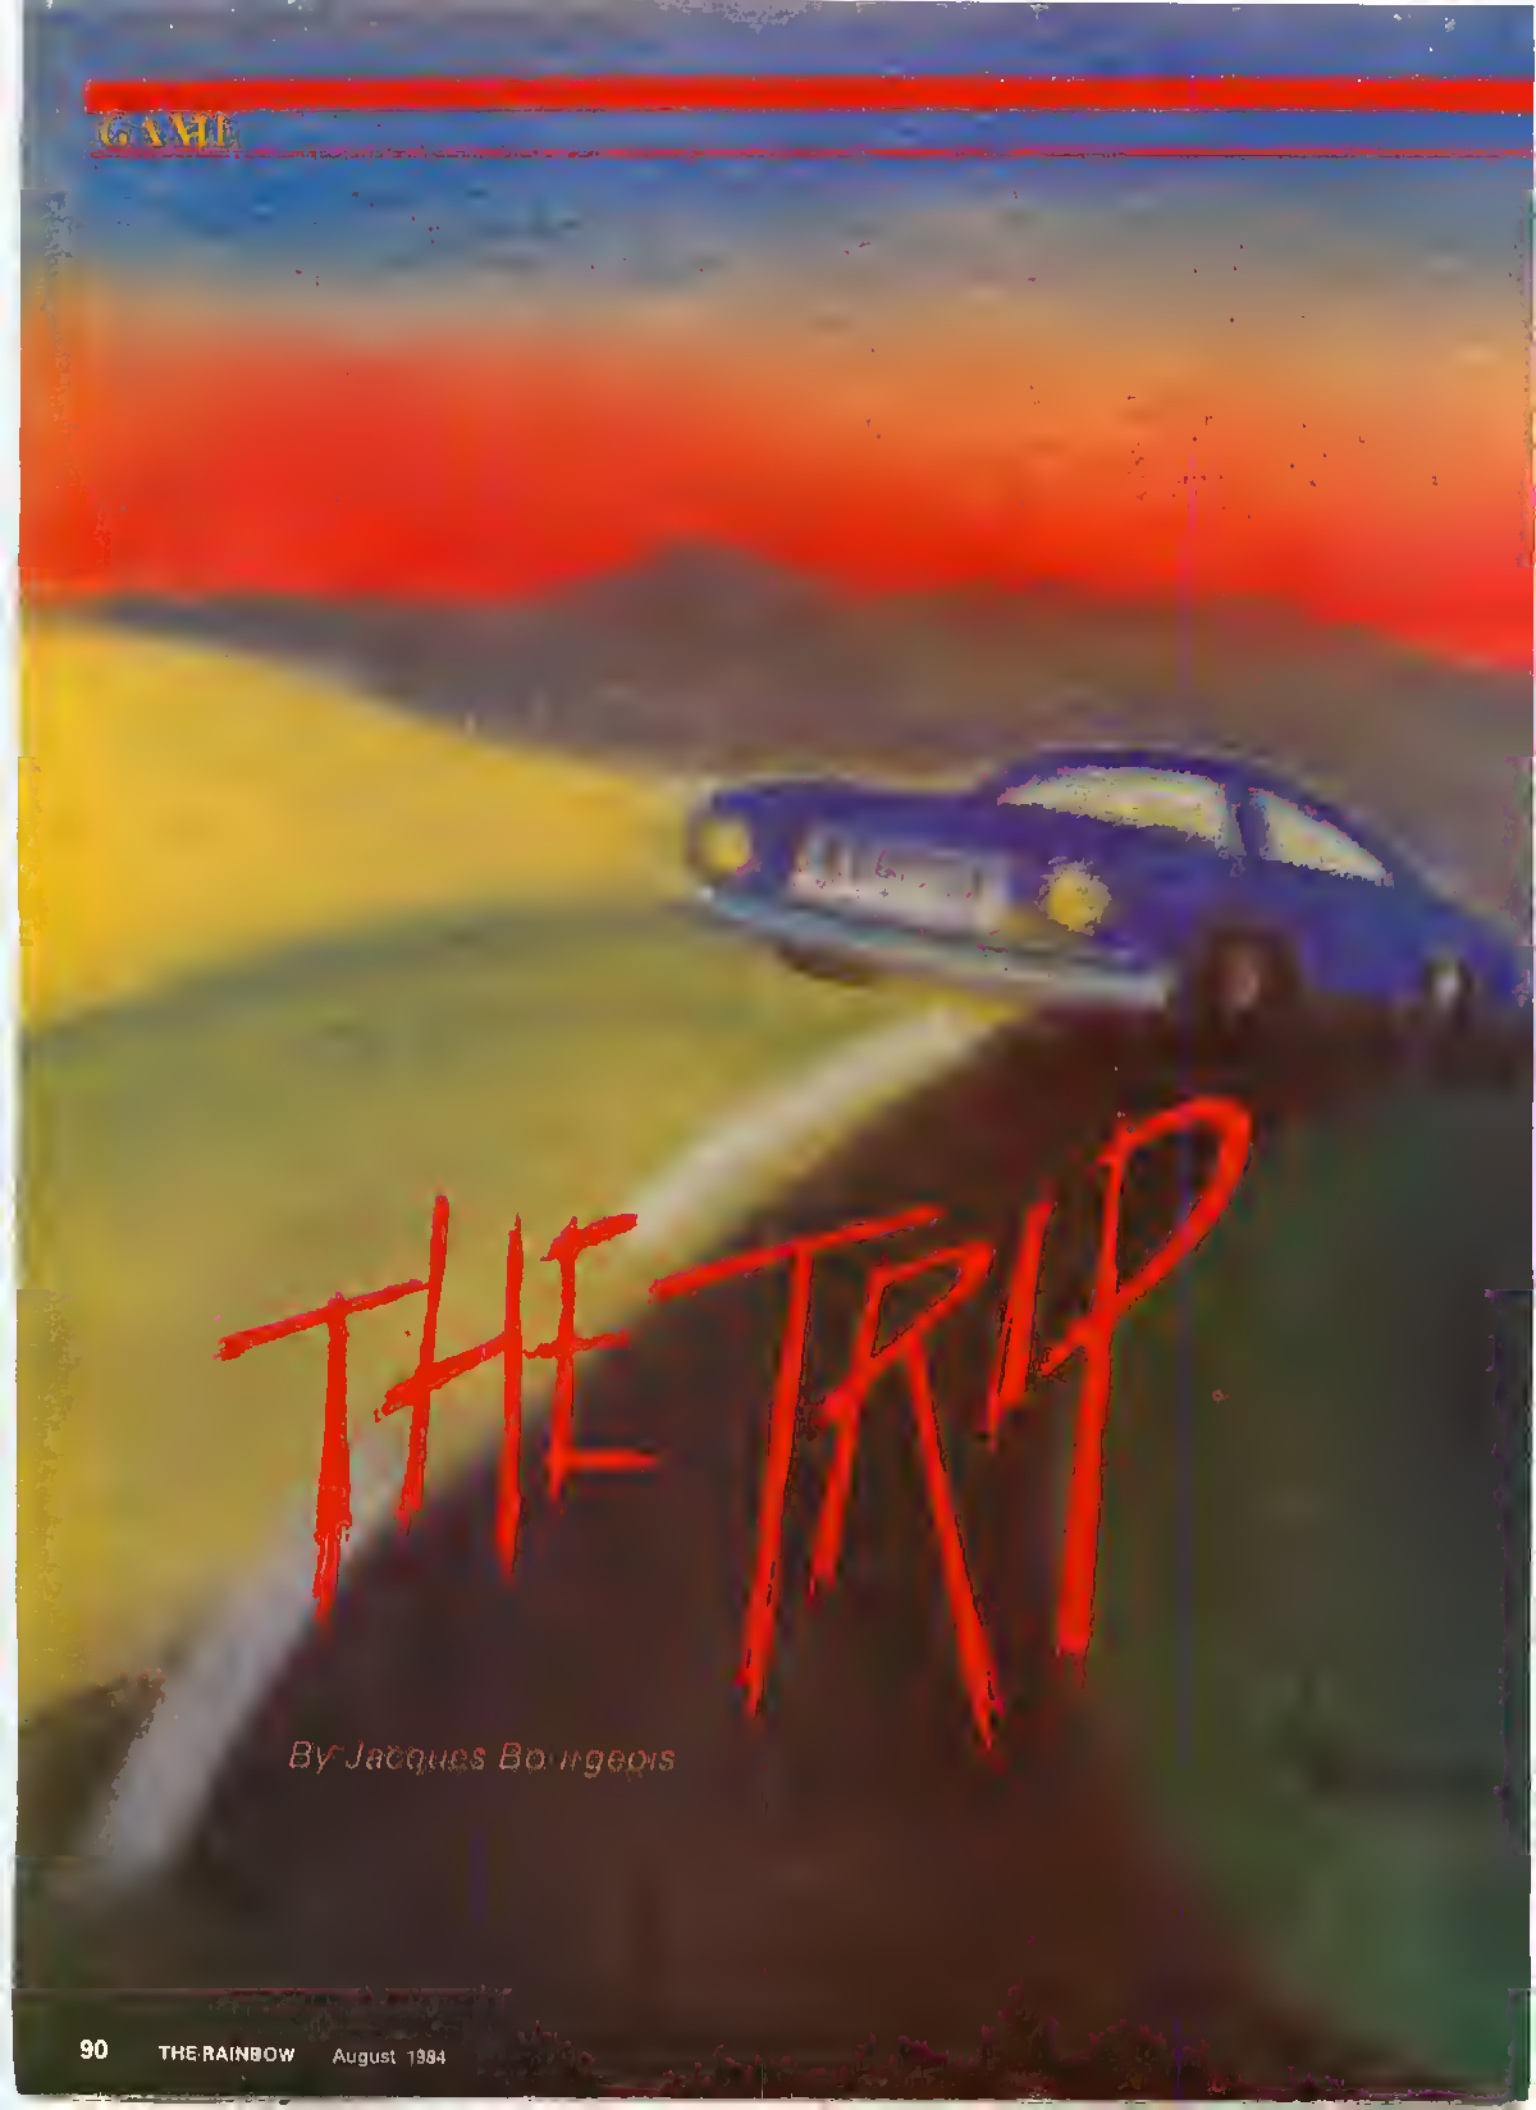

THE TRIP

By Jacques Bourgeois

The Trip is a 32K Hi-Res Adventure game that you play mostly with a joystick. The main element of the game is a car which you ride on a main road. This main road crosses 10 different side roads on which you go to find the objects you need.

It is a mix of Adventure and arcade-type games. Luck is involved as well as skill and head work. Most of the elements of the game are random, so you can play it over and over again and find it challenging every time.

It is not easy to get through, and even a skilled *Tripper* may take two hours to finish it or make a wrong move and be killed.

Free your friend Joe, prisoner of the evil forces. At the start of the game, you do not know where the evil forces hide, and you have nothing in your possession.

You are represented by the flashing dot on the screen and can move around using your right joystick. Be careful, however, because moving in some positions may get you into trouble.

To get into action, you have to use your fire button. For example, if you see a sign moving in front of you, push the fire button and you will be able to read it. The computer will react by flashing a message for a few seconds or by changing the graphics. If nothing happens, it means that you are not in the right position on the screen, or that there is nothing to do there.

You can press 'I' any time the cursor is present on the screen to get an inventory of what you have. Pressing the Space Bar in the same conditions will automatically bring you back to the car (if you have one) and it can sometimes help in difficult situations. 'I' and the Space Bar will not work when there is text on the screen.

The car, you will find, is very sophisticated. It will give you instructions the first time you will get into it by *speaking to you*. The program makes use of the audio possibilities of your CoCo, but for that, you will have to prepare a short recording.

Make a save of the program on an empty cassette. Right after the program, record the following text with a microphone, pinching your nose to give the impression that a computer is talking:

I am the Car.

Please listen carefully because I will not repeat these instructions.

I am an all push button car. You have to push a button to turn me ON or OFF, to move around or to open the door to get out of me.

Once on the main road, you will encounter a number of side roads. Each one bears a number which will appear at the upper-left or right side of your screen. You can turn on a side road as long as you can see the road and the number. If you turn when there is no road, you will end up in the field and lose control of me.

Once on a side road, your screen will become blank. You then have to open the door and get out to see what happens there.

To get back to me and the main road, try hitting the Space Bar.

Good luck and have a good trip.

This recording will self-destruct within 10 seconds.

If you leave the recorder on play after loading the game, the message will be heard through your TV the first time you enter the car. The recorder will shut off after one minute of play, so make your recording less than one minute long.

The computer will be in a long loop during that time and will not accept any command. If you want to get rid of that feature, delete the end of Line 99 from *:IFPEEK*. This program will not run with the disk drive plugged in.

As with any Adventure game, you will have to find your way through it. If you are stuck somewhere, you can write to me, including 50 cents to cover the cost of postage, and I will be glad to help. Those who do not have the RAINBOW ON TAPE and do not want to type in the long program can send me $10 to purchase a cassette. A disk version is also available for $15. It is somewhat better and faster, but it does not have the message from the car. Write me at 105 Poincare, Longueuil, Quebec J4L 1B2.

(Jacques Bourgeois is an audio-visual technician who became involved in computers because they will soon replace the video and audio equipment he uses every day.)

11..... 118	100..... 195	179..... 96
24..... 109	112..... 219	190..... 207
35..... 216	122..... 67	201..... 183
42..... 97	133..... 201	208..... 1
52..... 130	138..... 146	218..... 181
63..... 131	147..... 200	228..... 93
71..... 5	156..... 10	238..... 155
78..... 205	162..... 248	244..... 205
85..... 218	168..... 84	END 218

The listing:

```
1 CLEAR2,32766:CLEAR300:POKE6549
5,0:IFPEEK(32767)<7THENPOKE32767
,8:GOTO16ELSE22
2 FORX=1TO1000:NEXT:RETURN
3 FORX=1TO3000:NEXT:RETURN
4 IF(JOYSTK(0)<40RJOYSTK(0)>590R
JOYSTK(1)<40RJOYSTK(1)>59)AND(PE
EK(65280)=126ORPEEK(65280)=254)T
HEN4
5 IFC8=1THENT=T+1:IFT>300THENT=0:
TX=TX-1:IFAP=1THENLINE(TX,144)-(
TX,152),PSET
6 A$=INKEY$:IFA$=" "ANDA8=1ANDAT
=0ANDC6=0THEN91ELSEIFA$="I"THENC
LS:GOSUB241
7 IFINKEY$="I"THENCLS:GOSUB241
8 IFAT=1THENCX=JOYSTK(0)*4:CY=JO
YSTK(1)+108:GET(CX,CY)-(CX+3,CY+
3),M::PUT(CX,CY)-(CX+3,CY+3),A2:
FORX=1TO9:NEXT:PUT(CX,CY)-(CX+3,
CY+3),M:RETURN
9 PUT(CX,CY)-(CX+3,CY+3),M:IFJOY
STK(0)<4THENCX=CX-8:IFCX<1THENCX
=1:GET(CX,CY)-(CX+3,CY+3),M ELSE
GET(CX,CY)-(CX+3,CY+3),M:SOUND12
5,1
10 IFJOYSTK(0)>59THENCX=CX+8:IFC
X>252THENCX=252:GET(CX,CY)-(CX+3
,CY+3),M ELSEGET(CX,CY)-(CX+3,CY
+3),M:SOUND125,1
11 IFJOYSTK(1)<4THENCY=CY-3:IFCY
<1THENCY=1:GET(CX,CY)-(CX+3,CY+3
),M ELSEGET(CX,CY)-(CX+3,CY+3),M
:IFJOYSTK(0)>3ANDJOYSTK(0)<60THE
NSOUND125,1
12 IFJOYSTK(1)>59THENCY=CY+3:IFC
Y>188THENCY=188:GET(CX,CY)-(CX+3
,CY+3),M ELSEGET(CX,CY)-(CX+3,CY
+3),M:IFJOYSTK(0)>3ANDJOYSTK(0)<
60THENSOUND125,1
13 IFPPOINT(CX-1,CY-1)=10RPPOINT
(CX-1,CY-1)=5THENPUT(CX,CY)-(CX+
3,CY+3),A2:RETURNELSEPUT(CX,CY)-
```

```
(CX+3,CY+3),A1:RETURN
14 FORX=1TO2000:NEXT:RETURN
15 DATAt,h,e,,t,r,i,p
16 A$=STRING$(32," "):CLS0:PRINT
@226,"WELCOME";:PRINT@234,"TO";:
PRINT@160,A$;:PRINT@288,A$;
17 PLAY"L30IEEEL1C":Y=236
18 FORZ=1TO8:Y=Y+2:READA$:PRINT@
Y,A$;:IFA$<>""THENSOUND250,3:GOS
UB2:NEXTELSEGOSU82:NEXT
19 PLAY"L30IAAAL1F":GOSU82
20 PRINT@352,"  C. JACQUES BOURG
EOIS - 1983
21 FORX=1TO255STEP3:SOUNDX,1:NEX
T
22 CLS0:PRINT@256,"  WE HOPE YOU
 WILL STAY ALIVE              HA!
 HA! HA!"
23 DIMA1(3,3),A2(3,3),M(3,3),R(1
0),RS(10),C(16,16),D(3,3),E(3,3)
,F(3,3)
24 Y=RND(10):FORX=1TO10:IFR(X)=Y
 THEN24
25 IFR(X)=0THENR(X)=Y:IFX=10THEN
26ELSEGOTO24ELSENEXT
26 Y=RND(10):FORX=1TO10:IFRS(X)=
Y THEN26
27 IFRS(X)=0THENRS(X)=Y:IFX=10TH
EN28ELSEGOTO26ELSENEXT
28 PMODE3:PCLS4:GET(10,10)-(26,2
6),C:PCLS:GET(0,0)-(3,3),A1
29 80$="U48R48D48NL48H48
30 LINE(0,0)-(9,9),PSET,BF::PAIN
T(2,2),2,1:GET(1,1)-(4,4),A2
31 PMODE3:PCLS:SCREEN1,0
32 DRAW"BM0,96C3R255":DRAW"BM0,8
0E2F2":FORX=1TO63:DRAW"BM-4,+1;E
2F2BU1E2F2":NEXT:PAINT(2,84),2,3
:PAINT(1,1),3,3:DRAW"BM0,96C2R25
5
33 FORZ=1TO50:X=RND(255):Y=RND(9
5):PSET(X,Y,2):NEXT:CIRCLE(50,20
),10,2:PAINT(50,20),2,2
34 AT=0:COLOR4,1:LINE(8,96)-(56,
68),PSET,BF:LINE(84,104)-(220,52
),PSET,BF:CIRCLE(182,52),24,4:PA
INT(182,51),4,4:DRAW"BM182,28C1U
8
35 DRAW"BM16,76;C3R32D20L32U20":
PAINT(32,84),2,3:DRAW"BM16,80;R3
2":FORY=1TO3:DRAW"BM-32,+4;R32":
NEXT:DRAW"BM170,88;R24D16L24U16"
:PAINT(182,96),3,3
36 LINE(84,52)-(220,56),PRESET,B
F:FORX=164TO196STEP8:IFX<>180THE
NLINE(X,56)-(X+4,104),PRESET,B:P
```


It's time we put our chips on the table

. . . and showed you our best deals on computer hardware.

HARDWARE SPECIALS

Extended Basic w/bk	$ 39.95
64k (DEI) Memory Upg	$ 59.95
Amdek Disk Drives	$499.95
26-3029 CoCo Drive 0	$329.95
26-3023 CoCo Drive 1	$239.95
HJL Keyboard (D,E,F,2)	$ 79.95
Super Pro Keybd. (D,E)	$ 64.95
26-3127 64k Extended CoCo 2	$229.95
26-3801 Model 100 8k	$549.95
26-3816P 8K Upgrade Model 100	$ 99.95
26-1192 CGP-115 Printer/Plotter	$169.95
26-1271 DMP-110 Printer 50 cps	$349.95
C. Itoh 8510 AP Printer 120 cps	$399.95
Gorilla/NAP Video Monitor (Grn)	$109.95
Video Monitor Adapters	$ CALL
26-3024 RS Multi-Pac Interface	$ 89.95
Bolek Ser/Par Interface	$ 69.95

ACCESSORIES

RS D.C. Modem IB	$ 69.95
Novation J-Cat Modem	$129.95
RS D.C. Modem II	$179.95
Signalman MK X Modem	$179.95
Hayes SM 300 Modem	$239.95
USR Password 1200/300	$429.00
CoCo Switcher	$ 39.95
Elephant Disks ssdd	$ 22.95
26-3030 OS-9 (64k)	$ 64.95 (disk)
Basic-09 (req. OS-9)	$ 87.95 (disk)
"C" Compiler (OS-9)	$ 87.95 (disk)
FHL O-Pak (req. OS-9)	$ 34.95 (disk)
Elite Word	$ 59.95 (d&c)
Elite Calc	$ 59.95 (d&c)
Color Term Plus	$ 29.95 (cass)

MSI SOFTWARE

MSI DISKUTIL	NEW	$19.95
COLOR FINANCE 1	RAINBOW	$49.95
COLOR FINANCE 11	NEW	$69.95
MSI NAMEFILE	RAINBOW	$24.95
MSI CALENDAR	NEW	$19.95

Call for prices and availability of your favorite software and hardware. All advertised items subject to availability. **Prices do not include shipping and handling.** All of the above units are covered by our 120 day carry-in warranty.

TRS-80 Trademark Tandy Corporation. Prices subject to change without notice.

Write for our FREE newsletter.

TOLL FREE TENNESSEE 1-800-545-2502 | TOLL FREE 1-800-251-5008

OELKER ELECTRONICS, INC.
P.O. Box 897
Dept. R
408C Nissan Blvd.
Smyrna, TN 37167

VISA MasterCard

800-251-5008
800-251-2502 (TENNESSEE)
615-459-2636 (TENNESSEE)
615-254-0088 (NASHVILLE)

```
AINT(X+2,57),1,1:NEXTELSENEXT:LI
NE(182,20)-(182,28),PSET:LINE(84
,104)-(220,104),PSET
37 COLOR4,1:FORX=88TO148STEP20:L
INE(X,64)-(X+12,76),PRESET,BF:PA
INT(X+2,65),2,4:LINE(X+6,60)-(X+
6,80),PSET:NEXT:LINE(86,70)-(162
,70),PSET:FORY=64TO88STEP24:LINE
(204,Y)-(216,Y+12),PRESET,BF:PAI
NT(212,Y+1),2,4:LINE(202,Y+6)-(2
18,Y+6),PSET:NEXT
38 LINE(210,60)-(210,102),PSET:F
ORX=92TO128STEP36:LINE(X,84)-(X+
28,100),PRESET,BF:PAINT(X+2,90),
2,4:NEXT:FORY=80TO96STEP4:LINE(8
8,Y)-(160,Y),PSET:NEXT:FORX=98TO
114STEP8:LINE(X,83)-(X,101),PSET
:LINE(X+36,83)-(X+36,101),PSET:N
EXT
39 COLOR3,1:LINE(4,172)-(16,96),
PSET:LINE(48,96)-(60,172),PSET:L
INE(158,172)-(170,104),PSET:LINE
-(194,104),PSET:LINE-(206,172),P
SET:DRAW"BM0,172R48R56R98BR48R50
":PAINT(30,191),3,3:DRAW"BM160,1
04C4R40
40 COLOR2,1:FORX=1TO255:Y=RND(10
)-2:LINE(X,191)-(X,191-Y),PRESET
:NEXT:DRAW"BM136,168U12L8U12R160
12L88R92L8U12R16012L8D12":PAINT(
132,148),2,2:PAINT(226,148),2,2
41 FORX=132TO224STEP92:FORY=148T
0152STEP4:FORW=0TO9STEP2:PSET(X+
W,Y,3):NEXTW,Y,X
42 IFPEEK(32766)=7THENCX=36:CY=1
10ELSECX=180:CY=170
43 A1=0:A2=0:GET(CX,CY)-(CX+3,CY
+3),M
44 IFA1=1THENDRAW"BM16,76C4R3202
0L32U20":PAINT(32,84),3,4:PAINT(
32,78),3,4:PAINT(32,92),3,4
45 IFA2=1THENDRAW"BM179,88C2R701
5L7U15":PAINT(183,90),2,2
46 GOSUB4
47 IFCY<172ANDCX>0AND(CX<173ORCX
>189)THENIFPPOINT(CX-1,CY-1)=1OR
PPOINT(CX+4,CY+4)=1THENCLS:PRINT
@101,"YOU HEAR A DOG BARKING":A3
=A3+1:GOSUB14:ELSEA3=0
48 IFA3>1THENA3=0:PRINT@192,"YOU
 STAYED TOO LONG ON THE GRASSTHE
 INVISIBLE DOG COMES AND EATSYOU
.":IFAC=1THEN243ELSE248
49 SCREEN1,0:IF(CX<84 ANDA1=0 AN
DCY<96)OR(CX>84ANDA2=0ANDCY<104)
THENPUT(CX,CY)-(CX+3,CY+3),M:CY=
CY+4:GET(CX,CY)-(CX+3,CY+3),M
50 IFA2=1ANDCX>172ANDCX<190ANDCY
<104THEN58
51 IFA1=1ANDCX<48ANDCX>12ANDCY<9
6THEN61
52 IF(PEEK(65280)=126ORPEEK(6528
0)=254)THEN53ELSEGOTO46
53 IFCX<48ANDCX>12ANDA1=0ANDCY>9
4ANDCY<100THENA1=1:GOTO44
54 IFCY<172THEN56ELSEIFCY<182AND
CX>126ANDCX<142THENCLS:PRINT@232
,"THE SIGN READS:":PRINT@295,"KE
EP OFF THE GRASS":GOSUB3:GOSUB2:
SCREEN1,0
55 IFCY<182ANDCX>218ANDCX<238THE
NCLS:PRINT@232,"THE SIGN READS:"
:PRINT@290,"BEWARE OF THE INVISI
BLE DOG":GOSUB3:SCREEN1,0
56 IFA2=0ANDCX>172ANDCX<190ANDCY
<107THENA2=1:GOTO45
57 GOTO46
58 CLS0:PRINTSTRING$(32,CHR$(159
));:FORX=30TO34:FORY=31TO1STEP-1
:SET(X,Y,2):NEXTY,X:PRINT@96,"A
TRAP OPENS ";:PRINT@128,"UNDER Y
OU AND";:PRINT@160,"YOU FALL IN
A";:PRINT@192,"DEEP DARK PIT";
59 FORY=1TO31:SET(32,Y,RND(8)):S
OUNDY*8,2:SET(32,Y,2):NEXT:FORX=
31TO34:SET(X,31,4):NEXT:PRINT@14
6,"YOU ARE THE    ";:PRINT@210,"R
ED BLOB      ";:PRINT:GOSUB3:IFAC
=1THEN243ELSE248
60 GOTO46
61 CX=244:CY=180
```

Hint . . .

More Disk For The Money

Disk drive users can save a great deal of money by double-siding their single-sided disks. This can be accomplished by notching the left corner, as is the right, with a sharp razor (and ruler for accuracy). Then (using a ruler again), a hole must be punched opposite the hole already in the disk jacket. Both sides must be done, taking extreme care not to scratch the disk surface. (The jacket may be pulled away from the disk surface far enough to facilitate punching.) A standard hole punch does the job nicely. This hole punch is necessary due to the LED inside the drive which begins reading/writing after touching off a photo-circuit on the opposite side of the disk through the hole.

Dave Raun
Jacksonville, IL

```
62 POKE32766,7:AH=RND(5)-1:SCREE
N1,0:PCLS3:FORW=1TO8:X=RND(18)+1
62:Y=RND(42)+58:PSET(X,Y,2):NEXT
:LINE(220,108)-(228,116),PRESET,
BF
63 COLOR4,3:FORX=0TO1:FORY=0TO1:
LINE(162+12*X,58+22*Y)-(162+12*(
X+1),58+22*(Y+1)),PSET,B:NEXTY,X
:FORY=60TO84STEP24:NEXT:COLOR2,1
:LINE(223,110)-(224,111),PSET,BF
:GET(CX,CY)-(CX+3,CY+3),M
64 GOSUB84
65 IFPEEK(65280)=126ORPEEK(65280
)=254THEN66ELSEGOTO64
66 IFCX>160ANDCX<189ANDCY>54ANDC
Y<102THENCLS3:PRINT@166,"NICE WE
ATHER OUTSIDE";:PRINT@225,"THE F
ULL MOON GIVES A STRANGE";:PRINT
@259,"LOOK TO ALMOST EVERYTHING"
;:GOSUB83:SCREEN1,0:GOTO64
67 IFCX>218ANDCX<230ANDCY>106AND
CY<114THENIFA6=1THENA6=0:GOTO62E
LSE69
68 IFA6=1THEN78ELSE64
69 A6=1:LINE(0,56)-(136,100),PSE
T,BF:FORX=12TO108STEP24:LINE(X,6
4)-(X+20,92),PRESET,BF:CIRCLE(X+
5,84),3,2:NEXT
70 LINE(0,164)-(255,191),PRESET,
BF:LINE(0,163)-(100,128),PSET,BF
:FORX=4TO76STEP24:LINE(X,136)-(X
+20,162),PRESET,BF:CIRCLE(X+4,14
4),3,2:NEXT
71 COLOR4,1:FORY=1TO3:LINE(4,102
+Y)-(100,102+Y),PSET:LINE(4,114+
Y)-(100,114+Y),PSET:NEXT:FORX=14
TO86STEP12:FORY=1TO3:LINE(X+Y,10
4)-(X+Y,116),PSET:IFX=140RX=50OR
X=86THENLINE(X+Y+7,102)-(X+Y+7,1
06),PRESET:NEXTY,X ELSENEXTY,X
72 IFA6=1THEN78ELSEFORX=86TO198S
TEP28:IFX=86ORX=170ORX=198THENCI
RCLE(X,166),14,3:PAINT(X,176),3,
3:CIRCLE(X,166),7,2:PAINT(X,166)
,2,2:A$="BM"+STR$(X):DRAWA$+",16
6C3NU7ND7NE7NF7NG7NH7NR7L7":NEXT
ELSENEXT
73 COLOR2,1:FORX=0TO1:LINE(163+X
,58+X)-(188-X,101-X),PSET,B:LINE
(175+X,58)-(175+X,101),PSET:LINE
(163,79+X)-(188,79+X),PSET,B:NEX
T:LINE(159,100)-(192,104),PSET,B
F
74 DRAW"BM24,168C4R448R36R48BR64
R12BM24,152M92,128NM108,108R8BE8
U12R608M182,114L34ND148L8ND14L26
D14R268R8R54BM222,152R6D108L30BU
4L28
```


DYNAMITE+™

"THE CODE BUSTER"

disassembles any 6809 or 6800 machine code program into beautiful source

- Learn to program like the experts!
- Adapt existing programs to your needs!
- Convert your 6800 programs to 6809!
- Automatic LABEL generation.
- Allows specifying FCB's, FCC's, FDB's, etc.
- Constants input from DISK or CONSOLE.
- Automatically uses system variable NAMES.
- Output to console, printer, or disk file.
- Available for all popular 6809 operating systems.

FLEX™ $100 per copy; specify 5" or 8" diskette.
OS-9™ $150 per copy; specify 5" or 8" diskette.
UniFLEX™ $300 per copy; 8" diskette only.

For a free sample disassembly that'll convince you DYNAMITE + is the world's best disassembler, send us your name, address, and the name of your operating system.

NEW **CoCo OS-9 VERSION**

$59.95

DISASSEMBLES OS-9, FLEX, DOS FILES

Order your DYNAMITE+ today!

See your local DYNAMITE + dealer, or order directly from CSC at the address below. We accept telephone orders from 10 am to 6 pm, Monday through Friday. Call us at 314-576-5020. Your VISA or MasterCard is welcome. Orders outside North America add $5 per copy. Please specify diskette size for FLEX or OS-9 versions.

Computer Systems Center
13461 Olive Blvd.
Chesterfield, MO 63017
(314) 576-5020

CSC

UniFLEX software prices include maintenance for the first year.

DYNAMITE + is a trademark of Computer Systems Center.

FLEX and UniFLEX are trademarks of TSC.
OS-9 is a trademark of Microware and Motorola.

Dealer inquiries welcome.

MasterCard VISA

```
75 CIRCLE(32,175),24,4,1,.63,.7:
CIRCLE(24,144),16,4,1,.05,.3:CIR
CLE(36,144),28,4,1,.32,.4:CIRCLE
(100,120),8,4,1,0,.25:CIRCLE(86,
180),22,4,1,.6,.9:CIRCLE(170,180
),22,4,1,.6,.75:CIRCLE(198,180),
22,4,1,.75,.9 :CIRCLE(145,255),8
B,4,1,.81,.96
76 PAINT(24,164),4,4:PAINT(24,15
6),2,4:COLOR2,1:LINE(114,113)-(1
41,129),PSET,8:DRAW"BM179,113C2L
33D16R5B":PAINT(226,154),4,4
77 CIRCLE(64,168),20,3,1,.5,.75:
CIRCLE(64,168),24,3,1,.5,.75:DRA
W"BM40,168C3R4BM64,148R158H4L152
":PAINT(210,145),3,3:CIRCLE(145,
255),88,4,1,.81,.96:PAINT(44,165
),3,3:DRAW"BM110,168U5BR34D58":C
L=RND(5):DRAW"BM114,13BC2R8D1L8D
1R8"
7B IFCX<125ANDCX>111ANDCY>134AND
CY<142THEN79ELSEGOTO80
79 IFA7=1ANDAG=0THENB9ELSECLS7:P
RINT@230,"THIS DOOR IS LOCKED";:
GOSUB2:SCREEN1,0
B0 FORX=14TO110STEP24:IFCX>=X AN
DCX<X+BANDCY<87ANDCY>79THENPAINT
(CX+9,CY),3,2:CIRCLE(X+3,84),3,3
:GET(CX,CY-4)-(CX+3,CY-1),M:GOTO
81ELSENEXT:GOTO64
81 X=12+24*AH:IFA7=0ORAG=1THEN82
ELSEGOTO64
82 IFCX>X ANDCX<X+18THEN83ELSEGO
TO64
83 IFAR=0ANDAG=1THENGOTOB8ELSEIF
AR=0THENFORW=X+4TOX+16STEP4:FORY
=68TO88STEP4:PSET(W,Y,RND(2)*2):
NEXTY,W:GOSUB82:CLS3:PRINT@96,"TH
ERE IS A PANEL FILLED WITH REDAN
D YELLOW KEYS":PRINT"DO YOU WANT
 A KEY (Y/N)";ELSEGOTO64
84 INPUTA$:IFA$="Y"THEN85ELSESCR
EEN1,0:GOTO64
85 PRINT@327,"WHAT COLOR (Y/R)";
:INPUTZ$:A7=1:IFZ$="R"THENCLS:A6
=0:FORY=1TO10:PRINT@234,"***ALAR
M***":FORW=1TO200STEP25:SOUNDW,1
:NEXTW:PRINT@234,"***alarm***":N
EXTY:CLS:PRINT"THE INVISI8LE DOG
 COMES AND EATSYOU.":IFAC=1THEN2
43ELSEGOTO248
86 IFZ$<>"Y"THEN85
87 SCREEN1,0:GOTO64
88 CLS:X=RND(2000):PRINT:PRINT"Y
OU FIND"X"GOLD COINS":G=G+X:GOSU
B241:AR=1:GOTO64
89 IFPEEK(32767)<>7THENA5=1:AUDI
OON:MOTORONELSEA5=1
90 AU=0:A7=0:A8=1:C5=0:CB=0:PX=1
04:PY=161:TX=156:T=0
91 IFC8=0THENZ1=3:Z2=2:GOTO94ELS
EZ1=2:Z2=3:IFTX>92THENCLS:PRINT:
PRINT"YOU FORGOT TO TURN THE MOT
OR OFFWHEN YOU LEFT THE CAR.  YO
U ARE LUCKY THERE IS SOME GAS LE
FT. BECAREFUL NEXT TIME":GOSUB3:
GOTO94ELSEGOTO92
92 CLS:PRINT:PRINT"YOU LEFT THE
CAR WITHOUT TURNINGTHE MOTOR OFF
. IT RAN OUT        OF GAS
   ":PRINT:PRINT"the game is ove
r":GOTO249
93 IFCB=1THENZ1=2:Z2=3
94 A6=0:PCLS1:SCREEN1,0:AE=0:DRA
W"BM24,24C3M0,108R255M232,248M20
8,0L160":CIRCLE(52,27),28,3,1,.5
2,.73:CIRCLE(204,27),28,3,1,.77,
.98:PAINT(0,26),4,3:PAINT(255,26
),4,3
95 A$="R28D20L28U20":DRAW"BM4,12
0"+A$+"8M72,120"+A$+"8M116,120"+
A$+"BM160,120"+A$+"BM224,120"+A$
:COLOR3,2:LINE(92,144)-(168,152)
,PSET,8:LINE(TX,144)-(TX,152),PS
ET:PAINT(166,150),3,3:LINE(100,1
60)-(160,188),PSET,B:LINE(10,164
)-(48,176),PSET,B
96 LINE(208,164)-(228,176),PSET,
8:LINE(230,164)-(250,176),PSET,8
:PAINT(120,1),3,3:PAINT(0,109),4
,3:COLORZ1,Z2:LINE(208,164)-(228
,176),PSET,B:LINE(230,164)-(250,
176),PRESET,B
97 DRAW"BM28,132C3U4L12U4M-8,+6M
+8,+6U4R12BM228,132U4R12U4M+8,+6
M-8,+6U4L12":PAINT(27,129),3,3:P
AINT(230,130),3,3:DRAW"BM80,136U
12R10F2D2G2L10M92,136BR32R10E2U2
H2L8H2U2E2R108R32R10F2D8G2L10U12
":C$="U4R2F1D2G1L2BR7":A$="BR1H1
U2E1R1F1D2G1L2BR7
98 B$="U4R4D2L4F1M+2,+1R1":DRAW"
BM17,172"+C$+"8R1"+A$+"BL1"+A$+B
$+"S4"
99 AT=1:DRAW"BM213,172S5"+A$+"S4
U4F4NU4BR8"+A$+"8L1U2NR2U2R3BR3N
R3D2NR2D2BM88,152C1L4U4NR4U4R4BM
172,152U4NR4U4R4":IFPEEK(32767)<
>7ANDA5=1ANDAN=0THENFORX=1TO4400
0:NEXT:FORX=1TO25:SOUNDRND(255),
1:NEXT:AN=1:POKE32767,7:AUDIOOFF
:MOTOROFF:GOTO103
100 IFA5=1THEN103
101 DRAW"8M22,32C1R210M255,10BBL
255M22,32BM3,96M12B,32M253,96":P
AINT(118,35),1,1:PAINT(138,35),1
```

PRO-COLOR-SERIES

©1984 BY DERRINGER SOFTWARE, INC.

NOBODY, BUT NOBODY HAS DONE IT LONGER AND BETTER THAN US!

A fully intergrated series of programs that offers a full range of information tracking capability.

PRO-COLOR-FILE *Enhanced* $79.95

This is the main link in the series. With PRO-COLOR-FILE, you can design a full featured database that is custom tailored to your needs. Its ability to allow the user to custom define formats is unmatched by anything else on the market. A full range of features for information handling is available for any application you might have:

- *60 Data Fields for storing data*
- *1020 bytes capacity per record*
- *Variable record length capability*
- *Multi-drive drive ability*
- *Allows maximum system storage*
- *4 Custom designed screen formats*
- *28 Equation lines (+ - * /)*
- *8 Custom designed report formats*
- *Send reports to printer or screen*
- *Summarize file by groups of records*
- *Column totals and averages*
- *Posting routine performs file wide calculations and updates fields*
- *6 Custom designed mailing label formats*
- *Custom designed menus for selection of reports and label formats*
- *Selectable password protection for data entry screens and reports*
- *Sort any size file*
- *3 level sort capability*
- *Select options for sorting or reporting sub-sets of a file*
- *Duplicate records and fields*
- *Cursor controlled text editing*
- *Fast record selection via indexing*
- *Global file searching*

As a database is created, all of the formats are stored in a file which means you won't have to enter it each time you want to print a report or label. Once your database is up and running, you can install a limited menu that will lead even the most timid user through the program. Since menu selection of report formats are custom made, you'll know exactly which format does what.

PRO-COLOR-FILE is also supported by a NATIONAL USERS' group. Their quarterly newsletter is packed with ideas for using PRO-COLOR-FILE to its fullest. A listing of database programs that have already been created is also provided for comparing notes with other users. Useful database information such as magazine articles are available on a data disk for use on your own system.

Think about it, how can a program exist for over a year and a half, be sold in every state and overseas, and have the support of a national users' group? Simple, it's that good!

PRO-COLOR-FORMS** $39.95

This is the second link in the series. PRO-COLOR-FORMS offers the ability to merge data files with text files. Just imagine being able to place the data you enter with PRO-COLOR-FILE anywhere on a sheet of paper, either by itself or within an external source of text, then you'll have the picture. This means you could write a general letter to a list of people but have each one custom printed with their name and address. You can pre-enter checks into a data base and then have the checks printed on form-feed checks. You might even use form-feed statements for sending out to customers at the end of each month. All of the parameters can be modified to indicate just what size "page" you need for any application:

- *6 Menu Selectable formats*
- *Page width from 40 to 133 characters*
- *Lines per page from 7 to 66*
- *Supports printer control codes*
- *Converts any ASCII file for use*
- *Prints multiple copies*
- *Interfaces with PRO-COLOR-FILE*
- *Password protection*

If you need to generate forms from your data files then chances are you can do just that with PRO-COLOR-FORMS. Form letters, billing statements, index cards, or even post cards can be used easily.

PRO-COLOR-DIR** $24.95

The latest addition to the series is a utility for organizing disk directories into one nice listing. PRO-COLOR-DIR reads the directory of a diskette and then stores valuable information about each program into a master data file. This data file can then be accessed by PRO-COLOR-FILE for sorting, searching and reporting. PRO-COLOR-DIR will create a record for each filename on a diskette and store the following information about each one:

- *Diskette ID name*
- *Date diskette was created*
- *Last date diskette was updated*
- *Filename and extension*
- *File type (BASIC, ML Text, Data)*
- *Number of Grans allocated*
- *Number of sectors allocated and used*
- *Machine Language program addresses*

PRO-COLOR-DIR allows for hardcopies of a single diskette's files and has a versatile label printing routine. A global replace function can re-store a diskette's files with deleted files being removed or new ones appended automatically.

PRO-COLOR-FORMS & PRO-COLOR-DIR Require PRO-COLOR-FILE to be used

Requires 32K Disk Basic

Give your Color Computer a Masters Degree in Business.

	SALE
PRO-COLOR-FILE *Enhanced*	$79.95
PRO-COLOR-FORMS	$39.95
PRO-COLOR-DIR	$24.95
ALL THREE PROGRAMS	$124.95 *(Best Value)*

Checks
Money Order
Visa
Master Card
COD
Add $3.00 for Shipping & Handling
Over seas add $15.00

Derringer Software Inc., P.O. Box 5300, Florence, S.C. 29502 — (803) 665-5676 9 a.m. - 5 p.m.

Note: All of our programs have registration cards - If you've purchased one from another dealer, then you should be registered with us. If not, send your name, program ID# and where the program was purchased. We want to keep you informed about changes.

PETROCCI FREELANCE ASSOCIATES

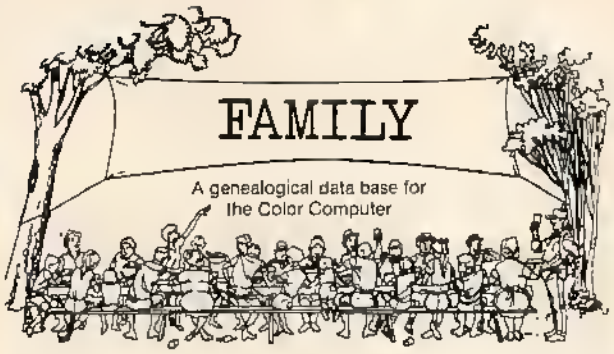

Maintains data on 255 people in first eight generations of your family tree. Prints 3 charts; 5 generation pedigree - graphic display of lineage; Family group charts; ancestors by reference number. Easy to use.
32K EXT 14.95

Inspector Clueseau

- **INSPECTOR CLUESEAU**
  The No. 1 Murder Mystery for the CoCo!
  (Every game is different.) 32K EXT 19.95

ASTRO CAST

ASTROLOGY MADE FAST & SIMPLE
Data files saved on each chart. (Makes record keeping easy and provides instant access to data).

Quick calc routine calculates planet positions to .5 min. accuracy.

Precision calc routine provides *exact* figures necessary for planets on cusps & wide orb aspects.

Calculates Ascendant, Midheaven, NODE



Calculates Equal & Placidian house systems.

Formatted printout of all data.

Graphic screen display of chart. Dumps to LPVII/DMP100 printers.

Written by Professional Astrologer

Excellent documentation & after purchase support.

32KT - 29.95 32KD - 34.95

BOWLING SECRETARY

(New Super Second Edition)

Now includes handicap routines for both men and women, pin spotting, selection of up to 15 players per team, plus the standard team standings, individual average, high and total pins, team won/lost, high series, cumulative total team points.

Printer Output & Screen Display

32K EXT - 24.95 Std. 16K Version Still Available

WEATHER PRO

Over 4 years of research and testing are behind this program. Provides accurate area-specific forecast for current day, next day, and following day. Also gives deviance from the norm. Attractive printout for future reference. Well documented.

32KT - 24.95 32KD - 29.95

Voice synthesized version compatible with colorware's Real Talker. 32KT - 29.95 32KD - 34.95

Statistical Analysis
32K EXT 2 Programs for 34.95

Stress Evaluator
16K EXT 24.95

Medical Terminology
32K EXT 19.95

Heart Lung Circulatory
32K EXT 34.95

Weather Forecaster
32K EXT DISK 19.95

Weather Watch
16K EXT 24.95

Hurricane Tracker
16K EXT 15.95

Print Spooler
64K 11.95

Master Graphics Tool Kit
32K EXT 39.95

Text Master Graphics
32K EXT 19.95

Super Disk Utility
32K EXT DISK 44.95

Real Estate Investment
16K EXT 24.95

Homeowner Selling Analysis
16K EXT 24.95

Owner Financed Real Estate
16K EXT 24.95

KIDS KORNER
Preschool Package, ABCs, 123s, Shapes, Big-Bigger All Four 24.95
Guillotine Spelling Game 16K EXT 9.95
Alphabet Song 16K EXT 11.95

All Programs 16K Tape
Unless Otherwise Specified
All Programs Available on Disk - Add $5.00
Special Sale Prices - Retail Only

Include $1.50 for handling for each program
Arizona residents add 7% sales tax
Quantity Discounts to Dealers

PETROCCI FREELANCE ASSOCIATES
651 N. Houghton Rd.
Tucson, AZ 85748
602-296-1041

```
,1:FORW=1TO2Ø:X=RND(2ØB)+24:Y=RN
D(31):IFPPOINT(X,Y)=3THENPSET(X,
Y,2):NEXTELSENEXT
1Ø2 COLOR3,2:LINE(122,1ØB)-(12B,
32),PRESET:LINE-(134,1ØB),PRESET
:LINE-(122,1ØB),PRESET:PAINT(12B
,1ØØ),2,2:COLOR4,3:LINE(Ø,Ø)-(25
5,191),PSET,B
1Ø3 COLOR3,2:SCREEN1,Ø:AP=1:GOSU
B5:IFTX<92THENCLS:PRINT:PRINT"YO
U RAN OUT OF GAS":PRINT:PRINT"th
e game is over":GOTO249
1Ø4 IF(PEEK(6528Ø)=126ORPEEK(652
8Ø)=254)THEN1Ø5ELSE122
1Ø5 IFCY<176ANOCY>162THEN1Ø6ELSE
11Ø
1Ø6 IFAQ=1ANOCX>8ANDCX<47THENC6=
1:GOTO232
1Ø7 IFCX>2Ø6ANDCX<227ANDC8=ØTHEN
CB=1:LINE(2ØB,164)-(228,176),PRE
SET,B:LINE(23Ø,164)-(25Ø,176),PS
ET,B
1Ø8 IFCX>23ØANDCX<251ANDC8=1THEN
CB=Ø:LINE(2ØB,164)-(22B,176),PSE
T,B:LINE(23Ø,164)-(25Ø,176),PRES
ET,B:C5=Ø
1Ø9 GOTO1Ø3
11Ø IFCB=ØORAQ=1THEN1Ø3
111 IFCX>158ANOCX<187THENC5=1:IF
A5=1THENCLS:AS=1:AU=1:A7=Ø:AT=Ø:
A6=Ø:AG=Ø:PRINT:PRINT"YOU CRASHE
O INTO THE WALL OF THEGARAGE.":G
OSUB2:IFAC=1THEN243ELSECLS:GOTO2
4B
112 IFCX>7ØANOCX<99THENC5=ØELSEG
OTO115
113 IFA5=1THENCLS:PRINT:PRINT"YO
U ARE OUT OF THE GARAGE":GOSUB2:
A5=Ø:GOTO114ELSECLS:PRINT:PRINT"
YOU CAN'T GO BACKWARO ON THE
ROAO.":GOSU83:SCREEN1,Ø:GOTO1Ø1
114 PRINT:PRINT"THE CAR IS PROGR
AMMEO TO GET YOUOUT OF TOWN AUTO
MATICALLY. IT   THEN STOPS ANO W
AITS FOR YOUR   INSTRUCTIONS.":G
OSUB3:GOSUB2:SCREEN1,Ø:GOTO1Ø1
115 IFCX<144ANOCX>114THENC5=Ø
116 IFC5=ØTHEN1Ø3
117 IFCX<31ANDCX>2ANDC5=1ANOC8=1
THENC1=1ELSEIFCX>222ANDCX<251AND
C5=1ANOC8=1THENC2=1
11B IFC1=1THENIFAA=1THENR=RG:GOT
O13ØELSEIFC1=1ANOC5=1THEN121
119 IFC2=1THENIFAB=1THENR=RD:GOT
O13ØELSEIFC2=1ANDC5=1THEN121
12Ø GOTO123
121 FORX=1TO1Ø:SCREEN1,1:SOUND1,
2:SCREEN1,Ø:SOUNO2ØØ,2:NEXT:CLS:
PRINT:PRINT"YOU TURNED WHEN THER
E WAS NO   SIDE ROAO SO YOU ENT
EREO THE   FIELOS AT HIGH SPEEO
 ANO LOST   CONTROL OF THE CAR":
AS=1:C1=Ø:C2=Ø:AU=1:A7=Ø:AT=Ø:A6
=Ø:AG=Ø:GOTO243
122 IFC5=ØORAQ=1THEN1Ø3
123 T=T+2:COLOR3,1:IFAB=1THENLIN
E(SO,YO)-(XD,YO),PRESET:SD=SD+.5
:XD=XO+4:YO=YO+2:IFXO>25ØTHENPUT
(235,4)-(252,2Ø),C:AB=ØELSELINE(
SO,YD)-(XO,YD),PSET:GOTO125
124 X=RNO(2Ø):IFX=1ØTHENX=RND(1Ø
):IFX=RG THEN125ELSEGOSUB229:ORA
W"BM235,2ØC2"+L$:RD=X:AB=1:XD=12
B:YO=32:SO=233
125 COLOR3,1:IFAA=1THENLINE(SG,Y
G)-(XG,YG),PRESET:SG=SG-.5:XG=XG
-4:YG=YG+2:IFXG<4THENPUT(4,4)-(2
Ø,2Ø),C:AA=ØELSELINE(SG,YG)-(XG,
YG),PSET:GOTO127
126 X=RNO(2Ø):IFX=1ØTHENX=RND(1Ø
):IFX=RO THEN127ELSEGOSUB229:ORA
W"BM4,2ØC2"+L$:RG=X:AA=1:XG=128:
YG=32:SG=22
127 PUT(PX,PY)-(PX+3,PY+3),A1:PX
=PX+4:IFPX>157THENPX=1Ø4:PY=PY+4
:IFPY>184THENPY=161
12B PUT(PX,PY)-(PX+3,PY+3),A2
129 GOTO1Ø3
13Ø GOTO232
131 SCREEN1,1:PCLS5:CIRCLE(12B,9
6),125,6,.75:PAINT(Ø,Ø),6,6:COLO
R6,7:LINE(Ø,176)-(255,176),PSET,
BF:PAINT(128,177),6,6:LINE(32,16
B)-(224,175),PRESET,BF
132 BR$="BE4E12F4G16U7"
133 ORAW"BM4Ø,168S4CBU132BE12R52
8F12Ø132L748M6Ø,34R32BD24L32":CI
RCLE(5Ø,35),12,8,1,.5,.75:CIRCLE
(1Ø6,35),12,8,1,.75,1:CIRCLE(6Ø,
46),12,8,1,.25,.75:CIRCLE(92,46)
,12,B,1,.75,.25:PAINT(41,167),B,
B:LINE(6Ø,4Ø)-(92,44),PSET,BF:PA
INT(44,167),8,B
134 LINE(6Ø,48)-(92,52),PRESET,B
F:ORAW"BM112,6ØC7"+BR$:PAINT(12Ø
,56),7,7:LINE(4B,72)-(1Ø4,14B),P
SET,BF:DRAW"BM1Ø4,148C5L56M76,72
M1Ø4,148":PAINT(76,76),5,5:CIRCL
E(76,13Ø),14,7:PAINT(76,13Ø),7,7
135 CX=126:CY=1B2:GET(CX,CY)-(CX
+3,CY+3),M:AD=RNO(2):IFAD=1THENO
RAW"BM132,167CBS7"+BO$+"S4":PAIN
T(136,163),8,8:PAINT(187,122),7,
B
136 IFOW=ØTHEN138ELSECLS:PRINT:P
RINT"YOU OWE"OW"COINS":PRINT:IFO
W<G THENG=G-OW:OW=Ø:PRINTTAB(8)"
THANK YOU!":GOSUB3:SCREEN1,1:GOT
```

```
0138
137 PRINT"YOU DO NOT HAVE ENOUGH
 MONEY TO PAY YOUR DEBT. WE TAKE
 WHAT YOU HAVE AND YOU WILL HAVE
 TO COME  8ACK TO GET GAS.":OW=O
W-G:G=Ø:GOSU83:GOSUB2:GOTO131
138 GOSU84:SCREEN1,1:IFPEEK(6528
Ø)=126ORPEEK(6528Ø)=254THEN139EL
SEGOTO138
139 IFCX>12ØANDCX<13ØANDCY>41AND
CY<56THENPUT(CX,CY)-(CX+3,CY+3),
M:DRAW"8M112,6ØS4C5"+8R$:PAINT(1
2Ø,56),5,5:DRAW"8M112,6ØA1C7"+8R
$:PAINT(12Ø,69),7,7:FORX=1TO25:S
OUND24Ø,1:SOUND255,2:NEXT:CLS8:P
RINT@229,"YOUR TANK IS NOW FULL"
;:ELSE142
14Ø W=166-TX:TX=166:PRINT@288,W"
LITERS * 15 COINS/LITER":PRINT"T
OTAL COST:"W*15"COINS":GOSU83:IF
G-W*15<ØTHENPRINT@384,"YOU HAVE
ONLY"G"COINS, SO YOU  OWE"A8S(G
-W*15)"COINS":OW=A8S(G-W*15):G=Ø
:GOSUB3:ELSEG=G-W*15:GOTO141
141 SCREEN1,1:DRAW"BM112,6ØC5"+8
R$:PAINT(12Ø,69),5,5:DRAW"8M112,
6ØA0C7"+8R$:PAINT(12Ø,56),7,7:CO
LOR8,6:LINE(116,52)-(116,78),PSE
T:PAINT(114,64),8,8
142 IFAD=1ANDCX>134ANDPPOINT(CX-
1,CY-1)=8ANDPPOINT(CX+4,CY+4)=8T
HENGOSU8237:SCREEN1,1:GOTO138ELS
E138
143 R=RND(4):PCLSR:SCREEN1,Ø:CX=
12B:CY=96
144 V=RND(4):IFV=R THEN144ELSECO
LORV,R:LINE(Ø,Ø)-(3,3),PSET,8F:G
ET(Ø,Ø)-(3,3),D
145 Z=RND(4):IFZ=R ORZ=V THEN145
ELSEPAINT(1,1),Z,R:GET(Ø,Ø)-(3,3
),E
146 FORX=ØTO255STEP8:FORY=ØTO188
STEP8:IFINT(Y/8)-Y/8=ØTHENPUT(X,
Y)-(X+3,Y+3),D:NEXTY,X
147 W=RND(4):IFW=R ORW=V ORW=Z T
HEN147ELSEFORZ=1TO5:X=RND(215)+2
Ø:Y=RND(151)+2Ø:CIRCLE(X,Y),2Ø,W
:PAINT(X,Y),W,W:SOUND2ØØ,3:NEXT
148 CX=RND(251):CY=RND(187):IFPP
OINT(CX-1,CY-1)=W ORPPOINT(CX+4,
CY+4)=W THEN148ELSEGET(CX,CY)-(C
X+3,CY+3),M
149 X=RND(249)+1:Y=RND(185)+1:GE
T(X,Y)-(X+3,Y+3),F:PUT(X,Y)-(X+3
,Y+3),E:ZZ=RND(28):FORV=1TOZZ:GO
SU84:IFPPOINT(CX-1,CY-1)=W ORPPO
INT(CX+4,CY+4)=W THENGOSU82:CLS:
GOTO243ELSEIFCX<X+4ANDCX>X-4ANDC
```


COLOR COMPUTER Buyers Club

- Members enjoy a 25-40% savings on software!
- Over 500 programs from 38 companies to choose from!
- More software constantly being added!
- Hardware & accessories at substantial savings!
- Special order service for members!
- No service charge for VISA or MC!
- Your savings can far exceed your dues!

Join Today and Start Saving!

Dues are $24.50 - We accept Personal Checks, M.O. or Charge It!

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

☐ VISA ☐ MC _____

Exp. Date _____ Bank # _____ (MC only)

Mail to: **Color Computer Buyers Club**
P.O. Box 241
Eaton Rapids, MI 48827

ATTENTION CANADIAN DEALERS!

Kelly Software Distributors Ltd. manufactures and distributes software to over 100 stores throughout Canada for the following firms: Aardvark, Bob Van Der Poole, Cer-comp, Cheshire Cat, Chromasette, ColorQuest, The Computer House, Computerware, Double Density, Dr. Preble's Programs, DSL Products, Elite, Jarb, Mark Data Products, Michtron, Moreton Bay, Petrocci Freelance, Prickly-Pear, Rainbow Connection, Rainbow on Tape, Shooting Star, Silverware, Softlaw, Spectral Associates.

To provide complete dealer support, Kelly Software can guarantee fast delivery of over 500 products to anywhere in Canada. We also provide an excellent opportunity for software authors and publishers to have their products distributed to stores across Canada. Call or write immediately for further details and your free catalogue.

Kelly Software Distributors Ltd.
P.O. Box 11932
Edmonton, Alberta
T5J 3L1
(403) 421-8003

```
Y<Y+4ANDCY>Y-4THEN151ELSENEXT:PU
T(X,Y)-(X+3,Y+3),F
150 IFAF=1THENAF=0:SCREEN1,0:GOT
0149ELSEAF=1:SCREEN1,1:GOTO149
151 PCLS6:SOUND132,16:DRAW"BM160
,64C7"+B0$:PAINT(162,25),7,7:PAI
NT(162,62),B,7:SCREEN1,0
152 GOSUB4:IFPPOINT(CX-1,CY-1)=3
ANDPPOINT(CX+4,CY+4)=3AND(PEEK(6
52B0)=126ORPEEK(652B0)=254)THENG
OSUB237ELSE152
153 GOSUB4:GOTO153
154 PCLS5:R=RND(3)+5:SCREEN1,1
155 V=RND(3)+5:IFV=R THEN155ELSE
FORZ=1TO29:W=RND(15)+10:X=RND(25
5):Y=RND(191):SOUND1,1:CIRCLE(X,
Y),W,V:PAINT(X,Y),V,V:NEXT:X=RND
(232)+10:Y=RND(16B)+10:CIRCLE(X,
Y),15,R:PAINT(X,Y),R,R
156 X$=STR$(X-6):Y$=STR$(Y+6):DR
AW"BM"+X$+","+Y$+"S1C5"+B0$+"S4"
:PAINT(X-4,Y+4),R,5
157 CX=RND(251)+1:CY=RND(1B7)+1:
IFPPOINT(CX-1,CY-1)=V OR PPOINT(
CX+3,CY+3)=V THEN 157 ELSEGET(CX
,CY)-(CX+3,CY+3),M:PUT(CX,CY)-(C
X+3,CY+3),A1
15B GOSUB4:PUT(1,1)-(4,4),M:IFPP
OINT(1,1)=V OR PPOINT(4,4)=V THE
NGOSUB2:CLS:GOTO243ELSEIFPPOINT(
CX-1,CY-1)=R OR PPOINT(CX+4,CY+4
)=R THENGOSUB2:GOSUB237:GOTO15BE
LSE15B
159 CLS3:IFAV<>1THENPRINT@192,"
IT IS NOT POSSIBLE TO TURN ON
THAT ROAD, A POLICEMAN ASK YOU
TO GO BACK ON THE MAIN ROAD.":AV
=AV+1:GOSUB3:C1=0:C2=0:SCREEN1,0
:GOTO103ELSE234
160 AV=AV+1:CLS:PRINT:PRINT"THE
POLICEMAN HAS FALLEN ASLEEP. DO Y
OU WANT TO GO ON (Y/N)";:INPUTA$
:IFA$="Y"THEN161ELSEIFA$="N"THEN
94ELSE160
161 X=RND(3):IFX=2THEN163ELSECLS
:PRINT"YOU GO ON THE ROAD FOR A
WHILE. SUDDENLY, YOU HEAR A STRA
NGE     NOISE.":FORX=255TO150STEP
-1:SOUNDX,1:NEXT:CLS5:SOUND1,19:
CLS:PRINT"SOMETHING HITTED YOUR
CAR WHICH EXPLODED. YOU ARE BADL
Y INJURED.
162 AU=1:PRINT"THIS IS A TESTING
 GROUND FOR NEWWEAPONS.":GOSUB3:
GOTO243
163 X=RND(10000):CLS:PRINT"YOU C
OME TO THE SCENE OF AN      ACCID
ENT WHICH SEEMS TO HAVE     TAKEN
```


PARALLEL PRINTER INTERFACE

FOR THE RADIO SHACK COLOR COMPUTER

* Runs any parallel printer from the Color Computer serial I/O port.
* No hardware modifications or software patches needed. Works with all standard Color Computer commands including graphics.
* Switch selectable baud rates from 300 to 9600.
* All cables and connectors included.
* 1 year warranty.
* Most printers supply power at the parallel port. With these printers you may order your interface without the power module.
  (Printers known to require the power module are:
  Epson, Panasonic, and Mannesmon Tolly.)
* PRICE: Model CCP-2 with modem connector & switch------ $84.
  Model CCP-1 without modem connector & switch----$69.
  Either model without power module deduct-------- $3.
  Shipping costs included in price.
  Michigan residents add 4% sales tax.

CCP-2

CCP-1 OWNERS

UPGRADE YOUR CCP-1 TO A CCP-2 !!

Send us your CCP-1 plus $17 (includes shipping) we will add the necessary cable and switch.

BOTEK INSTRUMENTS

313-739-2910 4949 HAMPSHIRE, UTICA, MICH., 48087 Dealer inquiries invited

```
 PLACE ABOUT AN HOUR AGO. ACAR I
S STILL BURNING. NEAR IT ANARMY
TRUCK IS LYING ON ONE SIOE,DOORS
 OPEN. IT IS FILLED WITH  BAGS.
":G=G+X:Z1=2:Z2=3:AA=0:A8
164 PRINT"A FEW SOLDIERS ARE AWA
Y IN THE  FIELDS, LOOKING ON THE
 GROUNO ATSOMETHING YOU OO NOT S
EE. YOU  GRAB ONE OF THE BAGS A
NO GO AWAYWITH IT. WHILE ORIVING
 BACK TO  THE MAIN ROAO, YOU OPE
N IT AND  FINOS THAT IT CONTAINS
"X:PRINT@44B,"GOLO COINS:
165 PRINT@4B0,"PRESS <ENTER> TO
GO ON.";:IFINKEY$=""THEN165ELSEC
LS:GOSUB8241:GOTO94
166 CLS5:PRINT@448,"IT IS SNOWIN
G SO MUCH THAT YOU  CAN'T SEE.":
GOSUB83
167 IFS=0THENPRINT"OO YOU WANT T
O (1)-COME BACK ON THE MAIN ROAD
   (2)-STAY ON THIS ROAO";:INPUTX
:IFX=1THENAA=0:AB=0:C1=0:C2=0:C5
=1:GOTO93ELSEIFX<>2THEN167
168 CLS5:PRINT@416,"THE CAR IS S
TUCK IN THE SNOW ANOCANNOT MOVE
ANYMORE. OO YOU WANTTO USE A BAG
 OF SALT TO MELT THESNOW ANO FRE
E YOU (Y/N)";:INPUTA$:IFA$="Y"TH
EN169ELSEIFA$="N"THEN171
169 IFS>0THENS=S-1:PRINT"IT WORK
EO, YOU ARE NOW MOVING":GOSUB83:G
OTO172
170 PRINT:PRINT"YOU OO NOT HAVE
A BAG OF SALT":GOSUB3:GOSUB8241
171 AA=0:A8=0:C5=0:CB=0:CLS5:PRI
NT@0,"AFTER LONG HOURS OF FREEZI
NG,   YOU FALL ASLEEP.":GOSUB83:G
OSUB83:GOTO243
172 X=RNO(10):IFRS(X)=3ORRS(X)=6
THEN172ELSEC6=1:C8=0:GOTO234
173 AG=1:GOTO31
174 R=RNO(3)+5:V=RNO(3)+5:IFV=R
ORV=7THEN174ELSEPCLS5:SCREEN1,1:
COLORV,R:U=0:FORZ=1TO35
175 X=RNO(252):Y=RND(18B):W=RNO(
100)+Y:IFW>188OR(X>234ANO Y<16)T
HEN175ELSELINE(X,Y)-(X+4,W),PSET
,BF:NEXT:FORZ=1TO25
176 Y=RND(187):X=RNO(245):IFX>23
4OR Y<16THEN176ELSELINE(X,Y)-(X+
10,Y+4),PSET,8F:NEXT:W=0
177 W=W+1:IFW=V ORW=R THEN177ELS
ECOLORW,R:DRAW"8M240,16C7S1"+80$
+"S4":PAINT(250,6),8,7:PAINT(242
,14),7,7:CX=4:CY=1B5:GET(CX,CY)-
(CX+3,CY+3),M:TIMER=0
178 PUT(CX,CY)-(CX+3,CY+3),M:SX=
CX:TY=CY:GET(SX,TY)-(SX+3,TY+3),
D:GOSUB4:IFPPOINT(CX-1,CY-1)=V O
R PPOINT(CX+4,CY+4)=V THENPUT(CX
,CY)-(CX+3,CY+3),M:PUT(SX,TY)-(S
X+3,TY+3),O:CX=SX:CY=TY:GET(CX,C
Y)-(CX+3,CY+3),M:PUT(CX,CY)-(CX+
3,CY+3),A2
179 IFTIMER>1200THENLINE(U,0)-(U
,191),PRESET:U=U+4:IFCX+4<U ORU>
252THENGOSU82:CLS:GOTO243ELSEIFU
>12BTHENU=U+2
180 IFCX>236ANOCY<16AND(PEEK(652
B0)=126ORPEEK(65280)=254)THENGOS
U8237
181 GOTO178
182 PCLS4:SCREEN1,0:ORAW"BM240,1
6C3S1"+80$+"S4":PAINT(250,6),3,3
:PAINT(242,14),1,3:CX=1:CY=1BB:G
ET(CX,CY)-(CX+3,CY+3),M:COLOR2,1
1B3 GOSUB84
1B4 X=RNO(255):Y=RNO(191):W=RND(
255):Z=RNO(191):IF(X>236ANOY<16)
OR(W>236ANOZ<16)THEN184ELSELINE(
X,Y)-(W,Z),PSET:SOUNDRND(255),2
185 IFCX>236ANOCY<16THEN189
1B6 FORU=CX TOCX+3:FORV=CY TOCY+
3:IFPPOINT(U,V)=2THENGOSUB2:SCRE
EN0,0:FORUE=0TO9:CLS(UE):SOUNORN
D(255),2:NEXT:GOTO188
187 NEXTV,U:GOTO189
1B8 CLS:PRINT:PRINT"YOU HAVE BEE
N HIT.  YOU ARE VERYWEAK ANO UNA
BLE TO GO ON.":GOSUB2:GOTO243
189 IFPEEK(652B0)=126ORPEEK(652B
0)=254THENGOSUB237:GOTO183ELSE1B
3
190 CLS:PLAY"EEEC":FORX=0TO351:P
RINT@X,CHR$(RNO(117)+128):NEXT:I
FAM=0THENAL=RNO(5000)+5000:AM=1
191 IFC8=1THENTX=TX-3
192 PRINT@352,"YOU HAVE FOUNO US
. DO YOU HAVE  "AL"GOLO COINS, T
HE ELIXIR ANOTHE BAG OF SALT?
193 A$=INKEY$:X=RNO(351):PRINT@X
,CHR$(RND(117)+128);:IFA$="N"THE
N206ELSEIFA$="Y"THEN194ELSE193
194 PRINT@352,"":IFG>=AL ANDS>=1
THENIF8>=1THEN200ELSEIF8P>=1THEN
199
195 PRINT@384,"YOU ARE A LIAR. Y
OU OO NOT HAVE ENOUGH";:IFG<AL T
HENPRINTTAB(11)"GOLO
196 IF8=0THENPRINTTA8(11)"ELIXIR
197 IFS<1THENPRINTTA8(11)"SALT
198 GOSUB3:CLS:GOSU8241:GOTO91
199 PRINT@352,"THE 80TTLE YOU HA
VE CONTAINS A  GREEN LIQUIO WHIC
H IS POISON.   YOU WANTEO TO KIL
```

SEND FOR FREE CATALOG

TCE

TM

Dealer inquiries invited

ABC'S IN COLOR

In the ABC program, all 26 letters spring up in color to the familiar ABC tune. Then, colorful detailed pictures depicting each individual letter of the alphabet appear one by one. Your child's fascination will mount as he or she correctly presses the letter on the keyboard and is rewarded with a musical tune before the next detailed picture is drawn line by line onto the screen: AIRPLANE for A, BUS for B, CLOWN for C and so on to ZEBRA for Z. Truly a must program for the preschool to first grade age group!

CoCo 16K ECB . . . . . Tape: $19.95 Disk: $25.95

CRISS–CROSS MATH

As the program begins, your child is presented with a nine square playing board. It is your choice as to which square you choose. After a choice is made, a MATH PROBLEM appears in the square. You score your first X by answering the problem correctly. If your answer is incorrect, the square clears and your opponent is allowed his choice of squares. The game is over when three squares vertically, horizontally, or diagonally are won by the same player. When playing against the computer, every answer you get wrong is won by the computer. Multi-level ADDITION AND SUBTRACTION program.

CoCo 16K . . . . . Tape: $12.95

FRACTIONS

SIDE ONE: Fraction Lessons, explains fractions with the aid of graphics. Child studies the different ways fractions can be represented. Lessons include:

IMPROPER FRACTIONS
MIXED FRACTIONS
PROPER FRACTIONS

Many educators have praised the use of motion and color to display the fractional equivalents.

SIDE TWO: Fraction practice, offers a random computer generated quiz.

Atari 16k . . . . . Tape: $19.95
CoCo 16k . . . . . Tape: $19.95

JOYSTICK DRAW

Joystick Draw is the simple way to explore your artistic talents! Program operation is easy enough for a child to use, but effective enough that TCE uses it to design many sophisticated high-resolution graphic screens. Joystick Draw's design allows you or your child to save those masterpieces for future revisions or for use in other programs (instructions included). Your child will spend many hours enjoying this program and at the same time improving his or her eye hand coordination! You will find Joystick Draw to be an easy way to design those more sophisticated graphics for your own programs!

CoCo 16 ECB . . . . . Tape: $16.95

SPELL BOMBER

As captain of your ship, you must destroy the enemy bomber by spelling the mystery word. In this exciting and educational game the bomber gets closer with each inaccurate letter. You have only EIGHT tries to guess the mystery word or your ship will be bombed! If you guess the word correctly, GENERAL QUARTERS will sound and your ship will fire a missile to destroy the bomber. Three levels are available: EASY, MEDIUM, and HARD. Challenging for all ages!

Atari 16K . . . . . Tape: $18.95
CoCo 16k ECB . . . . . Tape: $18.95 Disk: $22.95
Vic 20 13k . . . . . Tape: $18.95

SPELLING BEE

The word is pronounced vocally and it is up to you to type in the correct spelling. If wrong, the computer will be your friend and flash the word on the screen for just an instant. OK! Try typing the word in again. STILL WRONG! The computer wants success and allows you to see the word again this time a little longer. If you just can't spell the word, the computer realizes you need to learn to spell the word and leaves the word on the screen for you to copy. Try your best and the computer has a surprise for your reward!

SPELLING BEE I . . . GRADE 1 & 2 SPELLING BEE III . . . GRADE 5 & 6
SPELLING BEE II . . GRADE 3 & 4 SPELLING BEE IV . . GRADE 7 & 8

CoCo 16k ECB . . . . . TAPE: $16.95 Each

TC—INVENTORY

Many insurance companies offer a discount for policy holders which have complete inventories on file. TC — Inventory is designed to help you organize, maintain, and compile the personal belongings of your home. Program is user friendly and menu driven. TC — Inventory allows input for location of item, price of item, serial number of item, date of purchase, and a text written description of the item. Don't put off recording your personal belongings until its too late. Requires printer for hard copy.

CoCo 32k ECB . . . . . Tape: $16.95

TEACHING CLOCK



Torn between teaching time on a digital or a conventional (face and hands) clock? Well, this program combines the two using high resolution graphics and prompts! Your child will learn to tell time with the aid of a specially designed CLOCK! Child enters the time, if wrong, the center of the clock displays a graphic aid. If the child is correct a musical reward is heard. Program offers three levels: hours, quarter hours, and five minute intervals.

Apple 48k . . . . . Disk: $19.95
Atari 32k . . . . . Tape: $16.95
CoCo 16k ECB . . . . Disk: $19.95 Tape: $16.95

MasterCard

Additional Educational Software available for Color Computer, TDP 100, Atari ®, Apple ®, Commodore 64 ®, and VIC 20 ®

VISA

P.O. Box 2477 Gaithersburg, Maryland 20879 (301) 963-3848

```
L US. YOU WILL OIE":GOSUB3:FORX=
352TO51Ø:PRINT@X,CHR$(RNO(117)+1
2B);:NEXT:PLAY"L3Ø1EEEL1CP2L3Ø1A
AAL1F":GOTO24B
2ØØ PRINT@3B4,"THERE IS ONE MORE
 THING YOU MUSTOO BEFORE WE GIVE
 YOU BACK YOUR FRIENO:  you must
 drink poison! ARE YOU READY TO
OO SO?
2Ø1 A$=INKEY$:X=RNO(351):PRINT@X
,CHR$(RNO(117)+128);:IFA$="N"THE
N2Ø2ELSEIFA$="Y"THEN2Ø3ELSE2Ø1
2Ø2 PRINT@352,"":PRINT"TOO BAO F
OR YOU!  WE KEEP YOUR  FRIENO. T
HANK YOU FOR THE       GOOOIES."
:GOSUB3:GOSUB3:CLS:GOTO249
2Ø3 IFAC=1ANOBP>=1THENCLS:PRINT:
PRINT"THE ELIXIR YOU ORANK SOONE
R     PROTECTS YOU ANO YOU OO NO
T OIE WHEN YOU ORINK THE POISON.
      YOUR FRIENO JOE IS FREE AN
O YOU GO AWAY WITH HIM.":PRINT:P
RINT"congratulations! YOU'VE MAO
E IT":GOTO249
2Ø4 IFBP>=1THENCLS:PRINT:PRINT"Y
OU DRINK THE POISON ANO YOU OIE"
:GOTO249
2Ø5 PRINT@352,"":PRINT"YOU OO NO
T HAVE ANY POISON.     COME BACK
 WHEN YOU'LL HAVE SOME.":GOSUB3:
GOTO91
2Ø6 PRINT@352,"":PRINT"THEN GO A
NO TRY TO FINO WHAT    YOU NEEO.
":GOSUB3:GOTO91
2Ø7 AT=1:CLS:PRINT"*****main roa
d general store****":PRINT"WE SE
LL ANO BUY. WE HAVE THE    LOWES
T PRICES THIS SIOE OF THE  ROAO
ANO WE GIVE THE BEST MONEY FOR Y
OUR GOOOIES.":PRINT"THE OEALS WE
 OFFER ARE SO GOOO  THAT WE HAO
TO FIX A LIMIT OF
2Ø8 IFCB=1THENTX=TX-3
2Ø9 PRINT"ONE TRANSACTION BY CUS
TOMER.":PRINT:PRINT"OO YOU WANT
TO BUY, SELL OR     LEAVE (B/S/L
)?
21Ø A$=INKEY$:IFA$="S"THEN211ELS
EIFA$="B"THEN222ELSEIFA$="L"THEN
91ELSE21Ø
211 X=RNO(4):IFX=1THENZ=S:A$="BA
GS OF SALT"ELSEIFX=2THENZ=BP:A$=
"BOTTLES OF POISON":ELSEIFX=3THE
NZ=B:A$="BOTTLES OF ELIXIR OF LO
NG LIFE"ELSEA$="EMPTY BOTTLES":Z
=B
212 Y=RNO(5ØØ):IFX=1THENY=RNO(25
Ø)ELSEIFX=4THENY=RNO(5Ø)
213 CLS:PRINT:PRINT"WE WOULO BE
INTERESTEO IN BUYING":PRINTA$:PR
INT"ANO WILL PAY"Y"GOLO COINS":G
OSUB241:IFZ=ØTHENPRINT:PRINT"WE
SEE THAT YOU HAVE NONE ANO   NOT
HING ELSE INTERESTS US."ELSE216
214 PRINT"MAYBE YOU WOULO LIKE T
O BUY     SOMETHING (Y/N)?"
215 A$=INKEY$:IFA$="Y"THEN222ELS
EIFA$="N"THEN219ELSE215
216 PRINT:PRINT"HOW MANY OO YOU
WANT TO SELL";:INPUTW:IFW>Z THEN
GOSUB241:CLS:PRINT"YOU OO NOT HA
VE"W:GOTO216
217 IFW=ØTHEN214ELSEG=G+W*Y:IFX=
1THENS=S-W ELSEIFX=2THENBP=BP-W
ELSEIFX=3THENB=B-W ELSEBV=BV-W
21B CLS:PRINT:PRINT"IT'S A DEAL"
:GOSUB241:PRINT
219 AT=Ø:CLS:PRINT"IT'S CLOSING
TIME NOW, YOU HAVE TO LEAVE.":GO
SUB3:GOTO91
22Ø PRINTTAB(5)"ARE YOU INTEREST
EO (Y/N)?"
221 A$=INKEY$:IFA$=""THEN221ELSE
IFA$="Y"ANO(G-Y)<ØTHENCLS:PRINT:
PRINT:PRINT"YOU OO NOT HAVE THE"
Y"COINS":GOSUB3:A$="":RETURNELSE
```


Co Co - Cooler

- *Brings operating temperature to ambient, regardless of accessory load*
- *Reduces tempero-ture of ENTIRE computer . . . not just the SAM chip*
- *Easy 1-minute installation*
- *$39.95*

Companion Keyboard Cover $7.95
Co Co Software
NOW SHIPPING
Co Co - Cooler Too
(Same Price, Same Fit, For Color Computer II)

- *Add $2.00 Shipping For Continental U.S.*
- *Add $4.00 Shipping For Alaska, Hawaii, Canada, & APO's*
- *Add $15.00 Shipping For Overseas*
- *Add $3.00 For 220-250 Volt Model*
- *Calif. Residents Add 6½% Sales Tax*
- *Will Ship C.O.D. On U.S.A. Shipments Only*
- *All Merchandise Shipped From Stock*

REM Industries, Inc.
9420 "B" Lurline Ave., Chatsworth, CA 91311
(818) 341-3719

```
RETURN
222 CLS:PRINT"**** DN SALE TDDAY
 ****":PRINT:Y=RND(1500)+500:IFR
ND(2)-1THENPRINT"1 BDTTLE OF ELI
XIR:"Y"GOLD":PRINT"CDINS":GDSUB2
20:IFA$="Y"THENG=G-Y:B=B+1:GDTD2
1B
223 IFRND(2)=1THENY=RND(1000)+50
0:PRINT"1 BDTTLE DF POISDN:"Y"GO
LD":PRINT"CDINS":GDSUB220:IFA$="
Y"THENG=G-Y:BP=BP+1:GDTD21B
224 IFRND(2)=2THENY=RND(500)+100
:PRINT"1 BAG DF SALT:"Y"GDLD":PR
INT"CDINS":GDSUB220:IFA$="Y"THEN
G=G-Y:S=S+1:GDTD21B
225 IFRND(2)=1THENY=RND(2000)+50
0:PRINT"1 SURPRISE BDX:"Y"GDLD":
PRINT"CDINS":GOSUB220:IFA$="Y"TH
ENG=G-Y:GDTD227
226 GDTD219
227 X=RND(4):Y=RND(4):Z=RND(4):I
FX=Y DRZ=X ORZ=Y THEN227ELSEPCLS
X:SCREEN1,0:CDLDRY,Z:DRAW"BM100,
95SB"+BD$+"S4":PAINT(17B,27),Z,Y
:PAINT(102,90),Y,Y:GDSUB2
22B W=RND(2):FDRZ=1TDW:AE=0:GDSU
B237:NEXT:GDTD219
229 IFX=1THENL$="BR6U16"ELSEIFX=
2THENL$="NR16U4E4R12U4H4L12D2"EL
SEIFX=3THENL$="R16UBNLBUBL16"ELS
EIFX=4THENL$="BR12U16G12R16"ELSE
IFX=5THENL$="BU4F4R10E2U4H2L14UB
R16
230 IFX=6THENL$="R16UBL16DBU16R1
6D2"ELSEIFX=7THENL$="E16L16"ELSE
IFX=BTHENL$="R16U16L16D16U8R16"E
LSEIFX=9THENL$="NU2R16U16L16DBR1
6"ELSEIFX=10THENL$="U16BR4D16RBU
16LB
231 RETURN
232 FDRX=1TD10:IFR(X)=R THEN233E
LSENEXT
233 IFRS(X)<>6ANDRS(X)<>3THENPAI
NT(126,2),4,4ELSEDNRS(X)/3GDTO16
6,159
234 AB=0:AA=0:C1=0:C2=0:C5=0:AR=
0:AP=0
235 IFRS(X)=6THEN160ELSEIFC6=1TH
ENAQ=0:C6=0:GDTD236ELSEAQ=1:GDTD
103
236 AT=0:DNRS(X)GOTD143,131,,190
,154,,173,207,182,174
237 IFAE=1THENRETURNELSEAE=1:X=R
ND(6):CLS:PRINT:PRINT"THE BDX DP
ENS.":PLAY"L1A#PBV10T3L2B-9":PRI
NT"IT CDNTAINS:
238 IFX<3THENY=RND(2000):G=G+Y:P
RINTTAB(10)Y"GDLD CDINS
```

CAN YOUR DATA BASE REMEMBER HOW YOU DID IT LAST TIME?

CAN YOUR SECRETARY RUN REPORTS AND POST TRANSACTIONS USING YOUR DATABASE?

CAN YOU DEFINE AND SAVE REPORTS AND CALCULATIONS WITH RECORD SELECTION & SORT PARAMETERS?

THE DATABASE SYSTEM DESIGNED FOR BUSINESS

IS YOUR DATABASE ALL-IN-ONE INTEGRATED PACKAGE?

CAN YOU PRINT INVOICES AND STATEMENTS?

CAN YOU PRINT TRANSACTION SUMMARIES BY ACCOUNT?

CAN YOU SELECT, SORT, & PRINT FORM LETTERS & LABELS IN ONE OPERATION?

NEW!! FROM THE CREATORS OF HOMEBASE!!

ALL-IN-ONE INTEGRATED PACKAGE: DATABASE, SPREADSHEET, WORD PROCESSING & MAILMERGE

INTRODUCTORY PRICES: WORKBASE I $64.95 400 RECORDS —— WORKBASE II $79.95 1200 RECORDS

CALL TOLL FREE: 1-800-334-0854 (EXT 887)
OR SEND CHECK OR MONEY ORDER TO:

WORKBASE DATA SYSTEMS
P.O. BOX 3448, DURHAM, NC 27702

PAL CREATIONS

Specializing in 32K ECB Text Adventures
And Simulations On Cassette

*SAC For those against nuclear disarmament — pilot a B52 to any one of the 36 Soviet cities, destroy it with a nuclear bomb, and make it back to the base. 9 difficulty levels. You can use keyboard or joystick or both. This simulation takes a lot of pre-planning and fast thinking. $19.95

* HERE COME DE PREZ Are you fed up with the Stete of the Union? If so, run for president in this 1 or 2 player simulation complete with scandals, national disasters, end debates . . . $14.95

* PRIVATE INVESTIGATOR Murder! Could Sherlock Holmes heve solved this whodunit adventure simuletion? $14.95

ISLE OF FORTUNE You are e fisherman in a waterfront bar. The old salt just told you a tale of treesure on an island, before the poison dart struck . . . . .Sail your ship to dangerous adventure awaiting you on the Isle of Fortune $19.95

SCAVANGE HUNT Find the items on the list and return them to Hickory Ridge to free your niece Rebecca from the hermit of Medicine Tree County. $15.95

* BOMB SCARE A terrorist group has planted 8 bombs in a city. Your mission: locate and disarm all 8 belore time runs out. 1 is The Big One. $14.95

* DARK CASTLE Monsters-magic-myths. King Lothar of Rom has been abducted by the evil wizard. Destroy the wizard and return Lothar to his throne $14.95

MANSION OF DOOM Destroy the Vampire, rescue Princess Marlena. $14.95

* WITCHES KNIGHT Back to the days of old, where knights were bold and magic ruled the land. Many enchanted surprises aweit you on your quest to free Sir Noble lrom the witches evil spell. $15.95

BEACON Can you signal the ship before it runs aground? . $14.95

* SPACE ESCAPE Explore a death-ridden alien spacecraft in search of e way back to Earth $14.95

STALAG Escape the German prison camp before its bombed $14.95

* EVASION Sequel to STALAG! Get out of Germany alive. $19.95

* FUNHOUSE Work your way through this unique Funhouse searchling for the way out $14.95

* SCATTERBRAIN Help wanted: Put Commodore Winslow's

Buy any 1 of the programs above and get
any of the bonus programs below FREE!

*SKI LODGE Times are tough, weether is bad. Manage a Vermont ski lodge successfully to win this 1-4 player simulation.

MOTHER LODE You just inherited your great-grandlather's goldmine. Did he die penniless?

ENO You inherited a million dollars. Just one catch — first you llave to find it!

BETTER A better betting game for 1-4 players. You choose the winning criterla.

MATCH—IT A challenging word game in which you identify your opponent's 5-letter word using deduction. 1-4 players.

*DIFFERENT EVERY TIME

Send check or money order to:

PAL CREATIONS
10456 Amantha Ave., Sen Diego, CA 92126

Calif. residents add 6% sales tax.


```
239 IFX=4THENS=S+1:PRINTTAB(10)"
A BAG OF SALT"ELSEIFX=5THENBP=BP
+1:PRINTTAB(5)"A BOTTLE OF GREEN
 LIQUIO":INPUT"OO YOU WANT TO DR
INK IT (Y/N)";A$:IFA$="Y"THENPRI
NT"YOU ORINK ANO IT IS POISON":B
P=BP-1:BV=BV+1:GOSUB3:GOTO243
240 IFX=6THENPRINTTAB(10)"NOTHIN
G"ELSEIFX=3THENPRINTTAB(5)"A BOT
TLE OF REO LIQUIO":B=B+1:INPUT"D
O YOU WANT TO ORINK IT (Y/N)";A$
:IFA$="Y"THENBV=BV+1:B=B-1:CLS:P
RINT"YOU JUST ORANK ELIXIR OF LO
NG   LIFE. YOU ARE NOW SURE THAT
 YOU WILL NOT OIE.":AC=1
241 PRINT:PRINT"YOU NOW HAVE:":P
RINT@"GOLO COINS":PRINTS"BAGS OF
 SALT":PRINTB"BOTTLES OF ELIXIR
OF LONG        LIFE":PRINTBP"BOTT
LES OF POISON":PRINTBV"EMPTY BOT
TLES":PRINT:PRINT"---PRESS ANY K
EY TO CONTINUE.--"
242 IFINKEY$=""THEN242ELSESCREEN
1,0:RETURN
243 C2=0:C1=0:IFAC=0THEN245ELSEP
RINT:PRINT"YOU SHOULO BE OEAO NO
W. YOU ARE LUCKY YOU ORANK ELIXI
R OF LONG  LIFE. ";
244 IFAU=1THENPRINT"HOWEVER, YOU
 OON'T HAVE A CAR SO YOU WILL HA
VE TO FINO ONE":GOSUB3:GOSUB3:CB
=0:A7=0:AG=0:GOTO31ELSEC8=0:PRIN
T"THIS WAY I CAN SENO YOU   BACK
 ON THE ROAO.":GOSUB3:GOTO91
245 X=RNO(3):IFX=2THENPRINT:PRIN
T"YOU ARE LUCKY, YOU COULO HAVE
  OIED. YOU SPENO SOME TIME AT T
HEHOSPITAL ANO NOW YOU ARE OK.
  YOU STILL HAVE EVERYTHING";:IF
AU=1THENPRINT" EXCEPTTHE CAR WHI
CH WAS DESTROYED IN  THE ACCIDEN
T.":CB=0:AG=0:AR=0
246 IFX=2THENPRINT:PRINT"PRESS <
ENTER> WHEN YOU WILL FEELREADY T
O GO ON."ELSE24B
247 IFINKEY$=""THEN247ELSEIFAU=0
THEN91ELSEAU=0:PRINT:PRINT"YOU L
OST THE CAR, SO YOU WILL   HAVE
TO FINO ANOTHER ONE":GOSUB3:A7=0
:C8=0:A5=0:AS=0:GOTO31
24B PRINT@331,"YOU'RE OEAO";
249 PRINT@44B,"****** ANOTHER GA
ME (Y/N)? *****";
250 A$=INKEY$:IFA$="Y"THENRUNELS
EIFA$="N"THENPOKE65494,0:ENOELSE
IFA$=""THEN250ELSEGOTO249
251 A$=INKEY$:IFA$=""THEN251ELSE
PRINT@231,"ONE MOMENT PLEASE!":R
UN
```

Learning The Signs

By Steve Blyn
Rainbow Contributing Editor

This month's article deals with signed numbers. Those are the little nasties that have signs in front of the numbers. Mastery of signed numbers is an important skill needed in many areas of mathematics. Teachers introduce signed numbers when they deal with the set of positive and negative integers.

It is always best to introduce new concepts to children by relating to real life situations. There are two such readily available situations in the life of all children — money and the weather.

All children love to make purchases. We have successfully used a game of checks and bills to teach the addition of signed numbers. Checks represent money received and are positive or '+' numbers. Bills represent money spent and are negative or '–' numbers.

A game is played with the students by choosing a check and a bill for a purchase. The learning is in the computation of the resulting balance. When this is mastered, the result of a set of checks and bills can be computed. This approaches the later skill of balancing a checkbook.

Temperature changes are another good way of teaching the addition of signed numbers. Our game adds a change in temperature to the last reported temperature to find the new temperature. Let's suppose the current temperature is 60 degrees. If the temperature goes up three degrees, a plus three is added to 60. If the temperature falls three degrees, a minus three is added to 60 degrees.

The difficulty really begins when the temperature falls below zero. It is a surprising fact that many children believe that zero degrees is the lowest possible temperature. If the temperature is three degrees and falls eight degrees, the new temperature is five degrees below zero or minus five. If the temperature is minus five and rises six degrees, the new temperature is plus one.

$$\begin{array}{rr} & +3 \\ + & -8 \\ \hline & -5 \end{array} \qquad \text{and} \qquad \begin{array}{rr} & -5 \\ + & +6 \\ \hline & +1 \end{array}$$

Teaching subtraction of signed numbers is a more difficult task. The rule for subtraction of these numbers is to change the sign of the second number and *add*: (plus 15) minus (minus three) becomes (plus 15) plus (plus three). The answer is plus 18.

$$\begin{array}{rr} & +15 \\ - & -3 \\ \hline \end{array} \qquad \text{becomes} \qquad \begin{array}{rr} & +15 \\ + & +3 \\ \hline & +18 \end{array}$$

The program opens by giving a menu choice of addition or subtraction of signed numbers or of exiting the program. This is contained on Lines 40 to 110. Lines 120 through 300 contain the addition routines. Lines 310 through 490 contain the subtraction routines. After each example, you may either continue or return to the menu.

We felt that students would continue to practice these examples until they are mastered; therefore, there is no set number of examples to do. We have included a counter of the number of right and wrong examples attempted. This is on the screen at all times.

The difficulty of the examples is preset on Lines 150, 160, 340 and 350. We set the difficulty for a beginner's level. Please feel free to adjust the level of difficulty to your students' needs. As this skill becomes mastered, change the level to create more difficult examples for added practice.

In closing, we would like to mention a new product that has come to our attention which may be of interest to the educational community. It is called *Word-Pak* and is manufactured by PBI, Inc. It is a program and a ROM pack that contains a driver to turn the CoCo's screen into a profes-

(Steve Blyn teaches both exceptional and gifted children, holds two master's degrees and has won awards for the design of programs to aid the handicapped. He and his wife, Cheryl, own Computer Island.)

sional 80-column board. Of course, the main use of this device is in running business software. It does, however, also convert your screen into a very professional looking screen for educational programs that you may write. One of the biggest criticisms of the CoCo is its use of inverse capitals for lowercase letters. *Word Pak* produces the normal lowercase letters with which children are familiar. Light on dark or dark on light backgrounds are available. The dark letters on light background option also creates lines which make the screen resemble notebook paper. This product certainly opens new avenues for the creative user.



The listing:

```
10 REM"(C) STEVE BLYN,1984
20 REM"COMPUTER ISLAND,NY
30 S$=STRING$(32,239)
40 CLS8
50 PRINT@44,"MENU";
60 PRINT@135,"1. ADDITION";
70 PRINT@199,"2. SUBTRACTION";
80 PRINT@263,"3. END THE PROGRAM
";
90 PRINT@484,"PRESS THE CORRECT
NUMBER";
100 G$=INKEY$
110 IF G$="1" THEN 120 ELSE IF G
$="2" THEN 310 ELSE IF G$="3" TH
EN 500 ELSE 100
120 CLS:PRINT@7,"add signed numb
ers";
130 PRINT@32,S$;
140 PRINT@320,"   CORRECT=";C;"
   WRONG=";W
150 M=RND(10)-RND(15)
160 N=RND(5)-RND(10)
170 K=M+N
180 IF M>0 THEN PRINT@ 103,"+";
190 PRINT@104,M;" +  ";N;" = ";
200 IF N>0 THEN PRINT@111,"+";
210 PRINT@114,"";
220 INPUT J
230 PRINT:PRINT
240 IF J=K THEN PRINT"
  CORRECT":C=C+1:SOUND240,3
250 IF J<>K THEN PRINT"   SORRY,
THE ANSWER IS ";K:W=W+1:SOUND1,1
260 PRINT@320,"   CORRECT=";C;"
   WRONG=";W
270 PRINT@448,S$;
280 PRINT@480,"'C' TO CONTINUE O
R 'M' FOR MENU";
290 A$=INKEY$
300 IF A$="M" THEN RUN ELSE IF A
$="C"THEN 120 ELSE 290
310 CLS:PRINT@4,"subtract signed
 numbers";
320 PRINT@32,S$;
330 PRINT@320,"    CORRECT=";C;"
    WRONG=";W
340 M=RND(10)-RND(15)
350 N=RND(6)-RND(10)
360 K=M-N
370 IF M>0 THEN PRINT@103,"+";
380 PRINT@104,M;" -  ";N;" = ";
390 IF N>0 THEN PRINT@111,"+";
400 PRINT@114,"";
410 INPUT J
420 PRINT:PRINT
430 IF J=K THEN PRINT"
 CORRECT":C=C+1:SOUND240,3
440 IF J<>K THEN PRINT"   SORRY,
THE ANSWER IS ";K:W=W+1:SOUND1,1
450 PRINT@320,"   CORRECT=";C;"
  WRONG=";W
460 PRINT@448,S$;
470 PRINT@480,"'C' TO CONTINUE O
R 'M' FOR MENU";
480 8$=INKEY$
490 IF 8$="M" THEN RUN ELSE IF 8
$="C" THEN 310 ELSE 480
500 CLS:END
```


AT WITS END

(C) 1984 by Derringer Software, Inc.

You may lose your sanity while playing this new game from Derringer Software! As the resident caretaker at the local "Home for burned-out programmers", your job is to keep the public safe by keeping the patients within the confines of the central compound. But, every now and then the somewhat erratic patients start running about and you find yourself having to open and close doors to get them to safety. Of course as one gets in, another may jump out! Three separate display screens with nine levels of play for each. Play against the clock for the best time. Score kept for each game and level.

CRAZY MAZE


SPIRALMANIA

BEGINNER'S BOX

The CRAZY MAZE is completely different each time you play. SPIRALMANIA will be a true test of mental strength.
The BEGINNER'S BOX is for those short on patience!

$24.95

Requires joysticks and can be played on 16K Extended tape or disk systems! Please indicate tape or disk when you order. Send check or money order to: Derringer Software, Inc. P. O. Box 5300, Florence, S.C. 29502-2300. Visa or Master Card customers can call (803) 665-5676 9:00am to 5:00pm Mon-Fri. Please include $2.00 for shipping and handling — No COD's.

★ See the ad for Double Buster also ★

The first in a five part series on . . .

Everything You Always Wanted To Know About The CoCo But Radio Shack Didn't Tell You

By Andy Kluck

In response to the introductory page of the first section of Radio Shack's *Getting Started with Color BASIC*, which invites the reader to "prove us wrong (if you can)," I have made an attempt to compile a list of some of the major errors and omissions in the Color Computer's documentation. In this article and in the following installments, I will also outline some of the techniques that can be helpful in using the CoCo that were not mentioned in the manuals. One of the examples assumes that the PLUCK function has been previously defined with the Extended BASIC *DEF FN* statement:

```
100 DEF FN PL(X)=PEEK(X)*&H100+ PEEK(X+1)
```

This function returns the value of the two-byte integer at the address specified by the argument, and is useful for examining Color BASIC's pointers. Hexidecimal numbers in this text are identified by the dollar sign; this should be replaced by *&H* in Extended BASIC expressions. I will refer to Radio Shack's *Getting Started with Color BASIC*, *Going Ahead with Extended Color BASIC*, and *Color Computer Disk System Owners Manual and Programming Guide* as the Cbasic, Xbasic, and Dbasic manuals respectively. Some of this information has been previously published, and is included here in the interest of completeness. If you find any mistakes, please be advised that they are intentional: I tried to include something for everyone, and some people are always looking for mistakes. (I'll bet you had fun with Radio Shack's manuals.)

Release Numbers — When Extended or Disk BASIC is activated, the sign-on message gives the revision number of the highest level ROM in the system, ignoring the revision numbers of the other ROM or ROMs. These statements may be used to determine the hidden revision numbers of the Color BASIC and Extended ROMs:

```
PRINT PEEK(41301)-48 'Revision of Color BASIC
PRINT PEEK(33023)-48 'Revision of Extended BASIC, if applicable.
```

General Information — Color BASIC only accepts line numbers from 0 to 63999. Whenever program lines are added, edited, renumbered, or deleted, a *CLEAR* is executed. A question mark may be used as an abbreviation for *PRINT*, and a single quote (shifted 7) may be substituted for *:REM*.

Variables and Spacing — According to the Cbasic manual, variable names may be any combination of one or two letters. Actually, the second character may be a letter or a digit, and they may be followed by as many letters and digits as you want; however, only the first two are significant, so

(Andy Kluck is an electrical engineering student at the University of Texas at Austin.)

AB and ABC are the same variable. Also, variable names may not begin with any BASIC keyword. These rules also apply to array names and defined functions. Note that unlike Level II BASIC, Color BASIC allows BASIC variables to contain BASIC keywords as long as they don't begin with them; *XPRINT* is a legal name for the variable *XP*. The Color BASIC manual says that spaces in a program may be removed to save memory. This is true in most cases, but there is an important exception. Wherever a variable or Hex constant or octal constant with the optional 'O' included is followed by a BASIC keyword without an intervening space, the tokenize routine will consider the keyword as part of the variable or constant, usually causing a Syntax Error. The most common examples are statements like:

IFA=BANDC=DORE=FTHENG=HELSEEND
(Needs spaces before *AND, OR, THEN* and *ELSE*)
FORA=&H1FTO&H3FSTEP2 (Needs spaces before *TO* and *STEP*)
ONXGOTO 100,200 (or *GOSUB*; Needs space before *GO*)
PRINT XTAB(10)Y (with spaces means *PRINT X;TAB(10);Y*. Without spaces means *PRINT XT(10);Y*)

Examples where the extra spaces are not necessary include:

IFA=3ANDC=5ORE=7THENG=2ELSEEND
FORA=3ITO63STEP2
ONX+1GOTO 100,200

Reset — There are several sensitive routines in BASIC that will cause the BASIC program or variables to be scrambled if they are interrupted by Reset, so Reset should in general be used only when the BREAK key is repeatedly ignored, such as during *PAINT* or a machine language program. It is generally safe to use Reset to stop tape I/O, but not disk I/O, except in special circumstances, such as when you accidently *DSKINI* the wrong disk. Note that Reset leaves all open files open. At least one version of the Extended BASIC manual explains the Reset sequence on Page 208, mentioning the restart flag *RSTFLG* and restart vector *RSTVEC*, but doesn't give their addresses. *RSTFLG* is at $71, and *RSTVEC* is in bytes $72-$73.

Errors — Whenever an error occurs, Color BASIC turns off the cassette motor and does an *AUDIO OFF*. In Disk BASIC, it also closes all disk files.

***CONT* —** Any of these statements and actions: *CLEAR, PCLEAR, FILES*, pressing Reset, any error, or changing the program, disables the *CONTinue* statement until the next *STOP, END* or BREAK in the program. The reason for this is that all these conditions re-initialize BASIC's stack area, including records of subroutine calls and *FOR . . . NEXT* loops, so that if a *CONTinue* were allowed, the program would probably not work right anyway.

***CLEAR* —** Besides clearing variables as described in the Color BASIC manual, *CLEAR* cancels all *DEF FN* statements and performs a *RESTORE*. Statements of the form: *CLEAR 200* allocate the specified number of bytes for string space. To prevent an OS Error, there must be one byte allocated for each character in a string variable except variables that are fielded in disk buffers, read from data statements, or defined as literals in the program: *50 A$="str"*

+"*ing*" uses six bytes of string space, but *50 B$="string"* uses no string space because the BASIC only needs to remember where the string is located in the program text. There also must be enough string space for temporary strings that are formed while expressions are evaluated. Usually it is best to overestimate the amount of string space by a few hundred bytes unless the program and variables use up almost all the RAM, since *INPUTed* strings may be up to 249 bytes long. To allocate half of the available memory to strings:

```
CLEAR 0:CLEAR MEM/2
```

It is often helpful to know how much string space is left unused. In Level II BASIC, the *FRE* function, when used with a string argument, causes the free and "in use" string space to be separated and returns the number of free string bytes. Color BASIC doesn't have this function, but it can be duplicated by using the Color Computer's "garbage collection" routine and then taking the difference between the bottom of used strings and bottom of string space pointers:

```
EXEC 46481:FRE= FNPL(35)- FNPL(33)
```

gives the amount of free string space. According to the Color BASIC manual, "Without *CLEAR*, the Computer reserves 200 characters." Actually, a *CLEAR 200* is done only when BASIC is first entered. The number of reserved string bytes is not affected by *LOAD* or *RUN* and is inherited from the last program; therefore, no program should assume that 200 bytes are reserved, since the last program run may have reserved 0 or 10000. For this reason, all substantial programs should use *CLEAR* to reserve string memory. Statements of the form: *CLEAR 200,23999* allocate the first number of bytes for string space and set the end of the string pool to the address of the second number minus one. Since the end of the string pool plus one is the highest RAM area used by BASIC, the area starting with the given address plus one, 24000 in this case, is made available for the user's machine language routines. Note that BASIC positions the stack to build down from the bottom of the string pool, so in this example the stack will be in the area just below 24000–200 = 23800.

PCLEAR **—** According to the Extended BASIC manual, a *PCLEAR 4* is done automatically, and *PCLEAR* is necessary only "when you want to reserve a different number of pages." In fact, the number of *PCLEARed* pages is also inherited from the last program run, so this number may be anything from one to eight when a new program is loaded, and no program should make assumptions about this number. The manual also says that *PCLEAR* should be the first or second statement in the program, right after *CLEAR*. This advice could cause problems in many cases because the *PMODE* parameters are also unaffected by *LOAD* operations. For example, if the last program used *PMODE 4,5* and the new program tries to *PCLEAR* any fewer than eight pages without first setting *PMODE* to a reasonable value, an FC Error will occur. Furthermore, whenever *PCLEAR* is used with a different number of pages than the last *PCLEAR*, the BASIC program is moved up or down in memory according to the new number of pages. This, in itself, wouldn't cause any problems, except for the now infamous *PCLEAR* bug in the Xbasic 1.0 ROM —after *PCLEAR* copies the program to its new position, it doesn't set the interpret pointer at $A6 to the new copy. This can

PERRY COMPUTERS

COLOR COMPUTERS

CALL TOLL FREE 1-800-248-3823

COLOR COMPUTER, DISK DRIVE AND PRINTERS

	LIST PRICE	OUR PRICE
26-3027 16K Color Computer 2	$ 199.00	$ 169.00
26-3127 64K Color Computer 2	$ 259.00	$ 220.00
26-3029 Disk Drive 0	$ 399.00	$ 310.00
26-3023 Disk Drive 1, 2, 3	$ 279.95	$ 230.00
26-1271 DMP-110	$ 399.00	$ 310.00
26-1255 DMP-120	$ 499.00	$ 400.00
26-1254 DMP-200	$ 699.00	$ 520.00
26-1257 DWP-210	$ 799.00	$ 630.00

COLOR COMPUTER SOFTWARE

	OUR PRICE
Telewriter 64 Tape	$ 49.95
Telewriter 64 Disk	$ 59.95
VIP Writer	$ 59.95
VIP Speller	$ 49.95
VIP Database	$ 59.95
RADIO SHACK Software	15% Off
TOM MIX Software	$ CALL
SPECTRAL ASSOCIATES	$ CALL

OTHER PRINTERS AND ACCESSORIES

	OUR PRICE
EPSON Printer	$ CALL
OKIDATA Printer	$ CALL
STAR GEMINI 10X Printer	$ 300.00
TRANSTAR Deisy Wheel Printer	$ 465.00
C.ITOH 8510 Prowriter Printer	$ 380.00
BOTEK Serial to Parallel Interface	$ 59.00

MONITORS

	OUR PRICE
COMREX 12" Monitor	$ 95.00
COMREX 13" Color Monitor	$ 285.00
AMDEK 300A Monitor	$ 155.00
AMDEK Color I Plus	$ 335.00
VIDEO PLUS Monitor Adeptor	$ CALL
GORILLA Monitor	$ 85.00

COLOR ACCESSORIES

	LIST PRICE	OUR PRICE
26-2226 RS-232 Program Pak	$ 79.95	$ 66.00
26-3012 Deluxe Joystick (EACH)	$ 39.00	$ 34.00
26-3017 64K RAM Kit	$ 69.95	$ 59.00
26-3025 Color Mouse	$ 49.95	$ 42.50
26-1173 Modem II	$ 199.95	$ 169.00
26-3008 Joysticks	$ 24.95	$ 21.00
26-3016 Keyboard Kit	$ 39.95	$ 34.00
26-3018 Ext. BASIC Kit	$ 39.95	$ 34.00
26-1175 Modem I	$ 99.95	$ 85.00
Hayes Modems		$ CALL

All prices and offers may be changed or withdrawn without notice. Advertised prices are cash prices. (Installation and shipping are not included in price.)

C.O.D., Visa, MasterCharge, and American Express welcome. Please call (517) 625-4161 for free price list or information.

PERRY COMPUTERS • DEPT. NO. A1 • 137 NORTH MAIN STREET • PERRY, MI 48872

have several results. Sometimes an unexplained Syntax Error occurs on the line with *PCLEAR*. Often the program runs normally until the *PCLS* statement is present, which erases the old copy of the program, since it is now in the area of the graphics screen, and causes either an error or a forced *END*. In rare cases, *PCLEAR* may result in a jump to another part of the program. Usually, when *PCLEAR* causes an error, the program will work if it is *RUN* a second time, since it has already been moved to the correct address. To prevent this problem in the first place, two steps have been suggested. First, if *PCLEAR* reduces the number of graphics pages, it should be at the end of the program, and if it increases the number of pages, it should be at the beginning. This prevents the immediate error that occurs when the *PCLEAR* statement is overwritten by another part of the program. Second, to set the interpret pointer to its correct position after *PCLEAR*, use a *GOTO* statement that references a line number less than the current line. To prevent as many errors as possible, I recommend using something like:

For *PCLEAR 1*:

```
10 GOTO 63990
20 CLEAR 500
30 REM PROGRAM STARTS HERE
63980 END
63990 PMODE 0,1:PCLEAR 1:GOTO 20
```

For *PCLEAR 2* through *8*:

```
10 GOTO 63990
20 GOTO 40
30 CLEAR 500: PCLEAR 5: GOTO 20
40 REM PROGRAM STARTS HERE
63980 END
63990 PMODE 0,1:PCLEAR 1:GOTO 30
```

Here the *PMODE* statement in Line 63990 prevents a possible FC Error in the *PCLEAR 1*, which, in turn, prevents an error in the *CLEAR 500*, which might occur, for example, if the last program used *PCLEAR 8* and there is not enough free memory for *PCLEAR 8* and 500 bytes for strings. The extra *GOTOs* force BASIC to recover from the bug. The *CLEAR* statements and the *PCLEAR* in Line 30 of the second example should be adjusted according to the needs of your program. A shorter version, for example: *10 PMODE 0,1:CLEAR 0:PCLEAR 5:CLEAR 500* would be sufficient for use with Xbasic 1.1, but since many users are stuck with 1.0, programs to be distributed to others should allow for the bug. Note that *PCLEAR* also does an implied *CLEAR*, erasing variables and defined functions.

PCLEAR 0 — They said it couldn't be done, and they were right — Various methods have been suggested for effecting a *PCLEAR 0*. An often published example is:

```
POKE 25,6:NEW
```

There are two problems with this. First, it moves the BASIC program to $601, which is only correct for plain Extended BASIC. If this is used in Disk BASIC, it jumbles system pointers and variables with the likely result that when you try to load a BASIC program, part of it will be written out on the disk in place of the File Allocation Table. (I hope you made backups.) Second, BASIC will give an error if you try to execute a *NEW* or *RUN* without a zero in the byte before the program. If Xbasic has just been started, there is a zero in this location, but use of graphics page 1 may change this. To fix these problems, try this revised *PCLEAR 0*:

```
POKE 25,PEEK(&HBC):POKE PEEK(&HBC)*256,0:
NEW
```

Address $BC contains the high byte of the start address of graphics page one, which is 6 for non-Disk Extended BASIC and varies with *FILES* in Disk BASIC. But this is still not a real *PCLEAR 0*; I would call it a *PNEW 0*. To *PCLEAR 0* from inside a program, part of the *PCLEAR* routine can be used to do the necessary moving of the program:

```
10 GOTO 63950
20 CLEAR 200 ' or whatever
30 REM PROGRAM STARTS HERE
63940 END
63950 POKE &H3C0,&H5F:POKE &H3C1,&H5C
' CLRB, INCB- $01 in B, Clear Carry
63960 POKE &H3C2,&H96:POKE &H3C3,&HBC
' LDA $BC
63970 POKE &H3C4,&H1F:POKE &H3C5,&H02
' TFR D,Y
63980 POKE &H3C6,&H7E:POKE &H3C7,&H96:
POKE &H3C8,&HA3 ' JMP $96A3
63990 EXEC &H3C0:GOTO 20 ' PCLEAR 0
```

This works with Xbasic 1.0 and 1.1. Of course, since any *PCLEAR 0* places the BASIC program where the graphics screens are supposed to be, any use of graphics statements afterwards should be avoided unless special arrangements have been made. For example, the addition of these lines:

```
30 POKE &HBA,&HE6:POKE &HB7,&HFE
40 POKE &HB9,&H20:POKE &HB6,3
```


Aurora Computing

49 Brookland Ave., Aurora, Ontario Canada L4G 2H6

FAMILY GAMES

The popular **STOCKBROKER** and **CRIBBAGE 32K** ..... $14.95 each.

AOVENTURE GAMES: Sea Quest and Shenanigans from MARK DATA ..... only $24.95(C); $27.95(D) each

From BRANTEX, **PIRATE TREASURE 16K** $13.95

SCAVENGER HUNT 16K $18.95

EDUCATIONAL GAMES

COLORMINO, CONCEN - improve your memory and logical thinking - **16K** ..... $10.95 each

• • •

Also from **BRANTEX**

EOU-COMBO (Math Derby, Peek 'N' Spell Metric Converter) **16K** ..... only $29.95

BUSINESS: **HOUSEHOLO EXPENSE MANAGER 16K** $19.95

LOAN ANALYSIS 16K $20.95

• • •

NEW from **MARK OATA**

The amazing **TIME FIGHTER 16K** ..... $24.95(C)
32K ..... $27.95(D)

Also the ever popular **GLAXXONS 16K** ..... $24.95(C)
32K ..... $27.95(D)

• • •

UTILITIES: **ROMOISK:** Run your rom pack games from a disk! **64K** $15.95

MR. COPY - make up to 99 copies of one program at once! **16K** $15.95

The HJL-57 Keyboard

Now available for all models, including CoCo 2.

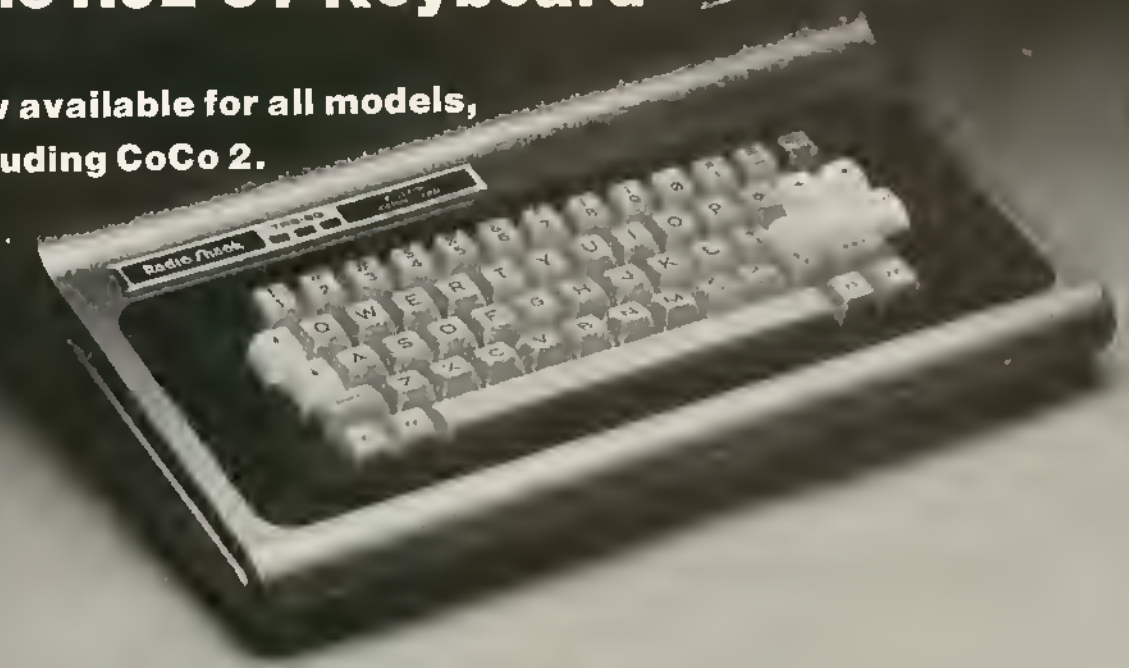

Compare it with the rest. Then, buy the best.

If you've been thinking about spending good money on a new keyboard for your Color Computer, why not get e good keyboard for your money?

Designed from scratch, the HJL-57 Professional Keyboard is built to unlock ALL the potential performance of your Color Computer. Now, you can do real word processing and sail through lengthy listings...with maximum speed; minimum errors.

At $79.95, the HJL-57 is reasonably priced, but you can find other CoCo keyboards for a few dollars less. So, before you buy, we suggest thet you compare.

Compere Deelgn.

The ergonomically-superior HJL-57 hes sculptured, low profile keycaps; and the three-color layout is identical to the original CoCo keyboard.

Compare Construction.

The HJL-57 has e rigidized aluminum baseplate for solid, no-flex mounting. Switch contacts are rated for 100 million cycles minimum, and covered by a spill-proof membrene.

Compare Performance.

Offering more than full-travel, bounce-proof keyswitches, the HJL-57 has RFI/EMI shielding that eliminates irritating noise on displays; and four user-definable function keys (one latchable), specially-positioned to avoid inadvertent actuation.

Free Function Key Program

Your HJL-57 kit includes usage instructions end decimal codes produced by the function keys, plus a free sample program thet defines the function keys as follows: F1 = Screen dump to printer. F2 = Repeat key (latching). F3 = Lower case upper case flip (if you have lower case cepability). F4 = Control key; subtracts 64 from the ASCII value of any key pressed. Runs on disc or tape; extended or standerd Basic.

Compare Installation.

Cerefully engineered for easy installation, the HJL-57 requires no soldering, drilling or gluing. Simply plug it in and drop it right on the original CoCo mounting posts. Kit includes a new bezel for a totally finished conversion.

Compere Warrantles.

The HJL-57 is built so well, it carries a full, one-year warranty. And, it is sold with an exclusive 15-day money-back guarantee.

Compara Velue.

You know that a bargain is a bargain only so long as it lasts. If you shop carefully, we think you will agree...The HJL-57 is the last keyboard your CoCo will ever need. And that's **real** value.

Order Today.

Only $79.95, the HJL-57 is available for immediate shipment for either the original Color Computer (sold prior to October, 1982) or the F-version and TDP-100 (introduced in October, 1982), and the new 64K CoCo. **Now also available for CoCo 2.**

Call Toll Free

1-800-828-6968

In New York 1-800-462-4891

HJL

PRODUCTS

Div. of Touchstone Technology Inc.
955 Buffalo Road • P.O. Box 24954
Rochester, New York 14624
Telephone: (716) 235-8358

Ordering Information: Specify model (Original, F-version, or CoCo 2). Payment by C.O.D., check, MasterCard or Visa. Credit card customers include complete card number and expiration date. Add $2.00 for shipping ($3.50 for Canada). New York state residents add 7% sales tax.
Dealer inquiries invited. For dealer information in Eastern U.S. and Canada, call collect: 617-586-7614, Advanced Computer Services (distributor), 74 Plain Street, Brockton, MA 02401.

will direct the action of any graphics statements to the area $E600 through $FDFF. This prevents graphics statements from causing problems; and, in the 64K BASIC in RAM mode, it allows normal use of one *PMODE 3* or *4* screen in otherwise unused RAM. For example,

```
50 PCLS 1:SCREEN 1,0:CIRCLE (128,96),90,4
60 GOTO 60
```

draws a big *PMODE 3* circle using "free" memory with *PCLEAR 0* still in effect *if* the SAM has already been set to the 64K RAM mode and BASIC has been copied into the upper page of RAM with a *MOVEROM* program. The *PCLEAR 0* effectively disables *PMODE*, but *PMODE 3* or *4* may still be selected by *POKEing* the 3 or 4 into location &HB6; *PMODEs 0* through *2* require some additional *POKEs* to set up correctly. Because *PCLEAR* is disabled by Line 30, the only way to bring the system back to normal is something like:

```
POKE &HBA, PEEK(&HBC):POKE &HB7, PEEK
(&HBC)+6:PCLEAR 1:PMODE 0,1
```

PCLEAR 0 graphics should not be used if Extended BASIC has been relocated for extra free memory or any RAM in the range $F600-$FDFF is in use. Finally, *FILES* should be avoided while this is in effect.

FILES — According to the Disk BASIC manual, the statement *FILES 1,400* reserves space for 1 file and 400 bytes of buffer space for it. Actually, the first number specifies only the number of files that can be accessed by *OPEN*; one extra file control block is reserved for use by *LOAD(M)*, *SAVE(M)*, *MERGE*, and *COPY*. The second specifies the number of bytes to be reserved for random file buffers. To prevent an OB Error, this number must be >= the sum of the record lengths of random (direct) files to be open at the same time. Since this buffer space is not used by files opened for sequential access, the program on Page 55 demonstrating the necessity of *FILES 1,400* would work just as well without it. A more appropriate example would have been to open a random (direct access) file with a record length of 400. There are also problems in the *FILES* routine itself. Use of *FILES* involves displacement of the graphics area, and *FILES* will sometimes set the start of page one to an odd page boundary in Dbasic 1.0. Since the SAM chip can only handle graphics on even pages, this results in garbage appearing at the top of the high resolution picture. To prevent this, test your *FILES* statement on a computer with Dbasic 1.0 (In RAM, if necessary, I hope to soon publish a routine to install different BASICs from disk files into the upper-half of the 64K RAM.) before putting it in the program and check the contents of location $BC. If *PRINT PEEK(&HBC)* gives an odd number after *FILES*, add 256 to the second number in *FILES* and try again. *FILES* also may require moving the BASIC program, and in Disk BASIC 1.0 it has the same bug, with similar solutions, that *PCLEAR* does. Note that many BASIC and machine language programs assume that graphics Page 1 begins at $E00 and makes use of this area. If *FILES* causes Disk BASIC's file handler variables to move into this area, these programs could cause a crash; therefore, it is a good idea to print a warning to the user when a program's use of *FILES* causes *PEEK(&HBC)* to exceed 14. Finally, executing *FILES* closes all disk files and does an automatic *CLEAR*.

Educational Programs
for the TRS-80 Color Computer

All TRS-80 programs require Extended BASIC
Available for both tape and disk

Used successfully in classrooms across the country on a daily basis, B-5 programs make learning fun! Each program can be geared to the individual needs of each student.

Instructive programs on:

☆MATH FUNCTIONS
☆LANGUAGE ARTS
☆LEARNING TO COUNT MONEY
☆LEARNING TO TELL TIME
and more!

Priced from $9.95 to $26.95



☆Graphics
☆Sound/Color
☆Individualized Lessons
☆Positive Feedback

Write today for a free catalog, or ask for a dealer demonstration.

B-5 Software Co.
1024 Bainbridge Place
Columbus, Ohio 43228
Phone (614) 276-2752

Teachers: Have you written the "ultimate" program? We'd like to take a look . . .

SOFTWARE-HARDWARE

FOR RADIO SHACK'S TRS-80 MODEL 1/3
TRS-80 COLOR COMPUTER

•SEND FOR FREE CATALOG•

UTILITY PROGRAMS ON CASSETTE
SU-1 CASSETTE COPY $10.00
SU-2 CASSETTE DUMP $10.00
SPECIFY COMPUTER

Y-PAK
TRS-80 COLOR COMPUTER
$70.00

TURN YOUR COMPUTER INTO A 2-SLOT SYSTEM. SWITCH BETWEEN THE TWO WITH EASE.

RECORDER STAND
$19.00

MADE OF STURDY PLASTIC. HOLDS RECORDER AT A PERFECT ANGLE.

RAM/ROM USER-PAK FOR TRS-80 COLOR $30

•GAMES ALSO AVAILABLE•

B. ERICKSON SOFTWARE · P.O. BOX 11099 · CHICAGO IL 60611
CALL (312) 276-9712 FOR INFORMATION

Weird And Wonderful

By Richard White
Rainbow Contributing Editor

Programming a computer is always full of surprises. Perhaps that is why many of us keep at it in spite of its many frustrations. This month, we are going to play with a program sent in by James Shera of Altus, Okla. Jim took me up on my challenge to write a *PRINT USING* routine for Color BASIC in April 1984 "Bits and Bytes." Jim's code is not the general subroutine I had in mind, but addresses right justified printing of strings and formatting a number to print with alignment on the decimal point. There is a lot to comment on in the logic of his routines. He also added a few pokes I had not seen before which open a whole box full of surprises. Now a surprise may be good or bad, and there are some of both in what we will examine here.

Jim's program essentially makes a formatted listing of outstanding checks, adds the amounts and prints the total amount to the screen or printer. A simple program that will not distract us from studying the *how* rather that the *what* is done. The whole program, along with some experiments I added, is at the end of the column.

The jewels begin in Line 53.

```
53 POKE 298,0:POKE303,0 'DISABLES EXTENDED
   BASIC
```

Line 53 turns both Extended and some of Disk BASIC off.

(Richard White has a long background with microcomputers and specializes in BASIC programming. With Don Dollberg, he is the author of the TIMS data base management program.)

It is used here to assure that the program really will work in Color BASIC. I made a few tests from the keyboard just like any doubter would. If you temporarily add *54 END*, you can type *GOTO 53* from the keyboard and *RUN* that line only and come back to the keyboard mode. Then type *PRINT USING"##.##";22.897* and ENTER. The computer will respond:

```
0 ##.## 22.897
OK
```

Color BASIC does not recognize *USING* as a keyword and thinks it is just another variable which, not having been defined before, equals zero. It then dutifully prints the string and the number following exactly as entered from the keyboard. *SAVE"PROGNAME"* returns an SN Error as expected. But, I could open a disk data file, save data to it and close it with Extended BASIC "off." Obviously, the *OPEN* and *PRINT#D* statements use routes through BASIC that are not affected by the above *POKEs*. BASIC is assuredly "off" only when it has not been "on." When the CoCo comes up in Extended and Disk BASIC, a variety of addresses are set differently than they are in the lower level BASICs.

Two pokes change only two of these "hooks." It's like the front and back doors are locked, but we can climb in through the basement window to get into part of the house.

Let's now turn Extended BASIC back on and try again.

```
288 POKE298,25:POKE303,14 'ENABLES
    EXTENDED BASIC
290 CLOSE:END
```

Type *GOTO288*. Then from the keyboard mode type *PRINTUSING"##.##";22.897*. The computer replys:

```
22,90
OK
```

Now the result is as we expect with *PRINT USING* functioning. Note that an Error was not reported in Color BASIC because it could treat *USING* as a variable. We talked last month about variables longer than two characters being accepted by CoCo and will review the topic below.

Observe Line 55 and then I will give you the good news and the bad news.

```
55 POKE360,162:POKE361,191 'ENABLES SCREEN
   PRINT
```

The good news is that these pokes cause text to be written to the screen and to the printer *at the same time*. But, there is bad news. Once you have done this poke, you will not be able to save a data or ASCII file to disk. The file is opened and closed correctly, but no data is stored.

```
285 POKE360,130:POKE361,115 'DISABLES SCREEN
    PRINT
```

Line 285 stops the dump to the printer and restores the capability to send files to the tape. I am running Disk BASIC and this indeed does stop the dump to the printer, but still redirects ASCII file text to the screen. After a cold start in Disk BASIC, addresses 360 and 361 contain 203 and 74 rather than 130 and 115. This is a good example of that magical device called a hook. Together, 360 and 361 contain an address to code in the highest level of BASIC in your machine. This hook directs control to the highest level BASIC available which then calls routines in lower level ROMS. If you are running a disk change the line to the following:

```
285 POKE360,203:POKE361,74 'DISABLES SCREEN
    PRINT
```

Now I got a surprise here; I had to do some digging to find out why the expected result was not obtained and learned something along the way. No damage was done. You can expect surprises when you poke numbers in memory sections that are controlling CoCo's operation. You can also expect that what works with Extended BASIC will not work with Disk BASIC. ROM updates will have code at different addresses and *POKEs* that work with Disk BASIC 1.0 will not work with the greatly revised Disk BASIC 1.1. Radio Shack has taken pains to make sure that published BASIC works the same in both versions. Version and level considerations are one reason I have made very little use of *POKEs* in the column. However, you can *POKE* and *PEEK* all you want. You will learn a lot about your machine and the worst that can happen is that it may "go west.". Just turn it off and then back on and start over.

Lines 60 to 90 set up a menu and allow the user to choose whether to send the output to the screen or printer. But we just went through something like that didn't we? First, Jim wants to have a different format to the printer than he would use on the screen. Second, the Line 55 *POKEs* provide the ability to put the screen format to both the screen and printer for program development and documentation purposes. The user might not want to do this very often. In fact the program listing I received has Line 55 code preceded by a single quote, turning it into an inoperative REM.

```
55 'POKE360,162:POKE361,191 'ENABLES SCREEN
   PRINT
60 Q$=CHR$(34)'QUOTATION MARKS
70 CLS:PRINT@228,"PRESS "Q$"ENTER"Q$"FOR
   SCREEN "
   :PRINT@260,"PRESS "Q$"P"Q$" FOR HARD
   COPY"
80 A$=INKEY$:IFA$=""THEN80
90 IFA$<>"P"THEN D=0:X=4:Y=10:Z=31:WIDTH
   =32 ELSE
   D=-2:X=30:Y=40:Z=60:WIDTH=80
```

Lines 60 and 70 show you how to print quotation marks to the screen. Here *Q$* is defined as *CHR$(34)*, the ASCII value for a quotation mark. *Q$* then appears in the code following the *PRINT* statement. In this case ENTER and P will be enclosed by quotes. Line 80 is the conventional *INKEY$* routine and Line 90 tests for a P as input and sets tabs (X,Y and Z) and *WIDTH* depending on the *INKEY$* entry. From here on we will see a number of long variable names. They do make the code more readable. You have to be very careful since only the first two letters are significant and conflicts with reserved words are more likely. I think Jim edited the program to add long variables after he got it up and running. One variable he used was *TOTAL*, which seems like a good name for carrying the total in. But it bombs the program since CoCo sees *TO*, a reserved word and calls SN Error. SUM works and is descriptive.

Earlier, I mentioned the fact that I was able to make a file on disk even though Extended BASIC was "off." I wanted to do this so I could route the program output to an ASCII file and then bring it into this article through the Append Mode of *Telewriter*. Jim had already set up his *PRINT#D* statements with a variable so device numbers could be chosen by the program. D is set in Line 90 as 0 for the screen and -2 for the printer. I added code Lines 94 through 96 to provide the file option.

```
94 IFA$<>"P"THENA$="SCREEN"ELSEA$=
   "PRINTER"
95 PRINT@324,"PRESS 'D' FOR DISK FILE"
96 B$=INKEY$:IFB$="D"THEND=1:OPEN"O",#1,
   A$ ELSEIFB$=""THEN96
```

In Line 94, A$ is checked for a "P" and redefined as SCREEN or PRINTER to provide file names. Line 95 prints the option to the menu. Line 96 is an *INKEY$* loop that sets D=1 and opens a disk file for output, using #1 buffer, whose name is in A$. Any key other than "D" drops to the next line without opening the file.

Normally, there would be some sort of routine for data input. Since the program was designed to demonstrate some BASIC procedures, data is provided in *DATA* statements. This is a good temporary approach when developing and debugging a program. You can later write the input code after the processing routines work. Lines 100 through 160 include initialization of two variables and the *DATA* statements.

```
100 ITEM$="OUTSTANDING CHECKS"
110 UNIT=1
120 DATA 89,FEB 29,100
130 DATA 999,APR 15,21.35
140 DATA 1000,APR 16,1872.99
150 DATA 1001,APR 18,21.90
160 DATA 9999,EOF,0
```

A *DATA* statement consists of the keyword *DATA* followed by fields of data separated by commas. You do not have to make a distinction between string data and numbers in the data statement itself. You make the destinction in defining your variables in the *READ* statements. The above *DATA* statements consist of a check number which will be treated as a string, a date string and a value which will be treated as a number. Line 190 *READs* the data.

```
190 READ CHECKS$,DATE$,AMOUNT
```

We are going to print a table and all tables need headings. Lines 170 and 180 perform these chores. The name of the table is held in the variable *ITEM$*. Line 170 performs a calculation to center this name. It's a simple subtract the text length from the line *WIDTH* and divide by two to establish the location to start printing.

```
170 CLS:PRINT#D,TAB((WIDTH-LEN(ITEMS$))/2)
    ITEM$:PRINT#D," "
180 PRINT#D,TAB(X-3)"NO.";TAB(Y+1)"DATE";
    TAB(Z-6)"AMOUNT":PRINT#D," "
```

Column headings are trickier. Check number and amount are to be right justified so the tab values X and Z refer to the last right column to contain a character. Dates are left justified so the tab position Y is the first column from the left to print. In Line 180, print locations for *NO.* and *AMOUNT* are counted back left from X and Z while the heading *DATE* is centered one character right of the date tab Y.

Data processing occurs in lines 200 through 250. First *DATE$* is checked for an *EOF*. In this case *EOF* was included in the terminating record date field in Line 160. This method could be used for a keyboard input routine. Plenty of alternates exist such as –1 in the check number (surely nobody numbers their checks in a series using a –1). If an EOF is found, the program goes to Line 260 to develop totals and finish the table.

```
200 IF DATE$="EOF"THEN260
210 SUM=SUM+AMOUNT
220 COUNTER=COUNTER+UNIT
230 N=AMOUNT:GOSUB1010
```

COUNTER simply counts the number of outstanding checks. *UNIT* was defined as one in Line 110. View it as a constant that might need to be changed at some future time. If all constants used in a program are grouped together and defined at one place in the program, changes to the constants are easy and one change will affect all places that a constant is used in the program. Here the application is trivial, but demonstrates the procedure.

In Line 230 is a subroutine call to 1010. A good subroutine will be general in nature so it can be called from a number of places in the program. This subroutine takes a number, N, and returns a formatted string N$. Here the number we want to format is in *AMOUNT* so we make the assignment *N=AMOUNT* and *GOSUB 1010*.

```
240 PRINT#D,TAB(X-LEN(CHECK$))CHECK$;TAB
    (Y)DATE$;TAB(Z-LEN(N$))N$
250 GOTO190
```

Line 240 prints the data much like we printed headings except the computer is given the task of calculating the lengths of strings *CHECK$* and *N$* and counting back from tab locations X and Y.

```
260 N=SUM:GOSUB1010
270 PRINT#D:PRINT#D,TAB(X)COUNT"CHECKS"
280 PRINT#D,TAB(X)"TOTAL AMOUNT"TAB(Z-L
    EN(N$)-1)"$"N$
285 ...
288 ...
290 CLOSE:END
```

Line 260 is the second call to 1010 and N now carries the value from *SUM*. In Line 270 *COUNT* is the same variable as *COUNTER* (remember only the first two characters are meaningful). Note in Line 280 the position to print is moved left by one to allow for the $. In Line 290 a *CLOSE* is included just in case we had the file open. If it were not opened, nothing is lost. And here is how the result looks on the screen. The printer output is similar, but more spread out and is centered on the page.

OUTSTANDING CHECKS

NO.	DATE	AMOUNT
89	Feb. 29	100.00
999	Apr. 15	21.35
1000	Apr. 16	1,872.99
1001	Apr. 18	21.90
4 Checks		
Total Amount		$2,016.24

"Plug In Kits" for **CoCos*** *Including the new* **CoCo II** *from...* **MetroKit Retrofit**

1. **EYE-BALL SAVER.** Flip easily from NORMAL VIDEO when using games, to *REVERSE VIDEO* when you write text. Ready to plug in. Price $19.95....Order # MK 1233
2. **COCO SOUND.** Did you buy one of those video things to drive a monitor and now can't hear the sweet sounds of CoCo? No TV or external amp required. Price $24.95....Order #MK 1235, for COCO *II*s, order #MK 1235A
3. **COCD DRIVE.** Monochrome video driver. Make that text really readable. An improvement really worth plugging in. Price $19.95....Order #MK 1236
4. **DELUXE VERSIONS** for #1 and #3 combination. Price $29.95....#MK 1239

METRO ELECTRONICS, 5131 Mission St., San Francisco, CA 94112 (415) 333-1917 Established 1963

Terms: Check, Money order, Visa/Master. Add $2.00 for Shipping and handling.
** D & E Board will require soldering. [California residents add sales tax]*

→→→→→For COCO *II*s, add "A" to part number.←←←←←

Now we come to the subroutine all the foregoing program was written to demonstrate. It is the equivalent of *PRINT USING* with the format string "###,###.##". Instead of printing the string, the subroutine returns a formatted string that is printed later. *PRINT USING* rounds the second decimal place so that's the first thing done in Line 1010 as well as converting the result to a string without a decimal (*100).

```
1010 N$=STR$(INT((N+.005)*100))

1020 IFLEN(N$)>6THEN1050
1030 N$=MID$(N$,2,LEN(N$)-3)+"."+RIGHT$(N$,2)
1040 GOTO1060 'ALTERNATE 1040 RETURN
1050 N$=MID$(N$,2,LEN(N$)-6)+","+
 MID$(N$,LEN(N$)-4,3)+"."+RIGHT$(N$,2)
1060 RETURN
```

A string made from a number using *STR$* carries a leading space. Line 1020 takes this space into account in testing whether there are six or more digits and the comma insertion, Line 1050, is to be used. Line 1030 takes a five digit or smaller number and inserts a decimal point before the second digit from the right. Basically a left-hand portion of the string is obtained, a point is added and the right two digits are added. The *GOTO1060* only sends the program to a *RETURN* statement. My preference is to throw out the *GOTO* and use a return. Line 1050 is like 1030 except a comma is added.

This subroutine is specific to a particular need, formatting a number and returning it as a string. Now that you have an example of how it is done, try your own.



The listing:

```
10 REM **COLOR BASIC PRINT USING
 ROUTINE** 21 APR 84  JAMES SHER
A
20 REM WITH EXAMPLES OF MULTIPLE
 DEVICE CENTERING AND TABBING
30 REM D...DEVICE NO.
40 REM X, Y, & Z...TAB LOCATIONS
50 REM TOTAL ... 2ND CHARACTER =
 ZERO
53 'POKE 29B,0:POKE303,0 'DISABL
ES EXTENDED BASIC
55 'POKE360,162:POKE361,191 'ENA
BLES SCREEN PRINT
60 Q$=CHR$(34)'QUOTATION MARKS
70 CLS:PRINT@22B,"PRESS "Q$"ENTE
R"Q$"FOR SCREEN ":PRINT@260,"PRE
SS "Q$"P"Q$" FOR HARD COPY"
80 A$=INKEY$:IFA$=""THEN80
90 IFA$<>"P"THEN D=0:X=4:Y=10:Z=
31:WIDTH=32 ELSE D=-2:X=30:Y=40:
Z=60:WIDTH=B0
94 IFA$<>"P"THENA$="SCREEN"ELSEA
$="PRINTER"
95 PRINT@324,"PRESS 'D' FOR DISK
 FILE"
96 B$=INKEY$:IFB$="D"THEND=+1:OP
EN"O",#1,A$ ELSEIFB$=""THEN96
100 ITEM$="OUTSTANDING CHECKS"
110 UNIT=1
120 DATA B9,FEB 29,100
130 DATA 999,APR 15,21.35
140 DATA 1000,APR 16,1B72.99
150 DATA 1001,APR 18,21.90
160 DATA 9999,EOF,0
170 CLS:PRINT#D,TAB((WIDTH-LEN(I
TEMS$))/2)ITEM$:PRINT#D," "
1B0 PRINT#D,TAB(X-3)"NO.";TAB(Y+
1)"DATE";TAB(Z-6)"AMOUNT":PRINT#
D," "
190 READ CHECKS$,DATE$,AMOUNT
200 IF DATE$="EOF"THEN260
210 SUM=SUM+AMOUNT
220 COUNTER=COUNTER+UNIT
230 N=AMOUNT:GOSUB1010
240 PRINT#D,TAB(X-LEN(CHECK$))CH
ECK$;TAB(Y)DATE$;TAB(Z-LEN(N$))N
$
250 GOTO190
260 N=SUM:GOSUB1010
270 PRINT#D:PRINT#D,TAB(X)COUNT"
CHECKS"
2B0 PRINT#D,TAB(X)"TOTAL AMOUNT"
TAB(Z-LEN(N$)-1)"$"N$
2B5 POKE360,130:POKE361,115 'DIS
ABLES SCREEN PRINT
2B8 POKE298,25:POKE303,14 'ENABL
ES EXTENDED BASIC WITH DISK BASI
C
290 CLOSE:END
1000 REM ** PRINT USING NUMBER F
ORMATTER **
1010 N$=STR$(INT((N+.005)*100))
1020 IFLEN(N$)>6THEN1050
1030 N$=MID$(N$,2,LEN(N$)-3)+"."
+RIGHT$(N$,2)
1040 GOTO1060 'ALTERNATE 1040 RE
TURN
1050 N$=MID$(N$,2,LEN(N$)-6)+","
+MID$(N$,LEN(N$)-4,3)+"."+RIGHT$
(N$,2)
1060 RETURN
```

Computer Simulation For Fun And Prophet

Part II: Exogenous Human Interaction Simulation — The *Stock Market*

By Dr. Bob Tyson

"Oh, I can do better than that!" We've all said that one time or another. "If I were the teacher . . . If I were the Commander-in-Chief . . . If I were the pole sitter . . . ." Computer Simulations give us the opportunity to prophesy our capability if we were someone that we might never be. "The pilot, the astronaut, the quarterback, are all possibilities if we let the computer do the work for us by just acting as "the other side." Part one of this series, last month, dealt with the components of a Simulation and how prophecy-by-computer is accomplished. The universe and the initial boundary conditions were defined so that anyone with an idea, a computer, and a little programming ability might be able to write a Simulation. One of the most difficult tasks in any Simulation is the art of simulating human thought or the world's reactions to our human thought. This article describes a few of the details of simulating human thought with emphasis on seeing how we might do if conditions were not known in a stock market Simulation.

After deciding what you want to simulate, defining your universe, and setting your initial and final boundary conditions, you can begin to simulate the human thought processes that go into your Simulation. There are two types of simulated human thought. One is called endogenous, which means "from within." An endogenous Simulation is one which lets the program do "the thinking." In an exogenous ("from without") Simulation, the player runs the program and does the thinking. Both are equally difficult to do. Endogenous Simulations are limited by their universe. They can only *think* certain things. They are not complete human brains. On the other hand, an exogenous Simulation will let the "player" think anything, but the computer programmer must have anticipated every possible thought that may arise.

I say these are equally difficult after examining my *Strategy Football* Simulation. In it, the program had both endogenous and exogenous human thought Simulations. The endogenous part came about when the computer had to play one of the teams. It chose plays, punts and onside kicks based on my own perception of the need for certain plays. I programmed it so that it would not try to kick a 95 yard field goal since that wasn't reasonable. One of the bugs in the published version of the Simulation allowed a very good chance of success for a 95-yard field goal. The exogenous part, the part where the player entered the plays, allowed for that possibility. Thus, a go-for-broke player might just try such an absurd thing and be successful. That, unfortunately, was the case. The universe for the exogenous human interaction just was not well enough defined. That is a pitfall in any complicated human thought Simulation.

Some endogenous thinking can be done with random numbers. For instance, if the best play to call would be a punt, but one out of 15 times, a forward pass might be successful, the computer could simply generate a random number *RND(15)* and see if it was equal to 1. If so, it would run the unlikely, but surprising play. Another approach to programming endogenous human thought is the *IF* statement. These can be quite complicated. For instance a chess Simulation — which is the epitome of human thought Simulations — generally runs through dozens of *IF . . . THEN* type statements (in BASIC or Machine Language) before it decides on the best one. It loses because the programmer didn't have the right one in there, not because it made a mistake. The state-of-the-art of endogenous human thought Simulations is called "artificial intelligence," which I will be writing about next month. The crux of this month's article is really exogenous human thought Simulation which is the basis for the *Stock Market* Simulation.

(Dr. Bob Tyson is a senior systems engineer at United Technologies Research Center, where he designs and analyzes high energy laser systems using computer simulations. His CoCo Simulations include Strategy Football *[August 1983 issue] and* Election '84 *[November 1983 issue].)*

The *Stock Market* Simulation

Key in the listing shown or load it from RAINBOW ON TAPE. It takes more than 16K after it is run. The Simulation allows up to five players to test their skill buying and selling securities as the market rises and falls. If you think you are a latter-day E.F. Hutton then this Simulation, since it is exogenous, *lets you prove* it. This is more than a simple buy low-sell high Simulation . . . everybody writes those. This program allows buying and selling stocks, short selling, options (puts and calls), borrowing against the prime rate, and the purchase of fixed rate bonds. It also provides a description of 10 different stocks along with a plot of their performance at any time.

The universe for this Simulation is the 10 stocks from 10 diverse companies, fixed rate bonds, up to seven options-to-buy, borrowing and paying on a debt, exercising the option-to-buy, and long and short selling on the 10 stocks. The Simulation provides for stock splitting and bankruptcies. If you don't know exactly what I'm talking about, just play it with buying and selling and buy a book on the subject, or ask a teacher or a broker, then let them play it and see how well they do. Most importantly, enjoy yourself. You just might learn something.

The Simulation is menu driven. After watching the logo when all the data arrays are initialized in lines 10-90, the main menu will appear. This will step through the players with the "day" shown on the screen. The "day" really simulates about two weeks in an actual market like the New York Stock Exchange. However, if you change the names and initial conditions in Lines 9000-9017 you can simulate any exchange. If you try a commodities exchange, my computer "day" simulates only a few minutes. Each player has many options (not to be confused with his "options" listed). He can look at his own portfolio; this tells him what he owns and what he owes. It also tells him the condition of any option that he owns. From the main menu, any player can review the current market status. This will tell him the current price of the 10 stocks and their high and low value over the last 12 days. (Remember a "day" is not a *day*.) The current market status menu will also tell you the prime rate, the market average, and the increase or decrease from the last period. From this menu, you can also get a "description" of each stock. The description routine will ask you for the ticker symbol of the stock (that's a three-letter abbreviation). It will give you a brief market analysis and a graphic plot of its performance over the last 12 days. The number on the upper left of the plot is the maximum of the vertical axis. It's also a clue to when the stock might split. This is useful when you've got a half dozen stocks floating around and you forgot what they were. From this menu you can also get a list of the options for sale. You can't purchase or sell anything from this menu, you can just get information.

From the main menu you can choose to place an order. This will allow you to buy, sell, and do just about everything except call Merrill Lynch. Investing allows you to buy a stock at its current market price and pay the commission. The Simulation will tell you how many shares you can afford and then prompt you for the number of shares you wish to buy.

Don't enter fractional or negative shares; it was debugged, but I'm not perfect. Divesting allows you to sell shares, also with the commission fee. If you don't own any, the Simulation will stop you. After all, the Securities and Exchange Commission must do its job.

A "short sell" is a gamble that the stock price will go down, rather than up. If you short sell a stock you essentially borrow the shares and sell them. This money is added to your cash on hand. The shares will show up in your portfolio with an 'S' beside them (for Short). If you bought the shares outright, by INVESTING, the shares will have an "L" beside them in the portfolio (for Long). This looks like a way to borrow money, and it is, but it really becomes a debt you incurred. Cancelling the short sell is the opposite. You must have enough cash to "buy back" the shares that you borrowed. If you want to cancel the short sale, just borrow enough to buy back all the shares, and then do it. This Simulation Universe doesn't allow someone to own a stock "long" and "short" at the same time. If you can't decide whether it's going up or down, I can't either.

Another investing trick of the trade is the "option." This Simulation provides only for an option-to-buy. The option-to-sell just makes it that much more complicated. When you purchase an option, you purchase a chance to buy the stock at a fixed price before a fixed expiration date. All this is spelled out on the option. If the price of the stock goes above the option price then you should exercise the option and "buy the stock at a bargain." If nothing happens before the option expires, just let it die. The price of the option is always much less than the price of the shares. In real life you could also sell the option itself, since it has value. But, in this Simulation you must "exercise it" to buy the shares and then take your profit by selling them.

Sooner or later you may need more money. You can simply borrow what you need here. The rate is based on the prime interest rate that is shown. But, as in real life, the more you borrow, the lower the rate becomes. Don't overdo it; you can easily go into debt too far. At any time you can also pay back all or part of the loan. That will save you a lot of interest.

The last player has an extra choice at his main menu. He, or she, can EXIT to see the results. This ends the Simulation. You can compare yourself with the other players by looking at your total net worth. If the last player decides to continue to the next "day" they just press 'G'. The Simulation will then do all the updating. This takes place in lines beginning with 5000. The new stock prices are computed based on bull (rising) or bear (falling) market conditions. The new averages are computed. The arrays holding the stock price histories are updated. If a stock price has gone too high, depending on its market analysis, it will split. This is where each owner of the stock will get two shares for each one he owns *and* the price of the stock will be halved. By itself, it is meaningless, but say, for instance, that the stock rises, on the average, $2 a day. If the stock sells for $20/share that's 10 percent. But now, if it splits, and the price goes to $10/share the same $2 increase amounts to 20 percent. In general, if you own a stock when it splits, that's good. On the other hand, if the stock price goes to zero, the company becomes bankrupt. Any shares that you hold are generally worthless, but the Simulation gives you a break, it only takes 90 percent of your unfortunate shares. The company will start over, cautiously.

Also during the update period, dividends are paid to owners of stock. You will be able to see this by your cash increase. If you have any outstanding debt, the bank will deduct the interest and you will see a cash decrease. All these operations are automatic since the broker and banker of the Simulation are endogenous.

Good luck, capitalists. Don't let greed and longing for power overcome your senses. This mainly exogenous Simulation doesn't have a conscience. The prophecy you make may be your own.

100	89	5310	251
2070	162	6200	24
3270	117	8106	20
3450	30	8850	119
3690	148	9006	233
3898	41	END	113

The listing:

```
10 DIM S(5,24),V(11,7),OP(7,6),N
$(5),T$(10),PH(10,24)
15 CLS0:PRINT@132," S T O C K
M A R K E T ";:PRINT@196," SIMUL
ATION BY BOB TYSON ";
17 I$="% %% %######%    %$$#,###,#
##.##"
20 PMODE 3,1:PCLS(1):COLOR 2,4
21 LINE (10,180)-(230,20),PSET,B
F:COLOR 3,4:LINE(10,180)-(230,20
),PSET,B
22 DRAW"BM20,30;R20L2002OR2002OL
20;BR40U40L10R16;BR1004OR20U40L2
0;BR50L20D40R20;BR10U40D20R7E14G
14F1407"
23 DRAW"BM10,160;E40F10E25F20E50
F20E22FBE25":PAINT(190,175),4,3
24 DRAW"BM50,172;U40F10E10D40;BR
10U40R20D20L20R2002O;BR10U40R200
20L20R1403R303R3014;BR10U4002OR7
E14G14F1407;BR10R20L20U20R14L14U
20R20;BR10R20L1004O"
25 SCREEN 1,0:FOR X=1 TO 10:GOSU
B 9900:NEXT
29 SCREEN 0,0:CLS::PRINT"ENTER N
UMBER OF PLAYERS 1-5":INPUT NP

30 DA=1:P=1:PR=11+RND(20)/10:ON=
1
35 IF NP<0 OR NP>5 THEN 29
40 FOR S=1 TO 10:READ V(S,1):V(S
,2)=V(S,1):V(S,4)=V(S,1):READ V(
S,6),V(S,7):NEXT:FOR I=1 TO 7:RE
AD V(11,I):NEXT
50 FOR PP=1 TO NP:FOR I=1 TO 24:
S(PP,I)=0:NEXT I:S(PP,22)=25000:
NEXT PP
60 LA=0:FOR S=1 TO 10:FOR X=1 TO
 12:PH(S,X)=V(S,1):PH(S,X+12)=0:
NEXT X:LA=LA+V(S,1):NEXT S:LA=LA
/10:ON=10
70 FOR PP=1 TO NP:CLS:PRINT @65,
"ENTER NAME OF PLAYER ";PP,"":IN
PUT N$(PP):NEXT PP
```


Computer Servo Controlled Robot Arm

Call or Write for Free Catalog

Analog Micro Systems

5660 Volmont Road · Boulder, Colorado 80301 · Tel: (303) 444-6809

Robot-1

Keyboard or Joystick Control

Remembers Everything It Did & does It again

Typical System Includes:

- Robot-1 & Cables
- 6 Channel Servo Controller
- Power Supply
- All Software with source code

Modular Robotic Accessories:

- Mobile Cart for Traveling Robot
- Radio Links between all Functions
- Robot-mounted MicronEye
- Ultrasonic Range Finder

Robot-1 Series

starting at $289.00
for the Color Computer
and 6809 SS50 Computers

Additional Systems Available

Robot-1R for Radio Control Systems

```
80 FOR S=1 TO 10:READ T$(S):NEXT
 S
90 GOSUB 8400:LA=AV:FOR I=1 TO 7
:OP(I,6)=-1:NEXT I:GOSUB 8700
100 CLS3:PRINT @40," M E N U ";
101 PRINT @102," "+N$(P)+" ";:PR
INT @134," DAY= ";DA;" "
102 PRINT @160,"       V -- VIEW
PORTFOLIO              C -- CURRE
NT MARKET STATUS       P -- PLACE
 ORDER          ";
103 IF P=NP THEN PRINT"        G
-- GO TO NEXT WEEK              X
-- EXIT TO SEE RESULTS "; ELSE P
RINT"        G -- GO TO NEXT PLAY
ER    "
110 K$=INKEY$:IF K$="" THEN 110
ELSE IF K$="V" THEN 1000 ELSE IF
 K$="C" THEN 2000 ELSE IF K$="P"
 THEN 3000 ELSE IF K$="X" THEN B
000 ELSE IF (K$="G" AND P=NP) TH
EN 5000 ELSE IF (K$="G" AND P<>N
P) THEN 4000 ELSE 110
1000 CLS:PRINT N$(P)
1010 PRINT"ITEM   SHARES TYPE VA
LUE "
1020 FOR S=1 TO 10
1030 IF S(P,S)<>0 THEN 1050
1040 IF S(P,S+10)<>0 THEN 1070 E
LSE 1100
1050 PRINT USING I$;T$(S);"    ";
S(P,S);"    L ";S(P,S)*V(S,1)
1060 GOTO 1100
1070 PRINT USING I$;T$(S);"    ";
S(P,S+10);"    S ";S(P,S+10)*V(S,
1)
1100 NEXT
1110 IF S(P,21)<>0 THEN 1120 ELS
E 1130
1120 PRINT USING"%     %######% %$
$#,###,###.##";"BONDS ";S(P,21);
"    ";S(P,21)*1000
1130 PRINT USING"%     %%       %$
$#,###,###.##";"CASH  ";"
 ";S(P,22)
1140 PRINT USING"%     %%       %$
$#,###,###.##";"DEBT  ";"
 ";S(P,23)
1150 X=0:FOR S=1 TO 10:X=X+(S(P,
S)-S(P,S+10))*V(S,1):NEXT
1160 X=X+1000*S(P,21)+S(P,22)-S(
P,23)
1170 PRINT USING"%              %$
$###,###.##";"TOTAL VALUE   ";X
1175 IF S(P,22)>0 THEN 1180 ELSE
 PRINT"YOU MUST BORROW FUNDS":GO
SUB 9900:GOTO 3400
1180 PRINT"<M> FOR MENU, <P> TO
PLACE ORDER  <N> TO VIEW OPTION
OWNED"
1190 K$=INKEY$:IF K$="" THEN 119
0 ELSE IF K$="N" THEN 1200 ELSE
IF K$="M" THEN 100 ELSE IF K$="P
" THEN 3000 ELSE 1190
1200 I=1
1210 IF OP(I,6)=P THEN 1240
1220 I=I+1:IF I<8 THEN 1210 ELSE
 1230
1230 PRINT"YOU OWN NO OPTIONS":G
OSUB 9900:GOTO 100
1240 PRINT"YOU OWN AN OPTION TO
BUY":PRINT OP(I,2);" SHARES OF "
;T$(OP(I,1)):PRINT"AT $";OP(I,3)
;"/SHARE":PRINT"EXPIRES ON ";OP(
I,4)
1250 GOTO 1180
2000 CLS:PRINT"  C U R R E N T
 M A R K E T"
2010 PRINT"ITEM HIGH...   LOW...
  CLOSE..."
2020 FOR S=1 TO 10
2025 GOSUB 8800
2030 VV=V(S,2):GOSUB 8100:X$=K$:
X=VI:V(S,2)=VV
2040 VV=V(S,4):GOSUB 8100:Y$=K$:
Y=VI:V(S,4)=VV
2050 VV=V(S,1):GOSUB 8100:Z$=K$:
Z=VI:V(S,1)=VV
2070 PRINT USING"%  %###%    %##
#%    %###%    %";T$(S)+" ";X;X$
;Y;Y$;Z;Z$
2080 NEXT S
2090 PRINT "BONDS
$ 1000"
2100 PRINT "PRIME=";PR;" % ";:GO
SUB 8400:PRINT USING"%      %###
#.##";"AVERAGE ";AV
2107 X=INT(ABS(AV-LA)*1000)/1000
:IF AV>LA THEN K$=" UP "+STR$(X)
 ELSE IF AV<LA THEN K$=" DOWN "+
STR$(X) ELSE K$="NO CHANGE"
2108 PRINT K$
2110 PRINT"<M> MENU,<O> DESCR.,<
V> OPTIONS";
2120 K$=INKEY$:IF K$="" THEN 212
0 ELSE IF K$="M" THEN 100 ELSE I
F K$="O" THEN 6000 ELSE IF K$="V
" THEN 2200 ELSE 2120
2200 GOSUB 2300
2210 GOTO 2110
2300 CLS:PRINT"OPTIONS AVAILABLE
"
2310 FOR I=1 TO 7
2320 IF OP(I,6)<>0 THEN 2350
2330 PRINT "#";I;"-";OP(I,2);" S
HARES OF ";T$(OP(I,1))
2335 PRINT "AT $";OP(I,3);"/SH :
 EXPIRES ";OP(I,4)
```

```
2340 PRINT"OPTION COSTS $";OP(I,
5)
2345 PRINT"HIT KEY FOR NEXT"
2346 K$=INKEY$:IF K$="" THEN 234
6 ELSE 2350
2350 NEXT I
2360 RETURN
3000 CLS:PRINT" P L A C E   O R
O E R "
3010 PRINT:PRINT"<I> INVEST(BUY)
                 <O> OIVEST(SELL
)                <S> SHORT SELL
                 <C> CANCEL SHOR
T SELL"
3015 PRINT"<N> PURCHASE OPTION
           <E> EXERCISE OPTION
           <B> BORROW FUNOS
           <T> PAY TOWAROS OEBT"
3020 PRINT:PRINT"<M> MENU
                 <P> PLACE ANOTH
ER ORDER"
3030 K$=INKEY$:IF K$=""THEN 3030
 ELSE IF K$="I" THEN 3100 ELSE I
F K$="O" THEN 3200 ELSE IF K$="S
" THEN 3300 ELSE IF K$="B" THEN
3400
3040 IF K$="T" THEN 3500 ELSE IF
 K$="M" THEN 100 ELSE IF K$="P"
THEN 3000 ELSE IF K$="C" THEN 36
00 ELSE IF K$="N" THEN 3700 ELSE
 IF K$="E" THEN 3B00 ELSE 3030
3100 CLS:PRINT" I N V E S T I N
G"
3110 PRINT "CURRENT CASH AVAILAB
LE $";S(P,22)
3120 GOSUB B200
3122 IF S=0 THEN 3120
3125 IF S=11 THEN VV=0 ELSE VV=V
(S,1)
3126 IF S<>11 AND S(P,10+S)<>0 T
HEN 3199 ELSE GOSUB B100
312B IF S=11 THEN 3130 ELSE PRIN
T "CURRENT PRICE IS ";VI;K$
3129 X=INT(INT(S(P,22)/V(S,1)/10
0)*100)-100:PRINT"YOU CAN AFFORO
 ";X;" SHARES":GOTO 3140
3130 X=INT(S(P,22)/1000)-1:PRINT
 "CURRENT PRICE IS $1000.00 EACH
":PRINT"YOU CAN AFFORO ";X;" BON
DS"
3140 PRINT"HOW MANY OO YOU WISH
TO BUY?":INPUT NS:GOSUB B600:IF
FLAG=1 THEN 3129 ELSE IF NS>X TH
EN 3140
3150 OL=NS*V(S,1):GOSUB 8500
3155 CV=INT(OL+CM*OL/100)
3160 PRINT "YOUR COST IS $";CV:P
RINT"INCLUOING A ";CM;" % COMMIS
SION"
3170 PRINT"VERIFY SALE (Y/N)"
31B0 K$=INKEY$:IF K$="" THEN 31B
0 ELSE IF K$="N" THEN 100 ELSE I
F K$="Y" THEN 3190 ELSE 31B0
3190 IF S=11 THEN S(P,21)=S(P,21
)+NS
3192 IF S<11 AND S>0 THEN S(P,S)
=S(P,S)+NS
3194 S(P,22)=S(P,22)-CV
319B GOTO 100
3199 PRINT"YOU OWN THESE SHARES
SHORT, YOU CANNOT BUY THEM LONG"
:GOSUB 9900:GOSUB 9900:GOTO 100
3200 CLS:PRINT" O I V E S T I N
G"
3210 GOSUB B200:IF S=0 THEN 3210
3220 IF S=11 THEN 3250
3230 IF S(P,S)=0 THEN 3231 ELSE
3235
3231 PRINT "YOU OO NOT OWN ANY S
HARES":GOSUB 9900:GOTO 100
3235 PRINT "YOU OWN ";S(P,S);" S
HARES @";:VV=V(S,1):GOSUB B100:P
RINT VI;K$
3240 X=S(P,S):GOTO 3260
3250 X=S(P,21):VV=V(11,1)
3260 PRINT"HOW MANY OO YOU WISH
TO SELL?":INPUT NS:GOSUB B600:IF
 FLAG=1 THEN 3235
3270 IF X<NS THEN 3260
3275 OL=NS*VV:GOSUB B500
32B0 CV=OL-CM*DL/100
32B5 PRINT"YOUR REVENUE IS $";CV
:PRINT"INCLUOING A ";CM;" % COMM
ISSION":PRINT"VERIFY SALE (Y/N)"
32B7 K$=INKEY$:IF K$="" THEN 32B
7 ELSE IF K$="N" THEN 100 ELSE I
F K$="Y" THEN 3290 ELSE 32B7
3290 IF S=11 THEN S(P,21)=S(P,21
)-NS
3291 IF S<11 AND S>0 THEN S(P,S)
=S(P,S)-NS
3292 S(P,22)=S(P,22)+CV
3294 GOTO 100
3300 CLS:PRINT" SHORT SELL A COM
MON STOCK"
3320 GOSUB 8200
3322 IF S=0 OR S=11 THEN 3320
3323 IF S(P,S)>0 THEN 3325
3324 VV=V(S,1):GOSUB 8100:GOTO 3
328
3325 PRINT"YOU CAN NOT SHORT SEL
L A STOCK  THAT YOU OWN LONG; YO
U HAVE":PRINT S(P,S);" SHARES OF
 IT":GOSUB 9900:GOTO 100
3328 PRINT "CURRENT PRICE IS ";V
I;K$
3340 PRINT"HOW MANY OO YOU WISH
TO SHORT   SELL?":INPUT NS
```

```
3350 OL=NS*V(S,1):GOSUB 8500
3355 CV=OL-CM*OL/100
3360 PRINT "YOUR GAIN IS $";CV:P
RINT"INCLUDING A ";CM;" % COMMIS
SION"
3370 PRINT"VERIFY SALE (Y/N)"
3380 K$=INKEY$:IF K$="" THEN 338
0 ELSE IF K$="N" THEN 100 ELSE I
F K$="Y" THEN 3390 ELSE 3380
3390 S(P,S+10)=S(P,S+10)+NS
3394 S(P,22)=S(P,22)+CV
3398 GOTO 100
3400 CLS:PRINT" B O R R O W I N
G"
3410 PRINT:PRINT"THE PRIME RATE
IS ";PR;" %"
3420 PRINT"HOW MUCH DO YOU WISH
TO BORROW?":INPUT NS:IF NS<0 THE
N 3420
3424 IF NS=0 THEN 100
3425 IF NS>100000 THEN X=PR ELSE
 X=PR+1.5
3430 CV=NS*X*.01/26:PRINT"YOUR B
IWEEKLY INTEREST PAYMENT  WILL B
E ";:PRINT USING"$######.##";CV
3440 PRINT"VERIFY TRANSACTION (Y
/N)"
3450 K$=INKEY$:IF K$="" THEN 345
0 ELSE IF K$="N" THEN 100 ELSE I
F K$="Y" THEN 3460 ELSE 3450
3460 S(P,24)=(S(P,24)*S(P,23)+X*
NS)/(S(P,23)+NS):S(P,23)=S(P,23)
+NS:S(P,22)=S(P,22)+NS
3470 GOTO 100
3500 CLS:PRINT" PAYMENT ON DEBT"
3505 PRINT:PRINT"YOU OWE $";S(P,
23)
3510 PRINT"HOW MUCH DO YOU WISH
TO PAY?":INPUT NS:IF NS<S(P,22)
THEN 3525
3520 PRINT"YOU DON'T HAVE THAT M
UCH...      YOU ONLY HAVE $";S(P,
22):GOSUB 9900:GOTO 3510
3525 IF NS<S(P,23) THEN 3530 ELS
E PRINT"YOU DON'T OWE THAT MUCH
3526 GOSUB 9900:GOTO 3510
3530 PRINT"THAT WILL LEAVE YOU W
ITH $";S(P,22)-NS
3540 PRINT"THE PRIME RATE IS ";P
R;" %"
3550 PRINT"VERIFY SALE (Y/N)"
3560 K$=INKEY$:IF K$="" THEN 356
0 ELSE IF K$="N" THEN 100 ELSE I
F K$="Y" THEN 3570 ELSE 3560
3570 S(P,22)=S(P,22)-NS:S(P,23)=
S(P,23)-NS:GOTO 100
3600 CLS:PRINT" CANCEL A SHORT S
OLD STOCK"
3620 GOSUB 8200
3622 IF S=0 OR S=11 THEN 3620
3623 IF S(P,S+10)=0 THEN 3625
3624 VV=V(S,1):GOSUB 8100:GOTO 3
628
3625 PRINT"YOU DO NOT HAVE ANY S
HARES THAT ARE SHORT SOLD":GOSUB
 9900:GOTO 100
3628 PRINT "CURRENT PRICE IS ";V
I;K$
3630 X=INT(INT(S(P,22)/V(S,1)/10
0)*100)-100:IF X>S(P,S+10)THEN X
=S(P,S+10)
3635 PRINT"YOU CAN AFFORD ";X;"
SHARES"
3640 PRINT"HOW MANY DO YOU WISH
TO BUY      BACK?":INPUT NS:GOSUB
 8600:IF FLAG=1 THEN 3630 ELSE I
F NS>X THEN 3640
3650 OL=NS*VV:GOSUB 8500
3660 CV=OL+CM*OL/100
3662 PRINT "YOUR COST IS $";CV:P
RINT"INCLUDING A ";CM;" % COMMIS
SION"
3670 PRINT"VERIFY SALE (Y/N)"
3680 K$=INKEY$:IF K$="" THEN 368
0 ELSE IF K$="N" THEN 100 ELSE I
F K$="Y" THEN 3690 ELSE 3680
3690 S(P,S+10)=S(P,S+10)-NS
```


YORK 10®
CASSETTES

COMPUTER GRADE
• DATA TRAC •
BLANK CASSETTES
C-05, C-06, C-10, C-12, C-20, C-24, C-32

From the leading supplier of Computer Cassettes, now, longer length C-12's (6 minutes per side) provide the extra few feet needed for some 16K programs.
- BASF-LHD (DPS) world standard tape.
- Premium 5 screw shell with lenses.
- Internationally acclaimed Thousands of expert users
- Error Free • Money back guarantee

BUY THE BEST, AT FACTORY-DIRECT PRICES

✱ 500 C-10 + or C-10 + — 36¢ each
w/labels, add 4¢ • Shipping $12/500
500 Boxes 10¢ ea • Shipping $10/500
(Blue Caddy offer does not apply)

TRACTOR FEED • CUT-OUT
BLANK CASSETTE LABELS
White $3.00/100 $20.00/1000
NEW COLORED LABELS • Pastels •
Red, Blue, Green, Yellow, Lavender
$4.00/100 $30.00/1000

CASSETTE STORAGE CADDY
Holds 82 cassettes $8.00
with boxes
Includes edge labels
and index card

FREE
8 CADDY WITH EVERY
4 DOZ. CASSETTES PURCHASED
(does not apply to 500 quantity offer)

Call: 818/700-0330
FOR IMMEDIATE DELIVERY
on Credit Card Orders.

ORDER NOW . . . MAIL TO –
YORK 10
9525 Vassar Ave. #R1
Chatsworth, CA 91311

ORDER FORM #R1

ITEM	1 DOZEN	2 DOZEN	TOTAL
C-05	☐ 7.00	☐ 13.00	
C-06	☐ 7.00	☐ 13.00	
C-10	☐ 7.50	☐ 14.00	
C-12	☐ 7.50	☐ 14.00	
C-20	☐ 8.75	☐ 16.50	
C-24	☐ 9.00	☐ 17.00	
C-32	☐ 11.00	☐ 21.00	
Hard Box	☐ 2.50	☐ 4.00	
Wht. Labels	☐ 3.00/100	☐ 20.00/1000	
Color Labels	☐ 4.00/100	☐ 30.00/1000	
Other ____			
Storage Caddy @ 2.95 ea	Qty ____		
	SUB TOTAL		
Calif. residents add sales tax			
Shipping/handling		3.50	
Outside the Continental States — Add extra $1 per caddy, per doz. cassettes or boxes			
	TOTAL		

Each cassette includes 2 labels only. Boxes sold separately. In Continental U.S. shipments by U.P.S. If Parcel Post preferred, check here. ☐

Check or M.O. enclosed ☐ Send Quantity Discounts ☐
Charge to credit card. VISA ☐ MASTERCARD ☐

Card No. _____ Exp. ____
Name _____
Address _____
City _____ State/Zip _____
Signature _____ Phone _____

Ask about our DUPLICATING SERVICE

```
3694 S(P,22)=S(P,22)-CV
3698 GOTO 100
3700 K=0
3701 FOR I=1 TO 7:IF OP(I,6)=P T
HEN K=I
3702 NEXT I
3703 IF K=0 THEN 3709 ELSE 3704
3704 PRINT"YOU OWN AN OPTION ALR
EADY":GOSUB 9900:GOTO 100
3709 GOSUB 2300
3710 PRINT"CHOOSE OPTION # , 0 F
OR MENU"
3720 INPUT I:IF I<=0 THEN 100
3730 IF OP(I,5)<S(P,22) THEN 375
0
3740 PRINT"YOU CAN'T AFFORD IT":
GOSUB 9900:GOTO 100
3750 OP(I,6)=P:S(P,22)=S(P,22)-O
P(I,5)
3760 GOTO 100
3800 CLS:K=0
3810 FOR I=1 TO 7:IF OP(I,6)=P T
HEN K=I
3820 NEXT I
3830 IF K=0 THEN 3840 ELSE 3850
3840 PRINT"YOU OWN NO OPTIONS":G
OSUB 9900:GOTO 100
3850 IF S(P,OP(K,1)+10)<>0 THEN
3898
3860 X=OP(K,2)*OP(K,3):Y=OP(K,2)
*V(OP(K,1),1)
3865 IF X>S(P,22) THEN 3740
3870 PRINT "YOUR COST IS $";:PRI
NT USING"#######.##";X
3880 PRINT "MARKET PRICE IS $";:
PRINT USING"#######.##";Y
3890 PRINT"VERIFY OPTION SALE (Y
/N)"
3895 K$=INKEY$:IF K$="" THEN 389
5 ELSE IF K$="Y" THEN 3896 ELSE
100
3896 S(P,22)=S(P,22)-X:S(P,OP(K,
1))=S(P,OP(K,1))+OP(K,2)
3897 OP(K,6)=-1:GOTO 100
3898 PRINT"YOU OWN THIS STOCK SH
ORT          CANCEL THE SHORT SELL
 FIRST":GOSUB 9900:GOSUB 9900:GO
TO 100
4000 P=P+1:IF P=NP+1 THEN 5000
4001 GOTO 100
5000 CLS:OA=OA+1:P=1:Z=RND(0)
5005 IF Z>.7 THEN 5008 ELSE IF Z
<.3 THEN 5007 ELSE 5006
5006 PRINT"MIXED MARKET":GOSUB 9
900:GOTO 5010
5007 PRINT"BEAR MARKET":GOSUB 99
00:GOTO 5010
5008 PRINT"BULL MARKET":GOSUB 99
00:GOTO 5010
5010 FOR S=1 TO 10
5020 M=V(S,1)+Z*V(S,6):V=V(S,6)
5030 GOSUB 8300
5040 V(S,1)=T:V(S,3)=T:PH(S,24)=
0
5050 IF V(S,1)<=0 THEN 5100 ELSE
 IF V(S,1)>V(S,7) THEN 5200
5060 NEXT S
5070 FOR X=1 TO NP  'DEDUCT INTE
REST
5080 Y=S(X,23)*S(X,24)/2600
5090 S(X,22)=S(X,22)-Y:IF S(X,22
)>0 THEN 5096
5092 S(X,23)=S(X,23)+Y
5096 NEXT X
5098 GOTO 5300
5100 V(S,1)=0:V(S,3)=0:PRINT T$(
S);" DECLARED BANKRUPCY":PRINT"T
EMPORARY HALT IN TRADING; ALL  S
HAREHOLDERS ARE PAID 1 SHARE  F
OR EACH 10 CURRENTLY OWNED."
5110 GOSUB 9900:GOSUB 9900
5120 FOR X=1 TO NP
5140 IF S(X,S)<>0 OR S(X,S+10)<>
0 THEN 5150 ELSE 5180
5150 S(X,S)=INT(S(X,S)/10):S(X,S
+10)=INT(S(X,S+10)/10)
5180 NEXT X
```


YORK 10®
DISKETTES

BRAND NAME QUALITY "DOUBLE DENSITY" AT DISCOUNT PRICES!

"Plain Wrap" $1.59* ea.

• Certified 100% Error-free •
5 YEAR WARRANTY

BASF qualimetric $2.19* ea. | Dysan $2.69* ea.

*5¼" SSDD, Soft sector, price per disk, 100 pak.

TRACTOR FEED DISKETTE LABELS 1⅞" x 5" 2¢ EACH 1000 QUANT.

FLIP "N" FILE "15" $7.95 for 5¼" Diskettes "25," $21.95 "50," $31.95

Call: 818/700-0330 FOR IMMEDIATE DELIVERY on Credit Card Orders.

ORDER NOW . . . MAIL TO – YORK 10 9525 Vassar Ave. #R1 Chatsworth, CA 91311

ORDER FORM

PLEASE INDICATE QUANTITIES DESIRED

SIZE	Plain Wrap	BASF	Dysan	TOTAL
5¼" SSDD	17.00 / 159.00	24.90 / 219.00	29.90 / 269.00	
5¼" DSDD	20.70 / 182.00	33.90 / 293.00	41.30 / 363.00	
5¼" DS96tpi		47.80 / 421.00	52.50 / 461.00	
8" SSDD		30.00 / 274.00	35.70 / 314.00	
8" DSDD		38.80 / 330.00	41.30 / 363.00	
DISKETTE LABELS	$3.00/100	$20.00/1,000		
FLIP 'N' FILE 5¼"	15," $7.95 qty	25," $21.95 qty	50," $31.95 qty	
			SUB TOTAL	
CA residents add sales tax				
Shipping/handling (any quantity)				3.50
Outside Continental States Add/prep $1 per 10 pak (per file)				
			TOTAL	

All Diskettes are soft sectored, unformatted. #R1
In Continental U.S., shipments by U.P.S.
If Parcel Post preferred, check here ☐
Check or M.O. enclosed ☐ Send Quantity Discounts ☐
Charge to credit card: VISA ☐ MASTERCARD ☐

Card No _____ Exp _____
Name _____
Address _____
City _____ State/Zip _____
Signature _____ Phone _____

```
5190 GOTO 5060
5200 V(S,1)=V(S,1)/2:PRINT T$(S)
;" SPLIT 2 FOR 1"
5210 GOSUB 9900:PH(S,24)=1
5220 FOR X=1 TO NP
5230 IF S(X,S)<>0 OR S(X,S+10)<>
0 THEN 5240 ELSE 5250
5240 S(X,S)=2*S(X,S):S(X,S+10)=2
*S(X,S+10)
5250 NEXT X
5260 GOTO 5060
5300 LA=AV:FOR I=1 TO 10:T=V(I,1
):V(I,1)=V(I,3):V(I,3)=T:NEXT
5310 GOSUB 8400:FOR I=1 TO 10:T=
V(I,1):V(I,1)=V(I,3):V(I,3)=T:NE
XT
5320 X=0:FOR I=1 TO 10:X=X+V(I,1
):NEXT
5330 DN=X/AV
5340 FOR S=1 TO 10:FOR I=2 TO 12
:PH(S,I-1)=PH(S,I):PH(S,I+11)=PH
(S,I+12):NEXT I:PH(S,12)=V(S,1):
NEXT S
5350 FOR S=1 TO 10
5352 V(S,2)=0:V(S,4)=500
5354 FOR I=1 TO 12
5356 IF PH(S,I)>V(S,2) THEN V(S,
2)=PH(S,I)
5358 IF PH(S,I)<V(S,4) THEN V(S,
4)=PH(S,I)
5360 NEXT I
5370 FOR I=1 TO NP
5380 S(I,22)=S(I,22)+3.85*S(I,21
)
5390 NEXT I
5400 IF (2*INT(DA/2)<>DA) THEN 5
440
5410 FOR I=1 TO NP:FOR X=1 TO 10
5420 S(I,22)=S(I,22)+V(X,1)*S(I,
X)/(1200*V(X,6))
5430 NEXT X
5432 NEXT I
5440 FOR I=1 TO 7
5450 IF DA>OP(I,4) THEN OP(I,6)=
-1
5460 NEXT I
5470 GOSUB 8700
5471 FOR S=1 TO 10:IF V(S,1)=0 T
HEN V(S,1)=10
5472 NEXT S
5480 GOTO 100
6000 GOSUB 8200
6050 RESTORE:FOR X=1 TO 37:READ
Y:NEXT:FOR X=1 TO 10:READ K$:NEX
T
6060 FOR X=1 TO S:READ K$:NEXT
```


ARE YOUR WALKING FINGERS GETTING FOOTSORE?

Tired of typing in those long, but wonderful, programs from issues of **THE RAINBOW**? Now, you can get **RAINBOW ON TAPE** and give those tired fingers a rest. With **RAINBOW ON TAPE**, you'll be able to spend your time enjoying programs instead of just typing . . . typing . . . typing them! All you need to do ever again is pop a **RAINBOW ON TAPE** cassette into your recorder, *CLOAD* and *RUN* any one you want.

Think of it! Not 10 or a dozen — but between 20 and 30 — programs every month from **RAINBOW ON TAPE**. All the really good programs from **THE RAINBOW**! All the long ones . . . so you don't have to type them in. Just *CLOAD* and *RUN*!

Now...The Best Color Computer Magazine Offers The Best Tape Service

RAINBOW ON TAPE single issue rate is: within the US, $8, Canadian and Mexican rate, $10, all other countries, $10.00
RAINBOW ON TAPE subscription rate is: within the US, $70, Canadian and Mexican rate, 80, all other countries, $95.

US FUNDS ONLY PLEASE

VISA, MasterCARD and American Express accepted. All subscriptions begin with the current issue and back issues are available beginning with April, 1983. Tapes are sent first class mail to arrive approximately the same time as your current issue of **THE RAINBOW**.

ORDER RAINBOW ON TAPE TODAY!
HANDY ORDER CARD BETWEEN PAGES 34 & 35

```
6070 CLS:PRINT K$:PRINT:PRINT "<
M> FDR MENU, <P> FOR PLOT"
6080 K$=INKEY$:IF K$="" THEN 608
0 ELSE IF K$="P" THEN 6100 ELSE
IF K$="M" THEN 100 ELSE 6080
6100 IF S=11 THEN 100 ELSE PMDDE
 3,1:PCLS(1):SCREEN 1,0:CDLDR 3,
2   'S=# OF STDCK V(S,7) IS MAXI
MUM
6110 LINE(10,180)-(230,20),PSET,
8F
6115 CDLDR 2,3
6120 FDR I=10 TD 230 STEP 20
6130 LINE(I,176)-(I,180),PSET:NE
XT I
6140 X=10:Y=180-160*PH(S,1)/V(S,
7)
6150 FDR I=2 TD 12
6160 V=(I-1)*20+10:Z=180-160*PH(
S,I)/V(S,7)
6170 LINE(X,Y)-(V,Z),PSET
6180 X=V:Y=Z
6190 NEXT I
6192 COLOR 3,2
6193 DRAW"8M180,1"
6195 ON S GDTD 6200,6220,6240,62
60,6280,6300,6320,6340,6360,6380
6200 GOSUB 8901:GOSUB 8907:GOSUB
 8911:DRAW"8M10,1":GDSUB 8924:GD
SUB 8925:GDTD 6500
6220 GDSUB 8903:GDSUB 8911:GDSUB
 8912:DRAW"8M10,1":GDSUB 8925:GO
SUB 8920:GDTO 6500
6240 GOSUB 8904:GOSUB 8918:GOSUB
 8910:DRAW"8M10,1":GOSUB 8929:GD
SUB 8920:GDTD 6500
6260 GDSUB 8909:GDSUB 8909:GDSUB
 8908:DRAW"8M10,1":GDSUB 8925:GD
SUB 8920:GDTD 6500
6280 GDSUB 8910:GDSUB 8916:GDSUB
 8909:DRAW"8M10,1":GDSUB 8924:GD
SUB 8920:GDSUB 8920:GDTD 6500
6300 GOSUB 8913:GOSUB 8911:GDSUB
 8910:DRAW"8M10,1":GOSUB 8922:GD
SUB 8925:GOTO 6500
6320 GDSUB 8913:GOSUB 8917:GOSUB
 8903:DRAW"8M10,1":GOSUB 8922:GO
SUB 8925:GOSUB 8920:GDTD 6500
6340 GDSUB 8914:GDSUB 8909:GDSUB
8906:DRAW"8M10,1":GDSUB 8921:GDS
UB 8920:GDSUB 8920:GOTD 6500
6360 GDSUB 8915:GDSUB 8901:GDSUB
 8902:DRAW"8M10,1":GDSUB 8925:GD
SUB 8920:GDTD 6500
6380 GDSUB 8916:GDSUB 8907:GDSUB
 8905:DRAW"8M10,1":GDSUB 8922:GD
SUB 8925:GDTD 6500
6500 FOR I=1 TO 12
6510 IF PH(S,12+I)<>1 THEN 6550
6530 CIRCLE((I-1)*20+10,10),4,4
6550 NEXT I
6560 K$=INKEY$:IF K$=""THEN 6560
 ELSE 100
8000 CLS:PRINT"CDMPARATIVE RESUL
TS":PRINT"AFTER ";DA;" INVESTING
 PERIDDS"
8010 FDR P=1 TD NP
8020 PRINT N$(P)
8030 X=0:FDR S=1 TD 10:X=X+(S(P,
S)-S(P,S+10))*V(S,1):NEXT
8040 X=X+1000*S(P,21)+S(P,22)-S(
P,23)
8050 PRINT USING"%              %$
$###,###.##";"TOTAL VALUE   ";X
8060 NEXT P
8070 END
8100 VI=INT(VV):VD=VV-VI:IF VD<1
/16 THEN 8110
8101 IF VD>=1/16 AND VD<3/16 THE
N 8120
8102 IF VD>=3/16 AND VD<5/16 THE
N 8130
8103 IF VD>=5/16 AND VD<7/16 THE
N 8140
8104 IF VD>=7/16 AND VD<9/16 THE
N 8150
8105 IF VD>=9/16 AND VD<11/16 TH
EN 8160
8106 IF VD>=11/16 AND VD<13/16 T
HEN 8170
8107 IF VD>=13/16 THEN 8180
8110 K$="       ":VD=.0:VV=VI+VD:
RETURN
8120 K$=" 1/8   ":VD=.125:VV=VI+V
D:RETURN
8130 K$=" 1/4   ":VD=.250:VV=VI+V
D:RETURN
8140 K$=" 3/8   ":VD=.375:VV=VI+V
D:RETURN
8150 K$=" 1/2   ":VD=.500:VV=VI+V
D:RETURN
8160 K$=" 5/8   ":VD=.625:VV=VI+V
D:RETURN
8170 K$=" 3/4   ":VD=.750:VV=VI+V
D:RETURN
8180 K$=" 7/8   ":VD=.875:VV=VI+V
D:RETURN
8200 CLS:S=0:PRINT "ENTER TICKER
 SYM8DL DF STOCK DR 8DND"
8202 PRINT:FDR I=1 TO 5:PRINT T$
(I)+" ";:NEXT:PRINT T$(6)
8203 FOR I=7 TD 10:PRINT T$(I)+"
 ";:NEXT:PRINT" 8DNDS"
8208 INPUT K$
8210 FDR S=1 TD 10:IF K$=T$(S) T
HEN 8240
8220 NEXT S
8230 IF K$="80NDS" THEN S=11 ELS
```

```
E S=Ø
8240 RETURN
B300 'RANDDM NDRMAL DISTRIBUTIDN
 T,M=MEAN,V=VARIANCE
B310 T=V*(RND(Ø)+RND(Ø)+RND(Ø)-1
.5)/.497 + M:RETURN
8400 AV=Ø:FDR I=1 TD 10:AV=AV+V(
I,1)/DN:NEXT:RETURN
B500 CM=5:IF DL>100000 THEN CM=2
 ELSE IF DL>10000 THEN CM=3.5
B510 RETURN
B600 IF NS<Ø THEN FLAG=1 ELSE FL
AG=Ø
B610 RETURN
B700 FDR I=1 TD 7
B710 IF DP(I,6)<>-1 THEN B7B0
8720 DP(I,6)=Ø:K=RND(10):DP(I,1)
=K
B730 DP(I,2)=100*RND(5):Y=RND(10
)+5:DP(I,3)=INT(V(K,1)+Y*V(K,6)/
2):DP(I,4)=DA+Y:DP(I,5)=INT(DP(I
,3)*DP(I,2)/100)
B7B0 NEXT I
B790 RETURN
BB00 V(S,2)=Ø:V(S,4)=10000
BB10 FDR I=1 TD 12
BB20 IF PH(S,I)>V(S,2) THEN V(S,
2)=PH(S,I)
BB30 IF PH(S,I)<V(S,4) THEN V(S,
4)=PH(S,I)
BB40 NEXT I
BB50 RETURN
B901 DRAW"8M+6,+Ø;RBD12U6LBD6U12
RB":RETURN
B902 DRAW"BM+6,+Ø;D12R6U2R2U4LBR
6U2R2U2L2U2L68R8":RETURN
B903 DRAW"8M+6,+Ø;D12R8LBU12R8":
RETURN
8904 DRAW"BM+6,+Ø;D12R6U2R2UBL2U
2L6BRB":RETURN
B905 DRAW"BM+6,+Ø;D12RBL8U6R4L4U
6RB":RETURN
B906 DRAW"BM+6,+Ø;R4D12L4R8L4U12
R4":RETURN
8907 DRAW"8M+6,+Ø;R8L8D12RBU6L4D
2BUBL4RB":RETURN
890B DRAW"BM+6,+Ø;D12R8BU12":RET
URN
8909 DRAW"8M+6,+Ø;D12U12F4E4D12U
12":RETURN
8910 DRAW"BM+6,+Ø;D12U12F4D4F4U1
2":RETURN
B911 DRAW"BM+6,+Ø;R8D6LBU6D128R8
H68E6":RETURN
B912 DRAW"8M+6,+Ø;D6RBD6L88L'12RB
":RETURN
8913 DRAW"8M+6,+Ø;RBL4D12U12R4":
RETURN
8914 DRAW"8M+6,+Ø;D10F2R4E2U10":
RETURN
B915 DRAW"BM+6,+Ø;DBF4E4U8":RETU
RN
B916 DRAW"BM+6,+Ø;D12E4F4U12":RE
TURN
B917 DRAW"BM+6,+Ø;F4D4G4BRBH4U4E
4":RETURN
B91B DRAW"BM+6,+Ø;F4DBU8E4":RETU
RN
B920 DRAW"8M+6,+Ø;D12RBU12LBRB":
RETURN
B921 DRAW"BM+6,+Ø;BR2;R2D12L2R4L
2U12;BR2":RETURN
B922 DRAW"BM+6,+Ø;RBD6LBD6RBBU12
":RETURN
8924 DRAW"BM+6,+Ø;D6RBL2D6U12BR2
":RETURN
B925 DRAW"BM+6,+Ø;D6R6F2D2G2L6BU
12RB":RETURN
B929 DRAW"BM+6,+Ø;D6RBD6U12LBRB"
:RETURN
9000 DATA 10,2,45,4,.2,50
9001 DATA 30,3,90,17,1,50
9002 DATA 40,10,400,6,.5,25
9003 DATA 34,6,250,20,2,100
9004 DATA 9,.5,50,8,.5,25
9005 DATA 1000,1000,0,1000,0,0,9
999
9006 DATA AGR,CRS,DYN,MML,NWM,TR
N,TXC,UMI,VAB,WGE
9007 DATA AGRICDN FDDDS
   AGR      STABLE GRDWTH CDMPANY
 DEALING  IN WHDLE GRAINS AND PR
DCESSED   FRDZEN FDDDS.  CAN BE
AFFECTED  BY WEATHER CONDITIDNS.
9008 DATA CROSS DISCDUNT STORES
   CRS      CHAIN DF DISCOUNT DEP
ARTMENT   STDRES. USUALLY SU8JEC
T OF LIGHTTRADING WITH VARIATIDN
S DUE TD  CONSUMER ECONDMIC SITU
ATIONS.
9009 DATA DYNATRDNICS
   DYN      VERY VDLATILE HIGH TE
CHNOLDGY  GROWTH CDMPANY.  SPECI
ALIZES IN MILITARY HARDWARE.
9010 DATA MIDWEST MERCHANTS LIFE
   MML      A LARGE CONGLDMERATE
LIFE IN-  SURANCE COMPANY WITH A
SSETS DVER40  8ILLION DDLLARS. V
ERY STA8LEUSUALLY PAYS GDOD DIVI
DENDS.
9011 DATA NDRTHWEST MINERALS
   NWM      A SPECULATIVE MINING
CDMPANY.  RARELY PAYS DIVIDENDS
 8UT CAN  RISE AND FALL RAPIDLY
WITH      INVESTDR INTEREST.
9012 DATA TRANSCON TRUCKING
  TRN       A SMALL CDMMON CARRIE
R WITH     DPERATIONS BASED IN D
```

PRICKLY-PEAR SOFTWARE

QUALITY PROGRAMS FOR YOUR COCO & TDP-100

PROGRAMS REQUIRE 16K EXTENDED BASIC FOR TAPE, AND 32K DISK UNLESS OTHERWISE NOTED.

COLOR DISK TRIVIA

WITH DEVELOPMENT SYSTEM FOR EDUCATIONAL USE

Here it is! The first new program offered by the author of the famed **VIKING!** in nearly two years, and worth the wait.

Color Disk Trivia

is simply a very good, and very fun to play game. It has everything going for it: The challenge of trivia, ease of use, a good social game encouraging conversation, and you may even learn something! The development system (included) even lets you easily create your own custom question disks.

The play of the game is easy to understand, because the computer does all the work for you. It even looks up and presents the proper question!

On each question disk there are five categories, and there are an amazing 1100 questions on each disk. No, that's not a misprint, we said 1100 questions per question disk! Yes, that is a pretty full disk. Because the questions are stored on the disk, instead of in memory, you can play **COLOR DISK TRIVIA** on any size Color Computer system with one disk drive — 16K, 32K, or 64K.

There are already five question disks available, and you get the GENERAL disk when you purchase the game. That's correct, there are already FIVE question disks with a total of 5500 questions available for shipment RIGHT NOW, with more on the way shortly.

All question disks have five categories and 1100 questions. The disks available now are:

GENERAL: (Included with the game) The categories for this disk are history, the written word, movies & television, science & the world, and sports.

ENTERTAINMENT: These categories are movies, the stage, television, music, and literature.

BIBLE: 1100 questions in five categories on the Old and New Testaments.

SPORTS: This disk will challenge even the very knowledgeable sports fan. All major sports (and some minor ones) are represented.

CHILDREN: No, this isn't questions ABOUT children, it's questions FOR children. 1100 fun questions just for the younger set.

The game of **COLOR DISK TRIVIA** can be played by from 1 to 4 people (or teams), and you set the length of the game at the start when you decide how many questions must be answered in each category to win. The computer chooses the categories randomly, though sometimes it will let you choose the category for yourself (or let your opponents choose for you). Because of this category selection by the computer, a single category can often hold you up while one of your opponents slips by to win. The outcome is always in doubt, and no player is ever eliminated.

Trivia lovers will enjoy the fact that you can play without other people if you desire, because the computer will provide plenty of challenge. We want to emphasize that this is, first and foremost, a fun game.

The Development System

Naturally, in order for our programmers to type in thousands of questions easily and accurately, a good development program to create the question disks had to be written, and we include this program with the game at no additional charge!

The program is all menu-driven and very user-friendly. That means that no knowledge of programming is needed to use it. If you can turn on your computer and type, you're all set! Now sit back and imagine the educational possibilities.

Yes, our question disks have 1100 questions, but the game program will handle question disks having any number of questions from 5 up to a full disk of 1100, so a teacher can type in 50 or 100 questions and answers (the questions are multiple choice), and then the students can play the "game" and have a great time, while accidently picking up the lesson. Let the natural spirit of competition fuel the learning process.

The development program is very easy to use, and gives you options to add questions, change or delete a question, and print the questions and answers on the screen (or a printer, if you have one). You can develop a question disk and easily add questions to it any time you wish.

This program finally gives parents and teachers the opportunity to easily create a custom learning program for any level student, and if we keep it a secret, no one need know it's more than a game.

TECHNICAL INFORMATION: COLOR DISK TRIVIA is a mixture of Machine Language and BASIC. It uses Fielded Direct Access Disk Files. **COLOR DISK TRIVIA** requires 16K and at least one disk drive.

ORDERING INFORMATION:

COLOR DISK TRIVIA GAME with **QUESTION DEVELOPMENT SYSTEM** and **GENERAL** question disk containing 1100 QUESTIONS: **$29.95**

ADDITIONAL QUESTION DISKS:

THE BIBLE: 1100 questions on the Bible. **$19.95**

ENTERTAINMENT: 1100 questions on movies, TV, stage, music, and literature. **$19.95**

SPORTS: 1100 questions for the sports fan. **$19.95**

CHILDREN: 1100 questions for the younger set. **$19.95**

FOR A LIMITED TIME, buy the game for **$29.95** and select an additional disk of your choice for ½ price! That's a **$49.90 value for just $39.95.** You save $10, and we will pay the shipping.

Dealer and author inquiries are always welcome. Canadian dealers should contact Kelly Software Distributors, Ltd., P. O. Box 11932, Edmonton, Alberta T5J-3L1 (403) 421-8003

Your Personal check is welcome - no delay. Include $1.50 shipping for each program ordered. (Shipping free on $50.00 or larger orders). AZ residents add 7% sales tax. Orders shipped within two days.

Stocked by Quality Dealers, or

Send Order To: **PRICKLY-PEAR SOFTWARE**
8532 E. 24th Street
Tucson, Arizona 85710
(602) 886-1505

MasterCard VISA

```
ALLAS.      PRIMARILY A FOOD TRAN
SPORTER     BUT CAN ALSD HANDLE I
NDUSTRIAL   AND HIGH TECH PRDDUCT
S.
9Ø13 DATA TEXCAL DIL
   TXC      A SMALL TEXAS-BASED D
IL EXPLDR-ER WITH SPECULATION IN
 OKLAHDMA AND TEXAS REAL ESTATE
WITH MIN- ERAL RIGHTS.
9Ø14 DATA UNITED MOTORS INC.
   UMI      THIRD LARGEST PRODUCE
R OF AUTDSIN THE U.S. EMPLOYS DV
ER 4ØØØØØ GROWTH DRIENTED WITH G
DDD DIVI- DENDS.
9Ø15 DATA VIRGINIA BANK & TRUST
   VAB      LARGEST INTRASTATE BA
NKING CDN-CERN IN VIRGINIA.  HAN
DLES MANY LARGE GDVERNMENT ACCDU
NTS. DIVI-DENDS ARE STABLE BUT S
MALL.
9Ø16 DATA WESTERN GAS & ELECTRIC
   WGE      A LARGE MULTI-STATE U
TILITY IN THE NDRTHERN RDCKIES.P
AYS GDDD  DIVIDENDS AND HAS GRDW
TH PDSSI- BILITIES.
9Ø17 DATA NATIDNAL BANK BDNDS
   BDNDS    A SECURE FIXED INTER
EST  FIXEDPRICE BDND.  EACH BDND
 COSTS    $1ØØØ AND PAYS 1Ø%(APR
) INTEREST ... $3.B5 PER PERIDD
PER BDND.
99ØØ FDR I=1 TD 16ØØ:NEXT:RETURN
```

Corrections

This note for non-disk users of the electronic spreadsheet program in "*MoCalc — MiniCalc* Gets a Big Brother" (April 1984, Page 186), author Barry Spencer says those who don't have Disk BASIC should replace the command *WRITE* with *PRINT* in Line 1020 and change *KILL* to *PRINT* in Line 1040.

H. Allen Curtis writes that we mistakenly indicated the minimum system for his *Bandy* program (June 1984 issue) to be Disk BASIC. This was done because of the use of *SAVE*, *LOAD*, and *WRITE* in the listing, but Curtis says, "The program logic is such that the lines containing those commands are bypassed when there is no disk controller connected." Thus, *Bandy* can be used in cassette-based 16K ECB — as indicated in the third paragraph of his article.

Curtis adds, however, that *LOAD*, *SAVE* and *WRITE* will not tokenize when used with a cassette-based system. Therefore, the last *Rainbow Check Plus* value for Listing 2 will be 187 for cassette users instead of the 101 value given in the "checkbox" on Page 144. The 101 value is correct for disk-based systems.

In the July 1984 first installment of our "Cooking With CoCo" series, Listing 1 (*BASLOAD*) was inadvertently left out. This omission led to Listings 2 and 3 being mislabeled 1 and 2. The missing Listing 1 is appended to the end of this month's "Cooking With CoCo" article and begins on Page 187.

Reader Steven Ostrom, Minnetonka, Minn., tells us that there is an error in the "Simply Load and . . . Bingo!" program (Page 92, April 1984 issue). The beginning of Line 520 should read *IF BB=>10* (*not, IF BB>10*). You need to add the "equal" symbol because, otherwise, when L=3 and BB=10, the middle row of the Bingo card will not have a free space.

Steven adds, "For my DMP-120, I had to add a printer delay (*POKE 151,25*) in addition to changing the elongation commands that the author noted. This *POKE* is necessary for many programs that print, due to a bug in the DMP-120, even after the Radio Shack upgrade."

Damon Swanson writes, "There is an occasional but potentially deadly bug in my modification to Steve Good's Spooler, ("Make the Good Spooler Better," May 1984, Page 23). The disaster will strike if an interrupt occurs while in the RAM (Type 1) memory map.

"The bug rarely bites because the program is only at risk during 11 of the almost 15,000 clock cycles between interrupts, and it causes disaster only when the print buffer is empty, i.e., when printing the first character to the buffer. Under these conditions, the interrupt handler, START, detects the empty buffer and jumps to high memory expecting ROM but finding random code in RAM.

"If the buffer has at least one character, START gets that character from RAM and sets the map back to ROM before calling any ROM routines. We can still have an error — dropping one character. The program is at risk for seven clock cycles yielding an error rate of about one in 2,000 characters."

"Bugs of this species are hard to recognize, impossible to test, and often ignored. But a good programmer will find them and destroy them. Fortunately, this bug is easily exterminated."

Continues Swanson, "Add an ORCC #$50 (Line 743) to kill the potential interrupt before switching to the RAM page and ANDCC #$AF (Line 757) to turn it on again in the modified spooler listing. Also correct the start address to allow the four extra bytes (ORG $7F61 or $7CF0 with SCRPRT).

"Note there is no problem in the interrupt handler, START, which is synchronized with the interrupt and finishes long before another one comes along."

Thanks, Damon, your discussion calls attention to one of the more subtle problems of interrupt handling.

Get Your Feet Wet With These Paddles!

By Helene M. LaBonville

I am a tinkerer. So, when the Atari died, I just couldn't throw away a perfectly good set of paddles! Although I have no electronics background, I set out to convert the paddles to work on our system. It was easier than I had imagined. As a matter of fact, the hardest part of this project was obtaining the joystick plugs and 5-conductor cable.

I will illustrate two conversions. One is quite simple, the other is easy. I will not go into the theory of operation of the D/A converter nor of the *JOYSTK* command itself, as these topics have been well covered in prior articles.

Single Direction Model — Simple

Materials required for each paddle:

1 5-pin (240) DIN plug
5-inch length of hook-up wire (preferably black)

Atari Paddles are sold in pairs which are joined together by a mutual DB-9 plug. Remove the plug, unscrew the case, and refer to Figure 1 which is the current configuration of an Atari paddle. All that needs to be done to convert this paddle to CoCo (see Figure 2) is:

1) Add a jumper wire between one of the lugs of the momentary switch and lug 1 of the potentiometer. Disconnect the black terminal wire from the switch and solder the jumper wire directly onto the bullet connector. Reconnect. Next, solder the other end to lug 1 of the pot.
2) Install the DIN plug as per Figure 2. *Place the plug's cable sheath over the cable, now!* Strip one inch of outer insulation from the cable, then strip and tin about $^{1}/_{16}$" from each wire. Solder the connections as indicated and reassemble the plug.

Switch Selectable Model — Easy

The addition of the switch and the fifth wire in this conversion allows each paddle to do double duty, i.e., you can select either horizontal or vertical directions with each unit.

Materials required for each paddle:

1 5-pin (240) DIN plug
6 foot 5-conductor cable (stranded)
1 SPDT submini slide switch

1) Open the case, disconnect the terminals from the button switch and snip off the wires from the pot lugs. Remove the strain relief from the Atari cable and save the cable for future projects — I reuse everything!
2) Mount the slide switch to the top of the case. I drilled two holes side by side with a $^{3}/_{16}$" bit and enlarged them with a knife and file until the switch fit.
3) Carefully strip 4½" of outside insulation from the five conductor cable. Strip and tin about $^{1}/_{16}$" from each wire. Solder the connections as indicated in Figure 3. Note: In order to prevent damage (from overheating) to the button switch, I reused the bullet connectors from the Atari cable.
4) Install the DIN plug as per Figure 3. *Place the plug's cable sheath over the cable, now!* Strip one inch of outer insulation from the cable, then strip and tin about $^{1}/_{16}$" from each wire. Solder the connections as indicated and reassemble the plug.
5) Screw the cover(s) back on. Plug in the paddle(s) and test it/them with the following program:

(Helene M. LaBonville holds a B.S. degree in medical technology and has done post-graduate work in clinical chemistry. She has had her CoCo for three years and started HAC Labs, Ltd. after having difficulty obtaining parts needed to complete hardware projects.)

OSS Peripherals Corporation

THE INTRONICS EPROM PROGRAMMER

NEW VERSION 2.5

- ☐ Plugs into ROM pack port.
- ☐ Now programs 8K X 8 EPROM *in 15 Seconds.*
- ☐ On board firmware included.
- ☐ No personality modules required.
- ☐ Will program most EPROM's.
- ☐ High quality zero insertion force EPROM socket.

Price: $140.

Enclosed in Molded Plastic Case

OSS Peripherals Corporation

SPLC-1 Lower Case *FULLY ASSEMBLED, TESTED & GUARANTEED FOR 90 DAYS* **$59.95**

FOR THE COLOR COMPUTER & TDP-100

☐ TRUE LOWER CASE CHARACTERS ☐ NO CUTTING OR SOLDERING ☐ FULLY COMPATIBLE WITH ALL TRS-80C (SPECIFY REVISION BOARD) [NOT COMPATIBLE WITH COCO 2] ☐ INVERTED VIDEO AT A FLIP OF A SWITCH

YOUR SOURCE FOR THE

COLOR COMPUTER

*DRIVE 0 FOR COCO	$329
*DRIVE 1 FOR COCO	$198
*GUARANTEED FOR ONE FULL YEAR	
•DISK CONTROLLER FOR COCO	$139
•RS-232 PORT EXPANDER	$ 30
•POWER-ON L.E.D. KIT	$ 6
•FRONT RESET SWITCH KIT	$ 7
•LIBRARY CASE *HOLDS 70 DISKS*	$ 23
•NEW MULTI-COLOR RAINBOW DISKS	$ 25
•ELEPHANT DISKS SSDD	$ 23
•8 PRIME 64K RAM-CHIPS	$ 50
•GEMINI 10X PRINTER	$299
•HAYES SMART MODEM 300	$215
F·A·S·T· UPGRADE SERVICES	*$CALL!*

NEW SOFTWARE

OS·9BBS $89.95

☐ MULTI-USER CAPACITY ☐ FASTER THAN MOST BBS's ☐ MULTI-TASKING (NO LONGER COMPLETELY TIES UP YOUR COCO) ☐ REQUIRES OS·9 AND BASIC 09

OS·9 40-Track Program $24.95

☐ NOW OPERATE 35/40/80 DOUBLE SIDE, DOUBLE DENSITY DRIVES UNDER OS·9

64K Terminal Package $19.95

☐ AFFORDABLE ☐ REQUIRES 64K MEMORY ☐ GIVES YOU 52·58K BUFFER ☐ WRITES TO DISC ☐ READS IN FROM DISC ☐ STANDARD DISPLAY

MasterCard

VISA

(Dealer Inquiries Invited)

- MINIMUM $2.00 SHIPPING & HANDLING.
- NYS RESIDENTS ADD SALES TAX.
- ALL OTHER ORDERS ADD 4% SHIPPING.

OSS Peripherals Corporation

62 COMMERCE DRIVE
FARMINGDALE, NY 11735

(516) 249·3388

Formerly Saturn Electronics Company Inc.

*OS-9 IS A REGISTERED TRADEMARK OF MICROWARE, INC.

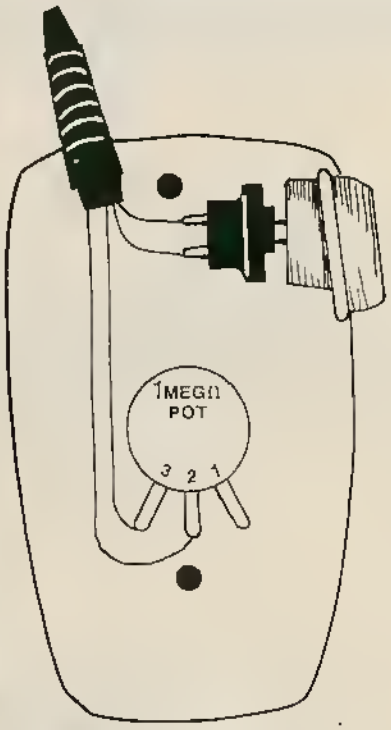

Figure 1. Current Configuration of Atari Paddle

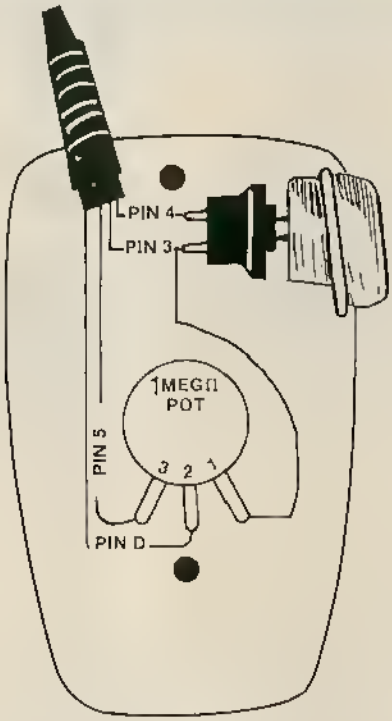

Figure 2. Single Direction Model D(irection) —Solder to Pin 1 for horizontal, or to Pin 2 for vertical

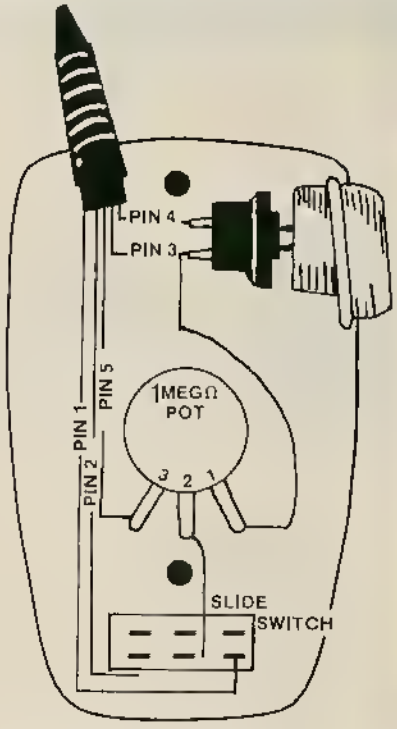

Figure 3. Switch Selectable Model

```
10 PRINT JOYSTK(0);TAB(5) JOYSTK(1);TAB(10)
     JOYSTK(2);TAB(15) JOYSTK(3);TAB(20) PEEK
     (65280)
20 GOTO 10
```

JOYSTK(0) and *(1)*, of course, correspond to the right joystick port while (2) and (3) are the left one. *PEEKing* location 65280 checks to see if the fire buttons are pressed. If not "fired," this spot contains either the number 255 or 127. When the right button is pressed, this memory location contains either a 126 or 254. For the left button the *PEEK* should read either 125 or 253. Refer to the Radio Shack BASIC Manual for further elucidation. As you rotate the pot, the values should range from 0 to 63 for the channels which you are testing. The values for unused channels will hover between 20 and 40.

As a finishing touch, I marked off the midpoint (reading of 32) on each paddle with a dab of correction fluid.

Materials

As I have mentioned, obtaining the parts proved to be the most difficult aspect of this project. For some unknown reason, Radio Shack does not carry the 240 5-pin DIN plugs, five conductor cable, or SPDT submini switches (one *is* enclosed, however, in (RS #275-327), Alternatively you could use one bank of a DPDT submini switch (RS #275-407) as in Figure 3.

I have bought a substantial supply of the plugs and cable. The Switchcraft plugs (12BL5M) can be purchased for $3 each, while the budget plugs (actually 6-pin DINs) are available for $1.75 each and the cable is available at 25¢/foot. USA orders please enclose an additional $1.50 to cover the cost of postage and handling. Others please add $3 S/H.

Atari paddles can be purchased for as little as $2.95/pair (JAMECO Electronics — Belmont, Calif.)

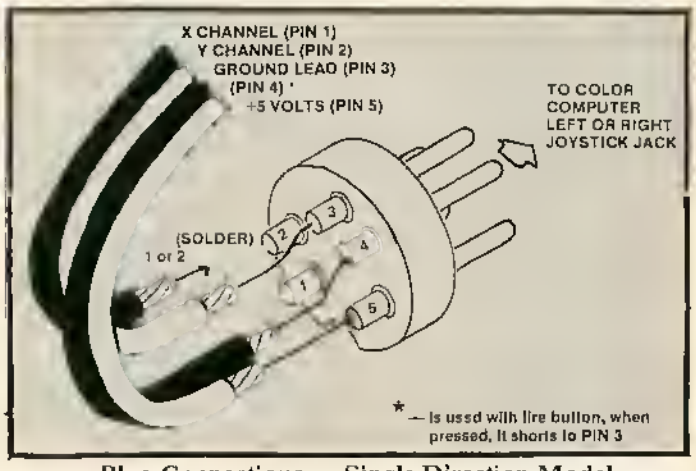

Plug Connections — Single Direction Model

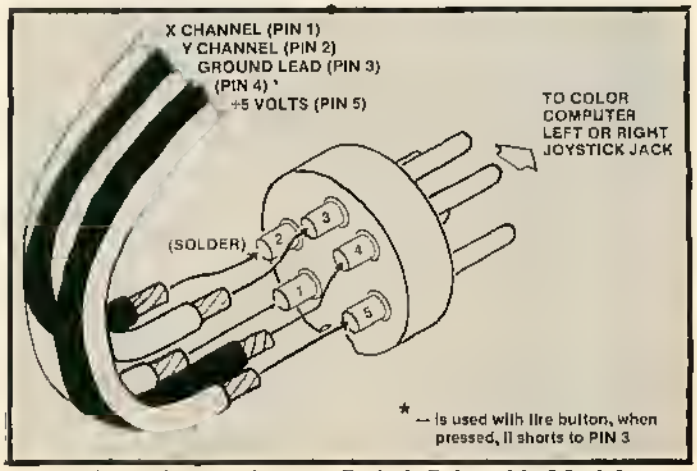

Plug Connections — Switch Selectable Model

Education Through Graphics

Don Inman
Rainbow Contributing Editor

Problems and Education

One of the greatest weaknesses of public school education is the overpowering obsession to teach facts rather than how facts can be acquired and used to solve problems. Facts are blocked off into subject matter areas with little cross-fertilization. As the body of knowledge (facts) acquired by the human race accelerates in size, the traditional teaching methods become overwhelmed by the task of cramming all this information into tidy blocks of school time.

We, as parents and friends, can provide meaningful learning experiences for children after the classroom doors are locked at the end of the school day. The Color Computer is an ideal tool for this purpose outside (as well as inside) the classroom. It is inexpensive and quite powerful when compared to other personal computers. Its ease of use and friendliness make it ideal for first-time computer users. A beginner can immediately use the CoCo with the introduction of a minimum of facts. Attention can then be turned to solving real-life problems.

Problem solving is the key to successful learning. The traditional method of education teaches a block of facts, supposedly logically arranged. Then an attempt is sometimes made to apply the "learned" facts to a set of similar problems which have right or wrong answers. When an arbitrary percentage of problems have been "solved" with matching right answers, students are rewarded with the next logical block of facts.

(Don Inman taught in the public school system for over 21 years. After a one-year sabbatical to investigate educational uses of computers, he never went back to the classroom.)

Problems faced in the real world do not have cut and dry "2+2=4" solutions. Real results are not black or white, right or wrong. There are many solutions to real problems, some better than others in a given situation.

Color LOGO provides one of the most free-form ways of learning that I have found. Anyone of any age can immediately encounter creative experiences with a minimum of factual knowledge with Color LOGO. The first LOGO commands encountered have a direct relationship to body-movements that are already familiar to a child.

> ***"We, as parents and friends, can provide meaningful learning experiences for children after the classroom doors are locked at the end of the school day. The Color Computer is an ideal tool . . ."***

Examples:
FORWARD, BACK, LEFT, RIGHT which can be abbreviated: FD , BK , LT , RT.

Shapes and turtle movements can be explored before the child is even aware of the concept of programs or procedures. In fact, the child will naturally develop a desire to write a complete LOGO procedure after experimenting with a few basic LOGO commands.

As you work with a child, listen closely for questions such

as: "How can I . . . .?", "What if . . . .?" These are clues that the child is ready to move forth to new learning experiences. Be careful that you do not provide a solution to the problem raised. The child is merely seeking clues, or new tools, for solving the problem.

The Problem Develops

Let's suppose that a young child, named Sue, is experimenting with Color LOGO.

Figure 1:

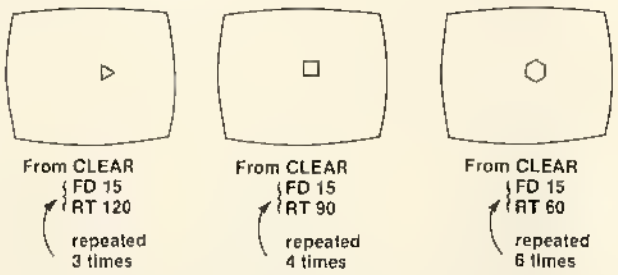

Sue, "That looks like the shape the bees use when making a honeycomb. How can I make two of them alongside each other? Is there a short way to make a shape? Can the computer remember how I made the last shape?"

This sounds like the time to introduce procedures. A procedure is simply a way to have the computer remember the steps that Sue has previously used in drawing her hexagon.

```
TO HEX          <- procedure's name
  FD 15
  RT 60
  FD 15
  RT 60
  FD 15
  RT 60
  FD 15
  RT 60
  FD 15
  RT 60
  FD 15
  RT 60
END
```

The procedure can be shortened by introducing the REPEAT command:

```
TO HEX
  REPEAT 6(FD 15 RT 60)
END
```

To make a second hexagon alongside the first, Sue could pick up the turtle's pen and move it to the right side of the first hexagon. Then the pen could be lowered in preparation for drawing another hexagon.

Figure 2:



A second procedure is added to control the placement and drawing of the hexagons.

```
TO PAIR
  CLEAR                      - clear the screen
  HEX                        - use the HEX procedure
  PU RT 120 FD 15 LT 60
  FD 15 LT 60 PD
  HEX                        - use HEX procedure again
END

TO HEX
  REPEAT 6(FD 15 RT 60)
END
```

Figure 3:



Notice that the turtle ended at the point where the second hexagon was started. Now Sue asks, "Can I make a complete circle of shapes around the first one?"

Your answer, "Well it might be possible. Where would you have to move the turtle to start the next one?"

Sue, "I think I'd try moving it FORWARD 15 from the second shape and then turn LEFT 60. In fact, if I did that six times, I might get them all."

You, "Why don't you try it?"

Sue, "Okay. I'll change the PAIR procedure and call it BEE. I'll call my new procedure HEX6."

```
TO BEE
  CLEAR
  HEX
  HEX6                       - call to new procedure added
END

TO HEX
  REPEAT 6(FD 15 RT 60)
END

TO HEX6
  PU RT 120 FD 15 LT 60
  FD 15 LT 60 PD
  REPEAT 6(HEX FD 15 LT 60)
END
```

Figure 4:

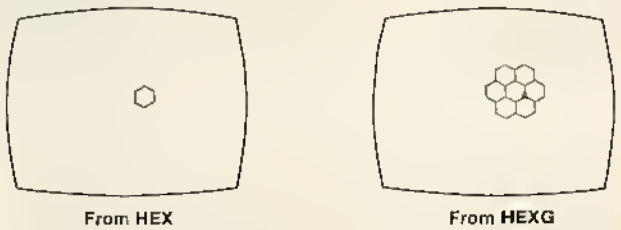

Sue, "It works! WOW! Now, I want to put another circle of shapes around that."

You, "How many little shapes do you think it will take?"

Sue, "I can try to fit them in my mind, or I can draw them on paper and count them."

You, "I have some paper here that has a grid made of the same shapes that you are working with. You can shade in the shapes you have so far, and then see how many you will need."

Sue drew them out like this:

Figure 5:

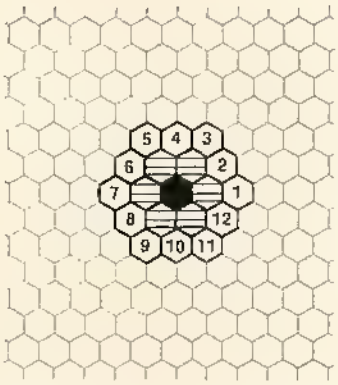

Sue discovered that she needed 12 new shapes to encircle the others. After a few false starts, Sue came up with the additional procedure HEX12. Of course she also needed to change the BEE procedure to call HEX12.

```
TO BEE
  CLEAR
  HEX
  HEX6
  HEX12                                  — new line
END

TO HEX
  REPEAT 6(FD 15 RT 60)
END

TO HEX6
  PU RT 120 FD 15 LT 60
  FD 15 LT 60 PD
  REPEAT 6(HEX FD 15 LT 60)
END

TO HEX12
  PU RT 120 FD 15 LT 60
  FD 15 LT 60 PD                         } new
  REPEAT 6(HEX FD 15 LT 60               } procedure
    HEX FD 15 RT 60 FD 15 LT 60)         }
END
```

Depending upon the child you are working with (age, ability, interest, or whatever), this development of HEX procedures may continue. By following the previous procedures with similar logic, can you write another HEX procedure to circle the outside 12 hexagons? How many small hexagons will be needed? If you draw it on a Hex-grid as we have, you will see that 18 new hexagons are needed.

Figure 6:



Study the figure, and see if you can come up with the necessary additions. If you want to go still farther, you will have to shorten the sides of the hexagons. How many hexagons would be needed in the next ring? Let's see . . . first one, then six, then 12, then 18, then . . . ?

Now that you have seen the beginning of drawing HEX RINGS, send me a general Color LOGO procedure for drawing any desired number of HEX RINGS. The number of rings is to be included as a variable in the name of the program so that:

HEXRING 3 would draw three rings of Hex shapes around the center hexagon.

HEXRING 5 would draw five rings of Hex shapes around the center hexagon.

• RADIO SHACK™ COLOR COMPUTER
ADVANCED MATH PROGRAMS
for
ENGINEERS • PHYSICISTS • STUDENTS

FUNCTION GRAPHING MODULE 16K EXT-$19.95

* HIGH RESOLUTION GRAPHS
* GRAPH ANY FUNCTION — 4 AT ONCE
* PARAMETERS EASY TO CHANGE
* AUTO-SCALING OPTIMIZES GRAPH SIZE
* COMPUTE FUNCTION VALUES & ZEROS
* INTERSECTION OF FUNCTIONS
* COMPLETE MANUAL — PROGRAM ON TAPE

CALCULUS MATH MODULE 32K EXT-$37.95

* INCLUDES THE GRAPHING MODULE ABOVE
* LOAD UP 9 FUNCTIONS AT ONCE
* FIND AND COMPUTE MAXIMA & MINIMA
* NUMERIC INTEGRATION & DIFFERENTIATION
* COMPOSITE AREAS
* HANDLES PIECEWISE CONTINUOUS FUNCTIONS
* HARD COPIES OF DATA AND/OR GRAPH
* COMPLETE MANUAL — ON TAPE OR DISK

RAINBOW CERTIFICATION SEAL
CALCSOFT
P.O. BOX 401
ST. ANN, MO 63074
RAINBOW CERTIFICATION SEAL

SEND CHECK OR MONEY ORDER
Add $2.00 for shipping

Federal Hill Software

FINE PRODUCTS FOR THE COLOR COMPUTER, DRAGON AND MC-10

Mon CoCo Parle Francais!
Mi Coco Habla Espanol!

These delightful 16K Extended Basic programs will teach your youngsters a basic Franch or Spanish vocabulary. Each language package contains two programs with a total of 1,000 words in a colorful gama format that teaches children to think as well as memorize. They'll have graat fun as they watch the letters hop across the screen and slip into place. Perfect for home or classroom. Wa includa a list of the vocabulary words for study guidas or lesson plans. Spanish or french, only $24.95 on tape, $27.95 on disk. Both languages only $39.95, tape or disk.

The Handicapper

Usa tha power of your computer to improve your performance at the track! Separata programs for harness and thoroughbred horses make it a snap to rank the horses in each race! Using information readily available from tha thoroughbred Racing Form or harness track program, you can handicap a race in fiva minutes and a whole card in lass than an hour! We evan provide diagrams showing where to get the information you need.

Factors include speed, class, post position, past performanca, jockey or driver's record, weight, parked out signs, beaten favorita and other attributes. Complete instructions and batting guide. Versions for all Color Computers, MC-10's and Model 100's. State computer type and memory when ordering. Harness or thoroughbred, $27.95 each, tape or disk.

NEW GREYHOUND HANDICAPPER! Now use your Color Computer for greyhounds, too! This fine handicapping program, written by a successful greyhound trainer, does it all. Using spead, braaking ability, favorite box, kennel performance, and othar factors, it ranks the dogs in each race and recommends quinnella, trifecta and axacta bets. For Color Computer only, $27.95 tape or disk.

SPECIAL! Any two handicappers, only $39.95. All threa only $54.95.

Tax Relief!

Were your taxas a hassla this year? Then you need Coco-Accountant II. This 32/64K homa and small businass accounting program is averything you nead to keep track of your finances and make incoma tax time a breaza. Use your canceled checks, credit card receipts, payroll and bank stubs. Coco-Accountant II will list and total expenditures by yaar, month, account and payee or income sourca. It tracks tax deductible expenses and payments subjects to sales tax. It even calculatas tha salas tax you paid.

Tha program offsats income and expenditures to produce net cash flow reports. It prints out a spreadsheet showing your yaar et a glanca, balances your checkbook and prints a monthly reconciliation statement. Tha 32K varsion handles 450 entries in RAM.The 32K disk version storas 500, while the 64K tapa and disk versions stora an amazing 900 antrias. State memory size when ordering. Only $27.95, tapa or disk.

Baseball Statpak

Whether you're in littla league, Pony League, high school or a company softball laague, your players will love thase Big Leagua statistics. Keap track of 180 hitters--AB, Hits, Avg., RBI, HR, SO, Walks and lots more. Pitching racords include Won-Lost, PCT., IP, ER, ERA, SO, BB and HR. Team records and league standings, too. Suparfast sort by any stat for beautiful screen displays and printouts. Only $28.95 on 16K tape, $31.95 on 32K disk.

Use All 64K!

Did you feel gypped when you found out your 64K computer had only 32K of memory in BASIC? Wa sure did. So we inventad HID 'N RAM, the most powerful 64K programming tool on tha markat. With HID 'N RAM you can access thet hiddan 32K of mamory from a BASIC program and use it to store and sort your data. Writa a 28K program and still have more than 30K laft to stora numbers, names, addresses or other data. It avan has a machina languaga sort routina! The package includas complata instructions and a damonstration program--a mailing list that holds 450 namas and addressas IN RAM! Only $27.95, tapa or disk.

VISA

Federal Hill Software

FINE PRODUCTS FOR THE COLOR COMPUTER, DRAGON AND MC-10

MasterCard

We accept checks, money orders, Vise and Mester Card. Add $1.50 for shipping and handling of softwere, $5.00 for disk drives. Credit Card orders should include cerd number, exp. dete end signature.

825 William St. Baltimore, Md. 21230 301-685-6254

Interfacing Your Own Circuits

By T. Whit Athey and Susan C. Athey

In the first article of this series (July, Page 138), I described a general-purpose I/O interface for the Color Computer. The interface consists primarily of an 8255A Programmable Peripheral Interface (PPI) chip, installed on a modified Radio Shack printed circuit (PC) board which plugs into the cartridge slot. You can add your own circuits to the board where they can communicate with your CoCo.

In this article I will describe some examples of circuits which can be added to the interface board. By building the interface and connecting it to other devices, you can learn about the way the CoCo works and about digital circuits in general.

The 8255A has three eight-bit I/O ports, designated A, B, and C. In the main circuit I will describe, port A will be used as a data bus, and two lines of port C will be used as control lines, to communicate with and control a General Instruments AY-3-8910 Sound Generator Chip.

The AY-3-8910

The AY-3-8910 is a 40-pin LSI chip. It has 16 internal registers which control the frequency and amplitude of three independent tone generators, a noise generator, an envelope generator, and two 8-bit I/O ports. Almost any kind of sound can be produced under program control. The production of sound is dependent only on the contents of the internal registers, and these will change only when the register contents are overwritten. Continuous microprocessor attention is not required.

The 16 PSG registers are not directly addressable in the way that the four registers of the 8255A are. There is only the one 8-bit data bus over which data and addresses must be transmitted to the AY-3-8910, so the selection of the desired register must be done separately. You can think of the 16 registers of the PSG as being connected to its data bus through a multiport switch. Only one register at a time can be connected to the data bus (for reads or writes). This process of "connecting" a register to the bus is called "latching."

To latch a sound chip register to the data bus, two operations must be carried out. First, both control lines (from the

(Whit Athey works for the federal government near Washington, D.C. Susan Athey is a 12-year-old student at Tilden Intermediate School in Rockville, Md. She wrote part of this article, and assembled nearly all of the hardware for this project and last month's I/O board, for a science fair project.)

Table 1. PSG Pin Functions

Pin No.	Label	Function
1	GND	Ground
2	N.C.	(Not connected)
3	AUDIO-A	Audio channel A
4	AUDIO-B	Audio channel B
5	N.C.	(Not connected)
6	IOB7	I/O port B, bit 7
7	IOB6	I/O port B, bit 6
8	IOB5	I/O port B, bit 5
9	IOB4	I/O port B, bit 4
10	IOB3	I/O port B, bit 3
11	IOB2	I/O port B, bit 2
12	IOB1	I/O port B, bit 1
13	IOB0	I/O port B, bit 0
14	IOA7	I/O port A, bit 7
15	IOA6	I/O port A, bit 6
16	IOA5	I/O port A, bit 5
17	IOA4	I/O port A, bit 4
18	IOA3	I/O port A, bit 3
19	IOA2	I/O port A, bit 2
20	IOA1	I/O port A, bit 1
21	IOA0	I/O port A, bit 0
22	CLOCK	Clock reference signal
23	RESET	Logic zero resets registers to "0".
24	A9	Extra "address" or "chip select lines, logic 0 selects A9, logic 1 selects A8.
25	A8	These should be tied to GND and VCC if only one PSG chip is being used.
26	TEST2	A test point — not used here.
27	BDIR	Bus direction control line
28	BC2	Bus control line 2 — not used here
29	BC1	Bus control line 1
30	DA7	Data/address bit 7
31	DA6	Data/address bit 6
32	DA5	Data/address bit 5
33	DA4	Data/address bit 4
34	DA3	Data/address bit 3
35	DA2	Data/address bit 2
36	DA1	Data/address bit 1
37	DA0	Data/address bit 0
38	AUDIO-C	Audio channel C
39	TEST1	A test point — not used here
40	VCC	To +5 volts

Part II —
The Programmable Chip

8255A port C) must go high (to +5 V). This is a signal to the chip that the byte about to arrive over the data bus is the register number of the register to be latched. Second, the register number must be transmitted through port A, e.g., with a *POKE &HFF40,[*reg. no.*]*, over the data bus.

Once a register is latched it will remain latched until another register is latched. While it is latched, any write (or read) operation to the 8255A port A will also be a write to the sound chip register currently latched. The two control lines from port C must be set for a write (C0 = 1, C1 = 0) during the write operation.

For example, the following sequence of operations would be carried out to write the byte 3B (Hex) to register two (assuming that both A and C ports of the 8255A are already programmed for output).

First, latch register 2:

```
POKE &HFF42,3     (set C0 and C1 high)
POKE &HFF40,2     (send register no. to data bus)
POKE &HFF42,0     (reset control lines)
```

Then, write the byte 3B:

```
POKE &HFF40,&H3B  (put byte on data bus)
```

Figure 1. AY-3-8910 Pin Assignments

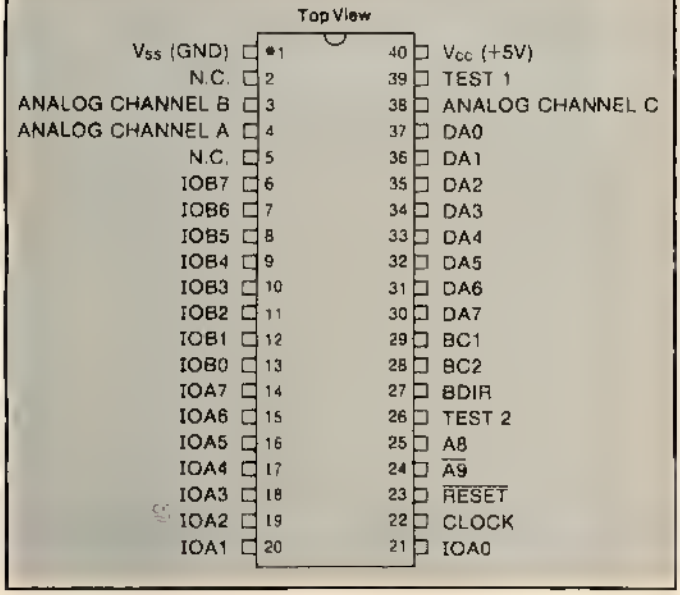


```
POKE &HFF42,1     (set control lines for write)
POKE &HFF42,0     (reset control lines)
```

These instructions illustrate the simple steps required to latch and write to a register, but unfortunately, they don't work in practice because of a timing problem resulting from the slowness of BASIC. The problem is that the sound chip wants to see the write indication on its control lines for no longer than 10 microseconds, while the BASIC *POKE* instruction requires about 4500 microseconds (that's still a lot less than a second!). The latch routine above will work okay, but the write routine will have to be done in machine language (using only three simple instructions). This can still be handled from BASIC using a *USR* subroutine (or *EXEC* statements for those of you without Extended BASIC). This will be discussed further in the software section.

The AY-3-8910 Programmable Sound Generator Chip

A pin diagram for the programmable sound generator chip (PSG) is shown in Figure 1, and the function of each line is given in Table 1. A functional block diagram is shown in Figure 2. The lines labeled BDIR and BC1 are the two control lines which were discussed above. The functions of the chip are determined by these two lines as shown in Table 2.

All functions of the PSG chip are controlled by the computer through a series of writes to the 16 registers (designated R0-R15). Registers R0-R5 are used to select the frequencies (actually the periods) of the three-tone generators. Register R6 selects the frequency of the noise generator (white noise). Register R7 is for mixer control and I/O enable (for the two I/O ports). The amplitudes of the signals generated by the three tone channels are controlled by registers R8-R10 when in the level amplitude mode. Registers R11-R13 are for control of the envelope generator, and the last two registers, R14 and R15, are the two I/O ports. The operation of these 16 registers will now be discussed in more detail.

Tone Generator Control (Registers R0-R5)

The frequency of each square wave generated by each of the three tone generators is controlled by Registers R0-R5. Register R0 and the lower four bits of Register R1 form a 12-bit tone period value (the reciprocal of the frequency). The exact frequency of the tone which is produced depends on the reference clock signal. The period values needed to produce musical notes for two clock frequencies are shown in Table 3. The upper (most significant) four bits of Register

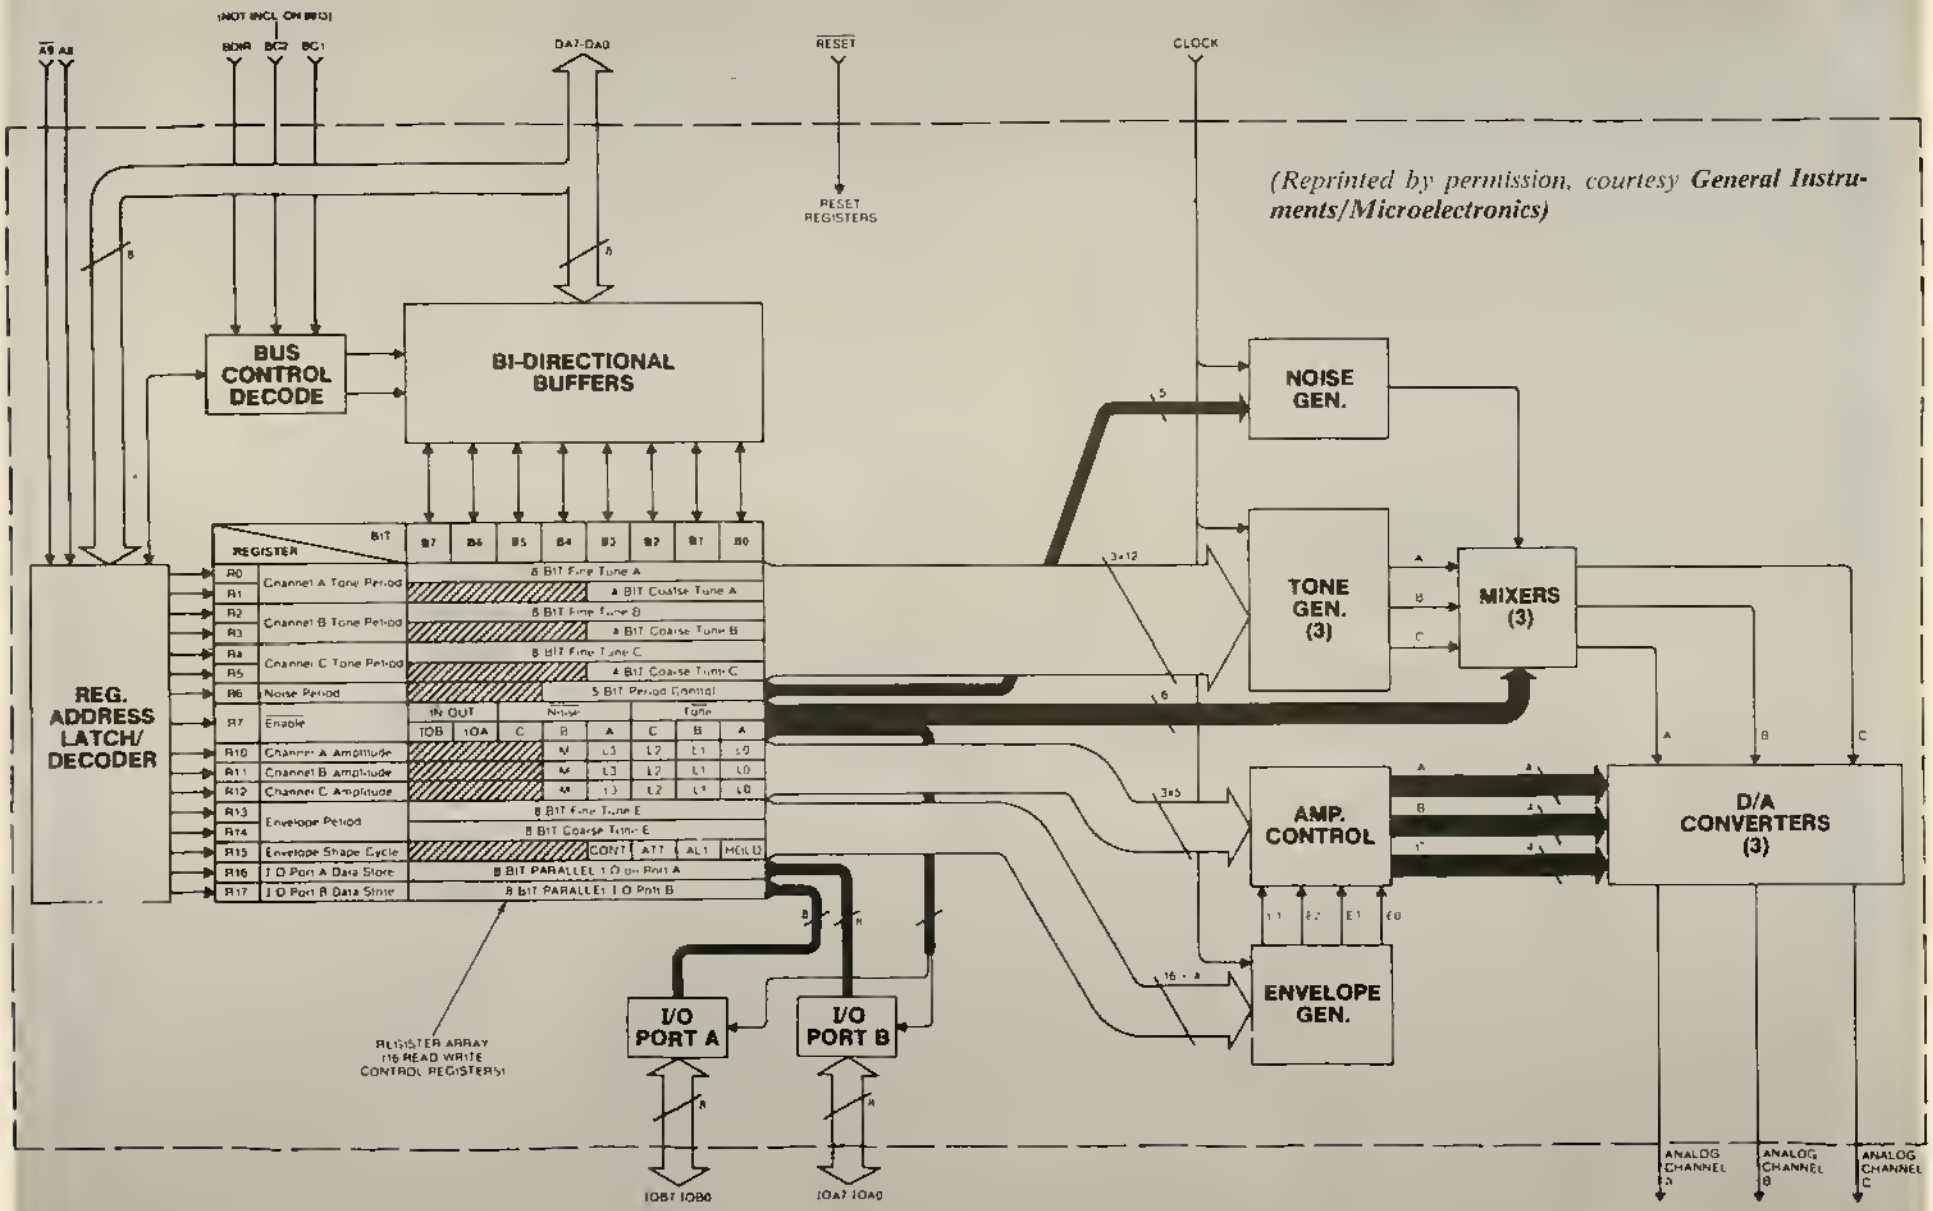

Figure 2. Programmable Sound Generator Block Diagram

Table 3. Notes, frequencies, and codes

Note	Frequency (1.97 MHz clock) Hz	Frequency (.897 MHz clock) Hz	Hex Code	Note	Frequency (1.97 MHz clock) Hz	Frequency (.897 MHz clock) Hz	Hex Code
C	32.7	16.3	D5D	C	522.7	261.4	0D6
C#	34.6	17.3	C9C	C#	553.8	276.9	0CA
D	36.7	18.4	BE7	D	588.7	294.4	0BE
D#	38.9	19.4	B3C	D#	621.5	310.7	0B4
E	41.2	20.6	A9B	E	658.0	329.0	0AA
F	43.7	21.8	A02	F	699.1	349.6	0A0
F#	46.2	23.6	973	F#	740.8	370.4	097
G	49.0	24.5	8EB	G	782.2	391.1	08F
G#	51.9	25.9	86B	G#	828.6	414.3	087
A	55.0	27.5	7F2	A	880.8	440.4	07F
A#	58.3	29.1	780	A#	932.2	466.1	078
B	61.7	30.9	714	B	989.9	495.0	071
C	65.4	32.7	6AE	C	1045.4	522.7	06B
C#	69.3	34.6	64E	C#	1107.5	553.8	065
D	73.4	36.7	5F4	D	1177.5	588.7	05F
D#	77.8	38.9	59E	D#	1242.9	621.4	05A
E	82.4	41.2	54D	E	1316.0	658.0	055
F	87.3	43.7	501	F	1398.3	699.1	050
F#	92.5	46.3	4B9	F#	1471.9	735.9	04C
G	98.0	49.0	475	G	1575.5	787.8	047
G#	103.9	51.9	435	G#	1669.6	834.8	043
A	110.0	55.0	3F9	A	1747.8	873.9	040
A#	116.5	58.2	3C0	A#	1864.3	932.2	03C
B	123.5	61.7	38A	B	1962.5	981.2	039
C	130.8	65.4	357	C	2110.6	1055.3	035
C#	138.6	69.3	327	C#	2237.2	1118.6	032
D	146.8	73.4	2FA	D	2330.4	1165.2	030
D#	155.6	77.8	2CF	D#	2485.8	1242.9	02D
E	164.7	82.4	2A7	E	2663.4	1331.7	02A
F	174.5	87.3	281	F	2796.5	1398.3	028
F#	184.9	92.4	25D	F#	2943.7	1471.9	026
G	195.9	97.9	23B	G	3107.2	1553.6	024
G#	207.5	103.8	21B	G#	3290.0	1645.0	022
A	220.2	110.1	1FC	A	3495.6	1747.8	020
A#	233.0	116.5	1E0	A#	3728.7	1864.3	01E
B	246.9	123.5	1C5	B	3995.0	1997.5	01C
C	261.4	130.7	1AC	C	4143.0	2071.5	01B
C#	276.9	138.4	194	C#	4474.4	2237.2	019
D	293.6	146.8	17D	D	4660.9	2330.5	018
D#	310.7	155.4	168	D#	5084.6	2542.3	016
E	330.0	165.0	153	E#	5326.7	2663.3	015
F	349.6	174.8	140	F	5593.0	2796.5	014
F#	370.4	185.2	12E	F#	5887.4	2943.7	013
G	392.5	196.2	11D	G	6214.5	3107.2	012
G#	415.8	207.9	10D	G#	6580.0	3290.0	011
A	440.4	220.2	0FE	A	6991.3	3495.7	010
A#	466.1	233.0	0F0	A#	7457.4	3728.7	00F
B	495.0	247.5	0E2	B	7990.1	3995.0	00E

R1 are not used. The other two tone generators are controlled in exactly the same way with Registers R2-R5.

Noise Generator Control (Register R6)

The frequency of the noise source is controlled with Register R6. The lower five bits of this register form a five-bit period value. You can try stepping through the range of periods available (&H01 to &H1F) to select the period with the desired effect.

Mixer Control-I/O Enable (Register R7)

Register R7 is a multi-function enable/disable register which controls which of the tone or noise sources is connected to the mixers, and also defines the direction for the bidirectional I/O ports. The control bits and their functions are shown in Table 4.

Table 4. Mixer-I/O Control

Noise Enable Truth Table

R7 Bits			Noise Enabled on Channel		
B5	B4	B3			
0	0	0	C	B	A
0	0	1	C	B	-
0	1	0	C	-	A
0	1	1	C	-	-
1	0	0	-	B	A
1	0	1	-	B	-
1	1	0	-	-	A
1	1	1	-	-	-

Tone Enable Truth Table

R7 Bits			Tone Enabled on Channel		
B2	B1	B0			
0	0	0	C	B	A
0	0	1	C	B	-
0	1	0	C	-	A
0	1	1	C	-	-
1	0	0	-	B	A
1	0	1	-	B	-
1	1	0	-	-	A
1	1	1	-	-	-

I/O Port Truth Table

R7 Bits		I/O Port Status	
B7	B6	IOB	IOA
0	0	Input	Input
0	1	Input	Output
1	0	Output	Input
1	1	Output	Output

Amplitude Control (Registers R8-R10)

The amplitudes of the three tone channels are determined by the contents of the lower five bits of registers R10, R11, and R12. The upper three bits are not used. The fifth bit is used to select either fixed level or variable (envelope) amplitudes (0 = fixed, 1 = variable). The lower four bits contain the amplitude value when bit five is zero, and are ignored when bit five is one. There are 16 amplitude levels, 0000 -1111 (binary), which can be selected.

When bit five is one, the envelope control is enabled. A description of the envelope generator and its control follows.

Envelope Generator Control (Registers R11-13)

The shape of the envelope is determined by the contents of the lower four bits of register R13. The envelope shape is the time history of the amplitude (amplitude as a function of time). Figure 3 shows the different shapes which are available and the control values which select each shape.

Registers R11-R12 contain the time for one cycle of the envelope. These two registers are used as one 16-bit register, R12 containing the most significant bits and R11 containing the least significant bits. R12 can be considered the course tune value and R11 the fine tune value. The envelope periods available range from a value of 0001 (Hex) to FFFF (Hex), corresponding to .285 milliseconds to 18.7 seconds (assuming a .897 MHz clock).

I/O Ports (Registers R14-R15)

The PSG chip has two 8-bit I/O ports which can be used in a manner similar to the three I/O ports of the 8255A chip. When an 8-bit word is written to register R14, the data also appears on the eight PSG pins for port A. When the PSG ports are in the input mode, any data present on the pins will be present in the corresponding register (R14 or R15). A read of the register will retrieve the data to the computer for processing. The mode of the ports (input or output) is determined by the contents of the two highest bits of R7 as discussed earlier.

Adding The PSG To Your I/O Board

If you have finished your I/O board according to last month's article, the addition of the PSG will be fairly easy. You will need only the PSG chip and a 40-pin socket (see the previous article for socket sources). Unfortunately, General Instruments, the manufacturer of the PSG, and their distributors are not really very interested in the hobbyist business, and this makes the purchase of a PSG chip a little tricky. Arrow Electronics is a General Instruments distributor with many offices around the country, but they usually have a $50 minimum order. If you have a lot of other things to order anyway, then try Arrow. You might also find it at some Pioneer outlets. If you can't find a source, HIB Associates (3505 Hutch Place, Chevy Chase, MD 20815) has again agreed to fill mail orders (include $2 shipping and handling on all orders, five percent sales tax on Maryland orders). The PSG is priced at $9.50, and the 40-pin socket is $1.

Table 2. PSG Control Line Functions

BC1	BDIR	Function
0	0	Inactive
0	1	Write
1	0	Read
1	1	Latch

A suitable location for the PSG is directly across the board from the 8255 (use the same row numbers), on the last black rectangle. In this position, as was the case for the 8255, all of the pins will be accessible without removing the computer cover when the board is plugged in. Bend and solder the corner pins of the socket to the copper pads, and bend and solder two more pins near the center of the socket. Now follow the wiring list in Table 3. Make sure that all pins to be connected via the copper pads are bent and soldered to the pads. When you are finished, recheck your work against the

wiring list until you are sure you have it right (improper connections may damage the chip or the computer). Now you can test the circuit using the test program shown in the next section.

In this design, the CoCo's clock signal (.897 MHz) on pin 6 of the cartridge connector is used as the clock signal for the PSG. Using a 1.79 MHz pulse would be better, allowing another octave of higher frequency tones. An external clock circuit may be used for this purpose if necessary. I will be glad to send you a simple clock circuit diagram if you include a self-addressed, stamped envelope with your request (6913 Breezewood Terrace, Rockville, MD 20852).

Table 5. Wiring List

Connect the copper strip running down underneath the new 40-pin socket to the ground bus. The two nearest strips parallel to the ground bus should be connected to Vcc (+5 V), forming a Vcc bus (one of these may already be connected to Vcc. Connect a 1000 ohm resistor between pin 38 of the AY-3-8910 and the ground bus. Connect a 0.1μF capacitor between Vcc and ground near pin 40 of the AY-3-8910 (or between its pin 40 and ground).

From	To	Signal
Vcc bus	AY-3-8910-25	Vcc
Vcc bus	-28	Vcc
Vcc bus	-40	Vcc
GND bus	-1	Ground
GND bus	-24	Ground
8255-14	-27	Port C, line 0 (control)
-15	-29	Port C, line 1 (control)
-4	-37	D0
-3	-36	D1
-2	-35	D2 (Data lines
-1	-34	D3 from
-40	-33	D4 Port A)
-39	-32	D5
-38	-31	D6
-37	-30	D7
AY-3-8910-3	-4	Audio
-3	-38	Audio
-3	CC Cartr.-35	Audio
CC Cartr.-6	AY-3-8910-22	Clock (.89 MHz)
-5	-23	Reset

You may also want to connect AY-3-8910-3 (audio out) to an audio jack for playback through a separate sound system.

Figure 3. Envelope Shape/Cycle Control

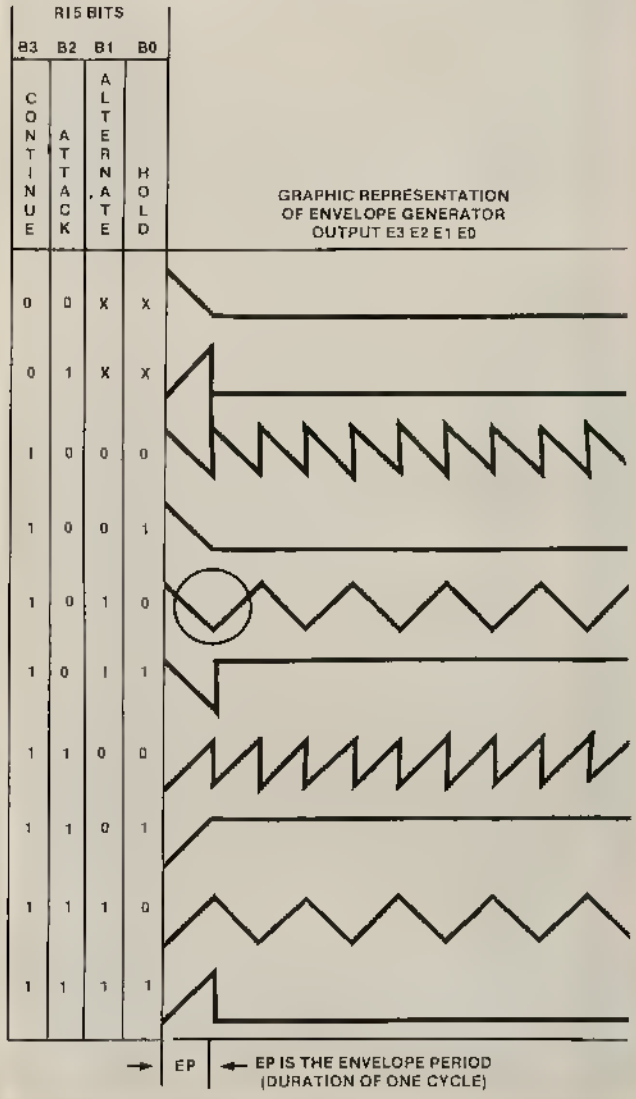

Software

The most important routines for controlling the PSG are the three which latch, write, and read. These must be written in machine language for proper timing and for maximum speed. Listing 1 shows these routines along with a short test program. It is assumed that the control lines are connected to PPI C-0 and C-1, and that the eight data lines are connected to port B.

The machine language instructions are shown in annotated assembly language in Listing 2. The statement numbers of the corresponding data statements are given in parentheses.

This example of assembly language programming is so simple that no previous experience should be necessary to understand the way it works. Only four instructions are used, although one of them (STA) is used in two different addressing modes. In Listing 2 the operation code is in the left column and the number or address it operates on is in the right column. The dollar sign means that the number following is in Hex, and the "#" sign means that the number following should be treated as a number rather than as an address. *LDA #$80* means that the CPU A register should be loaded with the Hex number 80. *STA $FF43* means that the contents of the CPU A register should be transferred to address FF43 (which, in our case is the control register of the PPI). *LDA $FF40* means that the contents of address FF41 should be transferred to the A register. *CLRA* simply clears the CPU A register, and *RTS* returns control back to the program which is called the routine.

Listing 1 has a few statements which require Extended BASIC, but it may be modified to get around this problem. If you don't have Extended BASIC, simply make the following changes:

220 EXEC PA

260 EXEC PA+&H17
290 EXEC PA+&H2A
Delete Lines 8910, 8920, 8930

Radio Shack doesn't advertise the fact the *EXEC* works in this manner, but it does.

To test the PSG, *RUN* the test program. In response to the prompt, *OP,REG,DATA:*, enter the operation (1 for write, 2 for read), the PSG register number, and the data to be written (enter zero here when reading). To get a tone from audio channel A, we must write and enable code to register 7 (see Table 4), a frequency value to register 0 (and sometimes to register 1 as well), and an amplitude code to register 8.

For example, try the following:

OP,REG,DATA: 1,7,&H3E
OP,REG,DATA: 1,0,&HD6
OP,REG,DATA: 1,8,&H0F

The note C should sound. Now test the read feature by reading the contents of register 7 (which we just set to 3E, or 62 in decimal, in the above procedure):

OP,REG,DATA: 2,7,0

The computer should respond by printing 62 on the screen. Test out the other features of the PSG in a similar manner.

Many sophisticated sound effects are possible with the PSG, and making the sounds does not tie up the CPU full time. Listing 3 shows a few of the examples which my 12-year-old daughter wrote for a science fair project. These statements should be added to the test program (Listing 1), replacing Lines 100-140.

As a different example of the possibilities with the PSG, I have added a second PSG to my board (a third control line to PSG pin 25 serves as a chip selector). I then connected the lines of the two additional I/O ports on each chip to switches under the keys of an old three-octave chord organ keyboard. With a few more subroutines, I now have a six-voice (real-time) electronic organ. My next step will be (just through additional software) to add synthesizer effects. As you can see, with the PSG you are only limited by your imagination.

The sound generator chip is only one example of the kinds of circuits which you can add to your interface board. A great security system could be built with each on/off or indicator switch from critical locations around your house wired in (through a buffer chip like the 74LS241) to the PPI I/O port lines.

The important thing is to build *something*. It's the best way to start learning about the wonderful world of digital circuits.

Listing 1:

```
10 CLEAR1000,&H2FFF
20 PA=&H3000
30 'SELECT CARTRIDGE SOUND
40 AUDIOON
50 POKE&HFF01,&H34
60 POKE&HFF03,&H3C
70 GOSUB8900
90 '
100 'TEST PROGRAM
105 '
110 INPUT"OP,REG,,DATA:";OP,R,S
120 GOSUB8210
130 IFOP=1THENGOSUB8240ELSEGOSUB2
90
140 GOTO110
200 'LATCH
210 POKEPA+&H08,R
220 X=USR1(0)
230 RETURN
240 'WRITE
250 POKEPA+&H18,S
260 X=USR2(0)
270 RETURN
280 'READ
290 X=USR3(0)
300 PRINT"CONTENTS=";PEEK(PA+&H2
9)
310 RETURN
8900 'READ AND STORE MACHINE LAN
GUAGE ROUTINES
8910 DEFUSR1=PA
8920 DEFUSR2=PA+&H17
8930 DEFUSR3=PA+&H2A
8940 'LOAD USR1, USR2, & USR3
8950 FORI=PA TOPA+&H41
8960 READY:POKEI,Y
8970 NEXTI
8980 RETURN
9000 'REGISTER LATCH ROUTINE
9010 DATA&H86,&H80
9020 DATA&H87,&HFF,&H43
9030 DATA&H86,&H03
9040 DATA&HB7,&HFF,&H42
9050 DATA&H86,0
9060 DATA&HB7,&HFF,&H40
9070 DATA&H4F
9080 DATA&H87,&HFF,&H42
9090 DATA&H87,&HFF,&H40
9100 DATA&H39
9110 'WRITE DATA ROUTINE
9120 DATA&H86,0
9130 DATA&H87,&HFF,&H40
9140 DATA&H86,&H01
9150 DATA&H87,&HFF,&H42
9160 DATA&H4F
9170 DATA&HB7,&HFF,&H42
9180 DATA&HB7,&HFF,&H40
9190 DATA&H39
9195 DATA0
9200 'READ ROUTINE
9210 DATA&H86,&H82
9220 DATA&HB7,&HFF,&H43
9230 DATA&H86,&H02
9240 DATA&HB7,&HFF,&H42
9250 DATA&HB6,&HFF,&H40
9260 DATA&HB7,&H30,&H29
9270 DATA&H4F
9280 DATA&HB7,&HFF,&H42
9290 DATA&HB7,&HFF,&H40
9300 DATA&H39
```

310..... 43
END 136

Listing 2:

```
09000 *REGISTER LATCH ROUTINE
09010        LDA     #$80    SET PPI REG. FOR
09020        STA     $FF43     B/C PORT OUTPUT.
```

```
09030         LDA     #$03    SET BOTH CONTROL LINES
09040         STA     $FF42     (C PORT) HIGH.
09050         LDA     0       OPERAND GETS POKED REG. NO.
09060         STA     $FF41   WRITE REG. NO. TO PORT B.
09070         CLRA            ZERO A REGISTER.
09080         STA     $FF42   CLEAR CONTROL LINES.
09090         STA     $FF41   CLEAR DATA LINES.
09100         RTS             RETURN.
09110 *WRITE DATA ROUTINE
09120         LDA     0       OPERAND GETS POKED DATA.
09130         STA     $FF41   WRITE TO DATA LINES.
09140         LDA     #$01    SET CONTROL LINES FOR
09150         STA     $FF42     WRITE DATA.
09160         CLRA            ZERO A REGISTER.
09170         STA     $FF42   CLEAR CONTROL LINES.
09180         STA     $FF41   CLEAR DATA LINES.
09190         RTS             RETURN.
09200 *READ DATA ROUTINE
09210         LDA     #$82    SET PPI CONTROL REG. FOR
09220         STA     $FF43     B PORT INPUT.
09230         LDA     #$02    SET PSG CONTROL LINES
09240         STA     $FF42     FOR READ.
09250         LDA     $FF41   READ DATA ON DATA LINES.
09260         STA     (PA+$3F)        SAVE IN SPARE LOCATION.
09270         CLRA    CLEAR A REGISTER.
09280         STA     $FF42   CLEAR CONTROL LINES.
09290         STA     $FF41   CLEAR DATA LINES.
```

1590 202
1840 159
END 140

Listing 3:

```
100 PRINT"SOUND EFFECTS BY SUSAN
 ATHEY"
105 PRINT
110 PRINT"TYPE THE LETTER OF YOU
R CHOICE."
115 PRINT
120 PRINT"(A) SWEEP AMPLITUDE"
125 PRINT"(B) SWEEP TONE FREQUEN
CY"
130 PRINT"(C) GUN SHOTS + EXPLOS
ION"
135 PRINT"(D) EUROPEAN SIREN"
140 A$=INKEY$:IFA$=""THEN140
145 IFA$="A"THENGOSUB1510
150 IFA$="B"THENGOSUB1610
155 IFA$="C"THENGOSUB1710
160 IFA$="D"THENGOSUB1910
165 CLS:GOTO100
170 '
1500 'SWEEP AMPLITUDE
1501 '
1510 R=0:S=&HD6:GOSUB2100:GOSUB25
0
1520 R=7:S=&O76:GOSUB2100:GOSUB25
0
1530 FORA=0TO&H0F
1540 R=8:S=A:GOSUB2100:GOSUB2500
1550 NEXTA
1560 FORA=&H0FTO0STEP-1
1570 R=8:S=A:GOSUB2100:GOSUB2500
1580 NEXTA
1590 FORDLY=1TO200:NEXTDLY
1595 RETURN
1600 '
1601 'SWEEP FREQUENCY
1602 '
1610 R=7:S=&O76:GOSUB2100:GOSUB25
0
1620 R=8:S=&H0F:GOSUB2100:GOSUB25
0
1630 FORI=1TO3
1640 FORN=&HD6TO&H6BSTEP-1
1650 R=0:S=N:GOSUB2100:GOSUB2500
1660 NEXTN
1670 NEXTI
1680 RETURN
1700 '
1701 'GUNSHOTS AND EXPLOSION
1702 '
1710 V=16:G=15:F=0
1720 FORY=1TO5
1730 R=6:S=G:GOSUB2100:GOSUB2500
1740 R=7:S=7:GOSUB2100:GOSUB2500
1750 R=8:S=16:GOSUB2100:GOSUB2500
1760 R=9:S=16:GOSUB2100:GOSUB2500
1770 R=10:S=16:GOSUB2100:GOSUB250
1780 R=12:S=V:GOSUB2100:GOSUB2500
1790 R=13:S=0:GOSUB2100:GOSUB2500
1800 FORDLY=1TO10:NEXTDLY
1810 NEXTY
1820 IFF=5THENRETURN
1830 FORDLY=1TO200:NEXTDLY
1840 V=56:F=5:G=0:GOTO1720
1900 '
1901 'SIREN
1902 '
1910 FORT=1TO10
1920 R=7:S=&O76:GOSUB2100:GOSUB25
0
1930 R=8:S=&H0C:GOSUB2100:GOSUB25
0
1940 R=9:S=&H0B:GOSUB2100:GOSUB25
0
1950 R=0:S=&H6B:GOSUB2100:GOSUB25
0
1960 R=2:S=&H69:GOSUB2100:GOSUB25
0
1970 FORDLY=1TO100:NEXTDLY
1980 R=0:S=&H47:GOSUB2100:GOSUB25
0
1990 R=2:S=&H46:GOSUB2100:GOSUB25
0
2000 FORDLY=1TO100:NEXTDLY
2010 NEXTT
2020 RETURN
```

The affordable step up in home computing.

Radio Shack's Best Is Now

Expand Your Programming Power! Our new 64K Extended BASIC Color Computer 2 gives superb features to serious programmers—at a very low price. It attaches easily to any television, and has an electric typewriter-quality keyboard in a compact, white case. Using the built-in Extended BASIC language, you can write sophisticated programs and easily create high-resolution graphics. Produce drawings, charts, diagrams and animation with simple, one-line commands. "Draw" with eight different colors, create musical tones, analyze data and much more. Or select from our large library of instant-loading Program Pak™ cartridges for games, education and budgeting.

Deluxe Joystick

39.95 Each
26-3012

TV not included

64K Extended BASIC Color Computer 2

259.95
26-3127

AS LOW AS $26 PER MONTH

Radio Shack CITILINE

Prices apply at participating Radio Shack stores and dealers. OS-9 is a trademark of Microware and Motorola, Inc. CitiLine is a service mark of Citicorp.

TRS-80® Color Computer Even Better.

The Heart of a Professional Disk-Based System. Add a Color Computer disk drive for an extra 156,000 characters of storage and quicker access to your data. You can add up to four disk drives for a vast 626,000 characters of total storage. For advanced programmers, our new OS-9 operating system (26-3030, $69.95) allows you to utilize the full 64,000-character memory for assembly language programs. OS-9 includes a text editor, assembler and debugger. You can develop and edit your own assembly language programs, convert them into machine language for execution, then test them for errors.

Easily Expandable. Best of all, your 64K Color Computer 2 will grow with your future needs. Add our Deluxe Joysticks for more accurate cursor control and faster response with your favorite games. Or choose our Multi-Pak Interface, which lets you connect up to four Program Paks to your Color Computer at once. When you're ready to change programs, just move the selector switch. Go on-line with the world with our deluxe RS-232 Program Pak (26-2226, $79.95). You can communicate with national information services and local bulletin boards by telephone—just add a modem. You can also add a printer, a Color Mouse cursor controller and more!

See It Today. The 64K Extended BASIC Color Computer 2 is available today at over 1200 Radio Shack Computer Centers and at participating Radio Shack stores and dealers nationwide.

Multi-Pak Interface
179.95
26-3024

Disk Drive #0 Kit
349.95
26-3029
AS LOW AS $28 PER MONTH

Send me a free TRS-80 Computer Catalog.
Mail To: Radio Shack, Dept. 85-A-103
300 One Tandy Center, Fort Worth, Texas 76102

NAME _____
COMPANY _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____
TELEPHONE _____

Radio Shack®
The biggest name in little computers®
A DIVISION OF TANDY CORPORATION

ATTACK OF THE KEY BOMBERS

By Gil Cummings

My daughter took an instant shine to my computer. When it was new I couldn't power up without hearing a little voice pipe up, "Daddy, can I sit down and type *RUN*?" She had already seen the canned games that run on the Atari 2600 so she wasn't much impressed with my early efforts at programming. Every day she wanted to see something new and better. I found a winning formula pretty quick — use all the colors, lots of different sounds and plenty of visual and verbal rewards and go lightly on the "you lose" routines.

Even so, Julie's favorite game soon became, "Let's get Daddy away from the computer." I'd have something half baked in the RAM and when she tried to run it, it would throw an RG Error or some such put down. Then I'd tell her to wait until it runs a little better and instantly the face would cloud over with the "Oh, what a bummer!" look.

Or worse, the game would call for a lot of inputs, making the pace grind to a halt as she hunted for the keys. That kind of thing would end in something like "Oh, I can never win."

I've been at this for about two years now and in the process I've learned a little about computer programming and, more importantly, about fathering — a few things that I would never have known without aeeess to a small computer. The Color Computer is the best kind of computer for this activity. Color and Extended Color BASIC make it easy to achieve the rewards of creativity, a real sense of satisfaction in seeing your dreams come true. Whatever you can dream you can bring into being through your CPU.

This little game helps kids make finding the right key a conditioned reflex. A small drama takes place above the keyboard as the bomber flits in and takes aim on a key. A bomb falls and it's up to the player to defend the helpless by pressing the targeted key, warding off the attack. The key colors and letters are stored in *DATA* statements, along with a symphony of inflight music. The graphics are all Lo-Res, the better to put all nine colors to work at once.

Line 2 provides room and board for an array in two dimensions, *LC$* (level, character). There are four rows of keys, 10 keys in each row. I put '@:' in the bottom row since they get a lot of action when programming. Lines 8 to 14 are subroutines for firing at the bomber, keeping score and making sure the bomber doesn't take aim on a key that's out of play.

The difficulty factor makes use of the tempo feature of the *PLAY* command. The lower the difficulty number, the slower the bomb whistles and the more time you have to respond with anti-aircraft fire. Lines 30-87 load in the colors and sounds, allowing the colors of the keys to change with each round of play. The bomber's inflight music corresponds to the key color.

Lines 100-165 draw the keys. Line 170 changes the row of keys presented with each round and awards bonus points for hitting five in a row. Line 190 paints the bomber (64 dazzling color combinations). Lines 200-290 control the play and build suspense as you wait for the bomb to drop. If the player presses the right key in time, it computes the score (more points for higher difficulty and quicker response). If the player misses, the key is out and a new round begins. A round is over when the player gets five in a row or loses the last key. A game is over after three rounds; then you get blue skies and a chance to do it again.

Instructions are in Lines 300-390, winning takes you to Lines 400-420 and losing all the keys gets you another chance at Line 500.

(Gil Cummings is an employee of Chevron U.S.A. in credit card customer assistance.)

NEW DISK DRIVES

STARTING AT

$159.00

WITH CASE & POWER SUPPLY

$189.95

TANDON MPI TEAC

Speed 5ms tk to tk and up
Capacity 250k unformatted
Tracks 40
Warranty **now 1 YEAR**

ORDER TOll FREE!
1-800-635-0300

CALL FOR SALE PRICES

Even more savings!!

ALL DRIVES FULLY TESTED&WARRANTEED

Complete Disk Drive with Power Supply&Case $189.95

Two Drives in Dual Case & Power Supply $359.00

1/2 ht double sided double density Disk Drives (Panasonic)..... $219.95

1/2 ht double sided double density Disk Drive with ps&case..... $249.95

2 double sided double density drives with ps&case $489.95

Single ps&case $39.95

Color Computer Controller (J&M) $129.95

DRIVE Ø FOR RADIO SHACK COLOR COMPUTER
TANDON, MPI OR TEAC DRIVE (SINGLE SIDED 40 TRACKS SPEED 5MS TRK TO TRK & UP)
POWER SUPPLY and CASE, TWO DRIVE CABLE WITH ALL GOLD CONNECTORS
J&M CONTROLLER, MANUAL and DOCUMENTATION ..... ~~$329.95~~ $308.00

DRIVE Ø FOR RADIO SHACK COLOR COMPUTER
PANASONIC 1/2 HEIGHT DOUBLE SIDED DOUBLE DENSITY DRIVE 500K unformatted
POWER SUPPLY and CASE, 2 DRIVE CABLE WITH ALL GOLD CONNECTORS
J&M CONTROLLER, MANUAL and DOCUMENTATION ..... ~~$399.95~~ ..... SALE!

TAKE ADDED SAVINGS ON TWO DRIVE SYSTEMS

DISKETTES with free library case $17.95

Unadvertised Specials ..... $Call

Drives cleaned, aligned & tested..... $29.95

TECHNICAL STAFF ON DUTY, PLEASE CALL FOR ASSISTANCE.

CALL US TODAY!! (617)234-7047 *DEALER INQUIRIES INVITED.

TRUE DATA PRODUCTS

195 Linwood Street, P.O. Box 546
Linwood, Massachusetts 01525
(617) 234-7047
HOURS MON-SAT 9-6 (EST)

We welcome
- Visa/Master Charge
- Checks (allow 2 weeks for clearing)
- C.O.D. Add $2.00



The listing:

```
2 DIM C8$(8),LC$(4,10):WB$=CHR$(
128)+CHR$(128)+CHR$(128):KC=0:SC
=0:GC=1:SS=1:GOSUB300:GOTO30
8 FOR I=23TO 3 STEP -1:SET(H,I,C
):SET(H-1,I,C):PLAY"O5T64GGGE":R
ESET(H,I):RESET(H-1,I):NEXT I:PR
INT@KC*3-2,WB$;:SC=SC+DF*(31-V):
GOSUB10:RETURN
10 PRINT@487,USING"  SCORE #####
# #  ";SC,SS;:RETURN
12 CR=0:SS=1:C=0:LE=RND(4):FOR I
=1 TO 10:XC(I)=1:NEXTI:RETURN
14 FORI=1 TO 10:IF XC(I)=1 THEN
RETURN ELSE NEXTI:GOTO500
30 CLS0:INPUT" EASY - HARD (1 -
16)";DF:DL$=STR$(DF*4):CLS0:FORC
=1TOB:READ CC
40 C8$(C)=CHR$(CC)+CHR$(CC)+CHR$
(CC)
50 NEXT C
60 FOR I=1 TO 4:FOR J=1 TO 10
70 READ LC$(I,J)
80 NEXT J,I
85 FOR I=1 TO B:READ FL$(I):NEXT
87 GOSUB12
100 J1=RND(7):J2=J1+10
110 FOR I=0 TO 2
115 L=385+I*32
120 FOR J=J1 TO J2
130 IF J<9 THEN C=J ELSE C=J2-J
140 PRINT@L,C8$(C);
150 L=L+3
160 NEXT J
165 NEXT I
170 IF SS>5 THEN PRINT @487,"!!!
!BONUS!!500!!!!";:FORI=1 TO 5:PL
AY"O"+STR$(I)+"T16CDEFGAB":NEXTI
:SC=SC+500:GOSUB10:GOSUB12:GC=GC
+1:IFGC>3THEN400
172 FOR LO=418 TO 445 STEP 3
175 CR=CR+1
180 PRINT @LO,LC$(LE,CR);:NEXT L
O:GOSUB10
190 BC=RND(8):WC=RND(8):BR$=CHR$
(115+WC*16)+CHR$(124+BC*16)+CHR$
(115+WC*16):IF SS>5 THEN100
200 KC=RND(10):IF XC(KC)=0 THEN
```


COLORFORTH™ FORTH COMPILER

THERE IS LIFE AFTER BASIC! COLORFORTH is a figFORTH language compiler designed for use on the Color Computer. COLORFORTH Version 2.0 is available now with all these features and more:

- Can access ALL available RAM from 16K through 64K and will work with any current ROM
- Executes 10 to 25 times faster than BASIC and can be programmed much faster
- 50 additional commands are included beside the standard figFORTH commands
- You get BOTH cassette and RS/DOS versions, PLUS a resident figEDITOR, and an 82 page manual
- A special command that allows you to copy your program so that it can be run on a CoCo without first loading COLORFORTH

ALL OF THE ABOVE FOR ONLY..... $49.95

DECISION MAKER™

IF YOU HAVE EVER HAD TROUBLE MAKING UP YOUR MIND, THEN THIS PROGRAM IS FOR YOU!

DECISION MAKER is a new concept in programs for the Color Computer.

DECISION MAKER is ...

- A step by step, interactive program to help you solve any problem
- Designed using standard analytic techniques
- A learning tool to discover the exact processes used in reaching a decision
- A valuable asset for anyone

RAINBOW CERTIFICATION SEAL

DECISION MAKER requires 32K and Ext. Basic
Complete with 16 page manual, only..... $24.95

BIO-PSYCHOMETER™

NOW YOU CAN INVESTIGATE THE HIDDEN REALMS OF THE HUMAN MIND!

BIO-PSYCHOMETER is an authentic Bio-feedback device complete with software

BIO-PSYCHOMETER includes:

- Bio-feedback graphing, Stress Reduction, and Memory Improvement modes
- Machine Language, high speed graphics
- Very sensitive hardware for optimum results
- Printed manual with instructions and suggestions for use

BIO-PSYCHOMETER requires 32K and Ext. Basic
Complete, with manual, only..... $39.95

We accept U.S. funds drawn on U.S. banks, VISA & MASTER CARD, & UPS C.O.D.s
Add $2.50 shipping & handling
Texas residents add 5%

ARMADILLO INT'L SOFTWARE
P.O. BOX 9351
AUSTIN, TEXAS 78766

VISA MasterCard

PHONE (512)835-1088

```
200 ELSE DR=RND(4):PRINT@KC*3-2,
BR$;
205 H=KC*6-1:C=POINT(H,29):PLAYF
L$(C):IFDR=4THEN220ELSEPRINT@KC*
3-2,WB$;:GOTO200
220 H=KC*6-1
240 FOR V=3 TO 24:SET(H,V,C):SET
(H-1,V,C):PLAY"O4T"+OL$+"B-":RES
ET(H,V-1):RESET(H-1,V-1):IFINKEY
$=LC$(LE,KC)THENSS=SS+1:GOSUBB:G
OTO190ELSENEXTV
250 XC(KC)=0:PRINT@416+H/2,CHR$(
128);:PLAY"O1T28-AGFE-OC":PRINT@
KC*3-2,WB$;:SS=1:GOSUB14:GOSUB10
290 GOTO 190
300 CLS:PRINT:PRINTTAB(42)"KEY B
OMBER"
302 PRINT:PRINT
304 PRINT"      LOOK OUT! UP IN T
HE SKY!      IT'S THE KEY BOMBER!
 HE'S        TRYING TO BOMB YOUR
COMPUTER     KEYS.  DON'T LET HIM
.  WHEN      HE DROPS HIS BOMB YO
U HAVE       TO PRESS THE KEY BEF
ORE THE      BOMB LANDS ON IT.  T
HEN YOUR     KEY IS SAFE!"
306 PRINTTAB(43)"GOOD LUCK!"
390 IFINKEY$=""THEN390 ELSE RETU
RN
400 CLS5:PRINT@(40),"THE SKIES A
BOVE";:PRINT@(103),"YOUR KEYBOAR
D ARE";:PRINT@(173),"SAFE!";
405 GOSUB 10
410 PRINT@266,"PLAY AGAIN?";
420 I$=INKEY$:IFI$=""THEN420ELSE
IFI$<>"N"THENRUNELSE PRINT@324,"
OK, TURN OFF THE COMPUTER.";:END
500 PRINT@262,"TH-TH-TH-THAT'S A
LL!";
510 PRINT@331,"TRY AGAIN?";
520 I$=INKEY$:IFI$=""THEN520 ELS
EIFI$="N"THENEND
540 RUN
B99 IF INKEY$=""THEN B99 ELSE CL
S:LIST-BBB
900 DATA 143,159,175,191,207,223
,239,255
910 DATA 1,2,3,4,5,6,7,B,9,0
912 DATA Q,W,E,R,T,Y,U,I,O,P
914 DATA A,S,O,F,G,H,J,K,L,;
916 DATA Z,X,C,V,B,N,M,"@",":","
-"
920 DATA O2TBGAG,O2T16COEFEOC,O2
T16EECCOGE,O3TBCOE,O3TBEOC,O3T16
EEECOOOB,O5T32COEFGABAGFEOC,O5TB
BAG
```


NEW PRICE REDUCTIONS

DISK SYSTEMS FOR THE COLOR COMPUTER

THESE PACKAGES INCLUDE DRIVE, *CONTROLLER,
POWER SUPPLY & CABINET, CABLE, AND MANUAL.

* SPECIFY WHAT CONTROLLER YOU WANT J&M, OR RADIO SHACK.

PAK #1 - 1 SINGLE SIDED, DOUBLE DENSITY SYS.	$389.95
PAK #2 - 2 SINGLE SIDED, DOUBLE DENSITY SYS.	$639.95
PAK #3 - 1 DOUBLE SIDED, DOUBLE DENSITY SYS.	$439.95
PAK #4 - 2 DOUBLE SIDED, DOUBLE DENSITY SYS.	$699.95
PAK #5 - 2 DOUBLE SIDED, DOUBLE DENSITY SYS. THINLINE DRIVES, HALF SIZE	$659.95
COLOR COMPUTER II 64K W/EXT. BASIC	$189.95
CONTROLLERS	
J&M DISK CONTROLLER W/ JDOS OR RADIO SHACK DISK BASIC, SPECIFY WHAT DISK BASIC.	$139.95
RADIO SHACK DISK CONTROLLER 1.1	$134.95
DISK DRIVE CABLES	
CABLE FOR ONE DRIVE	$ 19.95
CABLE FOR TWO DRIVES	$ 24.95
MISC	
64K UPGRADE W/MOD. INSTRUCTIONS, C,D,E,F, AND COCO 2	$ 49.95
HJL KEYBOARDS	$ 69.95
MICRO TECH LOWER CASE ROM ADAPTER	$ 74.95
RADIO SHACK BASIC 1.2	$ 29.95
RADIO SHACK DISK BASIC 1.1	$ 29.95
RADIO SHACK EXT. BASIC	$ 39.95
SCREEN CLEAN CLEARS UP VIDEO DISTORTION	$ 39.95
MEMOREX DISKS 5" SS,DD	$ 24.00
SHIPPING INCLUDED ON DISK PRICES	
DISK DRIVE CABINET & POWER SUPPLY	$ 49.95
SINGLE SIDED, DOUBLE DENSITY 5" DISK DRIVE	$199.95
DOUBLE SIDED, DOUBLE DENSITY 5" DISK DRIVE	$249.95
PRINTERS	
EPSON RX-80	$325.00
EPSON RX-80FT	$375.00
EPSON MX-100	$650.00
EPSON FX-100	$799.00
EPSON FX-80	$549.00
EPSON MX-70	$200.00
SERIAL BOARDS FOR PRINTERS	
MX-SERIES	$119.95
FX-SERIES	$ 99.95

USA ADD 2% SHIPPING
FOREIGN ADD 5% SHIPPING

For Ordering Call TOLL FREE

VISA

1-800-338-6800

MasterCard

DATA-COMP

PO BOX 794 HIXSON, TN 37343

PIPELINE

KRT SOFTWARE has announeed that they are taking over CoCoData Enterprises' complete line of software. The line includes: *Graphics Program Generator II, Electricity Consumption Monitor, Household Budget Worksheet, LLIST-RITE, Match2, Screen Reference Program,* and the *Programmer's Worksheet.*

The programs are available at individual prices or the Super Bonus Pak of all programs for the single price of $49. For more information, eontact KRT Software, P.O. Box 41395, St. Petersburg, FL 33743; phone (813) 321-2840.

* * *

"BULLETIN BOARD" BOB continues to tame the wild, wild West after extending his operation to California. Bob Rosen, president of Spectrum Projects, has now placed into operation the fifth of his popular Rainbow Conneetion bulletin board systems — and the first on the sunny Paeifie Coast. The BBS operates from Spectrum Project's West Coast office in San Jose and can be aecessed through the number (408) 984-7937.

The question now is: If it never rains in California — how can they have a Rainbow?

* * *

CO-PRODUCED BY COCO. Triad Pietures Corp. has announced a first for the Color Computer — what purports to be an "animation program that ean turn a home computer into a Hollywood cartoon studio."

The Animator, to be available in late July, features professional motion picture animation techniques, 12 "help" screens and a comprehensive manual. The average non-programmer can ereate original animated cartoons of up to 1½ minutes (600 frames) with a frame rate roughly equal to a standard Bugs Bunny cartoon. Thirty-two "eels," or character positions, are eycled and reeycled to ereate the illusion of motion. Sound effects can be ineluded as well.

At $35 for the three-cassette paekage, *The Animator* sounds like it might be a real show stopper. It requires 32K and Extended Color BASIC and ineludes a library of eels, baekgrounds and sound effeets, as well as the "Animation Studio" itself.

If you would like to know more about *The Animator*, contaet Triad Pietures Corp., 134 Simders Rd., Sequim, WA 98382; phone (206) 683-6459.

* * *

PRINTER THRONES from Royal Seating are featured in a new two-page brochure being distributed by the eompany. A full line of stands designed to aceommodate any type printer is offered, ineorporating various size slots and cutouts for front, eenter or rear feed and optional paper baskets for forms retrieval.

If you're interested in the brochure and a list of prices, contact: Royal Seating Corporation, Attn: Lorraine Moore, P.O. Box 753, Cameron, TX 76520; phone (817) 697-6421.

* * *

BAR CODE READING eapability is being offered for the Color Computer by Peripheral Connections (PERCON) with a newly enhaneed bar eode reader that will connect to any eomputer that supports RS-232 ASCII eommunieations. The E-Z-READER bar code reader features the Hewlett Paekard digital wand and can read the three most popular industrial codes: Code 3 of 9, Interleaved 2 of 5, and Codabar/ABC.

The E-Z-READER is designed to read dot-matrix printed bar codes, as well as those printed eonventionally. The pen design enables it to read through thin protective plastic and poorly printed bar codes. Also, it can detect the code over a range of angles and pen speeds as well as variable bar code densities. A "good read" audible signal is a standard feature.

The ability to read bar codes into your computer not only has several management and industrial applications, the potential exists for BASIC listings to be printed in bar code, sueh as those for the Radio Shaek Model 100 being printed in PCM, THE RAINBOW's sister publication.

The E-Z-READER bar code reader is eurrently priced at $495. For more information, eontaet: Peripheral Connections, 2190 W. 11th St., Eugene, OR 97402; phone (503) 344-1189.

* * *

GOVERNMENT CONTROLS, those dreaded or praise-worthy restrictions (depending on your view), and eonsumer lawsuits are inevitably coming to the software marketplaee, according to Bill Shoneman, viee president of XXCAL, Ine., a software testing firm. "The software industry is becoming big business and is developing a high profile both among consumers and the government," Shoneman says. "Sooner or later, they are going to start insisting on some assuranees about the reliability of our produets."

Shoneman finds the problem evident in the typical "non-warranty" diselaimer statement that appears on most software: *This program is provided as is without warranty of any kind — the entire risk as to the quality and the performance of the program is with you, the user.* "That kind of a statement," says Shoneman, "doesn't exactly inspire eonsumer confidenee.

"Magazine reviews and newsletters ean be very helpful," he continues, "but they shouldn't have to take the place of manufacturer testing, which the manufacturer should pay for as part of the produet development cost. Unfortunately, too few companies are investing in testing — either their own or that of an outside firm."

XXCAL, of 1901 Avenue of the Stars, Los Angeles, CA 90067, provides such testing, ranging from a brief overview to an in-depth analysis and eovering everything from technical content to documentation and ease of use. "Future sueessful software firms will be those that recognize the value of testing," says Shoneman. "They must realize that software sueeess will only eome to those who market programs that work."

Even if your views are a bit self-serving, Mr. Shoneman, we think they're very, *very* well put.

* * *

A LANGUAGE COMPILER that converts BASIC programs to machine eode is being offered by LLOYD I/O for FLEX and OS-9 systems. *K-BASIC* has three general data types: Real, String and Integer. There are four integer sizes (8, 16, 32 and 64 bit) and Real numbers are 15 digit preeision with an exponent of +/–99. There are directives, statements and funetions not found in BASIC interpreters.

K-BASIC is available for all FLEX, OS-9 and Color Computer OS-9 systems for $199 from: LLOYD I/O, 19535 NE Glisan, Portland, OR 97230; phone (503) 666-1097.

* * *

THE GRAND OPENING CELEBRATION

DISCOUNT COUPON

CLIP, MAIL ANO SAVE 10% ON SOFT AND HARO WARES OR COLORFUL UTILITY ORDERS FROM ANY OF OUR AOS SENT TO OUR NEW LOCATION IN SAN JOSE, CALIFORNIA !

SPECTRUM PROJECTS
PO BOX 9866
SAN JOSE, CA 95157-0866

ORDER HOT LINE 1-408 243-4558

OFFER EXPIRES AUG. 31, 1984
ORDERS SENT TO CALIFORNIA
NO OTHER DISCOUNTS APPLY
ON RETAIL PRICES ONLY

SPECTRUM PROJECTS
CELEBRATION
10% OISCOUNT

OFFER EXPIRES AUG. 31, 1984
ORDERS SENT TO CALIFORNIA
NO OTHER DISCOUNTS APPLY
ON RETAIL PRICES ONLY

SPECTRUM PROJECTS

SOFT AND HARD WARES FOR COLORFUL COMPUTING

SPREADSHEET

ELITE CALC - 255 Rows, 255 Columns, Help Displays, Repeat Text Entries, Insert, Delete, Move Entire Rows, Selectable Auto Cursor Movement, Formulas 255 chars. Disk/Tape $59.95 (see Aug '83 Rainbow Review)

SAVE $40 !

BUY 'EM BOTH FOR $99.95

DATA BASE MANAGER

PRO-COLOR FILE - 60 Data Fields, 8 Report Formats, 1020 bytes/record, Sorts 3 Fields, Screen and Summary Reports, Duplicate Records and Fields, Page Titles - Disk $79.95 (see June '83 Rainbow Review)

DISK DRIVES

DRIVE 0 System - 40 trks, Gold Platted Connectors - $299.95
AMDEK System - 624K Bytes with 3" Disk Cartridge - $499.00
DISK CONTROLLER - $139.95 (Systems include controller)
DISK Drive 1, 2 or 3 - $169.95
Single Drive PS & CASE - $59.95

GAME CONTROLLERS

WICO Command Adaptor - Hookup 2 Atari type joysticks- $19.95
With 2 Atari joysticks- $39.95
MACH II Joystick - Beats the competition! 360 Degree control with spring or positive true positioning and electrical trim adjustment on both axes- $39.95

UTILITIES (DISK)

1. FHL D-PAK $34.95
2. Adventure Generator..$39.95
3. Super Forth $39.95
4. Super Screen Machine.$49.95
5. OS-9 .....$69.95
6. FHL Flex $69.95
7. DEFT Pascal $79.95
8. MicroWorks MACRO-80C.$99.95

NEW PRODUCTS

POKES & PEEKS Manual $7.95
YELLOW Mail Labels (1K) .$14.95
Disk Head Cleaning Kit ..$24.95
6 Outlet Surge Protector $59.95
Green Monitor w/Audio ..$119.95
Bare Disk Drive $129.00
Amber Monitor w/Audio ..$139.95
CoCo Koala Pad $139.95

WEST DIVISION

Spectrum Projects
PO Box 9866
San Jose, CA 95157-0866

Add $3.00 S/H
NY Res Add Tax

EAST DIVISION

Spectrum Projects
PO Box 21272
Woodhaven, NY 11421

SPECTRUM PROJECTS

SOFT AND HARD WARES FOR COLORFUL COMPUTING

COMMUNICATION

COLORCOM/E - A complete smart terminal package! Upload, Download, Hi-Res (51X24) screen, 300/1200 Baud, Offline Printing and much more. Rompak or Disk - $49.95
(see Feb '84 Rainbow Review)

WORD PROCESSING

TELEWRITER-64 - Top CoCo Word Processor for 2 years! Three Hi-Res screens, true lowercase characters, right justification, full screen editor.
Tape $49.95 Disk $59.95
(see June '83 Rainbow Review)

MODEMS

MINI-MODEM - 300 Baud, Originate/Answer, Full Duplex, Direct Connect - $79.95
J-CAT Modem - Lowest priced auto/answer modem - $129.95
HAYES Auto Dial/Answer $239.95
ANCHOR - 300/1200 Baud $299.95
Prices include Modem cable.





PRINTERS

GEMINI 10X* - 120 cps, 9X9 dot tractor/friction feed $299.95
EPSON RX-80* - Faster than the MX-80 plus Graftrax! - $349.95
* Parallel interface required.
PBH Parallel Interface - Save $40 if ordered with above printers! - $49.95 (Reg.$89.95)

KEYBOARDS

SUPER-PRO (Mark Data) $59.95
PREMIUM (Micronix) $69.95*
HJL57 PROFESSIONAL $79.95*
* - Includes free software for 4 function keys. Specify Model Revision Board. PREMIUM board fits CoCo II w/adaptor. Add $5



MONITORS

MONOCHROME Monitors - 80X24 screens plus Hi-Res:
Green - $99.95 Amber - $119.95
BMC Color Monitor - $269.95
VIDEO PLUS - Video Interface for above monitors - $24.95
CoCo II (Monochrome) - $29.95
CoCo II(Color) Version - $39.95

Buy any Modem and Save $10 off Colorcom/E

Order Line
212-441-2807
408-243-4558

Buy any Printer, Keyboard or Monitor and Save $10 off Telewriter-64

RING IN THE OLYMPICS !

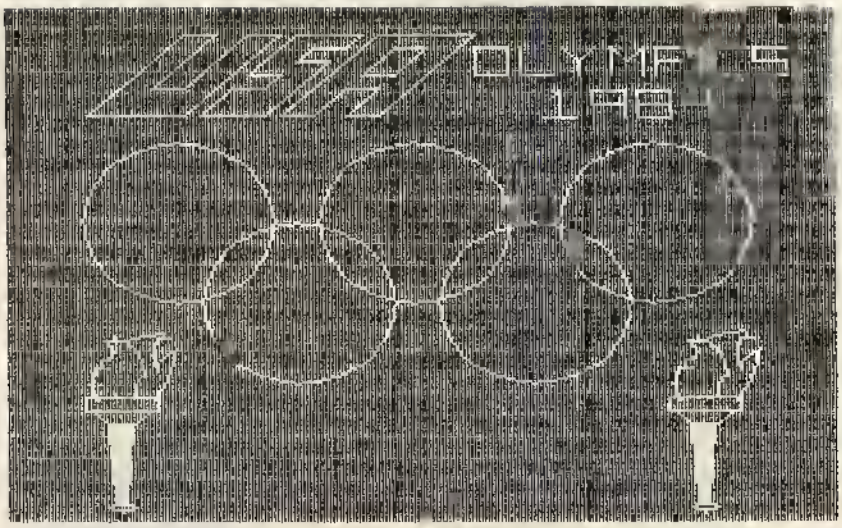

By Bill Duke

This is a 16K ECB graphics program that displays the five connecting rings universally known as the symbol of the Olympics. What better time to salute our athletes than in our games issue. Good luck, USA!

The listing:

```
10 PMODE4,1:PCLS:SCREEN1,1
20 GOSUB90
30 CIRCLE(126,80),30
40 CIRCLE(53,80),30
50 CIRCLE(200,80),30
60 CIRCLE(90,110),30
70 CIRCLE(163,110),30
80 GOTO80
90 DRAW"BM55,10;G30R30E30L10G20L
10E20L10
100 DRAW"BM90,10;G15R10G5L10G10R
20E20L10E5R10E5L20
110 DRAW"BM115,10;G30R10E10R10G1
0R10E30L30
120 DRAW"BM120,15;G10R10E10L10
130 DRAW"BM145,15;D10R10U10L10
140 DRAW"BM159,15;D10R10
150 DRAW"BM172,15;F5E5G5D5
160 DRAW"BM187,15;D10U10F5E5D10
170 DRAW"BM201,15;D10U10R10D5L10
180 DRAW"BM215,15;D10
190 DRAW"BM219,15;R10L10D10R10
200 DRAW"BM231,15;R10L10D5R10D5L
10
210 DRAW"BM171,31;D10R5L10R5U10G
3
220 DRAW"BM181,31;D5R10U5L10R10D
10
230 DRAW"BM195,31;D5R10D5L10U5R1
0U5L10
240 DRAW"BM209,31;D5R10L2U5D10
250 LINE(33,185)-(31,155),PSET
260 LINE(36,185)-(38,155),PSET
270 DRAW"BM32,155;R5
280 DRAW"BM33,185;R3
290 PAINT(33,175),5
300 DRAW"BM31,155;H5R18G5E5R2U5L
22D5R2
310 CIRCLE(29,140),4,,2,.30,.85
320 CIRCLE(29,128),4,,1,.85,.25
330 CIRCLE(33,142),10,,2,.70,.95
340 CIRCLE(43,145),5,,2,.47,.70
350 CIRCLE(22,127),30,1,1,.0,.12
360 DRAW"BM50,128;G4
370 CIRCLE(48,129),4,,2,.35,.85
380 CIRCLE(47,151),30,,1,.69,.75
390 CIRCLE(35,186),4,,.5
400 LINE(213,185)-(211,155),PSET
410 LINE(216,185)-(218,155),PSET
420 DRAW"BM212,155;R5
430 DRAW"BM213,185;R3
440 PAINT(213,175),1
450 DRAW"BM211,155;H5R18G5E5R2U5
L22D5R2
460 CIRCLE(209,140),4,,2,.30,.85
470 CIRCLE(209,128),4,,1,.85,.25
480 CIRCLE(213,142),10,,2,.70,.9
5
490 CIRCLE(223,145),5,,2,.47,.70
500 CIRCLE(202,127),30,1,1,.0,.1
2
510 DRAW"BM230,128;G4
520 CIRCLE(228,129),4,,2,.35,.85
530 CIRCLE(227,150),30,,1,.69,.7
5
540 CIRCLE(215,186),4,,.5
550 RETURN
```

(Bill Duke, a freshman in high school, has a 64K CoCo with one drive, printer and modem. He mainly works with graphics and his printer.)

THE SPECTRUM VOICE PAK

$49.95 SPECIAL

Price good with purchase of any Talking Software below ! Offer expires August 25, 1984

$69.95 CoCo I

New Features ! Single key echo and phoneme printouts ! Works w/$29.95 Disk"Y" cable!

$79.95 CoCo II

Includes adapter to work on 16K-64K CoCo II's. Same features as CoCo I. In stock!

TALKING SOFTWARE

see NOV'83 Rainbow Review

Talking Final Countdown - You must stop the mad general from launching a missle at the Russians and causing WW III ! Has multiple voices for added realism. 32K EXT **$24.95**

Educational Software - Computer Island's educational programs turn your CoCo into a true teaching machine. Reinforce basic lessions with the aid of voice. Three/pak special includes Math Drill, Spelling Tester and Foreign Languages. 16K EXT **$24.95**

see JUNE'84 Rainbow Review

Talking Score E-Z - An excellent adaptation of a Yahtzee type program with added speech. Up to 6 players can compete at a time, and all scoring and record keeping is done by the computer. 32K EXT **$24.95**

see MAR'84 Rainbow Review

Term Talk - A speaking smart terminal program for your CoCo. It contains all the features of an intelligent communications package, plus it talks! (Shades of War Games) 16K EXT Tape **$39.95** Disk **$49.95**

All orders plus $3.00 S/H - NY Residents add sales tax

SPECTRUM PROJECTS

WEST DIVISION :
PO BOX 9866
SAN JOSE, CA 95157-0866

EAST DIVISION :
PO BOX 21272
WOODHAVEN, NY 11421

408-243-4558 / 212-441-2807

Imagination And A Few Simple Graphics Techniques

Joseph Kolar
Rainbow Contributing Editor

One of the interesting features of the CoCo is the graphic character set. Refer to your manual for a review of *CHR$(128)* through *CHR$(255)*.

Using these graphic characters is fun. They allow any newcomer to CoColand to express him/herself artistically. Surprisingly, artistic ability is not a prerequisite to utilizing this capability of the CoCo. You might just as well learn how to use this effective enhancement of the CoCo and get your money's worth.

There are seven small listings that will help walk you through this tutorial.

Key in Lines 0, 10, 200, before you work on each program. At any time, you can *RUN* the program as you proceed to verify what you have added. Or, if you prefer, key in each program and follow along.

[20 PRINT@40, CHR$(128)]. A black box at screen location 40! Add another black box next to it, [+CHR$(128)]. To add two more black boxes, (squares), next to it, add [14A$=CHR$(128)]. Now, the black box has been assigned a name, A$. Add [+A$+A$] to Line 20. To add two more blocks, insert [15B$=A$+A$]. Two boxes, A$+A$ have been assigned a special name, B$. Add [+B$] to Line 20.

Note that you will be using concatenation, '+', exclusively in all of the programs. Think of concatenation as adding box cars to a freight train. You attach them to the end of the train using the plus sign.

Let's make a small design in the lower left-hand corner. Line [100PRINT@360,B$+B$] gives us four boxes that create a small horizontal bar. Note that you could have added [16C$=B$+B$] and changed line [100PRINT@360,C$]. Let's be simple as well as lazy. There are 32 columns to a screen line. We want to put a pair of boxes underneath and two spaces to the left. So, being lazy, we create line [101PRINT@360+32-2,].[360] is the starting location of our first row, [+32] positions us directly below the first box in the top row; [-2] moves over two spaces to the left. In effect, [PRINT@360+32-2,] is equivalent to [PRINT @360+30,] or [PRINT@390,].

For a beginner, it will be more meaningful to do calculations with small numbers to visualize what is happening as we move from one location to another. So, let's add [101PRINT@360+30,B$]

We wanted to skip four spaces and repeat the design element. Again, we consider: [360], the original location. [+32-2] or [+30], the beginning of the lower block; [+2], the spaces this block occupies; [+4], the four blank spaces we want to skip.

Line [102 PRINT@360+30+2+4,B$] adds the right-hand block in the desired location.

Remember, any time you want, just *RUN* your program to check it out and see if you follow the progress of the program.

We will close up the design by adding a block of four boxes, (squares), to the next row, directly under the top row. Since each row has 32 spaces, we want to add 64 spaces to our starting location, [360].

103 PRINT@360+64,B$+B$

Note that the first element, [B$], does not require a '+' because it is the locomotive of our imaginary freight train. However, you may insert it if you prefer. It won't do any harm. But, each succeeding element of the train must have the plus sign prefixed in front of the variable of the particular box car to be added to the train.

We have this blank space in our design. Blank spaces cry out to be filled. The first thing that comes to mind is that four empty spaces allow us to print a four letter word. The

(Joseph Kolar is a free-lance writer and programmer dedicated to proselytizing for computers in general, and the CoCo specifically.)

second most obvious choice is, 'COCO'.

Referring to Line 102, we can pick up the location of the first letter, 'c'. [360] is the starting location; [+30], the starting location of the left element on the second line; [+2], the spaces taken up by the block. Now, we have reached the location of the first of the four blank spaces.

104 PRINT@360+30+2, "COCO";

Did you add [;] at the end of the line? Omit it and *RUN*. What alternative to [;] could you use to add the right-hand block?

You may rightly ask, "Why couldn't I have inserted 'COCO' into Line 102?" Creativity, being unpredictable, as it is, I didn't think of it until the design was finished. 'COCO' was an afterthought.

For practice, insert ['] in front of Line 104 to hold it but not to include it in the display and rewrite Line 102 to include 'COCO'. Then *DEL 104*. You have now tightened up your program to eliminate an unnecessary program line.

Line 102 should read:

102 PRINT@360+30+2, "COCO"+B$

For practice, change Line 14 to whatever solid color you prefer. A solid color will give you the most simple, but pleasing border. You might just as well DEL20 . Check your manual, or the training aid you made a few months ago



FIGURE 1



FIGURE 2

if you followed this author's articles, to see how I got the blue graphic element. I used *CHR$(143+32)*. Could you have used *CHR$(175)* instead? This is Design Tutorial 2.

All well and good! You may as well move the design to the center of the screen.

For the purpose of this tutorial, we will relocate Line 100 first. You can figure out your desired location by referring to the "*PRINT*@ Screen Location" chart in the manual.

However, creativity knows no rules. So, we will be real lazy and locate it by trial and error. Pick a location number that you think is in the middle. Say, 220. Change Line 100 to [PRINT@220] and *RUN*. Whoops! It's in the middle all right, but away off to the right. Move it over to the left, say, about 10, or [210]. Try it! N.G.! Well, move it over some more. Try [204] and *RUN*. Too much! How about [207]? Ah, that looks fairly well centered.

The design looks centered, but if you get a ruler and check the blank area on both sides, you will see that it is off center. Correct it by changing the location -1 or [206]. While you are at it, check with the ruler to see if it is neatly centered vertically.

Now, move the rest of the design by changing the [360] in Lines 101, 102, and 103 to [207]. Check it out! Why did it move over so nicely by changing all the locations to the same number?

The secret is that every line was based on the original starting location in this program. Do you see why the simple 'plus or minus' algorithm worked so effortlessly?

From what you have learned, can you change Line 102 to include the information in Line 101, effectively eliminating the need for Line 101?

Here is the solution. Compare Lines 101 and 102. Note that [B$] in Line 101 falls where [+2] is shown in Line 102. Put ['] in front of Line 101 to hold it for reference. *RUN* and note that you were right. Line 102 begins with 'COCO'. Adjust line 102 by changing [+2] to [B$+]. Did you remember to put in [+]? *RUN* it! If it is okay, [DEL 101]. This is Design Tutorial 3.

Finally, if you feel that this is the final location of your design, you may tighten up the tutorial. Change Line 102 to [PRINT@236,], instead of [PRINT@206+30,] and Line 103, to [PRINT@270,] instead of [PRINT@206+64,].

When we complete our design, we plan to move it to the top of the screen page. It will be a lot more difficult to move your design around the screen because you now have three distinct reference locations in your program rather than one. Also, if you add more elements to the design, (Who can resist improving a design?), you will have difficulty in locating the new elements. So, for this tutorial, let's not tighten it up.

Looking over the design, I wonder how it would look with small squares in the four corners? See Figure 1.

It would look better if the blue was changed back to black. Change Line 14 to [14 A$=CHR$(128)].

Since you know the system, do this on your own. Use 206 as your base location. Compare your results with Design Tutorial 4. It was no problem to concatenate the proper elements to the ends of Lines 100 and 103. Lines 101 and 104 were added because it was the simplest and laziest way to locate the two left-hand elements. If you fail to end these two lines with [;], you would wipe out the balance of the top and bottom rows. The final result should be Design Tutorial 4.

You can eliminate Lines 101 and 104 by changing Lines 100 and 103, just as you had done before to get Design Tutorial 3. This will give you Design Tutorial 5.

RUN it and then look over the listing carefully. The two arms in the middle row look too long. They could be altered so that they don't extend so far out. We may be creative but we are also lazy. Suppose we added a bit more black to the top and bottom rows? Wouldn't that make the design more symmetrical? See Figure 2.

We want to go one line above Line 100 and one space to the right to start our new elements. We calculate: [206] is the base location; [-32] locates us directly above Line 100 and [+1] moves us over one space.

99PRINT@206-32+1,CHR$(140)+CHR$(140)

To get the new bottom location, we pick up the location of the bottom row, Line 103. The location of Line 103 is [206], the starting location: [+64], two rows down; [-1], one space to the left. We add to these figures, [+32], one line below the base locaton of the line; [+2], two spaces to the right.

104 PRINT@206+64-1+32+2,CHR$(131)+CHR$(131)

This is Design Tutorial 6. *RUN*. That looks better! The four corners we added previously were too narrow. Can you change Line 100, using [CHR$(140)] and Line 102, using [CHR$(131)] on both ends to make it even more visually attractive? Just substitute!

We could continue to change and improve the design. For you persistent puzzle-solvers, try to change Lines 100 and 102 so that there is a little blank area above and below 'COCO' to give it a 'step' look. See what you come up with.

As a final exercise, to get Design Tutorial 7, we will move the entire design to the top of the screen, centered horizontally.

Use Line 99, the new top line of the design and relocate it. If you use the trial and error method, you may get an FC error. Keep at it! When you get it located to your satisfaction, change the [206] in Lines 100; 102; 103; 104; to your new value. *RUN*. If all looks fine, as a final test, simplify the locations in all the lines by appropriately adding or subtracting, to get a conventional, one-number location. For example, Line 99 would be changed from [PRINT@46+1-32,] to [PRINT@15,].

That blank area under your design is screaming for you to fill it in. I leave it to your imagination to work something up.

We got a lot of experience locating, inserting and moving elements of a design. We used a few simple techniques, by no means the only ones available, to fool around with graphic characters. If you read your final listing, you could suggest that, heck, we could have programmed Design Tutorial 7, in the first place. Sure — if we knew what we were going to create and where we were going to locate it on the screen.

Keep in mind that we started with a black square that we placed on the screen. We were creating. One thing suggested the next and who knew what the end result would be?

When you are bored, sit in front of the keyboard. Start with a graphic character and let your imagination run wild. No two people have the same creative thoughts. Your end result will surely be an original creation that may lead down some unexpected byway. Always pose problems and each time you solve them, you can go on dreaming up additional problems and then have fun solving them.

Listing 1:

```
0 'DESIGN TUTORIAL 1
10 CLS
14 A$=CHR$(128)
15 B$=A$+A$
20 PRINT @ 40, CHR$(128)+CHR$(12
8)+A$+A$+B$
100 PRINT@360, B$+B$
101 PRINT@360+30,B$
102 PRINT@360+30+2+4,B$
103 PRINT@360+64,B$+B$
104 PRINT@360+30+2,"COCO";
200 GOTO200
```

Listing 2:

```
0 'DESIGN TUTORIAL 2
10 CLS
14 A$=CHR$(143+32)
15 B$=A$+A$
100 PRINT@360, B$+B$
101 PRINT@360+30,B$
102 PRINT@360+30+2,"COCO"+B$
103 PRINT@360+64,B$+B$
200 GOTO 200
```

Listing 3:

```
0 'DESIGN TUTORIAL 3
10 CLS
14 A$=CHR$(143+32)
15 B$=A$+A$
100 PRINT@206,B$+B$
102 PRINT@206+30,B$+"COCO"+B$
103 PRINT@206+64,B$+B$
200 GOTO 200
```

Listing 4:

```
0 'DESIGN TUTORIAL 4
10 CLS
14 A$=CHR$(128)
15 B$=A$+A$
100 PRINT@206,B$+B$+CHR$(141)
101 PRINT@206-1,CHR$(142);
102 PRINT@206+30,B$+"COCO"+B$
103 PRINT@206+64,B$+B$+CHR$(135)
104 PRINT@206+64-1,CHR$(139);
200 GOTO 200
```

Listing 5:

```
0 'DESIGN TUTORIAL 5
10 CLS
14 A$=CHR$(128)
15 B$=A$+A$
100 PRINT@206-1,CHR$(142)+B$+B$+
CHR$(141)
102 PRINT@206+30,B$+"COCO"+B$
103 PRINT@206+64-1,CHR$(139)+B$+
B$+CHR$(135)
200 GOTO 200
```

Listing 6:

```
0 'DESIGN TUTORIAL 6
10 CLS
14 A$=CHR$(128)
15 B$=A$+A$
99 PRINT@206+1-32,CHR$(140)+CHR$
(140)
100 PRINT@206-1,CHR$(142)+B$+B$+
CHR$(141)
102 PRINT@206+30,B$+"COCO"+B$
103 PRINT@206+64-1,CHR$(139)+B$+
B$+CHR$(135)
104 PRINT@206+64-1+32+2,CHR$(131
)+CHR$(131)
200 GOTO 200
```

Listing 7:

```
0 'DESIGN TUTORIAL 7
10 CLS
14 A$=CHR$(128)
15 B$=A$+A$
99 PRINT@46+1-32,CHR$(140)+CHR$(
140)
100 PRINT@46-1,CHR$(140)+B$+B$+C
HR$(140)
102 PRINT@46+30,B$+"COCO"+B$
103 PRINT@46+64-1,CHR$(131)+B$+B
$+CHR$(131)
104 PRINT@46+64-1+32+2,CHR$(131)
+CHR$(131)
200 GOTO 200
```

A SPECTRUM PROJECTS SHOPPING LIST

A CHIP OFF THE OLD...

6821 Standard PIA $9.95
6822 Industrial Grade PIA $14.95
6847 VDG Chip $17.95
68764 (Fits Ext Basic Skt) Eprom .$24.95
64K RAM Checker (ROMPAK) $24.95
16K-32K Upgrade Kit* $25.95
6883 SAM Chip w/heat sink $29.95
6809E CPU Chip $29.95
Basic ROM 1.2 Chip $39.95
Disk ROM 1.1 (New DOS Command) ..$39.95
Extended Basic 1.1 ROM $69.95
CoCo First Aid Kit (Be Prepared)
(2 6821's, 6809E & 6883) $69.95
Intronics Eprom Programmer- 15 seconds for a 68764! All popular EPROM's $139.95
* NOT compatible with CoCo II

COCO LIBRARY...

Color Computer Tech Manual $7.95
The World Connection - All about Bulletin Boards, Modems and the World's Most Famous Sysop (Bob Rosen)!.....$9.95
CoCo Memory Map $12.00
CoCo Secrets Revealed $14.95
Color Computer Interfacing $14.95
Basic 09 Tour Guide $18.95
CoCoINDX (1,800 articles) $19.95
New! CoCo II Service Manual $19.95

MORE GOOD STUFF...

Spectrum Light Pen $24.95
CoCo Voice Chip - Votrax SC01A ...$34.95
PBH Parallel Interface - Beats Botek! 300-9600 baud w/ptr-modem switch .$69.95
The Spectrum Switcher - Have your Disk & Cartridge too! Dual Slot System $69.95
Disk Interface (Spectrum Special)$139.95
PBJ 80X24 Video Board $139.95
Microfazer SER/PAR print buffer .$179.95
Sanyo MBC550 - 16 bit 8088 MS-DOS system 128K, 1 drive, 640X200 graphics .$895.00
W/Hi-Res green screen monitor ...$995.00

COCO CABLES AND...

Four Pin Male to Four Pin Female Extension- 15 feet. Move your printer or modem to another location.....$14.95
Tired of plugging and unplugging devices from the RS232 port? Make your life easier. Try our RS232 "Y" cable ..$19.95
OS-9 Null Modem Cable - Now timeshare with another CoCo or MC-10 .....$19.95
Disk Interface/Rom Pak Extender - Move your disks and ROM Paks where you want them (3 feet) $29.95
Triple RS232 Switcher - Now select one of any three RS232 peripherals ...$29.95
40 Pin Dual "Y" Cable - hook up a disk w/voice or word pak, a clock, etc.$29.95

OTHER GOOD STUFF...

C-10 tapes in any quantity .....49 cents
5 1/4 Diskettes in any quantity ...$1.99
Joystick plug $3.99
64K RAM Button $4.99
GEMINI 10X Ribbon $4.99
Amdek 3" diskettes in any quantity.$5.99
Epson MX/RX 80 Cartridge $6.99
Rompak w/Blank PC Board $9.95
RS Disk Controller Case $9.95
The Disk Doubler - Doubleside your 5 1/4 diskettes $14.95
Video Clear - Cleanup TVI !! $19.95
Cassette Recorder Stand- Put your CTR80 CCR81 at a 45 degree angle $19.95
The Data Defender- Store 70 diskettes in a hard plastic case w/key lock....$29.95
CoCo Cooler (D & E Rev. boards) ..$49.95
New! CoCo Cooler II (CoCo II) $49.95
CoCo Stereo Music Synthesizer $69.95

SPECIAL 64K RAM CHIPS $49.95

SPECTRUM PROJECTS

EAST DIVISION :
PO BOX 21272
WOODHAVEN, NY 11421

WEST DIVISION :
PO BOX 9866
SAN JOSE, CA 95157-0866

ALL ORDERS PLUS $3.00 S/H
NY RESIDENTS ADD SALES TAX

212-441-2807 / 408-243-4558

COLORFUL UTILITIES

DOUBLE DOS - Now access 10 more granules from your 40 track drive and still be compatible with RS DOS! Also works with double-sided and 80 track drives! DISK **$24.95**

MULTI-PAK CRAK - Save ROMPAKs to your 64K Disk system using the RS Multi-Pak Interface. Eliminate constant plugging in of ROMPAKs now by keeping all your PAK software on disk. DISK **$24.95**

TAPE OMNI CLONE - Easily handles programs with auto loaders, no headers, no EOF markers, unusual size blocks and more! Now is the time to get your tape software collection protected against loss. TAPE **$24.95**

DISK OMNI CLONE - Back everything up! This amazing program handles "non standard" disks with ease. We haven't found any disk yet that it can't handle. Lowest price too! 32K DISK **$29.95**

DISK MANAGER - Rescue crashed disks, date files on the disk directory, print a Super directory with ML addresses, maintain and sort a catalog of up to 300 files from a collection of disks! 16K DISK **$29.95** (see Nov '83 Rainbow Review)

DISK UTIL - A multi-featured enhancement that makes disk handling USER FRIENDLY. Utilize a directory window to sort, move and copy file entries, backup by file or by track, interrogate disk sectors or the GAT table, single command execution of both BASIC and ML programs plus much more! 64K DISK **$24.95** (see May '84 Rainbow Review)

MASTER DESIGN - A text designer/editor to generate graphics mode lettering with multiple font sizes, textures, shadowing and thicknesses, plus special patterns for creative backgrounds. Comes with a screen print routine and a Letter Head Utility that interfaces with Telewriter-64 and BASIC. DISK **$34.95**

BASIC COMPILER - Convert your BASIC programs into fast efficient machine language. Produces code more compact and up to 50Xs faster than original BASIC. Integer compiler with no Extended BASIC needed. 16K-64K versions included. TAPE **$39.95**

SCHEMATIC DRAFTING - Save hours of work and design professional looking electronic diagrams using a 480X540 pixel worksheet with 6 viewing windows. Over 30 electronic symbols with 10 user definable symbols are provided. Dump hard copy to the printer and save the created schematics to disk. 64K DISK **$49.95** (see Jan '84 Rainbow Review)

COLORAMA - A first-class Bulletin Board package... especially geared towards CoCo users... has an ordering section for those who want to run a mail-order business... one nice piece of work. 64K DISK **$99.95** July '84 Rainbow

MASTER MAIL - Quite easy to use... Capable of handling 1000 addresses on a single disk... FORM LETTER allows you to produce multiple letters from the address database... A program for serious applications. 32K DISK **$49.95** Jan'84 Rainbow

IN CANADA CALL TOLL FREE 800-361-5155

COLORFUL UTILITIES

* *

FAST DUPE - The fastest Disk copier ever! Will format and backup a diskette in only one pass and can make up to 4 Disk copies at once! The must utility for every Disk owner. 64K DISK **$19.95** (see May '84 Rainbow Review)

HIDDEN BASIC - Protect your BASIC programs. Mask your code so CLOAD, CSAVE, LIST, EDIT, DEL and LLIST will not function. TAPE **$19.95** (see Sept '83 Rainbow Review)

64 COL MOD I/III EMULATOR - Give CoCo a 64X16 screen. Run Model I/III graphics code without retyping the BASIC statements. 64K DISK **$19.95** (see May '84 Rainbow Review)

64K DISK UTILITY PACKAGE - Take advantage of an expanded 64K machine. Make an additional 8K of RAM available. Copy ROM cartridges to disk and create a 32K SPOOL buffer for printing. DISK **$21.95** (see July '83 Rainbow Review)

TAPE UTILITY - A powerful package that transfers tape to disk and disk to tape automatically. Does an automatic copy of an entire disk of programs and data to tape. TAPE/DISK **$24.95** (see Sept '83 Rainbow Review)

E-X-T-E-N-D-E-D DISK BASIC - Add new powerful commands to your 64K Disk system. Inverse Video (GREAT for monitors!), Wild Card Directory, Double POKE and PEEK, NSAVE, NLOAD, LDIR, OLD and TYPE. DISK **$24.95** (see April '84 Rainbow Review)

GRAPHICOM - The ultimate CoCo graphics development tool with sophisticated editing, preview animation, telecommunications and printer support. Hi-Res graphics for only **$24.95**. W/Spectrum's Menu Foot Switch **$34.95**. 64K DISK (see April '84 Rainbow Review)

NEW!

EZ BASE - A truly user friendly data base program at an affordable price. Maintain inventories, hobby collections, recipes, greeting card lists and much, much more! Hi-Res screen, up to 500 records with 15 fields, record or field search, and a Mailing Labels option. 32K DISK **$24.95** (see July '84 Rainbow Review)

NEW!

BLACKJACK ROYALE - A Hi-Res graphics casino blackjack simulation and card counting tutor. Fully realistic play includes: double down, splits, surrender, insurance bets, 1-8 decks, burnt cards, shuffle frequency and more! "This fine program is a must for the CoCo Blackjack player." (Aug '83 Rainbow Review) 32K TAPE/DISK **$24.95**

SHIPPING $3.00 - NY RESIDENTS ADD SALES TAX

SPECTRUM PROJECTS

WEST DIVISION
PO BOX 9866
SAN JOSE, CA 95157-0866
408-243-4558

EAST DIVISION
PO BOX 21272
WOODHAVEN, NY 11421
212-441-2807

Disk Drive Speed Check

By Roger Schrag

Have you ever suddenly been barraged by I/O Errors when trying to load a program from disk? Sometimes this is a sign that your disk drive needs some routine adjusting.

One of the things that can periodically slip out of line within your disk drive is its rotational speed. The disk drive is supposed to spin your diskettes at 300 revolutions per minute (rpm), give or take five percent.

Inside your disk drive there is a little knob which you may turn to adjust your disk drive's speed. This BASIC program will tell you how fast your drives are running. By repeatedly turning the knob slightly and then running the program, you may easily adjust your disk drives to perfect operating speed, thus saving a hefty repair bill.

If one of your drives is giving more than its fair share of I/O Errors, then run this program to see if indeed your drive's speed is off. The program will ask which drive you would like to check, and then will prompt you to insert an initialized diskette in the drive and press ENTER. Any diskette will do, as long as it has been initialized previously with the *DSKINI* command. The program then will draw up a chart of your drive's speed on 10 consecutive readings and the overall average.

If your drive is consistently more than about five rpm off from 300, you may wish to adjust the speed control. First, remove the outer cabinet by removing the four exterior screws. If your disk drive is a Radio Shack model, then the speed control is the bright yellow knob on the small circuit board on the same side of the drive as the large belt connecting the motor to the hub which grips the diskette.

Use a flat blade screw driver to turn the knob *slightly* in one direction or the other. Then run the speed check program again. Do this repeatedly until your drive's speed is within about five rpm of 300. Your drive does not need to operate at exactly 300 rpm, and fluctuations of one or two rpm is perfectly normal.

This little program lets you determine if the source of your disk problems is a drive motor running off speed. This program lets you also fix it if you are somewhat mechanically inclined. Please note that opening your drive may void your warranty. However, this should not be a problem; if your drive were still under warranty, you would take it back to the store if it exhibited any kind of problems whatsoever.

The program uses a short machine language subroutine to perform the actual timing. The data statements are set up so as to show the actual assembly language code that is being *POKEd* into memory.

All diskettes for the Color Computer have a pinhole in them called a "sector index hole." This pinhole passes in front of a sensor in the disk drive exactly once on each revolution. By reading this sensor, the machine language subroutine times how long it takes for the diskette to complete one revolution. From this information, the BASIC program is able to calculate how many revolutions the diskette would make in one minute if it continued spinning at that exact rate. This is the disk drive's rotational speed, measured in revolutions per minute.

(Roger Schrag, currently studying computer science at the University of California at Berkeley, enjoys working with the CoCo and writing articles for THE RAINBOW. He also designs and translates programs for Adventure International.)

If you have any questions or comments, please feel free to drop me a line. My address appears at the top of the program listing. Please include a self-addressed, stamped envelope, so that I may reply.



The listing:

```
1 REM ***************************
2 REM * DISK DRIVE SPEED CHECK *
3 REM ***************************
4 REM
5 REM  BY: ROGER SCHRAG
6 REM      2054 MANNING AVENUE
7 REM      LOS ANGELES, CA 90025
8 REM
9 REM
100 CLS:CLEAR 500
110 READ B$:IF B$="END" THEN 130
120 A$=A$+B$:READ DUMMY$:GOTO110
130 FOR X= 1 TO LEN(A$)/2
140 Y=VAL("&H"+MID$(A$,X*2-1,2))
150 POKE X+3585,Y:C=C+Y:NEXT X
160 IF C<>4001 THEN 490
170 S$=STRING$(32,61)
180 F1$="TRIAL ##  SPEED ###.##"
190 F2$="AVERAGE          ###.##"
200 PRINT "DRIVE SPEED CHECK"
210 PRINT S$
220 PRINT@128,"WHICH DRIVE";
230 INPUT DV:PRINT@142," "
240 IF DV<0 OR DV>3 THEN 220
250 PRINT:PRINT"PLEASE MOUNT ";
260 PRINT"AN INITIALIZED"
270 PRINT"DISK IN DRIVE";DV;
280 INPUT"& PRESS ENTER";X
290 CLS:PRINT"SPEED CHECK -- ";
300 PRINT"DRIVE";DV:PRINT S$;
310 DSKI$ DV,17,1,A$,B$
320 POKE &HFF48,3
330 TL=0: FOR TR=1 TO 10
340 POKE 2437,120 :EXEC 3586
350 SP=PEEK(3584)*256+PEEK(3585)
360 IF SP=0 THEN 450
370 SP = SP * 0.026779174
380 PRINT USING F1$; TR,SP
390 TL=TL+SP: NEXT TR
400 AV=TL/10
410 PRINT TAB(9)"-------------"
420 PRINT USING F2$; AV
430 PRINT@498,"PRESS ENTER";
440 INPUT X:CLS:GOTO 170
450 PRINT@384,"**** ERROR ****"
460 PRINT"PLEASE CHECK DISK ";
470 PRINT"IN DRIVE";DV
480 GOTO 430
490 PRINT"DATA ITEM INCORRECT"
500 STOP
510 REM
520 REM MACHINE LANGUAGE ROUTINE
530 REM
540 DATA"3413"   ,"ST PSHS A,X,CC
550 DATA"1A50"   ,"    ORCC #$50
560 DATA"9E8A"   ,"    LDX  $8A
570 DATA"8602"   ,"    LDA  #$02
580 DATA"3001"   ,"L1 LEAX 1,X
590 DATA"2719"   ,"    BEQ  EX
600 DATA"85FF48","    BITA $FF48
610 DATA"27F7"   ,"    BEQ  L1
620 DATA"9E8A"   ,"    LDX  $8A
630 DATA"3001"   ,"L2 LEAX 1,X
640 DATA"2710"   ,"    BEQ  EX
650 DATA"85FF48","    BITA $FF48
660 DATA"26F7"   ,"    BNE  L2
670 DATA"3001"   ,"L3 LEAX 1,X
680 DATA"2705"   ,"    BEQ  EX
690 DATA"85FF48","    BITA $FF48
700 DATA"27F7"   ,"    BEQ  L3
710 DATA"BF0E00","EX STX  $E00
720 DATA"3593"   ,"    PULS CC,X,A
,PC
730 DATA"END","MARK END OF DATA
```

TRS-80+ MOD I, III, COCO, TI99/4a
TIMEX 1000, OSBORNE, others

GOLD PLUG - 80

Eliminate disk reboots and data loss due to oxidized contacts at the card edge connectors.
GOLD PLUG 80 solders to the board edge connector. Use your existing cables. (if gold plated)

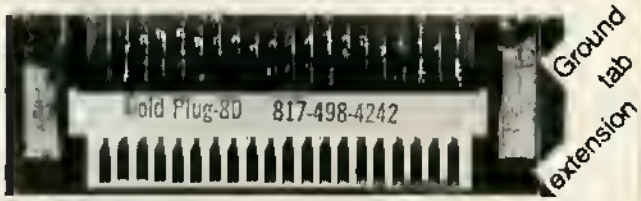

COCO Disk Module (2)	new	$16.95
Ground tab extensions		INCL
Disk Drives (all R.S.)	SPECIAL PRICE	$7.95
Gold Disk Cable 2 Drive		29.95
Four Drive Cable		39.95

USA shipping $1.45 — Can/Mex $4.
Foreign $7 — Don't wait any longer — TEXAS 5% TAX

Available at your favorite dealer or order direct from

E.A.P. CO.
P.O. BOX 14
KELLER, TEXAS 76248
(817) 498-4242 — MC/VISA

+ trademark Tandy Corp





SR-71

SR-71 is a fast action game in which you are the pilot on a mission to take photographs of missile sites in Russia and deliver them to our processing laboratory in Japan. So real you will feel as if you are in the cockpit on a real spy mission. Elude Russian missiles as well as their detection devices. Another Tom Mix exclusive. A must for the adventurous. Fantastic graphics, color and sound. **32K Ext. Basic** **TAPE $28.95** **DISK $31.95**

SKRAMBLE

Your mission is to penetrate the enemy skramble system and destroy their headquarters. You will start with three of our latest spacefighters equipped with repealing cannon and twin bomb launcher. If you succeed in evading the elaborate ground defenses, you will arrive at the Cave where flying becomes more difficult. In the cave are UFOs, after which you must avoid a field of meteorites. Very few pilots succeed this far, but if you do, then you must enter the Fortress, followed by the Maze. One or two player game. Machine Language, high speed, Arcade action. Full color graphics with sound. Keyboard or joystick control.

16K MACHINE LANGUAGE **TAPE $24.95** **DISK $27.95**



GRABBER

A pac type game. Two complete mazes jump from one to the other. Probably the most outstanding sound you have ever heard. Arcade Action. Method of play, you are the Grabber. The object is to grab the 8 treasures and store them in the center boxes. You start with 3 Grabbers and get extra ones at 20,000 points. Watch out for the googliest Super high resolution graphics.

32K MACHINE LANGUAGE
TAPE $27.95 **DISK $30.95**



CU*BER

Approaches the excitement and challenges of any Video Arcade. The hazards of CU*BER are many. Help CU*BER change the colors on the pyramid while avoiding many of the dangers always present. Vipers, the Nurd, the Dork, bonus points all add up to another exciting release from Tom Mix Software.

32K MACHINE LANGUAGE
TAPE $27.95 **DISK $30.95**

AIR TRAFFIC CONTROLLER

Air Traffic Controller is a computer model of an air traffic control situation for the TRS-80 Color Computer. Remotely Piloted Vehicles (RPV's) are operated by the controller in a situation similar to that of a commercial airline in that you must regulate landings and takeoffs of the vehicles.

32K EXT. BASIC
TAPE $28.95 **DISK $31.95**

KATERPILLAR II

The color computer has needed a perfect centipede type game since day one. You will throw all imitations aside when you see this. So close to the arcade you will start digging for quarters. Graphic to equal The King and Buzzard Bait. Joysticks required.

16K MACHINE LANGUAGE
TAPE $24.95 **DISK $27.95**

TRAPFALL

The "Pitfalls" in this game are many. Hidden treasures, jump over the pits, swing on the vine, watch out for alligators, beware of the scorpion. Another game for the Color Computer with the same high resolution graphics as "The King."

16K MACHINE LANGUAGE
TAPE $27.95 **DISK $30.95**



FANGMAN

Fangman is a high-resolution graphics arcade-type game based on the Dracula legend. Plot of Game: You're Dracula in your castle, stalking through a labrynth of passages in search of invading villagers seeking to destroy you by blocking your every path with deedly crosses. Their ally the Sun also wanders your halls, trying to touch you and turn you to bones and dust. Fortunately, you have allies of your own, the vampire bats who canse down the villagers, holding them till you arive. Joysticks required **16K MACHINE LANGUAGE**
TAPE $24.95 **DISK $27.95**

BUZZARD BAIT

We've done it again. You thought The King was great? Well till you see this!! Outstanding high resolution graphics, tremendous sound make this "Joust" type game a must for your software collection. As you fly from cloud to cloud you will enjoy sky high excitement dealing with the challenges presented to you by this newest release by Tom Mix Software. Joysticks required.

32K MACHINE LANGUAGE
TAPE $27.95 **DISK $30.95**



UTILITIES

SCREEN PRINT ROUTINE Prints contents of your graphic screen to an Epson, Microline or Radio Shack DMP Printers. Prints positive or reverse format. Horizontal or vertical, small and large printout. Print left, right or center of page. Specify printer when ordering. **TAPE $19.95 DISK $21.95**

TAPE TO DISK New version works on both 1.0 and 1.1 DOS. Load the contents of most tape to disk automatically. Machine Language
TAPE $17.95 **DISK $21.95**

COLOR MONITOR Written in position independent code. (May be located in any free memory). Very compact. Only occupies 1174 bytes of memory. Full featured, includes Break-Pointing of machine language programs, register display and modify, memory display and modify, and block memory move commands. Displays memory in hex and ascii format on one line 8 bytes long. Machine Language
TAPE $24.95 **DISK $27.95**

TOM MIX SOFTWARE
4285 BRADFORD N.E.
GRAND RAPIDS, MI 49506

•ADD $2.00 POSTAGE & HANDLING•TOP ROYALTIES PAID•
•MICHIGAN RESIDENTS ADD 4% SALES TAX•
LOOKING FOR NEW SOFTWARE
ARCADE ACTION GAMES
(616) 957-0444

VISA

DRACONIAN

You brace yourself as your ship materializes in the enemy sector. Your engine roars to life, and you consult the long-range scanner for the position of the nearest enemy base. As you head for the base, blasting asteroids and space-mines in your path, you suddenly notice a monstrous space-dragon looming before you. Reacting quickly, you dodge his deadly fire-breath and blast him out of existence.

Finally, the enemy base comes into view. Avoiding the enemy fire, you destroy the gun turrets one by one with your rapid-fire torpedoes. Then, with the explosions still echoing around you, you rescue the astronaut who was being held prisoner by the enemy. Your mission is far from over, however, as there are more bases to destroy and more astronauts to rescue before the sector will be secured. And all must be done quickly; if you are too slow, the invincible DRACONIAN will surely seek you out as its next victim.

This is it — the single most impressive, awe-inspiring arcade game you can buy for your Color Computer. High-resolution graphics, awesome sound effects, four-voice music, and quality you have to see to believe! Experience the realism of DRACONIAN today!







JOYSTICKS REQUIRED
32K MACHINE LANGUAGE
TAPE $27.95 **DISK $30.95**

CRASH

This game is a high resolution Machine Language program with outstanding Arcade type graphics. The game consists of 4 screens. Fly the airplane over and through obstacles. Piloted by "Mario" who also appeard in "The King". The object is to conquer

Great fun for the whole family. For 1 or 2 players. Uses joysticks.

32K MACHINE LANGUAGE
TAPE $24.95 DISK $27.95

CHAMBERS

Exciting high resolution graphics game. Multiple screens. Outstanding sound. Chambers is loosely based on Cosmic Chasm. The object in each level is to destroy all of the evil creatures in each room and then go into the main reactor room and blow up the base.

JOYSTICKS REQUIRED
32K MACHINE LANGUAGE
TAPE $24.95 DISK $27.95

WAREHOUSE MUTANTS

Journey through the werehouse seeking out the Mutents who are out to destroy you. WATCH OUT! They will push crates trying to crush you! Outstanding realism—high resolution graphics—multiple screens.

JOYSTICKS REQUIRED
16K MACH. LANGUAGE
TAPE $24.95
DISK $27.95

QUIX

This one is after a popular arcade game with a similiar name. Simply frustrating—you'll love it. Done in high resolution graphics with Super Sound.

JOYSTICKS REQUIRED
32K MACH. LANGUAGE
TAPE $24.95
DISK $27.95





MS. MAZE

MS. MAZE is remarkable in that it combines brilliant color, high resolution, detailed graphics, and music with a very playable game. Anything that could be done to make the Color Computer look and play like the arcade version has been done. MS. MAZE is without question the closest thing to the arcade Pac games that I have seen for the Coco.

JOYSTICKS REQUIRED
32K MACHINE LANGUAGE
TAPE $24.95 DISK $27.95

PAK-PANIC

Pakman is steered thru a maze eating dots and powerpills. Pakman is pursued by four monsters who try to catch and kill him. If Pakman eats a powerpill he becomes powerful and can eat monsters. Monsters try to avoid a powerful Pakman. As monsters are eaten their ghosts appear on the top of the screen. When seven ghosts have appeared one will fly across the screen or they will link together forming a centipede that will travel thru the maze. Pakman has no power against ghosts and centipedes and must avoid them or be killed. JOYSTICKS REQUIRED

32K MACHINE LANGUAGE
TAPE $24.95 DISK $27.95



PAK TWINS BOTH MS. MAZE & PAK PANIC FOR ONLY 44.90 TAPE ~~50.90 DISK~~

TOM MIX SOFTWARE
4285 BRADFORD N.E.
GRAND RAPIDS, MI 49506

•ADD $2.00 POSTAGE & HANDLING•TOP ROYALTIES PAID•
•MICHIGAN RESIDENTS ADD 4% SALES TAX•
LOOKING FOR NEW SOFTWARE
ARCADE ACTION GAMES
(616) 957-0444

Tom Mix Software Now Offers The Complete VIP Library System

VIP LIBRARY

VIP Writer™
RATED TOPS IN RAINBOW, HOT COCO, COLOR COMPUTER MAGAZINE & COLOR COMPUTER WEEKLY
32K (Comes with tape & disk) $59.95 (Includes VIP Speller)

VIP Speller™
WITH A 60,000 WORD INDEXED DICTIONARY! It can be used to correct any ASCII file—including **VIP Library™** files and files from **Scripsit™** and **Telewriter™**. **32K DISK ONLY $39.95**

VIP Calc™
You can forget the other toy calcs—The real thing is here! No other spreadsheet for the Color Computer gives you so many features! **32K (Comes with tape & disk) $59.95** 32K does have hi-res displays, sort or edit.

VIP Terminal™
RATED BEST IN JANUARY 1984 "RAINBOW" Choice of 8 hi-res lowercase displays * Memory-Sense with BANK SWITCHING for full use of workspace. **32K (Comes with tape & disk) $49.95** (Tape comes in 16K but without hi-res displays)

VIP Database™
INCLUDES MAIL MERGE CAPABILITIES TOO! 32K DISK $59.95 64K Required for math package & mail merge.

VIP Disk-ZAP™
Repairs crashed disks.
16K DISK $49.95 Lowercase displays not available with this program.

ELECTRON

Electron is composed of four subgames. You must complete one level in order to advance to the next. Supplied with four men, you are subjected to more difficult games as you move ahead. Beam Buggy, Prachnids, Force Fields and a Maze!
JOYSTICKS REQUIRED, 16K MACHINE LANGUAGE
TAPE $24.95 DISK $27.95

THE KING

This game contains all 4 full graphic screens like the popular arcade game. Exciting sound and realistic graphics. Never before has the color computer seen a game like this. Early reviews say simply outstanding. **JOYSTICKS REQUIRED**
32K MACHINE LANGUAGE
TAPE $26.95 DISK $28.95

THE FROG

This one will give you hours of exciting play. Cross the busy highway to the safety of the median and rest awhile before you set out across the swollen river teaming with hidden hazards. Outstanding sound and graphics. Play from keyboard or joysticks.
16K MACHINE LANGUAGE
TAPE $27.95 DISK $30.95

KING TUT

Journey through the caverns of King Tut's tomb. You are on a quest to find treasures hidden in the cavrns below. You light your way with only a small candle that growe dimmer as time passes. Watch out for the snakes and the ghost of King Tut himself. Five screens challenge your abilitiee every etep of the way. Joysticks required.
16K MACHINE LANGUAGE
TAPE $27.95 DISK $30.95

THE TOUCHSTONE

You are one of meny priests of Ra who has accepted the challenge of the touchstone. The challenge is a way for any of Ra's followere to become a favored high priest. Given limited use of Ra's powers, you will battle hidden dangers. Entering the mazes, you must be ready for anything.
32K MACHINE LANGUAGE
TAPE $27.95 DISK $30.95

TOM MIX SOFTWARE
4285 BRADFORD N.E.
GRAND RAPIDS, MI 49506

•ADD $2.00 POSTAGE & HANDLING•TOP ROYALTIES PAID•
•MICHIGAN RESIDENTS ADD 4% SALES TAX•
LOOKING FOR NEW SOFTWARE
ARCADE ACTION GAMES
(616) 957-0444



SPACE SHUTTLE

This program gives you the real feeling of flight. Full instrumentation complete to the max. Radar, altimeter, air speed, artificial horizon, fuel gauge, a mission status panel and much more. Actual simulation of space flight, weather conditions must be considered.
JOYSTICKS REQUIRED
32K EXTENDED BASIC
TAPE $28.95 DISK $31.95

EDUCATIONAL

VOCABULARY MANAGEMENT SYSTEM

16K Extended basic/32K for printer output TAPE $39.95 DISK $42.95

The Vocabulary Management System (VMS) is a series of programs designed to aid a parent or teacher in helping children to learn and practice using vocabulary and spelling words. The 9 programs that comprise the VMS include a full feature data entry/edit program, three printer output programs and 5 vocabulary/spelling game programs. The system's many outstanding features include:

—As many as 300 vocabulary words and definitions may be in the computer's memory at one time. Words and definitions may be saved on disk or tape.
—Remarks and/or comments can be saved with word files.
—A disk loading menu allows students to load disk files without typing file names.
—Word lists may be quickly alphabetized
—The three printer segments allow you to create and print individualized tests, puzzles, word searches and worksheets.
—Answer keys may be printed for all worksheets and puzzles.
—The printer segments allow full use of your printer's special features.
—The 5 game programs are based on sound educational principles and provide practice in identifying words and matching them with their definitions in a fast-paced set of activities.

STORY PROBLEMS

STORY PROBLEMS is a program that is designed to give practice in solving story problems (sometimes called statement thought or word problems) on the Color Computer. It is suitable for use in either a home or school environment. It is also a tool that will allow you to create new story problems to suit your children's needs and ability levels. It has many features that make it particularly attractive:

- Story problems involving addition, subtraction, multiplication, division or a combination of the four are presented to the student by slowly scrolling each letter of each problem onto the screen.
- Up to 5 students may use the program at the same time.
- There are 4, user modifiable, skill levels.

16K EXT. BASIC TAPE $19.95 DISK $22.95

MATH DRILL

MATH DRILL is a program designed to help children to practice addition, subtraction, multiplication and division skills on the Color Computer. It has several features that make its use particularly attractive:

- Up to 6 students may use the program at the same time.
- Answers for addition, subtraction and multiplication are entered from right to left, just as they are written on paper.
- Commas may be included in the answers.
- Partial products for the multiplication problems may be computed on the screen.
- Division answers that have a remainder are entered as a whole number followed by the letter "R" and the remainder.
- There are ten, user modifiable, skill levels.
- A "SMILEY FACE" is used for motivation and reward. Its size increases relative to the skill level.
- Skill levels automatically adjust to the student's ability.
- A timer measures the time used to answer each problem and the total time used for a series of problems.
- After a problem has been answered incorrectly the correct answer appears under (above in division) the incorrect answer.

REQUIRES 16K EXT. BASIC
TAPE $19.95 DISK $22.95

TEACHER'S DATABASE

TEACHER'S DATABASE is a program designed to allow a teacher to keep a computerized file of information about his/her students. There are many features that make this program particularly attractive:

- Information on as many as 100 students (or more) may be in the computer at one time.
- Each student may have as many as 20 (or more) individual items of data in his/her record.
- The program will run from cassette or disk.
- Cassette and disk files are completely compatible.
- The program is menu driven.
- Records may be easily changed, deleted, combined or added.
- Information about students may be numerical or text.
- Records may be quickly alphabetized.
- Records may be sorted by various criteria.
- Records may be reordered (ranked) based on test scores or other data.
- Data displayed during a sort may be printed on a printer or saved on disk or cassette as a new file.
- A full statistical analysis of data may be done and sent to the printer.
- Student test scores may be weighted.

REQUIRES 32K EXT. BASIC
TAPE $39.95 DISK $42.95

ESTIMATE

ESTIMATE is a program designed to help children to practice estimating the answers to addition, subtraction, multiplication and division problems on the Color Computer. It has many features that make its use particularly attractive:

- Up to 5 students may use the program at the same time.
- There are 5, user modifiable, skill levels.
- The acceptable percent error may be changed as a student's skill improves.
- A timer measures the number of seconds used to answer each problem and the total time used for a series of problems.
- If a problem has been answered incorrectly, the student is told the percent error and asked to try again.
- If a problem is answered incorrectly a second time, the student is told the correct answer and the range of acceptable answers is displayed.
- A report is given at the end of each set of problems that includes the number of problems done, the number of problems answered correctly on the first try and the average percent error.
- The (BREAK) key has been disabled so that a child will not inadvertantly stop the program from running.

REQURIES 16K EXT. BASIC
TAPE $19.95 DISK $22.95

PRE-ALGEBRA I INTEGERS

INTEGERS is a series of four programs designed to give students practice in working with addition, subtraction, multiplication, division and the comparison of integers. It has many features that make a very valuable tool for introducing and/or maintaining skills:

- Up to 4 students may use the program at the same time.
- There are 9, user modifiable, skill levels.
- Students are given two opportunities to answer a problem.
- A detailed report of student performance, including number correct on first try, number wrong, total time used and percentage score, is presented at the end of a series of problems.
- The programs will run on a 16K TRS-80 Color Computer with or without disk drive.

Four distinct problem formats are presented. The first presents problems in this format: −12 + −9 = ?. The second program presents a problem with missing numerals in this format: −7 −? = 18. The third program presents a problem with a missing sign: 8 — ?6 = 14. The last program asks the student to determine the relationship (=, or) between two statments 3 −9 (??) −4 −5.

TAPE $29.95 DISK $32.95

TOM MIX SOFTWARE
4285 BRADFORD N.E.
GRAND RAPIDS, MI 49506

•ADD $2.00 POSTAGE & HANDLING•TOP ROYALTIES PAID•
•MICHIGAN RESIDENTS ADD 4% SALES TAX•
LOOKING FOR NEW SOFTWARE
ARCADE ACTION GAMES
(616) 957-0444

Cooking With CoCo

PART II

In which we construct a simple plug-in cartridge programmer for the 2764 8K EPROM.

By Colin J. Stearman

This month we continue to build the tools needed to enhance the CoCo Disk Operating System (DOS). Last month we developed a means to store the complete BASIC operating system on a special system floppy disk. Now I will describe a simple construction project to build a plug-in programmer for one of the most popular (and hence cheapest!) 8K EPROM's currently available — the 2764. The primary purpose of this project is to allow us to put the modifications into an EPROM which will replace the ROM containing the original DOS. But once built, the programmer can be used to put any code you wish into a 2764.

Design Philosophy

I'm a firm believer in the "KISS" principle I learned many years ago ("Keep It Simple, Stupid!"). So this programmer uses three integrated circuits, a transistor and a few resistors and capacitors. The bulk of the work is done by the driving software. This means there are no timing circuits or other complex logic to worry about. The result is a simple project to build and get working.

Circuit Description

I do not propose to provide a long description of how a

(Colin J. Stearman is an electronics engineer educated in the U. K. He has worked with all kinds of computers and has been a CoCo enthusiast for over two years.)

2764 is programmed. In general, it is programmed by presenting the address and data to the chip, then pulsing the program input pin while supplying 21 volts to another.

If you look at the schematic in Figure 1, you will see that the key to the programmer's simplicity lies in the two 6821 peripheral interface adapters (PIA). These are the same chips used inside the CoCo for interfacing with the outside world. These two chips provide the 2764 with all address and data information along with other control lines. The only other chip is an inverting buffer to decode the address information to the PIAs.

One of the PIA outputs drives a transistor which activates a relay to control the 21-volt source. It's not the most elegant way of doing it, but certainly the simplest. A light emitting diode (LED) tells you when the programmer is programming. The diode around the relay suppresses transients during switching and the other two stop currents flowing to the wrong places. The capacitors are all for power supply filtering. These are not shown in Figure 1 for clarity. Locate a 0.1uF disk capacitor from +5V to 0V at each integrated circuit (polarity is not important) and one 10uF 12V electrolytic capacitor anywhere on the board across these same lines (polarity is important here, the wire labelled "+" goes to the +5V line).

The PIA is a programmable device and its external connections may be programmed as inputs or outputs. This makes it possible for the software to both program the 2764 and then read back the resulting data.

The 21 volt source is easily obtained from three nine-volt batteries and a few other components as shown in Figure 1. This circuit is not built on the board and may not be needed if you already have an adjustable power supply.

Finally, the two sockets shown at U4 and U5 have nothing to do with the programmer itself, but provide a convenient method of putting two programmed 2764s into the CoCo memory map. One socket is wired to fill the address space from $C000 to $DFFF and the other from $E000 to $FFFF. (The last 256 bytes are not accessible in the latter because the addresses $FF00 to $FFFF are used internally as system input/output and vector addresses.)

Construction Hints

Radio Shack sells a printed circuit breadboard with the correct 40-pin edge connect for the CoCo expansion port. Check the parts list in Figure 1 for the number. This board is ideal for the project. The photograph shows the construction method I used. The components were conveniently laid out and then hooked up using a combination of the copper tracks on the board and solid hook-up wire. Maybe it's not the most elegant, but it's serviceable and functional. You could lay out and etch a custom printed circuit board and make a more professional job if you wished.

Take your time during the construction! The finished project will be plugged into your precious CoCo and could cause some nasty problems if you make an error. Use a meter or continuity tester to make sure you have wired correctly and that there are no shorts. The most likely cause of damage is having the power supply voltages coming out of CoCo going to the wrong places. The only internal supply used is the five-volt source from pin nine of the connector so check this line carefully. Pins one and two, which supply -12 volts and +12 volts are not used, so make sure they do not go anywhere on your board. Check Figure 2 for the edge connector pin numbering.

Source For Components

Those parts available from Radio Shack have been listed in Figure 1. The PIAs and 2764s are not available from them, nor is the Zero Insertion Force (ZIF) socket. The ZIF socket is not essential but is a good idea as it saves wear and tear on the 2764s. Most mail order houses can supply these components and I can recommend ACTIVE Electronics (800-343-0874) in Westboro, Mass. as a reputable firm. When ordering the 2764 ask for the 2764-3 which has an access time of 300nS. This is fast enough to work in the familiar "speed-up mode" that some CoCo programs use. An enclosure for the board can be obtained from The Microworks or Colorware who both advertise in RAINBOW.

The only other major item you might want to consider is an EPROM eraser. EPROMs are erased by exposure to ultraviolet light and can usually be programmed and erased many times. It is probable that you will wish to erase an EPROM you have programmed at some point and will need an eraser. If you live in the Sun Belt you might try leaving them outside in the sun for a week or two. But if you live in the north like me and forget what the sun looks like you'll have to buy an eraser. Hobby models are available for around $60 (also from ACTIVE). They do the job in about 15 minutes and can erase 15 chips at once. UV is dangerous to the eyes and skin and these inexpensive models have no safety interlocks, so if you get one treat it with respect and NEVER look into the lighted lamp.

"Take your time during the construction! The finished project will be plugged into your precious CoCo and could cause some nasty problems if you make an error."

Software

Listing 1 shows the source code for the EPROM programmer. It is fully position independent and is an ideal candidate for loading into an EPROM. I put such a programmed EPROM into one of the sockets on the board so that the cartridge had both the hardware and software ready to go.

The program is menu driven and provides a variety of functions. Menu selection one will verify that all locations in the EPROM are erased. A colored bar shrinks as the EPROM is checked and if fully erased, this is reported. If not, the first unerased memory location is reported and the checking process stops. An EPROM is fully erased when all memory bits are a one. The programming process can only convert 1s to 0s, not the reverse. You can program a partially erased EPROM however, as long as the memory locations you do wish to program are erased.

Menu item two allows the data stored in any section of CoCo's memory to be programmed into the EPROM. This does not have to be the whole 8K and can be as little as one byte. All memory addresses are entered as hexadecimal and the EPROM memory locations are numbered from $0000 to

$1FFF. As the programming proceeds, the cell being programmed is indicated and also automatically verified. If a cell does not return the same data as was programmed in it, the address is shown and a "BAD EPROM" message issued. If it is just not erased, this will be reported as such. In either case the programming stops.

The third menu item allows the contents of the EPROM to be dumped as a hexadecimal and ASCII character table. This is useful for inspecting the contents of the EPROM. The EPROM start and stop addresses are supplied and the output can be directed to the screen or printer. If the screen is chosen, the output will pause and wait for any key-press after each screen is filled. In either case the BREAK key will stop output and return to the request for dump range. Pressing the ENTER key for this returns to the main menu.

Menu item four permits individual inspection and programming of EPROM memory locations. The up and down arrows scan through consecutive memory locations displaying their contents. If a new value is entered an attempt is made to program that cell. This is done by pressing the 'P' key at the appropriate address and then entering the data. Sometimes it is possible to correct minor errors in a programmed EPROM this way. A new address may be selected by pressing 'N' and entering the desired address. 'X' will return to the main menu.

The fifth menu item will return the load start and end addresses of a cassette binary file, along with the execution address. This is used to find out where a binary file from tape went in memory so that it can be transferred to the EPROM. This display does not take into account any load offset you might have used in the *CLOAD* command.

Menu item six simply returns you back to BASIC.

"When all 8K have been checked the 2764 will be declared fully erased. Pressing ENTER will return you to the menu. If you get this far, things are looking pretty good."

Assembling the Program

As I mentioned in the previous installment, I use *MAC* by Computerware as my assembler. However, many of you may have *EDTASM+* or some other brand. Generally they are compatible, but there are some differences. For example, MAC allows binary numbers in the operand field. These are preceded by a percent sign. For other assemblers simply figure out what the number is in hexadecimal and enter it with a dollar sign in front instead.

MAC also has an FCS (Form Constant String) mnemonic. This is similar to FCC (Form Constant Characters), but allows hexadecimal codes to be imbedded in the string by enclosing them in angle brackets. Also it automatically adds a zero byte at the end of the string. Every FCS instruction can be replaced by a series of FCC and FCB (Form Constant Byte) mnemonics. For example, this line:

```
FCS /<OD> Sample program <OD>Enter?/
```

would become:

```
FCB $0D return
FCC /Sample program/
FCB $OD return
FCC /Enter?/
FCB 0 terminating zero byte
```

You may also see mnemonics OPT, NAM and TTL in the listings. These are just directives to *MAC* and can be omitted.

Once you have entered the source code and it assembles without error, save a copy of the machine code binary file to a cassette. This will be needed to first "fire up" the programmer as the disk system will be disconnected.

Testing the Project

After you have thoroughly checked the circuit board for errors there is nothing else but to plug it in and try it. If you have a meter you might monitor a five-volt point somewhere on the board before powering up. Owners of the Multi-Pak Interface should plug the programmer into slot one and select this on the front switch. If you do not own one, remove the disk controller and plug the programmer directly into the computer.

Now cross your fingers and power up. (If you have the Multi-pak, just power that up and verify the five-volt line with your meter first.) Now power up CoCo. If the screen does not clear and the copyright notice does not appear in the normal time, power down immediately and further check your construction.

If everything is alright so far, *CLOADM* and *EXEC* the programmer driver software from your cassette. The title and menu should appear. If not, recheck your typing of the source code.

Without a 2764 in the ZIF socket, select menu item one. If the programmer is working you will see a purple horizontal bar which shrinks from the right as each of the 1024 bytes are verified. (If there is no 2764 chip in the socket, it looks like a fully erased chip to the programmer.) When all 8K have been checked the 2764 will be declared fully erased. Pressing ENTER will return you to the menu. If you get this far, things are looking pretty good.

Now try menu item five and verify that the start, end and execute addresses of the programmer software just loaded from cassette are returned. Make a note of these numbers.

Next is a dry run at programming. Connect the 21.5 volt external source using clip leads. Still without a 2764 in the ZIF socket, select menu item two. For the start and end address in RAM use the start and end address from the previous steps. For the EPROM target address use 0. As soon as you enter the zero, the program will announce the attempt to program the EPROM at address zero and then indicates you have a bad EPROM at the location. As you have not plugged in an EPROM, this is to be expected. You should have heard the relay actuate briefly and the LED may have flashed on momentarily. Press ENTER twice to return to the main menu. Things are still looking good.

Now plug in an erased 2764 into the ZIF socket. Use menu item one to verify it is erased. If so, return to menu item two and reenter the RAM start and end values as before. Target the code to begin at EPROM address $0000. When you press ENTER the relay should "click" in and the LED come

on. As each address is programmed its EPROM address is shown on the screen. Remember that data for each address is being verified as it goes along, so there is little likelihood of wrong data being programmed in, unless it was wrong in the first place. It takes 50mS to program each location, so an entire 8K takes a little over six minutes. This is not a limitation of the software but rather a requirement of the EPROM. The programmer software is not 8K long so will not take that long.

When the last byte of the block has been programmed, the addresses of the range of bytes programmed is displayed. Pressing ENTER once would allow you to program another part of this EPROM or another one. (You could put some other program in the unused portion of the EPROM just programmed, if you wish.) Pressing ENTER again returns you to the main menu.

It would be a good idea to dump the data just programmed to double check it. This is done with menu item three. Dump the range programmed and spot check the data for errors. It should be alright.

Now power down the system and remove the 2764 from the ZIF socket and put it into the spare socket on the programmer labelled *$E000 - $FEFF*. Power up again and type in *EXEC&HE000*. The EPROM programmer software should immediately start up.

If you got this far without problems I think you can breathe a sigh of relief. . . the unit seems to be working fine. If not, check and double check everything and after all else fails, drop me a line and a SASE and I'll try to figure out what went wrong.

Using the Programmer with the Disk

It is a good idea to get a copy of the unmodified Disk BASIC on to a cassette and if you have the Multi-Pak to also put it into an erased EPROM. The latter is the case because the Multi-Pak Interface allows you to use the programmer with the disk system. Put the disk controller in slot four and the programmer in slot one. Initially select slot four.

To save disk BASIC to cassette, with the disk system running and a blank cassette in the tape drive, type:
CSAVEM"DBASIC",&HC000,&HDFFF,&HA027.

If you have the Multi-Pak interface, the next few steps will put Disk BASIC into an EPROM so that it can be put into the other socket on the programmer. If you don't have this interface there is little point in doing this as the CoCo cannot have the programmer and disk controller available to it at the same time. However, Disk BASIC on a cassette will come in useful later.

For those with the interface, continue by powering down and selecting slot one. Then power up to Extended Color BASIC. Type in the following commands:

```
CLEAR 200,&H3FFF
CLOADM"DBASIC",&H4000-&HC000+65536
EXEC &HE000
```

Assuming you have the programmer software in an EPROM in the socket as SE000, it should start up and you can program a fully erased 2764 with the data stored in RAM at $4000 though $5FFF. This, of course, is Disk BASIC.

When the EPROM is programmed, power down and put the EPROM in the other socket on the programmer ($C000 to $EFFF, the normal addresses for Disk BASIC). With the selector still in position one, power up the system. You should get the normal Disk Extended Color BASIC banner. You are now running Disk BASIC from the EPROM. However, it will not work properly because the secondary chip select signal is going to slot one (because of the position of the switch) and it needs to go to the controller in slot four. This is accomplished by entering *POKE 65407,3*. Now the system will act normally until you press Reset. Then you'll have to do this *POKE* again.

You can now load machine code files from disk and then activate the programmer code. This is done by redirecting the secondary chip select to slot one with a *POKE65407,0*, then *EXEC&HE000* to start up the programmer code. Menu item six returns to Disk BASIC where the secondary chip select can once again be directed to slot four.

Wrapping It Up

If this was your first construction project and you got here with no problem, congratulations — you are now a qualified "hardware hacker." For those "old hands" this should have made a simple but rewarding project.

We now have all the necessary tools to enhance the DOS, so next month we will start that in earnest by revising some commands and maybe adding one or two new ones. Until then!

Listing 1:

```
EPROM.ASC                    COMPUTERWARE MACRO ASSEMBLER  PAGE 1
27a4 EPROM PROGRAMMER By E.J.STEARMAN (E)1984


                    0001 ********************************************
                    0002 *     EPROM  PROGRAMMER                    *
                    0003 *              BY                          *
                    0004 *      COLIN  STEARMAN                     *
                    0005 *                                          *
                    0006 *          (C)1984 C.J.Stearman            *
                    0007 ********************************************
                    0008 *
                    0009 *  THIS IS POSITION INDEPENDENT
                    0010 *
                    0011 *
                    0012 *
                    0013 ********************************
BE0F                0014        ORG   $E0F
                    0015 *
                    0016 *
                    0017 ********************************************
                    0018 * SOME EQUATES
                    0019 *
A928                0020 CLEAR  EQU   $A928       BASIC CLEAR SCREEN ROUTINE
01DA                0021 BUFFER EQU   $1DA        USES THE CASSETTE BUFFER
```


THE ROMPACK COPIER

- Copy and run rompacks from cassette or disk.
- Works even on so called "problem packs"

64K required. cassette $16.95

TRIVIAL CHASE

This is the one! The game that has become a cult phenomena finally comes to the Co Co. The board you play on is represented by graphics. 2000 trivia questions included. Not an imitation! ECB req. 16,32,64K all included. cassette $24.95

EXTERNAL EVENTS SOFTWARE CO.

P.O. BOX 892 • MADISON, TN 37116

```
#203          0022 NUM#   EQU   $          NUMBER OF K IN EPROM
1FFF          0023 !OPAD# EQU   !NUM*1024-1 TOP EPROM ADDRESS
              0024 *
              0025 *
              0026 *************************************
              0027 *
              0028 *  MAIN LINE OF PROGRAM
              0029 *
              0030 *
8E00 170838   0031 EPROM  LBSR  INIT       SET UP THE PIAS
              0032 * NORMAL EPROM MODE IS TO READ THE EPROM
8E03 8D4928   0033 MENU   JSR   CLEAR      CLEAR SCREEN
8E06 3B8D0043 0034        LEAX  MENU1,PCR  POINT TO MENU TEXT
8E0A 17094F   0035        LBSR  OUTS7#     OUTPUT THE MENU
              0036 *
              0037 *GET RESPONSE
8F00 170BFA   0038        LBSR  INSTR      GET RESPONSE INTO BUFFER
              0039 * FIRST SEE IF ONLY 1 CHARACTER ENTERED
8E10 5A810F   0040        LDA   BUFFER+2   SHOULD BE ZERO
8F13 25EE     0041        BNE   MENU       IT WASN'T
8E15 B60104   0042        LDA   BUFFER     GET FIRST CHARACTER IN BUFFER
8F18 8131     0043        CMPA  #'1        VERIFY ERASE
8E1A 2505     0044        BNE   .COPY
8E1C 17021F   0045        LBSR  ERASE
8E1F 20E2     0046        BRA   MENU
8E21 8132     0047 .COPY  CMPA  #'2        COPY RAM
8E23 2605     0048        BNE   .DUMP
8E25 170318   0049        LBSR  COPY
8E28 20D9     0050        BRA   MENU
8E2A 8133     0051 .DUMP  CMPA  #'3        DUMP EPROM
8E2C 2605     0052        BNE   .CELL
8E2E 170543   0053        LBSR  DUMP
8E31 20D0     0054        BRA   MENU
8E33 8134     0055 .CELL  CMPA  #'4        INDIVIDUAL CELL PROGRAM
8F35 2605     0056        BNE   .FILE
8E37 1705F8   0057        LBSR  CELL
8E3A 20C2     0058        BRA   MENU
8F3C 8135     0059 .FILE  CMPA  #'5        CASSETTE FILE DATA RETURN
8E3E 2605     0060        BNE   .BASIC
8E40 170818   0061        LBSR  CFILE
8E43 20BE     0062        BRA   MENU
8E45 8136     0063 .BASIC CMPA  #'6        IS IT EXIT TO BASIC?
8E47 26BA     0064        BNE   MENU       NO SO DO MENU AGAIN
8E49 BDA928   0065        JSR   FLEAB      BEFORE DOING TO BASIC
8E4C 39       0066        RTS              EXIT FOR CHECK SO FAR
              0067 *
8E4D 43       0068 MENU1  FCC   /E P R O M   P R O G R A M M E R/
8E4E 2050205220
8F53 4F204020
8E58 202020
8E5D 204F2047
8E62 522041204D
8E67 204D204520
8E6C 52
8F6D 3D       0069        FCC   /=*************************/
8E6E 3D3D3D3D3D
8E73 3D3D3D3D3D
8F78 3D3D3D3D3D
8E7D 3D3D3D3D3D
8E82 3D3D3D3D3D
8E87 3D3D3D3D3D
8E8C 3D
8E8D 0D0D     0070        FDB   $0D0D      TWO <CR>
8E8F 20       0071        FCC   / 1 - VERIFY ERASURE/
8E90 2031202D20
8E95 5645524946
8E9A 5920455241
8E9F 53555245
8EA3 0D       0072        FCB   $0D
8EA4 20       0073        FCC   / 2 - PROGRAM EPROM FROM MEMORY/
8FA5 2032202D20
8EAA 50524F4752
8EAF 414D204550
8EB4 524F4D2046
8EB9 524F4D204D
8EBF 454D4F5259
8EC3 0D       0074        FCB   $0D
8EC4 20       0075        FCC   / 3 - DUMP EPROM CONTENTS/
8EC5 2033202D20
8FFA 4455404520
8ECF 4550524F4D
8ED4 20434F4E54
8ED9 454F5453
8EDD 0D       0076        FCB   $0D
8EDE 20       0077        FCC   / 4 - PROGRAM INDIVIDUAL CELLS/
8FDF 2034202D20
8EE4 50524F4752
8EE9 414D204945
8EEF 4449564944
8EF3 55414C2043
8EFB 454C4C53
8FFC 0D       0078        FCB   $0D
8EFD 20       0079        FCC   / 5 - CASSETTE FILE DATA/
8EFE 2035202D20
8F03 4341535345
8F08 5454452046
8F0D 494C452044
8F12 415441
8F15 0D       0080        FCB   $0D
8F16 20       0081        FCC   / 6 - RETURN TO BASIC/
8F17 2036202D20
8F1C 5245544252
8F21 4E204254F20
8F26 4241534943
8F28 0D0D     0082        FDB   $0D0D
8F2D 20       0083        FCC   / SELECTION? /
8F2E 2053454C45
8F33 4354494F4E
8F39 3F20
8F3A 00       0084        FCB   0          MESSAGE TERMINATOR
              0085 *
              0086 *
              0087 *************************************
              0088 *************************************
              0089 *  EPROM ACCESS ROUTINES
              0090 *************************************
              0091 *
              0092 *
FF41          0093 CONREG EQU   $FF41      LOWEST CONTROL REGISTER
FF44          0094 LOWADD EQU   $FF44      LOW ADDRESS OUTPUT
FF46          0095 HIADD  EQU   $FF46      HIGH ADDRESS OUTPUT
FF40          0096 DATARG EQU   $FF40      DATA REGISTER
FF42          0097 CLINES EQU   $FF42      CONTROL LINES REGISTER
FF43          0098 VOLTS  EQU   $FF43      RELAY CONTROL REGISTER
              0099 *
              0100 *
              0101 *************************************
              0102 *  INITIALIZING ROUTINE
              0103 *
8F3F 4F       0104 INIT   CLRA             EXPOSE ALL THE DDRD
8F3C 8D1F     0105        BSR   DDRSET
              0106 *
              0107 *  NOW ALL DATA DIRECTION REGISTERS ARE EXPOSED
              0108 *
8F3E C6FF     0109        LDB   #$FF       SET ALL ADDRESS LINES TO OUTPUTS
8F40 F7FF44   0110        STB   LOWADD
8F43 F7FF46   0111        STB   HIADD
              0112 *
8F46 F607     0113        LDB   #7         SE CONTROL LINED TO OUTPUTS
8F48 F7FF42   0114        STB   CLINES
              0115 *
8F4B 7FFF40   0116        CLR   DATARG     TO MAKE IN INPUTS
              0117 *
8F4E 8604     0118        LDA   #4         RESET THE CONTROL REGISTERS
8F50 8D0B     0119        BSR   DDRSET     TO OUTPUTS
              0120 *
8F52 8634     0121        LDA   #$34       SET CONTROL REG FOR RELAY OUTPUT
8F54 B7FF43   0122        STA   VOLTS      ENABLES CB2 AS OUTPUT AT ZERO
              0123 *
8F57 8601     0124        LDA   #1         SET UP CONTROL LINES FOR READ
8F59 B7FF42   0125        STA   CLINES      DE,CS=0 PSW=1
              0126 *
8F5C 39       0127        RTS
              0128 *
              0129 **
              0130 ******* SUBROUTINES ********
              0131 *  SET CONTROL REGISTERS TO CONTENTS OF A
8F5D F604     0132 DDRSET LDB   #4         # OF CONTROL REGISTERS
8F5F BEFF41   0133        LDX   #CONREG    POINT 1 TO CONTROL REGISTERS
8F62 A781     0134 CLRREG STA   ,X++       CLEAR AND DOUBLE INCREMENT
8F64 5A       0135        DECB             DECREASE COUNTER
8F65 26FB     0136        BNE   CLRREG     DO NEXT REGISTER
8F67 39       0137        RTS
              0138 *************************************
              0139 *
              0140 *
              0141 *************************************
              0142 *    PROGRAM EPROM ROUTINE
              0143 *************************************
              0144 *
              0145 * THIS PROGRAMS THE PROM FROM DATA STARTING
              0146 * AT ADDRESS IN "START", FOR THE NUMBER OF
              0147 * BYTES IN "COUNT",AT EPROM ADDRESS "TARGET"
              0148 * THESE LOCATIONS ARE RESERVED IN THIS ROUTINE
              0149 * START ENDS UP WITH LAST ADDRESS DATA WAS
              0150 * TAKEN FROM RAM.  TARGET HAS LAST ADDRESS
              0151 * WRITTEN TO IN EPROM.
              0152 * B HAS ERROR CODE
```

```
                    #153 *  1= NOT ERASED
                    #154 *  2= BAD EPROM LOCATION
                    #155 *  4= NO PROBLEM
                    #156 ****************************************
                    #157 *
0101                #158 START  EQU  $101       USE0 CASSETTE NAME AREA
0103                #159 COUNT  EQU  START+2
0105                #160 TARGET EQU  START+4
                    #161 *
8F58 B6FF43         #162 PROGRM LDA  VOLTS      GET REG VALUE
8F5B 8A08           #163        ORA  #%00001000 SET BIT 0 TO APPLY 21V
8F5D B7FF43         #164        STA  VOLTS
                    #165 *  21V IS NOW APPLIED
                    #166 * WAIT A WHILE FOR RELAY TO CLOSE
8F60 8EFFFF         #167        LDY  #$FFFF
8F63 301F           #168 RLYDLY LEAY -1,Y       DECREMENT Y
8F65 26FF           #169        BNE  RLYDLY
                    #170 *
                    #171 *  PRESERVE T AND U REGISTERS
8F67 3408           #172        PSHS U,Y
                    #173 *
                    #174 *
8F69 108F0101       #175        LDY  START      POINT Y TO RAM START
8F6D FE0105         #176        LDU  TARGET     POINT U TO TARGET
8F60 5F             #177        CLRB
8F61 BE0103         #178        LDX  COUNT      GET BYTE COUNT
8F64 1027006D       #179        LBEQ PREXIT     ALL DONE PROGRAMMING
                    #180 *
                    #181 * MOVE CURSOR AHEAD 4
8F68 FC0088         #182        LDD  CURLOC
8F6B C30004         #183        ADDD #4
8F6E FD0088         #184        STD  CURLOC
                    #185 ************************
                    #186 *    PROGRAMMING LOOP
8F71 1F30           #187 PLOOP  TFR  U,D        SET UP EPROM ADDRESS
8F73 3341           #188        LEAU 1,U        INCREMENT EPROM ADDRESS
8F75 B7FF48         #189        STA  HIADD
8F78 F7FF44         #190        STB  LOWADD
                    #191 *
                    #192 * DISPLAY WORKING ADDRESS
8F7B 3436           #193        PSHS Y,X,D
8F7D FC0103         #194        LDD  COUNT      DONE IF 0 IS 1
8F80 1083000I       #195        CMPD #1
8F84 270F           #196        BEQ  NODISP     NO DISPLAY
8F86 ECC4           #197        LDD  ,S         RECOVER VALUE IN D
8F88 BE0B88         #198        LDX  CURLOC     MOVE CURSOR BACK 4
8F8B 301C           #199        LEAX -4,X
8F8D BF0000         #200        STX  CURLOC
8F90 1F01           #201        TFR  D,X        MOVE VALUE TO X
8F92 170B16         #202        LBSR HEXOUT     DISPLAY IT
8F95 3536           #203 NODISP PULS Y,X,D      RECOVER VALUES
                    #204 * GET DATA TO BE LOADED INTO REG B
8F97 E6A0           #205        LDB  ,Y+        AND INCREMENT ADDRESS
                    #206 *
8F99 B6FF4D         #207        LDA  DATARB     GET DATA AT THIS ADDRESS
8F9C 81FF           #208        CMPA #$FF       SHOULD BE THIS
8F9E 2704           #209        BEQ  EMPTY
8FC0 C401           #210        LDB  #1         NOT ERASED CODE
8FC2 2046           #211        BRA  PETIT
                    #212 *
8FC4 B6FF42         #213 EMPTY  LDA  CLINES     GET CONTROL LINES
8FC7 8A02           #214        ORA  #%00000010 RAISE OE
8FC9 B7FF42         #215        STA  CLINES
                    #216 *
8FCC 7FFF41         #217        CLR  CONREG     MAKE DATA LINES OUTPUTS
8FCF 86FF           #218        LDA  #$FF
8FD1 B7FF4B         #219        STA  DATARG
8FD4 8604           #220        LDA  #4         RESET TO OUTPUT REG
8FD6 B7FF41         #221        STA  CONREG
                    #222 *
                    #223 *  SAVE DATA IN B IN  EPROM
8FD9 F7FF4B         #224        STB  DATARD     PUT ON DATA LINES
                    #225 *
8FDC 8D41           #226        BSR  PULSE      THE RGN LINE LOW
                    #227 *
                    #228 *NOW VERIFY
8FDE 7FFF41         #229        CLR  CONREG     MAKE DATA LINE INPUTS
8FE1 7FFF4B         #230        CLR  DATARB
8FE4 8604           #231        LDA  #4
8FE6 B7FF11         #232        STA  CONREG
                    #233 *
                    #234 * ENABLE CHIP
8FE9 B6FF42         #235        LDA  CLINES
8FEC 8AF0           #236        ORA  #%11111101   OF LOW
8FEF B7FF42         #237        STA  CLINES
                    #238 *
                    #239 * NOW COMPARE DATA ON DATARB WITH CONTENTS AT T
8FF1 F1FF4B         #240        CMPB DATARB     DATA WAS LEFT IN B FROM LOAD
8FF4 2704           #241        BEQ  VERIOK     IT WAS THE SAME
8FF6 C602           #242        LDB  #2         VERIFY ERROR CODE
8FF8 2010           #243        BRA  PEXIT
                    #244 *
                    #245 *    END PROGRAMMING LOOP
                    #246 ************************
8FFA AD9FA0D0       #247 VERIOK JSR  [PDLCAT]   BREAK PRESSED?
8FFE 2705           #248        BEQ  DONNOT     NO SO DECREASE COUNT
9000 5F             #249        CLRD            READY FOR RETURN CODE
9001 B103           #250        CMPA #3         BREAK VALUE
9003 2705           #251        BEQ  RETIT      YES SO EXIT
9005 301F           #252 DONNOT LEAX -1,X       REDUCE COUNT
9007 26BB           #253        BNE  PLOOP      NOT DONE YET
9009 5F             #254        CLRB            NO ERROR CODE
900A 335F           #255 PEXIT  LEAU -1,U       DECREASE TO LAST LOADED ADDRESS
900C FF0105         #256        STU  TARGET
900F 313F           #257        LEAY -1,Y       GO SAME FOR RAM ADDRESS
9011 108F0101       #258        STY  START      SAVE LAST RAM ADDRESS
9015 B6FF43         #259 PREXIT LDA  VOLTS      GET VOLTS REGISTER
9018 84F7           #260        ANDA #%11110111 TURN OFF 21V
901A B7FF43         #261        STA  VOLTS
901D 35F0           #262        PULS U,Y,PC     RECOVER REGISTERS & RETURN
                    #263 *
                    #264 ****************************************
                    #265 *
                    #266 * THIS PULSES THE PGM LINE LOW FOR 50NS
                    #267 *
901F B6FF42         #268 PULSE  LDA  CLINES     GET LINES
9022 84FE           #269        ANDA #%11111110 MAKE PGM LOW
9024 B7FF42         #270        STA  CLINES
                    #271 *
9027 3410           #272        PSHS X          FOR DELAY COUNT
9029 1A50           #273        ORCC #%00010000 PREVENT INTERRUPTS
902B 8E1600         #274        LDX  #$1600     FOR 50 NS
902E 301F           #275 DLOOP  LEAX -1,X       REDUCE COUNT
9030 26FC           #276        BNE  DLOOP      KEEP LOOPING
9032 1CAF           #277        ANDCC #%11010111 ALLOW INTERRUPTS
                    #278 *
9034 B6FF42         #279        LDA  CLINES     GET LINES
9037 8A01           #280        ORA  #%00000001 SET RGN HI
9039 B7FF42         #281        STA  CLINES
903C 3590           #282        PULS X,PC       RECOVER X AND RETURN
                    #283 ****************************************
                    #284 ****************************************
                    #285 *      V E R I F Y    R O U T I N E      *
                    #286 ****************************************
                    #287 *
                    #288 * THIS VERIFIES ERASURE OF THE EPROM
                    #289 * PROVIDES A GO/NOGO RESPONSE
                    #290 * OF ERASURE OF ENTIRE EPROM
                    #291 *
903E 8DA928         #292 ERASE  JSR  CLEAR      CLEAR SCREEN
9041 3470           #293        PSHS Y          PRESERVE REGISTER Y
9043 30ED0078       #294        LEAX ERASE,PCR  PUT UP TITLE
9047 170711         #295        LBSR OUTSTR
                    #296 *
                    #297 *PUT UP PROGRESS NOMINOR
904A BF0000         #298        STX  CURLOC     GET CURSOR LOCATION
904D 3089           #299        LEAX NUMY,X     MOVE OVER NUMBER OF K IN EPROM
904F BF008B         #300        STX  CURLOC     AND SAVE IT
9052 CC8F8F         #301        LDD  #$8F8F     2 RED SQUARES
9055 10FF0000       #302        LDY  #NUMK      COUNTER
9059 ED81           #303 PUTMON STD  ,Y++       STORE ON SCREEN
905B 313F           #304        LEAY -1,Y       DECREASE COUNT
905D 26FA           #305        BNE  PUTMON
                    #306 *
905F 108F0000       #307        LDY  #0         START ADDRESS
9063 AD9FA000       #308 VLOOP  JSR  [PDLCAT]   TEST FOR BREAK
9067 2706           #309        BEQ  NOBRK      HE KEY PRESSED
9069 8103           #310        CMPA #3         BREAK?
906B 2502           #311        BNE  NOBRK
906D 35A0           #312        PULS Y,PC       RETURN
                    #313 *
906F 1F20           #314 NOBRK  TFR  Y,D
9071 B7FF48         #315        STA  HIADD      SET UP ADDRESS ON PIA
9074 F7FF44         #316        STB  LOWADD
9077 B6FF4B         #317        LDA  DATARB     GET DATA
907A 81FF           #318        CMPA #$FF       IS IT ERASED
907C 261C           #319        BNE  NOTNTY     NOT ERASED
907E 3121           #320        LEAY 1,Y        INCREASE
                    #321 * ADJUST PROGRESS COUNTER IF NEEDED
9080 1F20           #322        TFR  Y,D
9082 5D             #323        TSTB            IF NOT ZERO CONTINUE
9083 2609           #324        BNE  DONFIT     DONE YET
9085 8403           #325        ANDA #%00000011 SEEE IF THESE ARE ZERO
9087 2605           #326        BNE  DONEYT     NO SO SKIP
9089 CC8F8F         #327        LDD  #$8F8F     GREEN SQUARES
908C ED83           #328        STD  ,--X       DECREASE MONITOR FROM RIGHT
                    #329 *
908E 108C2000       #330 DONEYT CMPY #TOPADD+1  ADDRESS LIMIT
```

```
1092 26CF       0371        BNE   VIODP
1094 308D8079   0332        LEAY  GOOD,PCR     IS FULLY ERASED
1098 2419       0373        BRA   VETII
                0374 *
109A FC0B0B     0375 NOTMTY LDD   CURLOC
109D C30020     0376        ADDD  #32          MOVE TO NEXT LINE
10A0 FD0BB9     0377        STD   CURLOC
10A3 308D8259   0378        LEAY  ADDMSG,PCR   GET ADDRESS MESSAGE
10A7 17B6B1     0379        LBSR  OUTSTR
10AA 1F21       0380        TFR   Y,X
10AC 17871C     0381        LBSR  MSGOUT       PUT LAST ADDRESS UP
10AF 308D865B   0382        LEAX  BAD,PCR
10B3 17B6A5     0383 VETIT  LBSR  OUTST4
10B6 T8BD8867   0384        LEAY  VERFY,PCR
10BA 17B69E     0385        LBSR  OUTSTR
                0386 *
10BD 17864A     0387        LBSR  INSTR#       GET KEYBOARD RESPONSE
10C0 T5A1       0388        PULS  Y,PC         RECOVER Y AND RETURN
                0389 *
T0C2 20         0390 ERAMSG FCC   /   ERROR ERASURE VERIFICATION/
T0CT 2020455052
10CB 4F4D2045552
10CD 4153555245
10D2 2056455249
10DT 4649431I54
10DC 49RF4E
10DF 00         0391        FCB   4#0          (CR)
10E0 20         0392        FCS   /  **************************(#0)(#0)/
10E1 2070TDTD30
10C6 TDTDTDTDT0
10F0 3030303DT0
10F# T0TDTDTD30
10F5 5DTDTDT03D
10FA 2DTD3D00#D
10FF #0
                0393 *
1100 0D         0394 ADDMST FCS   /(#D)(#D)ADDRESS /
1101 0D414444452
1106 455ST5T2#00
1108 20         0395 BAD    FCD   / NOT /
110C 4C4F542000
1111 4D         0396 GOOD   FCD   /(#D)(#D)   FULLY /
1112 0020202044
1117 554C4C5920
111C 00
111D 45         0397 VERFY  FCS   /ERA0CD(#D)(#D)PRESS "ENTER" TO CONTINUE /
111E 524157454A
112T #00D505245
1128 5353202345
112D 4C544552222
1132 20544F2D4T
1137 4F4E544945
113C 55452000
                0398 ********************************************
                0399 ********************************************
                0400 *      CPROM   PROGRAMMING                 *
                0401 ********************************************
                0402 *
                0403 *
                0404 * THIS GETS START ADDRESS AND CMD ADDRESS IN
                0405 * RAM AND START TARGET ADDRESS TH EPROM
                0406 * CHECKS FOR ERRORD THEN TRANSFERS DATA
                0407 ********************************************
                0408 *
1140 BDA928     0409 COPY   JSR   CLEAR        SCREEN
1143 308D00CC   0410        LEAY  CPYITL,PCR   GET HEADER
1147 17B611     0411        LBSR  OUTST#       PUT IT UP
                0412 *
                0413 * GET START ADDRESS IF NULL THEN RTURN
114A T0BD0171   0414        LEAX  STARTT,PCR
114E 17866E     0415        LBSR  INPUT4
                0416 * DID WE GET A NULL
1151 96#DA      0417        LDA   $FFCA        GET FIRST BYTE
1154 81#D       0418        CMPA  #4#D         IS IT CR?
1156 2501       0419        BNE   $FIST
1158 39         0420 GETIT  RTS
                0421 *
1159 17B664     0422 $FIST  LBSR  HEXINT       CONVERT INTO REG T
115C BF#1D1     0423        STT   START        SET START ADDRESS
115F 5D         0424        TSTB               CHECK FOR ERRORS
1160 26DE       0425        BNE   CORY
                0426 *
1162 308D0IT#   0427        LEAX  ENDMSG,PCR   GET ENDING RAM ADDRESS
1166 170656     0428        LBSR  INPUI$       GET ENDING ADDRESS
1169 B6#DA      0429        LDA   4UFFER       TEST FOR NULL
116C 81#D       0430        CMPA  4#4D         IS IT CR?
116E 2TEB       0431        BEQ   GETIT
                0432 *
1170 17D5ED     0433        LBSR  HEXINT       GET VALUE ENTERED
1173 5D         0434        TSTB               DID WE GET ERROR?
1174 26CA       0435        BNE   COPY         RESTART
                0436 * T NOW HAS ENDING
1176 1F10       0437        TFR   T,D          PUT INTO ACC D
1178 B30101     0438        SUBD  START        FIND DIFFERENCE
117B 2542       0439        BLO   DERROR       DATA ERROR MESSAGE
117D C30001     0440        ADDD  #1           TO MAKE IT ACTUAL COUNT
1180 FD0103     0441        STD   COUNT        SAVE IT
                0442 *
                0443 *NOW GET TARGET ADDRESS
1183 T0BD0166   0444        LDAX  TOTMSG,PCR
1187 1766T5     0445        LBSR  INPUI4
118A B601DA     0446        LDA   BUFFCR       NULL ENTRY?
118D 810D       0447        CMPA  #4#D         (CR)
118F 27DT       0448        BEQ   CEXIT        SO EXIT ROUTINE
                0449 *
1191 17D5CC     0450        LBSR  HEXINI       GET VALUE IN X
1194 5D         0451        TSTB               CRROR?
1195 26A9       0452        BNE   COPY         RESTART
                0453 *
                0454 * X NOW HAS START ADDRESS
1197 BF0105     0455        STX   TARGET
119A BC1FFF     0456        CMPT  #TOPADD      HIGHEST ALLOWED VALUE
119D 2329       0457        BHI   TOOHI        GO TO ERROR MESSAGE
119F T410       0458        PSHS  T            PUT TARGET ONTO STACK
11A1 CC2B00     0459        LDD   #NUMK+1024   CPROM SIZE
11A4 ATE1       0460        SUBB  ,S++         SUBTRACT TARGET & CLEAR STACK
                0461 * D NOW HAS AVAILABLE BYTES ABOVE TARGET
11A6 10B70105   0462        CMPD  COUNT
11AA 2525       0463        BLO   WORDOM       NOT ENOUGH ROOM
                0464 * ALL SEEMS OK DO PROGRAM
                0465 * FIRST DISPLAY WORKING ADDRESS TEXT
11AC 308D01AC   0466        LEAX  WRKADD,PCR
11B0 17B5A0     0467        LBSR  OUTSI4
                0468 *
11B3 17FDB2     0469        LBSR  PRODRM
                0470 *
11B6 5D         0471        TSTB               FOR ERROR CODE
11B7 2729       0472        BEQ   GOODPR       GOOD PROGRAM
11B9 C101       0473        CMPB  #1           NOT ERASED
11BB 2741       0474        BEQ   UNERAS
11BD 204E       0475        BRA   BADLOC       BAD PROM LOCATION
                0476 ********************************************
                0477 **
                0478 *
11BF T0BDB0B9   0479 DERROR LEAX  DIFF,PCR     START ABOVE CMS MSB
11CT 176595     0480        LBSR  OUTST$
11C6 2010       0481        BRA   .KEY
                0482 *
11CB T0BD00A9   0483 TOOHI  LEAT  HIGH,PCR     TARGET TOO HIGH
11CC 1765BC     0484        LBSR  OUTST$
11CF 2007       0485        BRA   .KEY
                0486 *
11D1 T0BD00B2   0487 WORDOM LEAT  WARDM,PCR    NOT ENOUGH ROOM IN CPROM
11D5 176TBT     0488        LBSR  OUTST$
                0489 *
11D8 305D00C7   0490 .KEY   LEAX  FKEY,PCR     WAIT FOR ENTER
11DC 1765E0     0491        LBSR  INRUT4
11DF 16FF5E     0492        LBRA  COPY
                0493 *
11E2 T0BD011E   0494 BOOOPR LEAT  GOODP1,PCR   GOOD PROGRAM
11C6 176572     0495        LBSR  OUTST$
11E9 BF01D1     0496        LDX   START        GET LAST RAM ADDRESS
11EC 1765DC     0497        LBSR  HEXOUT       OUTPUT IT
11EF 30B0B120   0498        LEAT  BOODP2,PCR
11F3 176565     0499        LBSA  OUTST$
11F6 BE01D5     0500        LDX   TARGET       GET LAST PROM ADDRESS
11F9 1765CF     0501        LBSR  HEXOUT       OUTPUT IT
11FC 200A       0502        BRA   .KEY
                0503 *
11FE 3030013A   0504 UNERAS LEAX  UNERSD,PCR   NOT ERASED
1202 176556     0505 .LEAVE LBSR  OUIST4
1205 BF0105     0506        LDX   TARGET       GET LAST EPROM ADDRESS
1208 1765C0     0507        LBSR  HEXOUT       OUTPUT IT
120B 20CB       0508        BRA   .KEY
                0509 *
120D 30B0013B   0510 BADLOC LEAX  BADPAN,PCR   BAD PROM LOCATION
1211 20EF       0511        BRA   .LEAVE
                0512 *
                0513 *****
                0514 *
1213 20         0515 CPYITL FCC   /    RAM TO CPROM TRANSFER/
1214 2020202052
1219 4140205446
121E 2045505250
1223 4D20545241
1228 4E53464552
122D 0D         0516        FCS   /(#D)    ********************(#D)(#D)/
122E 2020202020
1233 3D3D3D3D3D
```

PROGRAMMER'S SKETCH PAD

- *Saves Time & is Easy to Use*
- *Durable & Attractive*
- *Have Fun & Learn*

RAINBOW CERTIFICATION SEAL

Would You Like To Design:

a) **BUDGETS**

b) **INVENTORY LISTS**

c) **GAMES, GRAPHICS**

The Kit includes: Two thick mylar coated **graphs** of the color computer's screen; step by step **instructions** for the beginner; two **demo programs**, and easy to follow "how to personalize" **budgets** that *you* write.

Each Sketch Pad has **print locations** on one side and **set screen locations** on the other, along with their corresponding **commands** and **color codes.**

This Month's Special
1 FREE SYNTACTICS' DISKETTE with each order.
Offer expires September 5, 1984

NEW!
Syntactics Single-Sided Double-Density Soft Sectored Diskettes
10 Diskettes with case $18.00
Plus $2.00 Shipping and Handling
5 Year Guarantee

Don't delay, order yours today. . .
Write for catalog of other fine products

ONLY $12

CANADA—$13.50
EUROPE—$14.50
Add an additional $1.50 for Hi-Res

Calif. residents add 6% sales tax.
(Postage paid.)

TO ORDER:
CALL (707) 722-4280
or WRITE TO:

ORDER FORM SP1

Quantity ☐
Name _____
Address _____
City _____ State _____
Country _____ Zip _____
Charge: MasterCard ☐ VISA ☐
Acct. No. _____
Expiration Date _____
Signature _____

SYNTACTICS®
P.O. Box 257
REDCREST, CALIFORNIA 95569

DEALER INQUIRIES INVITED

DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES

PRICE BREAKTHROUGH

Super Sale on New Disk Drives

Introducing

MEGADISK

5 to 20 Megabyte, ready to run on the TRS 80 Model I/III/IV/4P, color computer, I.B.M. PC, Apple, Franklin

DRIVE A HARD BARGAIN™ Complete Systems Starting at $999.95

Call Toll Free Ordering 1-800-343-8841

High Quality Lowest Price

Drive 0, 1, 2, 3

for the

Color Computer

Starting at $199.95

Disk Drive Upgrade

for model III/IV easy to install system

Starting at ~~$369.95~~

Call for new lower price

SOFTWARE SUPPORT, INC.

One Edgell Road, Framingham, MA 01701 (617) 872-9090

Hours: Mon. thru Fri. 9:30 am to 5:30 (E.S.T.) Sat. 10 am to 4:30 pm

DEALER INQUIRIES INVITED.

TERMS:
M.C./Visa/Amex and personal checks accepted at no extra charge.
C.O.D., please add $3.00.
Shipping: Please call for amount.
Not responsible for typographical errors.

CANADA
MICRO R.G.S. INC.
751, CARRE VICTORIA, SUITE 403
MONTREAL, QUEBEC, CANADA, H2Y 2J3
Regular **Tel. (514) 845-1534**
Canadian Toll Free 800-361-5155

Service! Service!

All in stock products are shipped within 24 hours of order. Repair/Warranty service is performed within 24 hours of receipt unless otherwise noted. We accept C.O.D., foreign and APO orders. School and D&B corporate P.O.s accepted.

TRS/80 Registered Trademark Tandy Corp. IBM-PC Registered IBM Corp. Apple Registered Trademark Apple Computer Corp.
Franklin Registered Trademark Franklin Corp. Max/80 Registered Trademark Lobo Int.

DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES

DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES

PRICE BREAKTHROUGH

Super Sale on New Disk Drives

Starting at **$169.00!**

Tandon — Siemens — Remex — MPI — Teac — Shugart — Tabor

40 or 80 Tracks — Single or Dual Head — New 3½'' Drivette™

Our Disk Drives are Capable of Single **and** Dual Density Operation

The **NEWEST** Technology Capable of Operating on Most Popular Computers

Drive a Hard Bargain!!™ For your TRS/80, Color Computer, IBM, Apple, Franklin

5 M.B.-20 M.B. Complete Systems . . . . . from $999.95

Diskette Breakthrough — 10 Pack in Library Case — ~~$18.95~~ NEW LOW PRICE

SAVE!! PLEASE CALL FOR OUR MOST CURRENT PRICE REDUCTIONS.

TOLL FREE ORDERING
1-800-343-8841

GENERAL AND TECHNICAL
1-617-872-9090

Disk Drives (0123) TRS/80-IBM-Apple - TI Franklin-Max/80-LNW . . . . . ◄
Model I/III/IV Upgrade (Disk Drives - Memory) . . . . . ◄
Printers — Daisywheel/Dot Matrix . . . . . ◄
Percom Double Density Controller (Model I) . . . . . ◄
Color Computer Printer Interfaces . . . . . ◄
Disk Drive Operating Systems . . . . . ◄
Repair Services Now Offered — FAST Turn-a-Round . . . . . ◄
Apple/Franklin Compatible Add-On Drives with Case & Cable . . . . . ◄
Diskettes in Library Cases . . . . . ◄
DISK DRIVE CASES AND POWER SUPPLIES . . . . . ◄
Printer **Buffers** 8K to 512K . . . . . starting at $143.95
Holmes Model I/III Speed-up Mod . . . . . starting at $90.00
Cables — Printer/Disk Drive . . . . . starting at $23.00

CALL TOLL FREE FOR NEW PRICES

Warranty on Disk Drives — 6 Months to 1 Year

SOFTWARE SUPPORT, INC.

One Edgell Road, Framingham, MA 01701 (617) 872-9090

Hours: Mon. thru Fri. 9:30 am to 5:30 (E.S.T.) Sat. 10 am to 4:30 pm

DEALER INQUIRIES INVITED.

TERMS:
M.C./Visa/Amex and personal checks accepted at no extra charge.
C.O.D., please add $3.00.
Shipping: Please call for amount.
Not responsible for typographical errors.

CANADA
MICRO R.G.S. INC.
751, CARRE VICTORIA, SUITE 403
MONTREAL, QUEBEC, CANADA, H2Y 2J3
Regular **Tel. (514) 845-1534**
Canadian Toll Free 800-361-5155

Service! Service!

All in stock products are shipped within 24 hours of order. Repair/Warranty service is performed within 24 hours of receipt unless otherwise noted. We accept C.O.D., foreign and APO orders. School and D&B corporate P.O.s accepted.

TRS/80 Registered Trademark Tandy Corp. IBM-PC Registered IBM Corp. Apple Registered Trademark Apple Computer Corp.
Franklin Registered Trademark Franklin Corp. Max/80 Registered Trademark Lobo Int.

DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES DISK DRIVES

```
1238 3030303030
1230 3030303030
1242 3030303030
1247 30000000
                    0477 *
1248 69         0478 DIFF   FCS   /<0D><0D>START HIGHER THAN END ADDRESS<0D>/
124C 0D535441
1251 5420484
1256 4845522
1259 48414E2
1260 4E442041
1265 4452455
126A 0D0A
126C 0D         0479 HIGH   FCS   /<0D><0D>TARDET ADDRESS TOO HIGH<0D>/
126D 0D544152
1272 455420
1277 4452455
127C 20544F
1281 4949474
1206 0A
1287 0D         0480 NROOM  FCS   /<0D><0D>NOT ENOUGH ROOM IN EPROM<0D>/
1288 0D4E4F
128D 454E4F
1292 4820524
1297 4D20494
129C 455052
12A1 0D0A
12A3 0D         0481 EKEY   FCS   /<0D>PRESS "ENTER" TO CONTINUE /
12A4 5052455
12A9 2022454
12AE 4552220
12B3 4F20134
12B8 5449455
12BD 2000
12BF 20         0482 STRTXT EQU   /   RAM START ADDRESS: /
12C0 2052414
12C5 2053544
12CA 5420414
12CF 5245535
12D4 2000
12D6 20         0483 ENDMSD FCS   /    RAM END ADDRESS: /
12D7 2052202
12DC 414D2045
12E1 4420414
12E6 5245535
12EB 2000
12ED 45         0484 TRTMS0 FCS   /EPROM TARDET ADDRESS: /
12EE 50524F4D
12F3 5441524
12F8 5420414
12FD 5245535
1302 2000
1304 0D         0485 SDDDP1 FCS   /<0D><0D>  LAST RAM ADDRESS USED: /
1305 0D2020
130A 5354205
130F 4D20414
1314 5245535
1319 5553454
131E 2000
1320 0D         0486 DDDD02 FCD   /<0D>LADT EPROM ADDRESS USED: /
1321 4C4153
1326 4550524
1328 2041444
1330 4553532
1335 5345443
133A 0D
1339 0D         0487 UNERSD FCS   /<0D><0D>NOT ERASED AT /
133C 0D4E4F
1341 4552415
1346 4420413
1348 0D
134C 0D         0488 BADPRM FCS   /<0D><0D>BAD EPROM AT /
134D 0D4C414
1352 4550524
1357 2041542
135C 0D         0489 WRKADD FCS   /<0D><0D>PROGRAMMING EPROM AT /
135D 0D50524
1362 5241040
1367 4E4720
136C 524F4D
1371 542000
                    0490 ****************************************
                    0491 ****************************************
                    0492 *  DUMPS EPROM CONTENTS TO SCREEN OR PRINTER *
```


The KEY-264K is here!!

DO YOU HAVE A 32K SYSTEM WITH 64K MEMORY CHIPS ?? ARE YOU STILL BEING TOLD YOU CAN ONLY USE 32K FROM BASIC ??

DON'T BELIEVE IT !! - KEY COLOR SOFTWARE brings you the KEY-264K. An exciting NEW SOFTWARE utility that allows any STANDARD 32K COLOR COMPUTER TO ACCESS 64K RAM FROM BASIC, and with NO HARDWARE MODIFICATIONS REQUIRED!!!

*** Works with CASSETTE based systems! *** *** Works with DISK based systems! ***

The KEY-264K divides the 64K ram memory into two 32K banks or sides, each of which can be utilized independently by the BASIC interpreter, with the ability to switch instantly from one side to the other. IT'S LIKE HAVING TWO COMPUTERS IN ONE!! Have your BASIC program on one side and keep your variables on the other side, or have your main program on one side and your subroutines on the other side, or have your program on one side and use the other side for 4 additional HI-RES pages, or any combination you like. The possibilities are endless because the KEY-264K allows full communication between sides plus the ability to switch back and forth at will, all from within BASIC. You could also have different programs in each side and switch back and forth between them using simple keystrokes, even while the programs are running!! Or run them both at the same time in the FOREGROUND/BACKGROUND MULTI-TASKING mode. Don't buy that printer buffer yet! With the KEY-264K you can be printing in the background side while utilizing your computer normally in the foreground side AT THE SAME TIME!!! Debugging a program? Use either a BASIC command or simple keystrokes to instantly duplicate your program, in it's present status, on the opposite side. Switch to the opposite side later and pick up exactly where you were before!

For DISK users, the KEY-264K allows you to alternate between DISK and EXTENDED BASIC on the same side with simple keystrokes. No need to pull your controller or power down. You can be in EXTENDED BASIC on one side and in DISK BASIC on the other side and still switch back and forth and have full communications between the two sides.

The KEY-264K does this and MORE thru extensions to BASIC. No need to learn a new language! The KEY-264K adds 15 NEW COMMANDS and 1 function to BASIC, including powerful new BLOCK MEMORY MOVE and GRAPHICS VIEWING commands.

The KEY-264K works on 32K systems with 'E', 'F', or even modified 'D' boards and requires EXTENDED or DISK BASIC with GOOD 64K MEMORY CHIPS! Systems with piggy-back 32K or half-good 64K memory chips WILL NOT WORK!!

ORDER YOUR KEY-264K CASSETTE TODAY by sending check or money order for $39.95 plus $2.00 postage U.S.A. ($5.00 outside U.S.A.) Mass. residents add 5% sales tax.

MASTERCARD, VISA, OR COD
CALL (617) 263-1737

KEY COLOR SOFTWARE
P.O. BOX 360
HARVARD, MA. 01451

RAINBOW CERTIFICATION SEAL

WORKS WITH THE NEW 64K COLOR COMPUTER TOO!!

```
                    0491 ************************************************
                    0492 *
1174 B04928         0493 DUMP   JSR   CLEAR      SCREEN
1177 108D0121       0494        LEAI  DMPTTL,PCR DUMP TITLE
117B 17010D         0495        LBSR  OUTSTR
                    0496 *
117E 308D0148       0497        LEAI  DSTRT,PCR  GET START ADDRESS
1182 17041A         0498        LBSR  INPUTN
                    0499 * DIDN'T GET A NULL2
1185 B601DA         0500        LDA   BUFFER
1188 8140           0501        CMPA  #$0D       (CR)
118A 2601           0502        BNE   DCONT      CONTINUE ROUTINE
                    0503 *
118F 39             0504        RTS              RETURN TO MENU
                    0505 *
1190 170300         0506 DCONT  LBSR  HEXIN      INTO X REG
1193 5D             0507        TSTB             AN ERROR
1194 26E1           0508        BNE   DUMP       RESTART IF SO
1196 BC1FFF         0509        CMPX  #$DFFF     CHECK RANGE
1199 22DC           0510        BHI   DUMP       RESTART IF OVER
119B 3410           0511        PSHS  X          PRESERVE START
                    0512 *
119D 308C013C       0513        LEAX  ESTRT,PCR  GET END ADDRESS
11A1 17041E         0514        LBSR  INPUTS
11A4 170300         0515        LBSR  HEXIN      INTO X REG
11A7 5D             0516        TSTB             FOR ERROR
11A8 2605           0517        BNE   RSTART     RESTART IF SO
                    0518 * CHECK FOR OVER RANGE
11AA BC1FFF         0519        CMPX  #$DFFF
11AD 2304           0520        BLS   GDUMP      RANGE OK
11AF 3262           0521 RSTART LEAS  2,S        CLEAN STACK
11B1 20C4           0522        BRA   DUMP       RESTART
11B3 1F10           0523 GDUMP  TFR   X,D        TO SEE IF START IS AFTER END
11B5 A1E4           0524        SUBD  ,S         START ON STACK
11B7 25F6           0525        BMI   RSTART     NOT SO RESTART
                    0526 *
11B9 3410           0527        PSHS  X          PRESERVE END ADDRESS
11BB 308D012E       0528        LEAX  DEV,PCR    WHICH DEVICE?
11BF 170480         0529        LBSR  INPUTS     S OR P
11C2 B601DA         0530        LDA   BUFFER     GET FIRST LETTER
11C5 C604           0531        LDB   #4         FOR SCREEN DUMP WIDTH
11C7 8150           0532        CMPA  #'P        IS IT PRINTER?
11C9 2607           0533        BNE   SCR        NO SO LEAVE DEVNUM
11CB 86FE           0534        LDA   #-2        PRINTER DEVICE CODE
11CD B7008F         0535        STA   DEVNUM
11D0 C610           0536        LDB   #16        FOR ITEM COUNT
11D2 1530           0537 SCR    PULS  X,Y        X HAS END, Y START
11D4 50             0538        NEGB             FOR MASK
11D5 3404           0539        PSHS  B          SAVE ON STACK
11D7 1F20           0540        TFR   Y,D        ROUND DOWN START
11D9 E4E4           0541        ANDB  ,S         ROUNDED DOWN NOW
11DB 1F02           0542        TFR   D,Y        PUT IT BACK IN Y
11DD 1410           0543        PSHS  X          SAVE END ON STACK
                    0544 * SET LINE COUNT FOR SCREEN
11DF B610           0545        LDA   #16        # OF LINES
11E1 B701D3         0546        STA   COUNT
                    0547 *
11E4 1F21           0548 DMLOOP TFR   Y,X        OUTPUT ADDRESS
11E6 1420           0549        PSHS  Y          SAVE Y
11E8 8680           0550        LDA   #$80
11EA A09FA002       0551        JSR   [CHROUT]   START NEW LINE
11EE 170100         0552        LBSR  HEXOUT     OUTPUT ADDRESS
11F1 3520           0553        PULS  Y          RECOVER Y
11F3 C608           0554        LDB   #8         SPACES COUNT
11F5 170099         0555        LBSR  SPACES     OUTPUT THEM
11F8 1F20           0556 DMLOOP TFR   Y,D        GET START ADDRESS
11FA B7FF46         0557        STA   HIADD
11FD F7FF44         0558        STB   LOWADD     SET UP EPROM ADDRESS
1200 3121           0559        LEAY  1,Y        INCREMENT ADDRESS
                    0560 **** OUTPUT THE HEX CHARACTERS
1202 F6FF4B         0561        LDB   DATARG     GET FROM EPROM
1205 3420           0562        PSHS  Y          PRESERVE VALUE
1207 170198         0563        LBSR  HXPAIR     PUT IN BUFFER
120A 8E01DA         0564        LDX   #BUFFER    POINT TO IT
120D 170345         0565        LBSR  OUTSTR
1210 1520           0566        PULS  Y          RECOVER Y
1212 F601           0567        LDB   #1
1214 D070           0568        BSR   SPACES
                    0569 *
1216 1F20           0570        TFR   Y,D        RECOVER COUNT IN D
1218 6362           0571        COM   2,S        FOR LOOK AT LOWER BITS
121A E462           0572        ANDB  2,S        COUNT MASK
121C 3401           0573        PSHS  CC         PRESERVE TEST RESULT
121E 5363           0574        COM   3,S        PUT IT BACK AS IT WAS
1220 3501           0575        PULS  CC         RECOVER TEST RESULT
1222 26D4           0576        BNE   INLOOP     NOT AT END OF LINE YET
                    0577 *
                    0578 *
1224 C602           0579        LDB   #2         SPACES
```

```
1226 BD6B           0580        BSR   SPACES     OUTPUT THEM
1228 E662           0581        LDB   2,S        GET COUNT AS MFG
                    0582 * B NOW HAS -16 IN IT
122A 10A5           0583 CHLOOP LEAI  B,Y        GET FIRST ADDR. IN GROUP
122C 3404           0584        PSHS  B          SAVE COUNT
122E 1F10           0585        TFR   X,D        PUT IT TO EPROM
1230 B7FF46         0586        STA   HIADD
1233 F7FF44         0587        STB   LOWADD
1236 E4F0           0588        PULS  B          RECOVER COUNT
1238 B6FF4B         0589        LDA   DATARG     GET EPROM DATA
123B 8130           0590        CMPA  #$30       HIGHER TO PRINT
123D 2509           0591        BLO   DOT        CHANGE TO DOT LESS THAN 3
123F 7D008F         0592        TST   DEVNUM     TO PRINTER?
1242 2706           0593        BEQ   OKPRNT     TO SCREEN SO OK
1244 8180           0594        CMPA  #$80       HIGHEST PRINTABLE?
1246 2502           0595        BLO   OKPRNT
1248 862E           0596 DOT    LDA   #'.,       REPLACE WITH DOT
124A A09FA002       0597 OKPRNT JSR   [CHROUT]
124E 5C             0598        INCB
124F 2009           0599        BLT   CHLOOP     GOES ZERO WHEN DONE
                    0600 ****
                    0601 *ARE WE AT END YET
1251 10ACE4         0602        CMPY  ,S         END ON STACK
1254 2228           0603        BHI   DMEXIT     YES SO EXIT LOOP
                    0604 *
1256 7D008F         0605        TST   DEVNUM     TO PRINTER?
1259 2708           0606        BEQ   NXLINE     DELETE SCREEN LINE COUNT
125B A09FA000       0607        JSR   [POLCAT]   BREAK PRESSED?
125F 8103           0608        CMPA  #3         BREAK
1261 2705           0609        BEQ   DMEXIT     EXIT ROUTINE
1263 16FF7E         0610        LBRA  DMLOOP     CONTINUE OUTPUT
                    0611 *
1266 7A01D1         0612 NXLINE DEC   COUNT      LINE COUNTER
1269 1026FF77       0613        LBNE  DMLOOP     NOT DONE YET
126D B610           0614        LDA   #16        RESET LINE COUNT
126F B701D1         0615        STA   COUNT
1272 A09FA000       0616 DWAIT  JSR   [POLCAT]   WAIT FOR KEY
1276 27FA           0617        BEQ   DWAIT      NO KEY YET
1278 8103           0618        CMPA  #3         IS IT BREAK
127A 1026FF66       0619        LBNE  DMLOOP     NOSO CONTINUE
                    0620 *
127E 3263           0621 DMEXIT LEAS  3,S        CLEAN STACK
```


Marymac INDUSTRIES
800-231-3680

Pan American ELECTRONICS
800-531-7466

Radio Shack TRS-80's ®

People you Trust to give you the very best!

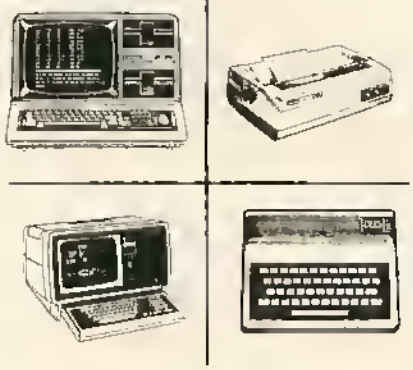

- Lowest Price
- Reliable Service
- Quality Products

22511 Katy Fwy., Katy (Houston) Texas 77450
(713) 392-0747 Telex 774132

HI-RES GRAPHIC
ADVENTURES
DISC NOT REQUIRED
Cassettes—$24.95/Disc—$27.95

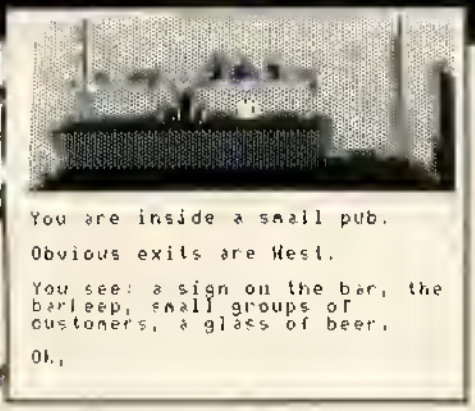

SHENANIGANS

Countless legends tell of a magnificent Pot of Gold hidden at the end of the rainbow. Many have attempted to find the marvelous treasure but success has eluded them and it remains hidden to this day. You, as a dedicated adventurer, have determined to search for the fabled gold and succeed where others have failed. This one is great fun! 32K required.

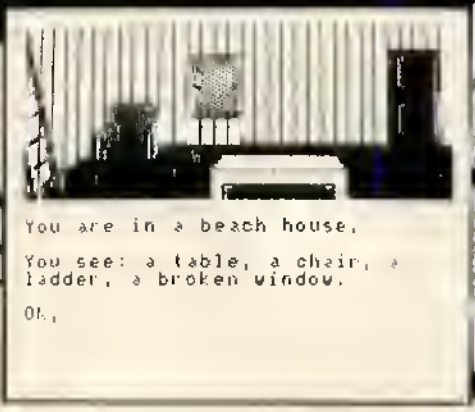

SEA SEARCH

Get your shark repellant and scuba tanks ready! The graphics in this adventure are truly outstanding and the under water scenes are unforgettable. You'll run into a pirate, a mermaid and some hungry sharks in this colorful and unique treasure hunt. 32K required.

Hot CoCo—April, '84 "The fine graphics accent your imagination. "

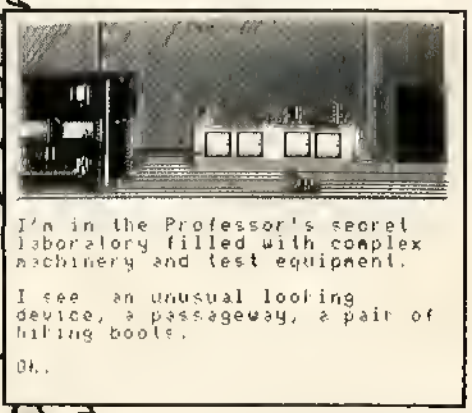

CALIXTO ISLAND

A valuable museum treasure has been stolen, can you recover it??? This is a challenging puzzle with an occasional twist of humor. You'll visit a secret laboratory, a Mayan pyramid and you'll meet crazy Trader Jack—all in living color and exciting detail. You will really love this hi-res graphic version of the classic Calixto Island Adventure. 32K required.

Rainbow—April, '84. "It was enough to keep my wife and 8 year old son glued to the computer for an entire weekend and two week nights. ."

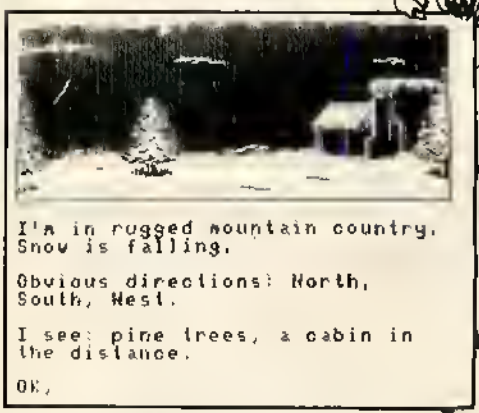

BLACK SANCTUM

Encounter the forces of black magic as you roam around an old 18th century monastery. You'll see all the evil locations in this spooky adventure, you'll love searching out and destroying the evil in this classic tale. A MUST for every adventure game fan! 32K required.

Rainbow—May, '84—"It's the graphic screens that are the shining stars. " "Some of the best I've seen "

MD

Mark Data Products

24001 ALICIA PKWY., NO. 207 • MISSION VIEJO, CA 92691 • (714) 768-155'

FREE—Send for our new, 24 page catalog.

NEW! ARCADE GAMES

Cassettes—$24.95/Disc—$27.95

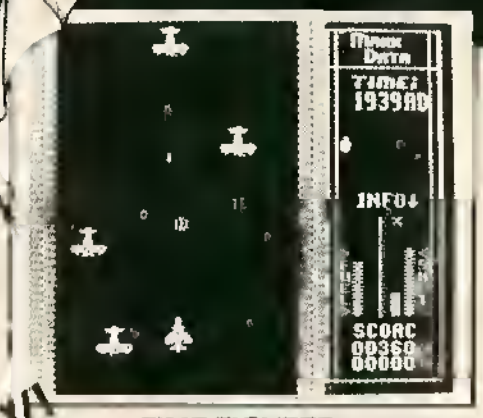

NEW!

TIME FIGHTER

Pilot your MD-64 fighter through a hazardous time tunnel. Your mission is to destroy the dreaded Time Guardian who threatens the natural order of the universe. In order to reach this menace you must fight aerial dangers from strange and different time zones. If you like fast action, this one's for you! 16K required.

Rainbow—March, '84 "One of the best in your library of computer games . . .It is a real gem."

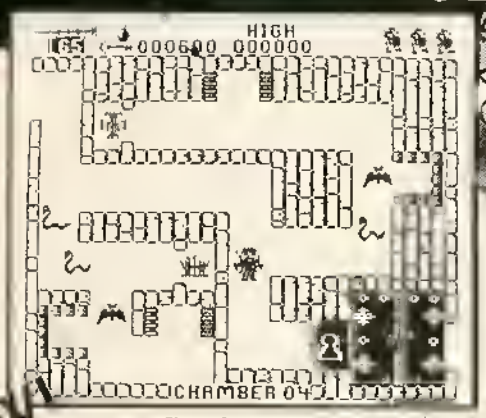

NEW!

TUT'S TOMB

Explore the ancient, mystical tomb of the great Pharoah. Find the magical keys which lead you to unbelievable treasures as you out maneuver the creatures that slither and swarm about you. Super fast arcade action—this one will knock your socks off with 16 screens of incredible color and sound. Fabulous! 32K required.

Hot CoCo—April, '84 "State-of-the-art CoCo graphics. . .A first rate game."

BUMPERS

A truly great maze game. Especially exciting when two players compete simultaneously. Tension mounts as you wildly race through a hidden obstacle course. Barrier walls are invisible until you bump into them and you must proceed cautiously as each dead end has a hidden booby trap. 16K required.



GLAXXONS

Put your playing skill against squadrons of swooping, diving spacecraft. Fast and furious with seven selectable skill levels and automatic game acceleration. . .guaranteed to blister your joystick finger. The object of the game is to achieve the highest score by eliminating as many attacking spacecraft as possible while avoiding your own destruction. Dynamite! 16K required.



EL BANDITO

El Bandito has to be a crafty little hombre to stay alive as he loots the local countryside. Escape into a tunnel to avoid that angry spider. . . race around the corner towards your lair. Two players may compete simultaneously in this unusual game. Selectable skill levels provide a challenge for beginners as well as experts. 16K required

HAYWIRE

The best Color Computer version of the Berzerk arcade game you can get. . .A real hi-res classic! This challenging combination of angry robots and the evil menace will provide many hours of fun and excitement. Haywire combines joystick and fire button action and is great as a two player game. 16K required.



ASTRO BLAST

Wave after wave of alien attackers—each one different and unique. A great space "shoot-em-up" with hi-res graphics, lots of color and dramatic sound effects. Three selectable skill levels coupled with automatic game acceleration provide a challenge for novice and expert alike. One of our all time best sellers! 16K required.

COSMIC CLONES

Clonial Warriors, Super Klones, Double Bombs and "the Death Layer" relentlessly challenge the most skillful player in this unique, fast action game. Your goal is to achieve the highest score by eliminating the Clonial invasion forces thus protecting your starbase fuel cells. Fast Fun! One of our favorites. 16K required.

Mark Data Products

All Orders: Please add $2.00 shipping and handling in the continental U.S. All others, add air shipping and $3.00 handling. California residents add 6% sales tax. Foreign orders please remit U.S. funds. Software authors—Contact us for exciting program marketing details. We accept MasterCard and VISA. Distributed in Canada by Kelly Software.

```
1470 8600      0624        LDA   #$0D       CR AT END
147F AD9FA002  0625        JSR   [CHROUT]   ALSO CLRS BUFFER IN PRINTER
1483 7FD05F    0626        CLR   DEVNUM     RESET TO SCREEN
1486 3DB0FE19  0627        LEAX  EKEY,PCR   ENTER MESSAGE
148A 170332    0628        LBSR  INPUT$
148D 16FEE4    0629        LBRA  DUMP       RESTART
               0630 ****
               0631 **************
               0632 * OUTPUT SPACES BY COUNT IN B
1490 8620      0633 SPACES LDA   #32        SPACE
1492 AD9FA002  0634 SLOOP  JSR   [CHROUT]
1496 5A        0635        DECB             COUNT
1497 10260FF7  0636        LBNE  SLOOP
149B 39        0637        RTS
               0638 **************
149C 2D        0639 DMPTTL FCC   /          EPROM DUMP/
1490 2020202020
14A2 2020202020
14A7 4550524F4D
14AC 2044554D50
14B1 00        0640        FCB   $00
14B3 20        0641        FCS   /          **********(@D><@D>/
14B3 2020202020
14B8 2020202020
14BD 3030303030
14C2 3030303030
14C7 00D00
14CA 53        0642 DSTRT  FCS   /START ADDRESS: /
14CB 5441525420
14D0 4144445245
14D5 535533A200
14DA 28        0643 ESTRT  FCS   /  END ADDRESS: /
14DB 2045484420
14E0 4144445245
14E5 535533A200
14EA 2B        0644 DEV    FCS   /(P)rinter or (S)creen? /
14EB 5029722598E
14FD 7A25722585F
14F5 7220285329
14FA 63726565E
14FF 3F2000
               0645 **************************************************
               0646 **************************************************
               0647 * INSPECTS AND PROGRAMS INDIVIDUAL CELL *
               0648 **************************************************
               0649 *
               0650 *
1502 8DA928    0651 CELL   JSR   CLEAR      SCREEN
1505 7D80006F  0652        LEAX  CELMSS,PCR GET TITLE
1509 17024F    0653        LBSR  OUTSTR
               0654 *
               0655 * GET COUNT (0 - 4 AND START (0 RAM LOCATION
               0656 * TO STORE ENTERED DATA
0107           0657 TEMP   EQU   TARGET+2
               0658 *
150C CC0001    0659        LDD   #1         GET COUNT
150F FD0103    0660        STD   COUNT
1512 CC0107    0661        LDD   #TEMP      GET TEMPORARY ADDRESS
1515 FD0101    0662        STD   START      PUT IT AS START
               0663 *
               0664 * CLEAR TARGET TO ZERO
1518 7F0105    0665        CLR   TARGET
1516 7F0106    0666        CLR   TARGET+1
               0667 *
               0668 * DISPLAY DATA AT TARGET LOCATION
151E 8600      0669 DISDAT LDA   #$0D       CR
1520 AD9FA002  0670        JSR   [CHROUT]   MOVE DOWN A LINE
1524 FC0105    0671        LDD   TARGET     GET EPROM ADDRESS
1527 B7FF46    0672        STA   HIADD
152A F7FF44    0673        STB   LOWADD
               0674 *
152D 1F01      0675        TFR   D,X        DISPLAY ADDRESS
152F 170299    0676        LBSR  HEXOUT
1532 170000    0677        LBSR  MOVCRS     PLACE TO RIGHT
               0678 *
1535 F6FF44    0679        LDB   DATA@B     GET EPROM DATA
               0680 *
1538 3404      0681        PSHS  B          SAVE VALUE
153A 170262    0682        LBSR  HXPAIR     MAKE IT A HEX STRING
153D BE01DA    0683        LDX   #BUFFER
1540 170218    0684        LBSR  OUTSTR     OUTPUT CONTENTS
               0685 *
1543 170000    0686        LBSR  MOVCRS     MAKE A SPACE
1546 3502      0687        PULS  A          RECOVER CHARACTER IN A
1548 8120      0688        CMPA  #32        LOWEST PRINTABLE CHARACTER
154A 2202      0689        BHI   CHARCH     OUTPUT AS A CHARACTER
154C 862E      0690        LDA   #'.        REPLACE BY A DOT
154E AD9FA002  0691 CHARCT JSR   [CHROUT]
1552 170093    0692        LBSR  MOVCRS     OVER A PLACE
1555 863F      0693        LDA   #'?        PROMPT
1557 AD9FA002  0694        JSR   [CHROUT]   DISPLAY IT
               0695 *
155B AD9FA000  0696 BIKEY  TST   [POLCAT]   GET RESPONSE
155F 27FA      0697        BEQ   BIKEY      WAIT FOR KEY
               0698 *
               0699 * VALID RESPONSES ARE:
               0700 * ^ PREVIOUS ADDRESS (WRAPS AROUND)
               0701 * DOWN ARROW NEXT ADDRESS (+1)
               0702 * N ENTER NEW ADDRESS
               0703 * P PROGRAM THIS ADDRESS
               0704 * X EXIT TO MENU
               0705 **************************************
               0706 *
1561 815E      0707        CMPA  #$5E       UP ARROW
1563 2610      0708        BNE   ,DARROW
1565 FC0105    0709        LDD   TARGET     GET [ARGET VALUE
1568 830001    0710        SUBD  #1         REDUCE BY ONE
156B 2A03      0711        BPL   NOTNEG     NO NEED TO WRAP
156D CC1FFF    0712        LDD   #LOPADD    TO WRAP ADDRESS
1570 FD0105    0713 NOTNEG STD   TARGET
1573 20A9      0714        BRA   DISDAT     DISPLAY IT
               0715 *******
1575 810A      0716 ,DARROW CMPA #$0A       DOWN ARROW
1577 2613      0717        BNE   NEWADD     GET NEW ADDRESS FOR [ARGET
1579 FC0105    0718        LDD   [ARGET
157C C30001    0719        ADDD  #1         INCREASE IT
157F 10B32D00  0720        CMPD  #NUMK+1024 WRAPPED AROUND?
1583 26D2      0721        BNE   NTOVER
1585 4F        0722        CLRA
1586 5F        0723        CLRB
1587 FD0105    0724 NTOVER STD   [ARGET
158A 2092      0725        BRA   DISDAT
               0726 *******
158C 814E      0727 NEWADD CMPA  #'N         ENTER A NEW ADDRESS
158E 261A      0728        BNE   NEXDAT
1590 308D0DAC  0729 LOOP16 LEAX  MADDRS,PCR GET NEW ADDRESS MESSAGE
1594 17022B    0730        LBSR  INPUT$     GET NEW VALUE
1597 170100    0731        LBSR  HEXINT     GET VALUE IN X
               0732 *  CHECK B FOR ERROR CODE B<>0 FOR ERROR
159A 50        0733        TSTB
159B 10260FF2F 0734        LBNE  DISDAT     BAD SO DO NOTHING
159F 8C1FFF    0735        CMPX  #LOPADD    MUST NOT BE HIGHER THAN THIS
15A2 22EC      0736        BHI   LOOP16
15A4 BF0105    0737        STX   TARGET
15A7 16FF74    0738        LBRA  DISDAT     GO DISPLAY IT
               0739 ******
15AA 8150      0740 NEXDAT CMPA  #'P         PROGRAM THE LOCATION
15AC 263B      0741        BNE   EXIT       EXIT ROUTINE
15AE 308D0D90  0742 LOOP1G LEAX  MDATA,PCR  NEW DATA MESSAGE
15B2 17021A    0743        LBSR  INPUT$     GET DATA
15B5 17018B    0744        LBSR  HEXINT     GET VALUE IN X
               0745 * TEST B FOR ERROR CODE B<>0 FOR ERROR
15B8 50        0746        TSTB
15B9 10260FF61 0747        LBNE  DISDAT     DO NOTHING
15BD 8C00FF    0748        CMPX  #$FF       HIGHEST ALLOWED DATA
15C0 22EC      0749        BHI   TOOLO
15C2 1F10      0750        TFR   X,D
15C4 F70107    0751        STB   TEMP       FOR PROGRAMMING
15C7 17F99E    0752        LBSR  PRGRM      TRY TO PROGRAM IT
15CA 50        0753        TSTB
15CB 10027FF4F 0754        LBEQ  DISDAT     ALL OK
15CF C101      0755        CMPB  #1         NOT ERASED
15D1 2710      0756        BEQ   NOERASD    NOT ERASED
               0757 ***
               0758 *  BAD EPROM
15D3 308DFD75  0759        LEAX  BADPRM,PCR
15D7 170181    0760 ,WRITE LBSR  OUTSTR
15DA BF0105    0761        LDX   TARGET
15DD 170EE8    0762        LBSR  HEXOUT
15E0 16FF38    0763        LBRA  DISDAT
               0764 *
15E3 308DFD54  0765 NOERSD LEAX  UNERSD,PCR UNERASED MESSAGE
15E7 20EE      0766        BRA   ,WRITE
               0767 *********
15E9 8158      0768 EXIT   CMPA  #'X         IS IT EXIT?
15EB 10260FF2F 0769        LBNE  DISDAT     NO SO REDISPLAY
15EF 39        0770        RTS              RETURN TO MENU
               0771 **********
               0772 *******
               0773 * THIS MOVES CURSOR 1 RIGHT IF NOT AT END OF SCREEN
15F0 FC0088    0774 MOVCRS LDD   CURLOC
15F3 10B305FF  0775        CMPD  #05FF      AT END?
15F7 2706      0776        BEQ   ATEND
15F9 C30001    0777        ADDD  #1         MAKE A SPACE
15FC FD0088    0778        STD   CURLOC
15FF 39        0779 ATEND  RTS
               0780 **************************************************
1600 20        0781 CELMSG FCC   /  INDIVIDUAL CELL PROGRAMMING/
```

```
16E1 2020494E44
16E6 49566494455
16EB 414C204345
16F0 4C4C20566F
16F5 4F47524140
16FA 4D494E47
16FE 0D          0782        FCB   $0D
16FF 20          0783        FCS   /  **************************<0D><0D>/
1720 2020303D3D
1725 303D3D303D
172A 3D3D303D30
172F 3D3D3D303D
1734 3D3D3D3D30
1739 3D3D3D3D0D
173E 4D0D
1740 0D          0784 MADDRS FCS   /<0D>NEW ADDRESS? /
1741 4E4557204144
1746 44445352533F
174B 533F2000
174F 0D          0785 NDATA  FCS   /<0D>NEW DATA? /
1750 4E4557204441
1755 4154413F20
175A 00
                 0786 ***************************************
                 0787 *   RETURNS CASSETTE FILE DATA
                 0788 ***************************************
                 0789 *
                 0790 * THIS RETURNS THE ADDRESSES OF THE LAST CLOADM
                 0791 *
                 0792 *
01E7             0793 STADD  EQU   487         START ADDRESS
01FE             0794 ENDADD EQU   126         END ADDRESS
01C5             0795 EXECAD EQU   485         EXEC ADDRESS
                 0796 *
1658 BDA920      0797 CFILE  JSR   CLEAR       SCREEN
165E 308D0035    0798        LEAX  FILMSG,PCR  HEADING
1662 17FBF6      0799        LBSR  OUTSTR
1665 9C1E7       0800        LDX   STADD       GET START ADDRESS
1669 17B168      0801        LBSR  HEXOUT      OUTPUT IT
                 0802 *
166B 308D0071    0803        LEAX  ENDTXT,PCR  GET END MESSAGE
166F 17BBE9      0804        LBSR  OUTSTR
1672 9E7E        0805        LDX   ENDADD
1674 301F        0806        LEAX  -1,X        MOVE TO ACTUAL END
1676 17B152      0807        LBSR  HEXOUT
                 0808 *
1679 308D0078    0809        LEAX  EXEMSG,PCR  GET EXE MESSAGE
167D 17BBD8      0810        LBSR  OUTSTR
1680 9C1E5       0811        LDX   EXECAD
1683 17B145      0812        LBSR  HEXOUT
                 0813 *
                 0814 * MOVE CURSOR DOWN 2 LINES
1686 FC0088      0815        LDD   CURLOC
1689 C30020      0816        ADDD  #32
168C FD0088      0817        STD   CURLOC
                 0818 *
168F 308DFC18    0819        LEAX  PKEY,PCR    GET ENTER MESSAGE
1693 17B129      0820        LBSR  INPUTS
                 0821 *
1696 39          0822        RTS
                 0823 ***************************************
1697 20          0824 FILMSG FCC   /      CASSETTE FILE DATA/
1698 2020202020
169D 2043415353
16A2 4554544520
16A7 46494C4520
16AC 44415441
16B0 0D          0825        FCB   $0D
16B1 20          0826        FCC   /      ****************/
16B2 2020202020
16B7 203D3D3D3D
16BC 3D3D3D3D3D
16C1 3D3D3D3D3D
16C6 3D3D3D3D
16CA 0D0D        0827        FDB   $0D0D
16CC 20          0828        FCC   /    START ADDRESS: /
16CD 2020205354
16D2 4152542041
16D7 4444524553
16DC 533A2000
16E0 0D          0829 ENDTXT FCC   /<0D>      END ADDRESS: /
16E1 2020202020
16E6 204E4E4420
16EB 4144445245
16F0 535333A200
16F5 0D          0830 EXEMSG FCS   /<0D>  EXECUTE ADDRESS: /
16F6 2020455845
16FB 4355544520
1700 4144445243
1705 53533A2000
```

```
                 0831 ***************************************
                 0832 ***************************************
                 0833 *    UTILITY  LIBRARY      *
                 0834 ***************************************
                 0835 ***************************************
                 0836 *INSTR GETS A STRING FROM KEYBOARD AND PUTS*
                 0837 *IT INTO "BUFFER" TERMINATED BY A ZERO BYTE.*
                 0838 ***************************************
                 0839 * BASIC POINTERS
0088             0840 CURLOC EQU   $88         CURSOR LOCATION
A000             0841 POLCAT EQU   $A000       KEYBOARD POLL
A002             0842 CHROUT EQU   $A002       CHARACTER OUTPUT
006F             0843 DEVNUM EQU   $6F         0 FOR SCREEN, -2 FOR PRINTER
                 0844 ***************************************
                 0845
1706 10BE01DA    0846 INSTR  LDY   #BUFFER     POINT Y TO BUFFER START
170E BD98        0847 CRSR   BSR   CURSOR      PUT BLACK SQUARE UP
1710 AD9FA000    0848 RETKEY JSR   [POLCAT]    LOOK FOR KEY
1714 27FA        0849        BEQ   RETKEY      NOTHING ENTERED YET
1716 9108        0850        CMPA  #$8         BACKSPACE
1718 2617        0851        BNE   ENKEEP
171A 10BC01DA    0852        CMPY  #BUFFER     AT START OF BUFFER
171E 27FF        0853        BEQ   CRSR        NO BACKSPACE POSSIBLE
1720 8620        0854        LDA   #$20        BLANK
1722 A71F8000    0855        STA   [CURLOC,Y]  STORE AT CURRENT LOCATION
1726 313F        0856        LEAY  -1,Y        DECREASE CURSOR LOCATION
1728 DC88        0857        LDD   CURLOC      GET CURSOR LOCATION
172A 830001      0858        SUBD  #1          REDUCE D BY ONE
172D DD88        0859        STD   CURLOC      RESET CURSOR LOCATION
172F 20DD        0860        BRA   CRSR
                 0861 *
                 0862 * IF ER THEN PUT INTO BUFFER, WITH A ZERO BYTE
                 0863 * THEN CTL?
1731 8101        0864 ENKEEP CMPA  #$01        CAPSLOCK RETURN
1733 2689        0865        BNE   INKEY       NO SO PUT INTO BUFFER
1735 A7A0        0866        STA   ,Y+         PUT CR INTO BUFFER
1737 AD9FA002    0867        JSR   [CHROUT]    PUT RETURN ON SCREEN
173B 6FA4        0868 EXIT   CLR   ,Y          SET LAST BYTE TO ZERO
173D 39          0869        RTS
                 0870 *
                 0871 * PUT CHARACTER INTO BUFFER. CHECK FOR
                 0872 * SPACE FIRST. IF BUFFER WAS 254 PUT IT
                 0873 * THEN SET 255 BYTE TO ZERO AND EXIT
                 0874 *
173F 8120        0875 INKEY  CMPA  #32         FIRST PRINTABLE CHARACTER
1740 25CC        0876        BLO   CRSR        NOT PRINTABLE SO LOOP
1742 A7A0        0877        STA   ,Y+         PO  INTO BUFFER
1744 AD9FA002    0878        JSR   [CHROUT]    OUTPUT ENTERED CHARACTER
1748 10BC20B     0879        CMPY  #BUFFER+254 BUFFER FULL?
174C 25C0        0880        BLO   CRSR          NOT FULL
174E 20EB        0881        BRA   EXIT
                 0882 *
                 0883 * CURSOR ROUTINE
1750 8680        0884 CURSOR LDA   #128        BLACK SQUARE
1752 A71F8088    0885        STA   [CURLOC]
1756 39          0886        RTS
                 0887
                 0888 ***************************************
                 0889 ***************************************
                 0890 *OUTSTR GETS A STRING POINTED TO BY REG X *
                 0891 *AND PUTS IT TO OUTPUT DEVICE. TERMINATED *
                 0892 *BY A ZERO BYTE IN BUFFER              *
                 0893 ***************************************
                 0894 *   BASIC POINTER
A002             0895 CHROUT EQU   $A002       OUTPUT ROUTINE
                 0896 *
1757 AD9FA002    0897 .OSPLY JSR   [CHROUT]    OUTPUT CHARACTER
175B A680        0898 OUTSTR LDA   ,X+         GET CHARACTER
175D 26F8        0899        BNE   .OSPLY      DISPLAY IF NOT ZERO
175F 39          0900        RTS
                 0901 ***************************************
                 0902 ***************************************
                 0903 *HEXINT GETS A HEX NUMBER FROM BUFFER AND  *
                 0904 *PUTS IT IN REG X.  REG B IS ZERO IF NO    *
                 0905 *ERROR.  WILL GET FIRST 4 CHARACTERS IN    *
                 0906 *BUFFER OR TO <CR> OR ZERO BYTE           *
                 0907 ***************************************
                 0908
1760 10BE01DA    0909 HEXINT LDY   #BUFFER     POINT Y TO BUFFER
1764 8E0000      0910        LDX   #0          CLEAR X FOR NUMBER
1767 C604        0911        LDA   #4          CHARACTER COUNTER
1769 E6A0        0912 GTHEX  LDB   ,Y+         GET CHARACTER FROM BUFFER
176B 271E        0913        BEQ   HEXIT       AT END OF BUFFER
176D C10D        0914        CMPB  #$0D        IS IT A <CR>?
176F 271A        0915        BEQ   HEXIT       YES SO AT END
1771 C130        0916        CMPB  #'0         IS IT LESS THAN 0?
1773 2524        0917        BLO   HEXERR      NO SO ERROR
1775 C139        0918        CMPB  #'9         GREATER THAN 9
1777 2214        0919        BHI   ALPHA       MAY BE A - F
1779 E830        0920        SUBB  #'0         MAKE A NUMBER
```

```
                    8921 *
                    8922 *B NOW HAS VALUE ENTERED
1778 1E8L           8923 HEX    EXG   D,X         SWAP REGISTERS FOR SHIFT
                    8924 * SHIFT D LEFT 4 PLACES
0004                8925        RPT   4
                    8926        ASLB
                    8927        ROLA
                    8928        EXGR
1778 58             8929+       ASLB
177E 49             8930+       ROLA
177F 58             8931+       ASLB
1780 49             8932+       ROLA
1781 58             8933+       ASLB
1782 49             8934+       ROLA
1783 58             8935+       ASLB
1784 49             8936+       ROLA
1785 1E01           8937        EXG   D,X         PUT IT BACK INTO X
1787 3A             8938        ABX               ADD VALUE INTO REGISTER X
1788 4A             8939        DECA
1789 26DE           8940        BNE   GTHEX
178B 5F             8941 HEXIT  CLRB
178C 39             8942        RTS
                    8943 **
178D C141           8944 ALPHA  CMPB  #'A          LESS THAN 'A'
178F 2308           8945        BLO   HEXERR      YES SO ERROR
1791 C146           8946        CMPB  #'F         HIGHER THAN 'F'
1793 2204           8947        BHI   HEXERR      YES SO ERROR
1795 C037           8948        SUBB  #'A-10      SET TO VALUE
1797 20E2           8949        BRA   HEX
                    8950 **
1799 C601           8951 HEXERR LDB   #1
179B 8E0000         8952        LDX   #0
179E 39             8953        RTS
                    8954 ********************************************
                    8955 ********************************************
                    8956 * HXPAIR CONVERTS CONTENTS OF REG B INTO A  *
                    8957 * STRING IN BUFFER TERMINATED BY A ZERO     *
                    8958 * BYTE.  NO <CR> IS ADDED TO THE STRING     *
                    8959 ********************************************
                    8960
                    8961 *
```

```
179F 108E0104       8962 HXPAIR LDY   #BUFFER     POINT TO BUFFER
                    8963 * GET HIGH NIBBLE FROM B
17A3 1F93           8964        TFR   B,A         INTO A
0004                8965        RPT   4           MOVE DOWN 4 PLACES
                    8966        LSRA
                    8967        ENDR
17A5 44               +         LSRA
17A6 44               +         LSRA
17A7 44               +         LSRA
17A8 44               +         LSRA
                    8968 *
17A9 8D09           8969        BSR   HEXASC
17AB 1F98           8970        TFR   B,A         GET LOW NIBBLE
17AD 840F           8971        ANDA  #$0F        GET LOW 4 BITS
17AF 8D03           8972        BSR   HEXASC      CONVERT AND STORE
17B1 6FA4           8973        CLR   ,Y          SET NEXT BUFFER LOCN TO 0
17B3 39             8974        RTS
                    8975 *
                    8976 *
                    8977 ********************************************
                    8978 ********************************************
                    8979 * INPUTS OUTPUTS A STRING POINTED TO BY REG *
                    8980 * X, THEN RECEIVES A STRING FROM KEYBOARD   *
                    8981 * AND PUTS IT INTO 'BUFFER' TERMINATED WITH *
                    8982 * A ZERO.  IF X IS ZERO NO STRING IS OUTPUT.*
                    8983 * MAX. CHARACTERS IN BUFFER IS 255.         *
                    8984 ********************************************
                    8985 * BASIC POINTERS
0088                8986 CURLOC EQU   $88         CURSOR LOCATION
A000                8987 POLCAT EQU   $A000       KEYBOARD POLL
A002                8988 CHROUT EQU   $A002       CHARACTER OUTPUT
006F                8989 DEVNUM EQU   $6F         0 FOR SCREEN, -2 FOR PRINTER
                    8990 ********************************************
```


One Stop Shopping For The Color Computer

Reitz Super Disk Charger

Now you can run R.S. DOS at up to 6 times the speed of normal DOS. Diskcharger will work with single or double sided disk drives at step rates up to 6 ms. and in both DOS 1.0 and 1.1 with no equipment modification. Step up to first class color computer operation today with the Reitz Super Disk Charger.

64K COLOR COMPUTER $21.95

FLIP IT! Punch your Disks for double the storage **$9.95**

New From Reitz

Reitz Serial to Parallel Interface $59.95
Three WAy RS-232 Switcher with power light $34.95
Serial to Parallel Interface/Switcher with indicator lights $79.95

New From Sugar Software

COCO CALLIGRAPHER...Prints Old English, Gay Nineties, and Cartoon fonts on your EPSON, GEMINI, OKIDATA, LPVII, OR DMP-100 PRINTER.

32KECB...TAPE...$24.95 DISK...$29.95

1-(800)-242-2626 (Outside Ohio) **1-(419)-537-8937** (Computer Order Line)

REITZ COMPUTER CENTER™

3170 W. Central
Westgate Meadows Shopping Center
Toledo, Ohio 43606
1-419-537-1432

Please include phone number with all orders. Include $5.00 for all hardware orders and $2.00 for all software orders. Ohio residents please add 6% state sales tax.

```
                0991 *
                0992 *
17BF BC0000     0993 INPUT$ CMPX  #0          ANY TEXT TO OUTPUT
17C2 2703       0994        BEQ   NOTEXT
17C4 17FF94     0995        LBER  OUTSI$      OUTPUT TEXT DIRING
17C7 17FF40     0996 NOTEXT LBSR  INETR$      GET INPUT STRING
17CA 39         0997        RTE
                0998 *
                0999 *
                1000 *
                1001 ********************************************
                1002 ********************************************
                1003 * HEXOUT TAKES CONTENTS OF X AND PUTS IT ON *
                1004 * SCREEN.  UDEE HXPAIR TO DO IT IN 2 PARTS  *
                1005 * OUTET$ IE ALSO USED                       *
                1006 ********************************************
                1007
17CB 1F10       1008 HEXOUT TFR   X,D         PUT DATA INTO REG D
17CD 1E89       1009        EIO   A,B         PUT HIGH BYTE IN B
17CF 17FFCD     1010        LBER  HIPAIR      PUT INTO SCREEN
17D2 3410       1011        PSHS  X           RREEERVE VALUE
17D4 8E01DA     1012        LDX   #BUFFER     POINT TO START OF STRING
17D7 17FFBT     1013        LBER  OUTST$      PUT OUT THE STRING
17DA 3506       1014        PULS  D           RECOVER VALUE IN D
17DC 17FFC0     1015        LBSR  HIPAIR      PUT LOW BYTE EN SCREEN
17DF 8E01DA     1016        LDI   #BUFFER     POINT TO START OF STRING
17E2 17FF76     1017        LBSR  OUTSI$      RUI OUT THE STRING
```

```
EPROM.MAC                       COMPUIERMAGE MACRO ASSEMBLER  RADE 22
2764 EPROM PROGRAMMER By C.J.STEARMAN (C)1984

17E5 39         1018        RTS
                1019 *
                1020 ********************************************
                1021 *
                1022        TIL   2764 EPROM PROGRAMMER By C.J.STEARMAN (C)1984
                1023        MAM   EPROM.MAC
                1024 *
0E00            1025        END   EPROM
       NO ERRO(S) DETECTED
```

```
  EYMBOL TADLE:

.BASIC 0E45     .CELL  0E33     .COPY  0E21     .DARRD 1575
.DSPLY 1757     .DUMP  0E2A     .EXIT  173B     .FILE  0E3C
.KEY   TIDB     .LEAVE 1202     .WRITE 1507     ADDWNT 1100
ALPHA  17B0     ASC2   17BA     AIEND  15FF     BAD    11(1
BADIOC 1200     BADPRM 134C     BUFFER 01DA     CFLL   1502
CELMSG 1600     CE(11  1150     CFILE  165B     CHARCI 154E
CHKRET 1731     CHLOOP 1427     CHROUT A602     CLEAR  A92B
CLINES FF42     CLRREG 0F62     COMREG FF41     COPY   1140
COUMI  01D3     CPYTTL 1213     CRER   178C     CURLOC 0098
EUREOR 1750     DATARB FF40     DCONT  13B0     DDREET 0F50
DCRROR 110F     DEV    14EA     DEVNUM 006F     DEXIT  15E9
DIFF   1248     DIEDAT 151E     DLOOP  102E     DNLOOP 13E1
DMPIIL 149C     DMPIT  1478     DONEYT 10BE     DOT    1445
DONNCT 1005     DSTRT  14CA     DUMP   1374     DWAIT  146F
EKEY   12A3     EMPTY  0FC4     ENDADD 007E     ENDMED 12D6
EMDIXI 16E0     EPROM  0E00     ERAMSG 10C2     ERASE  103E
EEIRT  140A     EXECAD 01E5     EXEMEB 16F5     FILMEG 1697
GDUMP  13B6     GEIKEY 1710     GETDI  1159     BOOO   1111
GOODPI 1304     GODDF2 1320     GDDORR 11E2     GTHEX  1769
GIKEY  155B     HEX    177B     HEXAEC 1784     HEXERR 1799
HEIINT 1760     HEXIT  178B     HCXOUI 17CB     HTADD  FF46
HIGH   126C     HXPAIR 179F     IHIT   0F30     IMXEY  173E
INLOOP 13F5     IMPUT$ 178F     IMETR$ 178A     LOWADD FF44
MCNU   0E03     MEMUI  0E40     MOVCRS 15F0     MADDRE 1640
MDAIA  164F     MEWADD 150C     MEWDAT 15AA     MODRK  106F
MDDIER 0FB5     MDERED 15E3     MDROCM 1101     MOTEXI 17C7
MOIMTY 109A     MOTMES 1570     MRDDM  12B7     MIDVER 15B7
MURK   0008     MXITME 1463     OKPRMT 1447     OLDDP  1492
OUIST$ 1750     PEXII  100A     PLOOP  0F91     POLCAI A000
PREXIT T015     PROGRM 0FAB     PULEE  101F     PUTMON 1059
RLYDLY 0F73     RDIARI 13AC     ECR    13CF     SPACES 1490
STADD  01E7     EIART  0101     DTRTXT 12BF     TARGET 0105
IERP   0107     TGTMSG 12ED     TOBIB  15AE     TOOHT  11C8
IDOMI6 1590     TOPADD 1FFF     UMERAE 11FE     UNERED 1330
VERFY  1110     VERIOK 0FFA     VEXIT  1083     VLOOP  1063
VOLTE  FF43     WRYADD 135C     WARB   0000

CMD>A:EPROMERC.ERC /P
```

Correction for Cooking With Coco:

In the July installment, Listing 1 *(BASLOAD)* was inadvertently left out. Listing 2 and 3 were labeled 1 and 2. Here is last month's Listing 1 (which is also on the August RAINBOW on Tape):



Listing 1 *(BASLOAD)*:

```
10 'THIS WILL TRANSFER BASIC
20 'EXTENDED BASIC AND DISK
30 ' BASIC TO RDM
40 ' CORRECT IT, THEN
50 ' COLD START IT.
60 ' IT WILL WORK WITH OR WITHOU
T
70 ' EXTENDED BASIC OR DISK BASI
C
80 ' IN RDM
90 'NOTE: For Color Basic 1.1 on
ly.
100 'Revs of Ext. and Disk not i
mportant
110 CLEAR 200,32511
120 DATA 32512,41044,41092
130 'RELOCATION PROGRAM
140 DATA 26,80,142,128,0,166,132
,183,255,223,167,128,140,224,0,3
9,5,183,255,222,32,239,28,175,57
150 ' PATCH #1
160 DATA 198,13,189,160,137,18,1
8
170 ' PATCH #2
180 DATA 142,127,254,32,10,167,1
93,90,38,251,206,255,224,57
190 READ S1,S2,S3
195 TT=S1+S2+S3
200 ' LOAD RELOCATION PROGRAM
210 FOR A=S1 TO S1+24
220 READ CODE
225 TT=TT+CODE
230 POKE A,CODE
240 NEXT A
245 IF TT<>117877 THEN PRINT"PRO
GRAM ERROR, PLEASE CHECK":STOP
250 '*SUBROUTINE IS NOW IN
260 'GO EXECUTE IT
270 EXEC 32512
280 SOUND 120,1' ANNOUNCE COMPLE
TION
290 ' OVERLAY PATCH #1 PREVENTS
MEMORY TYPE
```

```
300 ' FROM BEING SWITCHED BACK T
O ROM/RAM
310 FOR A=S2 TO S2+6
320 READ CODE
325 TT=TT+CODE
330 POKEA,CODE
340 NEXT A
345 IF TT<>11B610 THEN PRINT "ER
ROR IN PATCH #1, PRESS RESET, RE
LOAD 'BASLOAD' AND CHECK":POKE11
3,0:STOP
350 ' PATCH #2
360 ' INITIALIZE PARALLEL PIA
370 FOR A=S3 TO S3+13
3B0 READ CODE
390 POKE A,CODE
395 TT=TT+CODE
400 NEXT A
405 IF TT<>120656 THEN PRINT "ER
ROR IN PATCH #2, PRESS RESET, RE
LOAD 'BASLOAD' AND CHECK":POKE11
3,0:STOP
410 ' CLEAR COLD START FLAG
420 POKE 113,0
430 'START UP BASIC
440 EXEC40999
450 ' THIS IS THE ASSMEBLY SOURC
E FOR THE
460 ' ABOVE CODE SEGMENTS
470 '*****************************
*
4B0 '* BASIC RELOCATOR
490 '           ORCC #$50 DISABLE
 INTERRUPTS
500 '           LOX #$8000 BASIC
START ADDRESS
510 'LOOP       LDA ,X GET A BYTE
520 '           STA $FFDF SWITCH
TO RAM MAP
530 '           STA ,X+ PUT BYTE
IN RAM
540 '           CMPX #$E000 END O
F BASIC
550 '           BEQ DONE ALL MOVE
D LEAVE IN RAM MAP
560 '           STA $FFDE SWITCH
BACK TO ROM MAP
570 '           BRA LOOP CONTINUE
 MOVING
5B0 'DONE       ANDCC #$AF ENABLE
 INTERRUPTS
590 '           RTS RUNNING IN AL
L RAM SYSTEM
600 '*****************************
*****
610 '*PATCH 1 PREVENTS SAM FROM
BEING SWITCHED
620 '*BACK TO ROM MAP TYPE DURIN
G BASIC STARTUP
630 '           ORG $A054
640 '           LDB #0D ADDRESSES
 TO SET IN SAM
650 '           JSR $A0B9 JUMP TO
 NEW SETUP CODE
660 '* SPACE FOR THIS NEW ROUTIN
E IS MADE
670 '* AVAILABLE BY THE REMOVAL
OF THE MEMORY
6B0 '* SIZING ROUTINE IN PATCH #
2. MEMORY MUST
690 '* BY 32K TO EVEN BE DOING T
HIS.
700 '*****************************
*****
710 '*REMOVE MEMORY SIZE ROUTINE
 AND INSTALL
720 '*SAM SETUP ROUTINE FOR PATC
H #1
730 '           ORG $A0B4
740 '           LDX #$7FFE MEMORY
 SIZE
750 '           BRA CONT DO REST
OF ORIGINAL CODE
760 '*******
770 '* INITIALIZE SAM
7B0 'INIT       STA ,U++ WRITE TO
 SAM
790 '           DECB      COUNTER
DOWN
B00 '           BNE INIT DONE ALL
 ADDRESSES?
B10 '           LDU #FFE0 RESET U
 FOR REST OF CODE
820 '           RTS TO CODE AFTER
 PATCH #1
830 '           NOP FILLER BYTE
B40 'CONT       EQU * FIRST BYTE
OF OLD CODE
B50 '           END
B60 '*****************************
*******
```


NEW FOR YOUR COCO !!!
CHROMART !
A NEW HI-RES ART PROGRAM.

- No knowledge of BASIC required !
- For a 32K ECB CoCo, Joystick optional
- Ultra fast M.L. routine
- Lets you: autoload, box, circle, save, load, fill, get, put, joystick or keyboard control, line, move, change pmode and color set, pcopy, clear – all using single letter commands !

FOR ONLY $19.95 + $1 S&H *(Add $3 for DISK version)*

CHROMATIC COMPUTER COMPANY
801 Eldridge Rd., Fairless Hills, PA 19030
(215) 946-0263 or 493-5423
Check or Money Order Only !

DATAMAN INTERNATIONAL

presents

The BEST BARGINS in

UTILITIES

THE SPOOLER

Whenever you use your printer your COCO is totally dedicated to feeding it with data. Ihis isn't such a problem when you just want to print out a couple of lines, but listing a long program can be very boring. If you have better things to do than sit around waiting for your printer, our program is just what you need. THE SPOOLER will work on any COCO from 16K Basic to 64K with Disks.
$12.95CAN $10.95US

NEWERROR

NEWERROR will provide four extra functions and abilities for your Color Computer. It will ....
1. Give BASIC a ON ERROR GOTO command
2. Give full English error messages
3. Allow simulated error debugging
4. Give an audible error warning
As an added bonus we include a second M/L program that you add to your own Basic programs to provide them with the ON ERROR GOTO feature.
$19.95CAN $16.95US

EXECCART

EXECCART is a M/L program that allows you to copy ROMPAC programs to tape. They can then be loaded back into a 64K COCO and examined or modified. You can run most of your ROMPAC'S from disk without ever having to remove the disk controller this saves tremendous wear and tear on the contacts. EXECCART may also be used to add a loader to your programs to turn on 64K and copy Basic ROMs to RAM so that you can modify them
$17.95CAN $14.95US

SCREEN +

five much needed features are added to Basic with this new machine language utility program from Australia.
1. line by line program listing
2. Motor on / off from the keyboard
3. fully automatic line numbering
4. Your choice of light or dark orange, green or black screen with light or dark orange, or green characters.
5. New Auto key repeat

$12.95CAN $10.95US

SUPER EDIT

This powerful new utility program from the author of "IN ASSEMBLY LANGUAGE" adds many new editing commands to Basic. You can Print one screenful at a time, DELETE a line or lines, JOIN several lines together and hide your programs or FIND strings and variables. Also included are commands to INSERT, COPY MOVE & REPLACE one line or a block of lines, Super edit does not require EXT Basic
$19.95CAN $16.95US

Dealer Inquiries Invited

Add 3% Shipping Minimum $2.50

420 Ferguson Ave.N.
HAMILTON ONTARIO
CANADA L8L 4Y9

125 S. Fifth St.
LEWISTON N.Y.
U.S.A. 14092

416-529-1319

Ont. or N.Y. Residence

Add 7% Tax.

For CANADIAN orders call

compUstore
Your personal computer link to Canada's best shopping — anytime!

British Columbia *122-800-361-7330*
Prairies *1-800-361-7330*
Ontario, Quebec, Atlantic *1-800-361-3090*
Montreal *849-5365*

Send $3.00 for our NEW 100 Page Catalogue

Popular Misconceptions And Common Problems

Tony DiStefano
Rainbow Contributing Editor

In the past three and a half years I have learned much about the Color Computer. Playing and poking around inside I compiled lots of information about how this computer works. I listen to everyone that has something to say about it, in case I learn something new. If I do, I immediately race home and try it out. To see if what I heard or what I saw really works or is true. However, not everything I hear is right. This brings me to this month's topic. I will try to clear up the "hearsay" and "did you know" about the Color Computer. Some of them are started by good ol' Radio Shack and others are started by well known people in the Color Computer circles, but most are started by people who misunderstand something and repeat it to someone else. Nevertheless, where ever they come from, I would like to clear up the ones I am familiar with.

The first one pertains to disk drives and disk controllers. Some believe that the new 1.1 disk controller needs and gets its 12 volts from the power inside the disk drive. That means that the 1.1 controller can only work with the newer white drives. This is simply not true. The new 1.1 controller does not get 12 volts from the disk drive. The fact is the engineers at Radio Shack redesigned the 1.1 disk controller so that it *does not* use 12 volts. They used a different controller chip and data separator in the 1.1 controller. They did this so one could use this controller in the newer CoCo 2. You see, the CoCo 2 has no 12 volts inside, so the older controllers would not work with it. This is the way it is. The older 1.0 controller will work with the regular CoCo only. The newer 1.1 controller will work with both the regular CoCo and the CoCo 2. The older gray disk drives will work with either controller without any modification. The newer white disk drives will work with either controller without any modification.

(Tony DiStefano is well known as an early specialist in Color Computer hardware projects. He is one of the acknowledged experts on the "insides" of CoCo.)

The next misconception is that some software can damage your hardware. This, in most cases, is not true. The software cannot hurt the hardware. If the software crashes (does not work right), then at most, you could erase a disk if it was not write protected and the door to the disk drive was closed. You will lose what you have in memory, or turn the cassette player on and if it is in the record mode, you could write on top of something important. If you see garbage on the video screen or see the sync break up and the picture tear all across the screen, just turn the computer off, wait for 15 seconds, then turn it on again and all is well. This will not hurt the computer. The only case where I can see a problem is if the software turns the cassette relay on and off repeatedly at a high speed. If you were to leave this condition for a extended length of time, it could burn out the relay. I have never seen this happen to my computer. Another highly unlikely problem could exist with a disk drive. If the software were to bang the read/write head repeatedly to track 0, the head could get out of alignment. But again, you could stop it before any damage could result.

The third misconception involves memory. So many people call me and say, "I just had a 64K upgrade put in my computer. How come when I type *PRINT MEM* I get less than 32K? Did I only get 32K? Where are the other 32K?" I covered this topic in an article last year but the amount of times I hear this question warrants me to explain it again. The CPU inside the CoCo and the CoCo 2 is an MCM6809. This CPU can only access or work with 64K memory total, ROM and RAM total. When you turn on your computer, a total of 32K memory is reserved for BASIC, Extended BASIC, and Disk Extended BASIC. This right away leaves only 32K left for *PRINT MEM*. The rest of the memory difference is being reserved for such things like video area, graphics

pages, I/O buffers, and variables. The other 32K of RAM is sleeping. BASIC cannot get to it because it does not know how to wake it up. It takes programs that are written with 64K in mind. Programs that know how to wake up the sleeping 32K are usually advertised as being able to make use of the full 64K. They will perform a test to see how much memory is available and make use of all of it.

The second part of this month's article is about common problems. There are a lot of little quirks that bother the average user about the CoCo. The biggest one I can think about is with disk drives. The ever popular I/O Error. What a nightmare when the project you were working on for hours is lost to an I/O Error. There are a lot of so called "fixes" for I/O Errors, like hiding the directory on track 35 or backups of backups of backups. Then there are those programs that try to recover your lost files. Don't get me wrong, they are good programs and I did have to recover files myself, but if you have a lot of I/O Errors, it might be wise to take a look at your hardware. I get a lot of letters from people who have these problems.

Here are some good tips on how to prevent disk I/O Errors. The most common cause of errors is the connection between the controller and the computer. The Radio Shack controllers have lead-coated contacts and they get dirty. They oxidize and prevent the signal from going through. Some say to clean the contacts with a soft pink eraser. Others say that it is no good and say to use alcohol and a Q-Tip. I say use both. First the eraser to clean the big dirt and then the alcohol to mop up. It works great!

Some of the older disk drives have problems with speed. The speed drifts and causes I/O Errors because the drive belt slips due to excess oils present in that area. What you have to do is remove the cover and clean the belt. Clean your heads regularly. Finally, remember to always open the drive door whenever you are not doing I/O to disk. If your program crashes, there is no chance that it will garble your disk. Always have the door open when turning your computer on.

The next common problem is the Radio Shack keyboard. Sometimes the older keyboard keys can stick or give double characters. The best way to clean this would be to take it all apart and clean each key one by one. But if you take it apart you will be greeted with a springy surprise. Yes, many little springs are inside the keyboard. A much easier way to clean a key is to squirt a little shot of lighter fluid into the space around the key and quickly press the key several times. Do this again if the problem persists.

The last problem that is common to the CoCo user (especially the old "D" and "E" boards) is in the power supply. The symptoms are strange. At first, it might look like the software has crashed. Then, the screen might go blank . . . all white, no control. Hitting the Reset is no help, but turning it on and off fast sometimes fixes the problem. It sounds like the power switch is defective, but that is not the problem. The current sensing resistor is likely out of tolerance. It is supposed to be a .33 ohm two-watt resistor. The resistance in one case was up to .47. That gave a false reading to the current sensing amplifier. Then the five-volt section of the power supply shut down, thinking that there was a short, causing the computer to fail. The 12 volts to the RF adapter was still on. That gave the blank screen effect. To solve this problem change the resistor, with the same value, of course. On the "D" and "E" board it is R66 and on the "F" board it is R24.

Plan to Attend the 3rd ANNUAL OS-9 USERS SEMINAR

August 17, 18, 19, 20
Pre-Registration Only!

- MORE INFORMATION
- MORE EXHIBITS
- MORE SPEAKERS
- HARDWARE
- SOFTWARE

- TECHNICAL SESSIONS FOR 6809 & 68K

Plan now to attend the 3rd Annual OS-9 User Seminar. This is an event you won't want to miss if you use, sell or are interested in systems that use Microware 6809/68000 software. Informative round-table discussions on almost every aspect of the design and use of Microware software will be held. A bigger and better exhibit area will have display booths from many of the leading suppliers of OS-9 compatible hardware and software. Don't miss this chance to increase your knowledge and skill in the latest microcomputer software technology — Register today!!!

Fee: $125

Location: Marriott Hotel
Des Moines, Iowa

Don't Miss It: Pre-Register Now!
Call: 515/279-8844 or Write:

Microware®

MICROWARE SYSTEMS CORPORATION
P.O. Box 4865 • Des Moines IA 50304

OS-9 and BASIC09 are trademarks of Microware and Motorola.

CONNECT WITH CONFIDENCE

GEMINI-10X
COMPLETE SYSTEM

PRINT SPEED—120 cps, Bidirectional Logic Seeking
PRINT SIZE—10, 12, 17, 5, 6, 8.5 cpi
NUMBER OF COLUMNS—80, 96, 136, (40, 48, 68 in Double Wide)
CHARACTER MATRIX—9 x 9 Standard, with True Descenders • 18 x 9 Emphasized • 18 × 18 Double Strike • 6 x 6 Block Graphics • 60 x 72 Low Resolution, Bit Image Graphics • 120 x 144 Hi Resolution, Bit Image Graphics • 240 x 144 Ultra Hi Resolution, Bit Image Graphics
CHARACTER SETS—96 Standard ASCII Characters • 96 Italics • 64 Special Characters • 32 Block Graphic Characters • 96 Downloadable Characters • Super and Sub Script
LINE SPACING—Programmable by n/144"
PAPER HANDLING—Roll Paper • Cut Sheet • Tractor Fanfold • Copies: 3 Carbonless Sheets

COMPLETE SYSTEM
NOTHING MORE TO BUY

- 180 DAY WARRANTY
- BLUE STREAK INTERFACE
- SCREEN DUMP SOFTWARE

319.95+ $10 Shipping and Insurance
15X System 439.95

BLUE STREAK
SERIAL TO PARALLEL INTERFACE

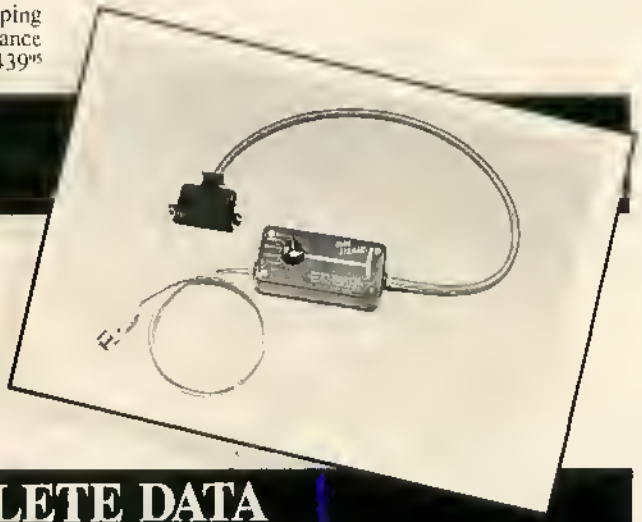

- RUN COCO I or II to PARALLEL PRINTER
- 300, 600, 1200, 2400, 4800, 9600 SWITCHABLE BAUD RATES
- AC POWER OPTIONAL—NOT NEEDED WITH GEMINI PRINTER
- COMPLETE WITH ALL CABLES AND CONNECTORS
- 180 DAY WARRANTY

RAINBOW

54.95 SHIPPING PAID!

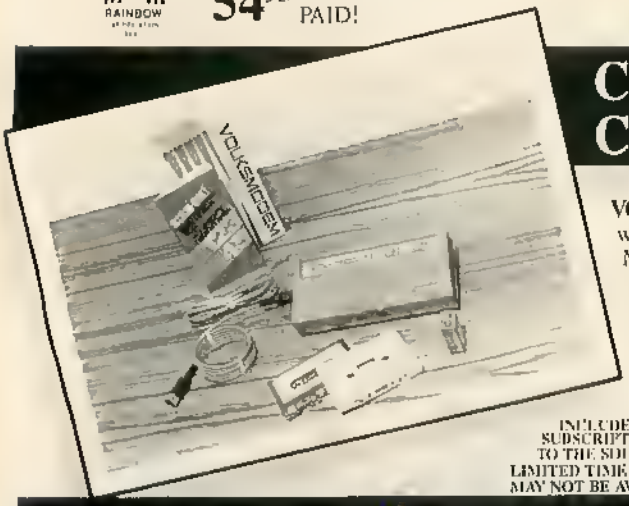

COMPLETE DATA COMMUNICATIONS PACKAGE

VOLKSMODEM™—Connects Directly to Wall Phone Jack • Telephone Jack with Voice/Data Switch • 300 Baud (bits per second) • Originate/Answer Mode Automatically Selected • Battery Powered, Low Drain for Long Life (batteries included) • Lifetime Warranty • Includes All Cables for COCO

YOUR CHOICE OF SOFTWARE!

TSP (Terminal Software Package)—51 x 24 Hi-Res Display • Buffer Auto Adjusts for 16K to 64K • Permits Communication to Virtually All BBS and Networks

AUTOTERM™—World's Smartest Terminal Program

INCLUDES SUBSCRIPTION TO THE SOURCE. LIMITED TIME OFFER MAY NOT BE AVAILABLE

$79.95+ $2.00 Shipping with TSP

$99.95+ $2.00 Shipping with AUTOTERM™

DAYTON ASSOCIATES, INC.

OHIO CHARTER CORPORATION • DUN & BRADSTREET LISTED
7201 CLAIRCREST BLDG. C • DAYTON, OHIO 45424
(513) 236-1454
OHIO RESIDENTS ADD 6% SALES TAX
C.O.D. ADD $2.00

Free Limited Time Offer

Over $100 In Discount Coupons On Software And Supplies

With Purchase Of Complete System

RAINBOW REVIEWS

Adventure Cracker
A Great Tool For Solving Those Hard Adventures/*Classical Computing, Inc.* 210
Alpha-Dir
Arrange Your Disk Directory Alphabetically/*Microcom Software* 201
The Black Sanctum
Excitement And Adventure In Every Byte/*Mark Data Products* 212
CGP-115SD
A Screen Dump For The CGP-115/*Derby City Software* 203
Candy Co.
Victory Is Sweet/*Intracolor Communications* 225
Chopper Strike
A Bit Too Rough/*MichTron* 227
CoCo Cookbook
Deserves A Chef's Salute/*Computerware* 218
Cocoindx
A Convenient Index To CoCo's Literature/*Cocoindx* 216
DMAGIC
A Disk Utility For Organization/*Dorison House Publishers, Inc.* 213
Flying Tigers
A High-Flying Space Odyssey/*Sugar Software* 208
Fractions
A Low-Cost Teacher's Aid/*Shamrock Software* 228
Grobot
An Education Game That Grows On You/*Radio Shack* 221
The Gunfighter
You'll Get A Bang Out Of It/*Jarb Software* 207
Ice Bird
A Fun, Heart Warming Game/*Crystal Software* 219
Lancer
A Contest Of Avian Agility/*Spectral Associates* 224
MSI Color Calendar
Organize Your Time/*Delker Electronics* 206
Model 102-RS232 Switcher
A Big Help/*Metric Industries* 228
Percents
A Low-Cost Teacher's Aid/*Shamrock Software* 228
The Sector Inspector
A Good Disk Utility With 'Zap'/*Sonburst Software* 220
Shrink
For Extra Bytes/*Elite Software* 216
Spectrum DOS
An Added Attraction For CoCo/*Spectrum Projects* 215
Super Color Biorhythms
Plotting Your Highs And Lows/*Armadillo International Software* 223
Super Guide/XPNDR1
A Well-Constructed Breadboard/*Robotic Microsystems* 208
Swiss Army Knife
A Sharp Disk Utility/*The Dataman* 205
Type Trek
Typing Can Be Fun/*CoCo Chips* 198
Witches' Knight
Will Cast A Spell On You/*Pal Creations* 231
Worlds Of Flight
An Uplitting Flight Simulation/*Tom Mix Software* 200

RECEIVED & CERTIFIED

The following products recently have been received by THE RAINBOW, examined by our magazine staff and approved for the *Rainbow Seal of Certification*, your assurance that we have seen the product and have ascertained that it is what it purports to be. This month the *Seal of Certification* has been issued to:

Personal Bookkeeping, a personal accounting program requiring 32K Extended BASIC, one disk drive and a printer. The program handles 25 accounts, supports 26 expense categories, records taxable and nontaxable income, and allows for notations to each check or expense. File searches can be performed on nine different fields and a user-definable password access system protects the confidentiality of your data. AMDT-Stardancers, 762 Brady Avenue, Bronx, NY 10462, disk $27.95 plus $1.50 S/H

Spooler, an ML utility requiring 64K of RAM and Extended Color BASIC. The program sets up a software printer buffer of nearly 8,000 characters in high RAM and permits the user to regain control of his CoCo faster than during normal operation. It is totally transparent and uses memory not ordinarily used. *Spooler* is being marketed through the freeware concept — forward a blank cassette tape or formatted disk and postage-paid mailer to obtain a copy. The CoCo Freeware Clearinghouse, P.O. Box 1084, Morgantown, WV 26507, free on supplied medium — contributions accepted

MegaMunk, a 32K ML strategic arcade-type game requiring one joystick. As a soldier of fortune in a civilization of monkeys, you accept the King of Ledonia's challenge to save the forest from the invading monster spiders. The game features 11 different Hi-Res screens, artifacted color and several musical selections. Color Connection Software, 1060 Buddlea Drive, Sandy, UT 84070, cassette $21.95, disk $23.95 plus $2 S/H

OKI DUMP, a 16K Hi-Res screen dump utility for the Okidata 80 series printers without Okigraph. The pictures are nearly the full paper width and can be inverted or normal. The manual includes hints on printing game screens. Color Connection Software, 1060 Buddlea Drive, Sandy, UT 84070, cassette $8.95, disk $10.95 plus $2 S/H

OS-9 Dynamite+, a Color Computer OS-9 disassembler for disassembling any 6809 or 6800 machine code program into source code. The program aids in converting 6800 programs to 6809. It automatically generates labels and allows for specifying FCBs, FCCs, FDBs, etc. Constants can be input from disk or console and output can be to either the console, disk or printer. Computer Systems Center, 13461 Olive Blvd., Chesterfield, MO 63017, disk $59.95

Middle Kingdom, a composite arcade graphics Adventure game requiring 32K of RAM. Movement is controlled by the arrow keys as you search the Pyramid, the Temple, and the Catacombs for the three magic rings. When you return with them to the Sanctuary, you will become the new ruler of the Middle Kingdom. Computerware, P.O. Box 668, Encinitas, CA 92024, cassette $24.95, disk $27.95, plus $2 S/H

Star Trader, a graphics Adventure and Simulation requiring 32K for cassette and 64K for disk, Extended Color BASIC, and either a joystick or mouse. You assume the role of a merchant ship captain, traveling between solar systems and trading for cargo. Your goal is to collect 1,000 credits so you can retire in luxury from the dangerous life of solar trading. Gauges in the cockpit indicate your location, current damage status, credit balance, cargo destination, location of nearby starships, fuel supply, laser power levels, and the current date. Computerware, P.O. Box 668, Encinitas, CA 92024, cassette $24.95, disk $27.95, plus $2 S/H

The Music Collection, Part 1, a BASIC compilation of music requiring 16K of RAM and Extended Color BASIC. The program is an assortment of favorite melodies, including folk songs, Christmas songs, classics, and songs to entertain children. Creative Chris Enterprises, 3701 Shannon Drive, Harvey, LA 70058, cassette $5.95

Adventure in Bipland, a graphics Adventure for the MC-10. After having fled from the Exjecters generations ago, the Bips are now being pursued by them again. To restore peace to Bipland, you must slay the Exjecter king and halt production of their new invention. The Dataman, 420 Ferguson Ave. N., Hamilton, Ontario, Canada L8L 4Y9, or 125 S. Fifth St., Lewiston, NY 14092, cassette $13.95 U.S. $15.95 Can., plus 3 percent S/H ($2.50 min.)

Club Controller, a 16K ML program that will assist in the tasks associated with running a club. The Dataman, 420 Ferguson Ave. N., Hamilton, Ontario, Canada L8L 4Y9, or 125 S. Fifth St., Lewiston, NY 14092, cassette $16.95 U.S., $19.95 Can., plus 3 percent S/H ($2.50 min.)

Alphatalk, an educational program for preschoolers requiring 16K ECB and designed for use with the Spectrum Voice Pak, although it is not required. The program presents a letter in either upper- or lowercase, speaks the letter, and then waits for the child to press the correct letter on the keyboard. HARMONYCS, 1747 Patricia Way, Salt Lake City, UT 84116, cassette $11.95

Stellar Life Line, an ML, arcade-type space game requiring at least 16K of RAM; joystick control is optional. As the commander of a fleet of spaceships, your mission is to clear a path among the stars so that your fleet can travel from one starbase to another. But blocking your path are asteroids, magnetic mines and alien attack ships that threaten to destroy you. Radio Shack Stores nationwide, Cat. No. 26-3047, ROM Pak $19.95

System Secrets, a comprehensive guide to *PEEKs*, *POKEs* and *EXECs* for the Extended BASIC and Color BASIC Color Computers. Put power into your programming with this 18-page booklet printed on 8½ x 11-inch, single-sided pages. RC Creations, 17251 Palatine N., Seattle, WA 98133. $5.95 plus $1.50 S/H

Super-Disk Charger 1.12, a machine language program that increases the disk step rate by 2.5 to six times over the normal step rate of 30 ms. This speeds up all disk operations, decreases mechanically generated noise from the drive head, and helps the drive last longer. The program supports both single- and double-sided disk drives. Reitz Computers-And Electronics, 3170 W. Central Avenue, Toledo, OH 43606, disk $21.95

Dapper, a disk "mapper/zapper" utility program requiring 32K and Disk Extended BASIC. It enables the user to certify disk quality; to backup to and restore from tape; and to recover data from, repair, and restructure bad disks. Sadare Software, P.O. Box 3891, Gaithersburg, MD 20878, disk $14.95

The Archivist, an ML utility requiring 64K Disk Extended BASIC. The program is primarily for making backups of disks to tape. Also, it will erase and format disks. Sonburst Software, 233 S.E. Rogue River Hwy., Grants Pass, OR 97527, disk $14.95 plus $1.50 S/H

The Deputy Inspector, an ML disk management utility requiring 64K Disk Extended BASIC. The program will alphabetize directories, sort the entries by extensions, or move them around wherever the user wishes. Then the disk can be backed up to another disk, rearranging the gran allocations of each program as it is copied so that the programs reside on consecutive grans. The program will also format disks and produce backups in three swaps. Sonburst Software, 233 S.E. Rogue River Hwy., Grants Pass, OR 97527, disk $21.95 plus $1.50 S/H

EDT, an assembly language text editor requiring 64K and Disk Extended BASIC. Features include menu selected functions, an optional "center of screen" work area, and a 49-page manual. Sonburst Software, 233 S.E. Rogue River Hwy., Grants Pass, OR 97527, disk $35.95 plus $1.50 S/H

Quizspin, an educational game for two players requiring 32K ECB. Based on the TV program "The Joker's Wild," a multiple-

choice question is asked by the computer from the category selected by the player. There are five categories to choose: presidents, states and capitals, mystery, chemistry and math. Hi-Res graphics are featured. Spectral Associates, 3416 S. 90th, Tacoma, WA 98409, cassette $24.95, disk $28.95, plus three percent S/H ($2 min.)

ADOS, an enhanced version of Disk BASIC that requires 64K for RAM use or can be burned into an EPROM to replace the Disk BASIC ROM. Features include: repeat and edit of the last direct-mode command; control key abbreviated entry of BASIC commands; automatic line number prompts for program entry; lowercase command entry; DOS command for booting OS-9; one- or two-column directory with free grans to screen or printer; *COPY "filename" TO (drive number)* command; AE Error override option for *COPY* and *RENAME*; RUNM command to load and execute machine language programs; RAM command for ROM-to-RAM transfers; SCAN command lists ASCII files to screen or printer and gives start, end and execution address for binary files; PEEP command provides movable window for inspecting memory contents; compatible with all commercial software. SpectroSystems, 11111 N. Kendall Drive, Suite A108, Miami, FL 33176, disk $27.95 plus $2 S/H

The Peeper, an ML utility requiring 16K of RAM. The program is an interrupt-based program tracer that allows the monitoring of machine language programs while they are running. Switching can be accomplished between watching the program's regular output and watching *Peeper's* trace output of registers and stack, either on screen or printer. Execution speed can be varied while the program is running, from moderate slowdown up to several thousand times slower than normal. It supports single-stepping, break points, memory examine/change, and movable windows to view memory in any graphics mode. SpectroSystems, 11111 N. Kendall Drive, Suite A108, Miami, FL 33176, cassette (copyable to disk) $21.95, with assembler listing $24.95, plus $2 S/H

Blackjack Royale, a new version of the Hi-Res graphics casino blackjack simulation and card counting tutor requiring 32K of RAM. Playing features include: double down, splits, surrender, insurance bets, one to eight decks, burnt cards and shuffle frequency. Improvements over the older version include: graphics are done in machine language for faster play; the deck point value bug has been corrected; and a new pit boss feature has been added. Spectrum Projects, P.O. Box 9866, San Jose, CA 95157-0866, or P.O. Box 21272, Woodhaven, NY 11421, cassette/disk $24.95, plus $3 S/H

Radio Systems Design Calculations, a program requiring 16K ECB for the tape version and 32K ECB for disk. It can be used to design, evaluate and modify land mobile radio systems, satellite TV and satellite data acquisition systems, TV and Broadcast FM systems, microwave systems and aircraft radio systems. Sugar Software, 2153 Leah Lane, Reynoldsburg, OH 43068, 16K/32K cassette $29.95, 32K disk $32.95, plus $1 S/H

Concordance, a 32K ML program that allows you to list the correlated references in a BASIC program, thereby aiding in debugging efforts. In addition to a standard listing, the program outputs a pretty print type listing which breaks each BASIC line into a more readable form, and the concordance listing, which provides a correlation of all *GOTOs*, *GOSUBs*, *PEEKs*, *POKEs*, and variables that reference the same line. Echosoft, 17 Skyline Dr., Shalfont, PA 18914, cassette $19.95, disk $24.95, plus $2 S/H

Continents and Oceans, a three program educational package designed for ages eight to 13 requiring 16K ECB. Through games, quizzes, and Hi-Res graphics representations, the programs help children to establish the locations, shapes and proper spellings of the continents and oceans of the world. Thompson House, P.O. Box 58, Kamloops, British Columbia, Canada V2C 5K3, three cassette package $24.95

WP, a BASIC word processor program requiring 32K of RAM. The program also functions as a database manager with complete control over printing every character. Also, special graphics alphabets can be generated, including large multiline characters. The program is user-modifiable and is accompanied by a 57-page instruction booklet. Bob Vereler, R.R.#2, Chenoa, IL 61726, cassette $35

Workbase I & II, two database systems designed for business and requiring 32K of RAM. Disk Extended BASIC and at least one drive. The program includes database, spreadsheet, mailmerge and word processing capabilities all in a single integrated package. *Workbase I* can handle up to 400 records and *Workbase II* can handle 1,200. Both can be defined to support all currently available printers and include a demonstration disk. Workbase Data Systems, P.O. Box 3448, Durham, NC 27702, *Workbase I* $64.95, *Workbase II* $79.95

The *Seal of Certification* program is open to all manufacturers of products for the TRS-80 Color Computer, the TDP-100, or the Dragon-32, regardless of whether they advertise in THE RAINBOW. By awarding a *Seal*, the magazine certifies the program *does exist*, but this *does not* constitute any guarantee of satisfaction. As soon as possible, these hardware or software items will be forwarded to THE RAINBOW's reviewers for evaluation.

— **Kevin Nickols**

SPECIAL OFFER!
SAVE $5.00
See offer below.

It's easy for the novice—sophisticated enough for the expert!

The power of the TRS-80™ color computer

This illustrated book is compiled with 29 **NEW** programs for fun and education. A guide to programming the full range of color computer capabilities, it helps users write intelligent and well thought out programs.

The program listings in the book are exactly as you would see them on the screen. Inside the book you'll find: **How to Use This Book • 10 Games and Puzzles • 8 Graphics Programs • 4 Business & Financial Programs • 7 Utilities • So You're Program Doesn't Work • Adding Two Programs Together**

The structure of each program contains the program type, objective, background, summary, graphic explanation, program structure, taking it further, and suggested hints to expand to other applications.

Only **$14.95.** Money back guarantee. We accept Master Card, Visa, check or money order. Add 5% Mass. sales tax if you're a resident of Massachusetts.

These programs are also available on floppy disk or cassette for the special price of **$14.95.** These **NEW** items are all available **NOW!**

Send for information on 2 new software packages. **SPECIAL OFFER: 2 new disk utilities for the color computer—DMAGIC & PRO-LOC. $14.95 each,** regularly $19.95.

Please send me:

___ TRS-80 Book @ $14.95 ____
___ TRS-80 Floppy Disk @ $14.95 ____
___ TRS-80 Cassette @ $14.95 ____
___ DMAGIC @ $14.95 ____
___ PRO-LOC @ $14.95 ____

Add 5% sales tax if a resident of Massachusetts ____

TOTAL ____

NAME

ADDRESS

CREDIT CARD NUMBER

EXPIRATION DATE

DDRISON HOUSE PUBLISHERS, INC.
824 Park Square Building
Boston, Massachusetts 02116

XPNDR1

Editor:

In this issue of THE RAINBOW, Dan Downard summarizes his review of the XPNDR1 bare breadboard by suggesting that it be redesigned. Certainly, to an experienced hardware person, the XPNDR1 may lack specific features preferred by one individual or another, but what of all the adventuresome CoCo users who have yet to build their first circuit; what does the XPNDR1 offer them? I don't think they need more space nor a more complex pattern of holes. I do think they need simplicity in a technically correct design. That's what the XPNDR1 is all about; those are the people I had in mind when I designed the board and wrote the eight-page application notes to go with it.

Since there are very few high quality CoCo breadboards available, though, the XPNDR1 is also for the skilled experimentalist who will have no problem obtaining results. (Need a lot of holes? Cut out the center of the XPNDR1 and epoxy in a section of perf board. Got a few resistors and capacitors to add? Insert them into the holes and go ahead and wirewrap to them. Wirewrap pins are square so the wire can bite into the sharp corners; in the case of round leads, a tiny dab of solder will ensure long-term reliability.) I favor wirewrap and would encourage anyone attempting to build expansion hardware to do the same; the tools can be *inexpensive* and the technique can be learned in a few minutes. In professional electronics, breadboard and wirewrap are nearly synonymous.

When designing the XPNDR1, my first specification was that all copper traces terminate on plated-through holes because they provide far superior solder connections. This introduces two constraints, however; the holes must be drilled rather than punched and the board must be rigid glass/epoxy. You can't plate punched holes (too ragged) and a flexible board will crack the plating. But drilled holes are two for a penny and it would be easy to have a very expensive board. The trick becomes getting the most utility from a reasonable number of holes. I think I did pretty well. Too many holes would also compromise the wide power and ground buses which are intended to eliminate potential noise problems many users would have no way of understanding.

Not to be overlooked is the CoCo power supply. While the XPNDR1 card will not hold enough CMOS to cause trouble, CMOS can be tricky to work with in the CoCo environment and many users will choose TTL and NMOS. In this case, the power supply current limits will be reached long before the board is stuffed to capacity. The XPNDR1 card fully supports the vast majority of digital ICs that will be interfaced to the CoCo; one or two LSI chips, a few smaller ICs for discrete logic and the user can have an awesome interface to the world outside the CoCo — with room to spare. What the XPNDR1 does not support well is a large analog application with the concomitant multitude of components (that's why digital was invented to eliminate that stuff!).

The SuperGuide, incidentally, is really a breakthrough gadget for the CoCo and will probably work with almost any printed circuit board that can be plugged into the ROM connector.

Reviewing products for a magazine is no doubt a tough assignment at times. The main thing Mr. Downard could not know is that XPNDR1 is intended to be exactly what it is — a simple but very useful introductory product and that I designed it knowing what the more advanced XPNDR2 looks like. Thanks.

Herb Hart
Robotic Microsystems

ATTENTION PROGRAMMERS

Mr. Szlucha's review of *CGP115SD* was correct in that it takes a long time for this program to dump a screen to the CGP-115 printer. But he was less than accurate when he said this was a "simple program designed to reproduce color for color, dot for dot. . . ." *CGP115SD* not only reproduces what is on the screen exactly, it does it twice, so that the printed picture is enlarged to twice the size of what a simple "color for color, dot for dot . . ." would be able to produce. Therefore, this program is not reproducing the usual 49,152 pixels; it is sending almost 150,000 pixels to the printer. The time that it takes to dump this large a picture is more than compensated for by that quality of the final printout. There are other programs on the market that do dump faster, but all that I have worked with do not compare to the quality of the *CGP115SD* printouts. Art, in any form, is a matter of quality, not quantity or speed.

When I want to dump a screen, I do it just before I go to bed. I first check to make sure the dump has started with no errors and then I leave it on its own. When I awaken in the morning, the dump is finished and the time it took does not interfere with any of my other activities with my CoCo.

I do agree with Mr. Szlucha that this type of program needs the speed of machine language, but as is the case with most CoCo owners, I do not know machine language. Derby City Software is just one person — me. I had originally written *CGP115SD* for myself, because I was not happy with the quality of the screen dumps that were currently on the market. Other owners of the CGP-115 that I shared my program with were impressed enough with *CGP115SD* that they suggested that I should try to make it available to other hobbyists who own the CGP-115 printer. A friend who knows machine language is currently rewriting *CGP115SD* for me. When it is finished, it will be made available. For those persons who have already bought *CGP115SD* in the BASIC language form and wish to have the new machine language version, they will be allowed to make a straight exchange at *no extra charge*.

Mr. Szlucha was also very unfair to the readers of THE RAINBOW who are owners of the CGP-115 in that he failed to mention any of the other features that this program also makes available to the user. What follows is a list of these features:

1) The *CGP115SD* dumps *all PMODEs*, not just *PMODE4* or *PMODEs 3 & 4*.
2) To save ink and time, the user may easily delete the background color from the dump.
3) *CGP115SD* takes in the fact that there are alternate color sets, such as the black, buff, cyan and orange color set used by many of the game programs (which, by the way, Radio Shack doesn't mention in its documentation).
4) In *PMODEs 0, 2* and *4*, *CGP115SD* allows easy reversal of the foreground and background colors.

All of the features of the *CGP115SD* program are extremely user friendly. In fact, most of these features are accomplished by the program in a way that is invisible to the user.

Mr. Szlucha also states in his caustic review of the *CGP115SD*, and I quote, ". . . this program is overpriced. *CGP115SD* is selling for about twice the price. . . ." At the time I submitted *CGP115SD* to THE RAINBOW for review, there were two other companies advertising screen dumps for the CGP-115 printer, both of which had fewer features and a lesser quality final printout than the *CGP115SD*. I choose an in-between price.

Mike Standefer
Derby City Software

Saguaro Software

Kidstuf

Picture, Letter, or Number Association. Play on old-time tune with correct answer (7 songs), buzzes when wrong & waits for correct choice. 8 screens.

Tape - $19.95
Disk - $24.95

Amdek Color I Plus Color Monitor

$299

Video Driver - $20 W/Purchase

Amdisk 3
Amdek Dual 3" Disk Drive

New Low Price

$450

Includes 2 Diskettes
And 2 Drive Cables
(One Amdek. One 5¼")

First Box Of Diskettes - $45.00 (Reg $55)
R.S. Controller - $135 With Amdisk 3

GAMES

PRICKLY-PEAR

* Travelin' Toad	32K	18.75
* Ockywoky	32K	18.75
* Light Runner		18.75
* Jumbo Jet		18.75
* Color Disk Trivio		22.75
* Question Disk		14.75
* With Color Trivia		7.50
Adventure in Wonderland	32K	18.75
Decipher		18.75
ERLAND	32K	18.75
Flight		14.75
Football		14.75
Gangbusters		14.75
Great Word Game		14.75
Monsters & Magic	32K	14.75
Naked Gamer		16.75
Teeeofff		18.75
Viking!		14.75

TOM MIX

• SR-71	32K	22.75
• The King	32K	20.75
• Touchstone	32K	21.75
• Junior's Revenge	32K	22.75
Air Traffic Controller	Tape-32K	21.75
Space Shuttle		21.75

PFA

• Guillotine		7.75
• Flasher		14.75
Dunk-a-Duck	Tape	14.75
Inspector Clueseau		14.75
Patti Pak		16.75
Stagecoach		14.75
TYCOON	Tape-32K	14.75

SUGAR

Flying Tigers	16K	19.75
Syntax Stories		8.75
Silly Syntax		16.75
3" Diskettes		10 for $55
Paper - 3,000 Sheets		32.75
Blank C-15 Tapes		.75
100% Tested Disk SSDD 5 1/2" 10 Year Guarantee		Box of 10 $20
R.S. Disk Manual		$17

**** Denotes New Programs***

EDUCATION

PRICKLY PEAR

Music Reader		26.75
Phonics 1 or 2 (tape only)		18.75
Prereader 1, 2 & 3		18.75
Spelling		37.75

PFA

*Alphabet		8.75
Chalkboard Math		15.75
Ed. Pack 123's, ABC's, Big-Bigger Biggest, Shapes		18.75
Heart-Lung-Circulatory		26.75
Medical Terminology		14.75

SUGAR

Bible Stories		21.75
Great U.S.A.		15.75
Prereader		15.75
Presidents of the U.S.	16K	19.75

APPLICATIONS

PRICKLY PEAR

Family Income Organizer (disk)		22.75
*Colorcal		18.75
Satellite Tracker		59.75
Super Astrology	32K	18.75

PFA

*Family		11.75
*Little Leaguer	32K	18.75
Stock Manager		31.75
Super Bowling Secretary	32K	19.75
Hurricane Tracker		11.75
Stress Evaluator		18.75

SUGAR

Co-Co Calligrapher	32K	19.75

UTILITY

Filmastr		23.75

PRICKLY PEAR

Clone Master	Tape-32K	29.75
Color Kit		26.75
Tape Omni Clone (tape)		22.75
Super Scroll	64K	18.75
Rom Free	64K	18.75
Modern Master	16K	18.75

PFA

*Text Master Graphics	32K	11.95
Super Disk Utility (disk)		35.75
*Moster Graphics Tool Kit	32K	29.75

SAGUARO

Move-it!		15.95

SUGAR

Auto Run		15.75	Tim's	20.75
Semigraf	32K	15.75	Tim's Mall	15.75

NEW FROM

SAGUARO SOFTWARE

Treasure Hunt

A graphics text adventure. You walk with our graphics character through desert, mountains and city to seek the elusive treasure of gold. Super graphics with a person who walks with you at each turn. 64K. Tape-$24.95. Disk-$29.95.

Co-Co Receivables

Keep track of all those accounts with current list of accounts, statement printing, last activity date, and current month's transactions, debits & credits. Disk storage of data. 32K disk. $29.95.

Ultimate Bingo & Jackpot

Do you want the ultimate in bingo? Use your LP7 or 8 to print the number of cards you desire. You can choose from 3 speeds & even pause the game to check the winner.

Jackpot

Pull the one arm bandit's arm & see if you can beat the odds. Both only tape-$19.95. Disk-$24.95. Amdek-$29.95.

NNFUSICOO CONFUSION

3 modes of play. 3-4/5-6/7 letter words. You select time to govern how long (30 or 60 seconds) to unscramble the words. First person with ten correct wins. 1-4 can play. Tape-$19.95. Disk-$24.95. Amdek-$29.95.

Co-Co Keno

Bring Las Vegas' Keno game home with Co-Co Keno. Bet $1, $3 or $5 & mark off 1 to 15 spots...can you beat the odds & win $50,000? 16K high resolution screen Keno chart print included. Tape-$24.95. Disk-$29.95. Amdek-$34.95.

Loveless Monor

Trapped in a bedroom by your evil aunt you've admired Queen Cinderella's castle in the distance...and you've just discovered she's a distant cousin. Can you escape to her protection? 32K. Great Word Adventure. Tape-$19.95. Disk-$24.95. Amdek-$29.95.

Add $3.00 For Disk, $6.00 For Amdisk

Arizona Residents Add 7% Tax • Add $1.00 Per Program For Shipping ($4.00 Maximum) - Dealer Inquiries Welcome • Some Quantities Limited • Ask About Royalties

MasterCard VISA

7331 E. Beverly - Tucson, AZ 85710 - (602) 885-6508

Arrange Your Disk Directory Alphabetically With *Alpha-Dir*

Having a disk drive hooked up to my Color Computer is a nice feeling. I enjoy it. Having a large library of programs for the many applications I use my computer for is even a nicer feeling. The storage of data on this particular medium has its own nuances though. One of them is if you have a disk full of programs and you decide to kill one of them. The next time you save any program to that disk, the name of the newly saved program will occupy the "slot" or space of the one you previously killed. It gets even more confusing if you kill a number of programs.

A certain way to know which slot a given program will occupy would be to alphabetize each disk's directory. It would make things easier.

Alpha-Dir from Microcom Software is just such a program and it operates very simply. After the program is loaded you should insert the disk that you wish to alphabetize and type *RUN*.

At this point *Alpha-Dir* will read in your directory from track 17, sectors two through 11, sort it, and write it back out in alphabetical order. When finished, you will be told how many of your disk's granules are unused and the quantity that are occupied. Also displayed are the number of bytes used and free.

When using *Alpha-Dir*, one should take care to remove any write-protect tabs that may be in place, otherwise you won't get much of a result!

The time it takes for *Alpha-Dir* to finish a run is very quick indeed. However, for some unknown reason, the author of the program put a *POKE 113,0 EXEC 40999* into the program that does a cold start after the directory is sorted. If I were to use this program, I would probably sort all of the directories in my whole collection at once and would not appreciate a restart after each sort. However, if you list the program and remove the above pokes, you can keep rerunning the program.

The documentation enclosed with the program consists of a single sheet of paper. There really isn't need for more since the program is automatic and only performs one function.

Alpha-Dir performs as advertised, although the cassette version did not load and I thought that it was high priced, especially since most popular Bulletin Boards have this as a standard download selection.

(Microcom Software, P.O. Box 214, Fairport, NY 14450, $6.95 tape, $14.95 disk)

— Steve Schechter

MUL-T-SCREEN

COLOR CHARACTER GENERATOR

A NEW DIMENSION IN COLOR COMPUTING

RAINBOW CERTIFICATION SEAL

RAINBOW CERTIFICATION SEAL

- Now includes a character generator and sample graphic space game at no extra cost.
- Full 224 text and graphic characters. Underline in all PMODES. Prints vertically.
- All machine language, user transparent. Supports all BASIC, EXTENDED BASIC and DISK commands.
- Automatic loader recognizes 16K, 32K & 64K computers.
- Mix up to 5 character sizes in 4 colors all on one screen. A total of 10 sizes available from 8*4 to 42*24 or 32*32 in vertical mode.
- Use up to 4 defineable window screens of any size. Also includes horizontally scrolling (crawling) one line screens.
- Includes positive & negative screen dumps in 2 sizes for R/S, Epson & Gemini printers. (Please specify)
- Special Trace Delay can be used to debug programs one line at a time (even graphics).
- A special printer control can output characters to the screen & printer simultaneously.
- A must for all color computer owners. Once you try it you won't write another program without it.

INCENTIVE SOFTWARE

(519) 681-0133

P.O. BOX 323
STATION B
LONDON ONTARIO
CANADA N6A 4W1

P.O. BOX 7281
PORT HURON
MICHIGAN 48301
U.S.A.

MINIMUM REQUIREMENT 16K BASIC
TAPE - 24.95 US or 29.95 CDN
DISK - 27.95 US or 32.95 CDN

VISA MasterCard

Tape to Disk upgrade available for $8US or $10CDN. We pay postage within US & CANADA on orders over $20, otherwise please add $1. Other countries please add $2. Charge orders please add $1.

RAINBOWfest SM

PRINCETON

Show Schedule:
Friday evening — Exhibit Hall open from 7 p.m. to 10 p.m.
Saturday — Breakfast at 8 a.m. Exhibit Hall opens at 10 a.m. and closes at 6 p.m.
Sunday — Exhibit Hall open from 11 a.m. to 4 p.m.

The fun and excitement of **RAINBOWtest** is coming your way . . . and now there will be a **RAINBOWtest** near you!

For the 1984-85 season, we've scheduled three **RAINBOWtests** in three parts of the country. Each one will offer fun, excitement, new products, seminars and information for your CoCo! And for those who (perish the thought) don't like CoCo as much as you, we've scheduled each **RAINBOWtest** in an area that will provide fun and enjoyment for the whole family.

Our Princeton, New Jersey, show is being held at the Hyatt Regency Princeton, which offers special rates for **RAINBOWtest.** The show opens Friday evening with a 7 p.m. to 10 p.m. session. It's a daytime-only show Saturday — the CoCo Community Breakfast is at 8 a.m., then the exhibit hall opens promptly at 10 a.m. and runs continuously until 6 p.m. There will be no exhibition hours or seminars Saturday evening. On Sunday, the exhibit hall opens at 11 a.m. and closes at 4 p.m.

Our highly popular CoCo Community Breakfast will again feature a well-known figure from the Color Computer Community. And the exhibition will be interspaced with a number of seminar sessions on all aspects of CoCo — from writing in machine language to making your BASIC work better.

But most of all, there will be exhibitors. Lots of them. All ready to demonstrate products of every kind. Some with special programs and hardware items to introduce. Others with show specials.

Tickets can be secured directly from THE RAINBOW. We'll also send you a special reservation form so you can get your special room rate.

Come to **RAINBOWtest . . .** help us all celebrate CoCo Community at its finest.

United Airlines and THE RAINBOW have joined together to offer a special discounted fare to attendees of **RAINBOWtest-Princeton.** Simply by calling United at the toll free number listed below and identifying our meeting, with account number 481-I, you will be eligible for a 20 percent discount on the Easy Saver Fare. The only requirement is a Saturday night stay.

(800) 521-4041
Account Number 481-I

RAINBOWtest-Princeton, New Jersey
Date: September 28-30, 1984
Hotel: Hyatt Regency Princeton
Rooms: $64 per night, single or double (Special Rate Deadline, September 7)
Advance Ticket Deadline: September 21, 1984

RAINBOWtest-Irvine, California (L.A. area)
Date: February 15-17, 1984
Hotel: The Marriott Inn
Rooms: Price To Be Announced
Advance Ticket Deadline: February 8, 1985

RAINBOWfest-Chicago, Illinois
Date: May 17-19, 1985
Hotel: Hyatt Regency Woodfield
Rooms: $49 per night, single or double
Advance Ticket Deadline: May 10, 1985

RAINBOWfest SM

FREE Rainbow poster for first 500 tickets ordered.
FREE T-Shirt to first five people from each state who buy tickets.

Make checks payable to:
THE RAINBOW

MAIL TO:
RAINBOWtest
P.O. BOX 385
Prospect, KY 40059
(502) 228-4492

YES, I'm coming to RAINBOWfest! I want to save by buying tickets now at the special advance sale price. Send me tickets for (check one):

☐ Princeton, New Jersey ☐ Irvine, California ☐ Chicago, Illinois

_____ three day tickets at $9 each total _____
_____ one day tickets at $7 each total _____
Circle one: Friday / Saturday / Sunday
_____ Saturday tickets at $12 each total _____

TOTAL ENCLOSED (U.S. FUNDS ONLY, PLEASE) $ _____

—Also send me a hotel reservation card for Princeton

NAME *(please print)* _____
STREET & NUMBER _____
CITY & STATE _____
TELEPHONE _____ ZIP CODE _____
COMPANY _____

Orders received less than two weeks prior to show opening will be held for you at the door.

VISA, MasterCharge, American Express accepted.

My Account # _____ Ex. Date: _____
Signature _____

Worlds Of Flight — An Uplifting Flight Simulation

By Dr. Lawrence D. Preble

Preflight check is complete, radio and lights off, master switch on, brakes on hold, ignition switch on both, clear prop and start! Great, the engine kicked right over. We're idling about 600 rpm.

Radio is set, proper frequency. "Dahlgren Tower, this is CoCo three six zero two Alpha, ready for takeoff with information Zulu. Requesting radar service eastbound to the practice area."

"Roger, zero two Alpha. After departure, fly heading zero niner zero, climb and maintain 1500 feet, squawk 4237. Departure frequency will be 124.5."

Now I read back the departure instructions to the tower and prepare for takeoff. "Read back is correct zero two Alpha, cleared for takeoff. Wind check 030 at fifteen knots."

I tell myself, "Be careful, we've got a crosswind and those rudder pedals are touchy. I don't want a ground loop." The sweat is pouring off my brow. I release the brakes, throttle up. We're rolling! We pick up speed, we rush by the tower on the left. Careful now, a little light back pressure, rotate and we're off! Set trim control for normal climb attitude. The bridge, and power plant loom in the distance. Keep her climbing . . .

"Zero two Alpha, right turn out is approved. Contact departure." I thank the tower and bank her gently to the right. A little extra back pressure on the stick is needed in the turn. Oops! We're side slipping. Center that ball with a little extra right rudder. We're on our way!

I feel a gentle tap on my shoulder. Oh, it's Peggy, my wife. "Dinner is ready," she says. What a great hostess! "Thanks, honey, I'll take it here." She flashes me one of her wry smiles, "Nope, Ace, you'll take it in the dining room."

"Dining room! But . . . " Oh well, I press ENTER and the view out the window freezes in place. I'll just have to finish this flight later. The engine sounds stop. But we're not falling!

No, this is not where Rod Serling walks in from the "Twilight Zone." It's Tom Mix Software's new *Worlds of simulator for the Color Computer.*

Tom Mix and company have outdone themselves, again. The *Worlds of Flight* simulator is surprisingly realistic. *Worlds of Flight* is a view-oriented flight simulator which contrasts sharply with previous instrument-only simulators for the CoCo. The software comes on cassette (soon on disk, too) with 22 pages of instruction. Believe me, you need the instructions. This is not really a game.

The *Worlds of Flight* simulator experience bears considerable resemblance to real flight. No, it is not a game, but it sure is fun!

All of the basic flight controls and primary instruments are simulated. In addition, there are several special features available such as the overhead radar view of the flight path.

The view out the "window" is simulated with "wire" (or line) graphics. The view changes in real time and appears three dimensional. *Worlds of Flight* gives you nine different "Worlds" from which to choose. Some of these "Worlds" are computer representations of real places, like Dahlgren, Virginia. Some are imaginary. There are mountains to watch out for and bridges to fly under — if you are nuts!

The "aircraft" is a single engine, light sport model capable of some aerobatic maneuvers. The landing gear is retractable. Even flaps are provided.

The software provided is auto-executing and is protected against unauthorized copying. The initial display of the program shows a picture of a single engine light plane doing an aileron roll. Press the ENTER key to exit this display.

The next operation is the Define Worlds mode. Here, the user can choose the location and weather conditions for his flight. If the user does not choose a world, he is left at the practice field (World 5) by default. Press ENTER when ready to begin the Simulation.

The flight Simulation begins with the aircraft positioned on the southern end of the runway facing north. The runways on all the fields face north and south.

Two joysticks are necessary for flight. The buttons on each joystick are pressed simultaneously to start the engine. The right joystick controls ailerons and elevator while the left joystick controls rudder and throttle. If you are already a pilot, it takes an effort to accommodate to this new control configuration.

From the runway threshold, it is possible to begin the takeoff roll. Alternatively, you may opt to taxi the aircraft about the field. There is a nifty refueling station available which you will need to visit sooner or later. Your fuel tank only holds 1.5 gallons!

The scenery at or near the airport is maintained in a bit more detail than the enroute representation. This is necessary since a pilot requires the most visual cues during the takeoff, landing and taxi phases of aircraft operation.

The takeoff roll is best handled with a light touch. Center the rudder control before you begin. Maintain a partial backward deflection of the elevator control throughout the roll. Too high a deflection will result in a stall shortly after liftoff. The aircraft will lift off when airspeed reaches about 42 knots.

In flight, the Simulation approximates real flight operations with reasonably good fidelity. For example, in a turn, lift requirements increase, necessitating an increase in elevator control input. A major (but unavoidable) shortcoming is the lack of control feedback to the pilot. In a real aircraft (or multi-thousand dollar simulator) the flight controls will exert varying amounts of pressure on the pilot's hands and feet. These varying pressures provide much of the kinesthetic information a pilot needs to fly the aircraft. By contrast, model airplane enthusiasts should feel more at home with the lack of pressure cues.

A big help to the simulator pilot is the overhead plan (or radar) view. By pressing the SHIFT and CLEAR keys at the same time, the view will switch to the "bird's-eye" (downward looking) view of the world. A crosshair will mark the position of the aircraft. It is possible to vary the magnification factor (zoom) by pressing a couple of keys. It would be neat if real aircraft had such a feature!

The normal straight-ahead view can also be altered. You can look from side to side and even directly behind the aircraft. You can also change the pitch angle of your view up or down by as much as eight degrees.

The aircraft performance specifications are a bit unusual.

Maximum Gross Weight	600 lbs
Engine Horsepower	40 hp
Fuel Capacity	1.5 gallons
Best Rate of Climb (Vy)	1020 FPM @ 60 kts
Best Climb Angle (Vy)	900 FPM @ 50 kts
Maximum Cruise Speed (Clean)	90 kts
Maximum Dive Speed (Vne)	120 kts
Service Ceiling	8960 feet
Stall speed (Clean)	46 kts
Stall speed (Gear & Flaps)	42 kts
Minimum Takeoff Roll	864 feet
Minimum Landing Roll	506 feet
Fuel Consumption Rate	2.1 gal/hr @ max. Throttle
Maximum Range and Endurance	109 mi in 1.9 hrs @ 50 kts @ Less Than 1500 ft @ 960 rpm
Maximum Roll Rate	20 deg/sec
Inverted Flight Time	Unlimited

The aircraft specifications read more like a sophisticated Ultralight than a normal aircraft. I feel this is a weak point. I would have much preferred that the program simulate the parameters of a real, recognizable aircraft. A Cessna 150, Piper Tomahawk or similar trainer could have been appropriate.

I suspect the limits of a 32K CoCo are being stretched to the maximum to accommodate the *Worlds of Flight* simulator. Naturally, one ought not to expect the extreme realism available on today's airline simulators costing millions of dollars. Still, what *Worlds of Flight* does accomplish is impressive.

I found the flight controls to be a little touchy. Of course, I am used to flying with a real yoke and rudder pedals — not two CoCo joysticks. I am tempted to cobble up a reasonable facsimile of the cockpit controls and hook them to the CoCo.

Also, this simulator is not FAA approved. So you over-ambitious throttle jockeys shouldn't try to log your required flight time on it! I'm serious! As it does with all flight instructors, the FAA sends me a safety newsletter. It seems that some jokers really are trying to get flight simulator credit from two joysticks and their personal computers!

Overall, the Tom Mix *Worlds of Flight* simulator has plenty of the "right stuff."

(Tom Mix Software, 4285 Bradford N.E., Grand Rapids, MI 49506, tape $29.95, disk $32.95)

Hint . . .

Single-Line Scroll

A hint for those of you who are trying to write scrolling games in BASIC — use Lo-Res graphics and use *PRINT@ 511,"";* to scroll the screen up one line.

Rogers George IV
Terrace, MN

TRS-80 COMPUTER DISCOUNTS

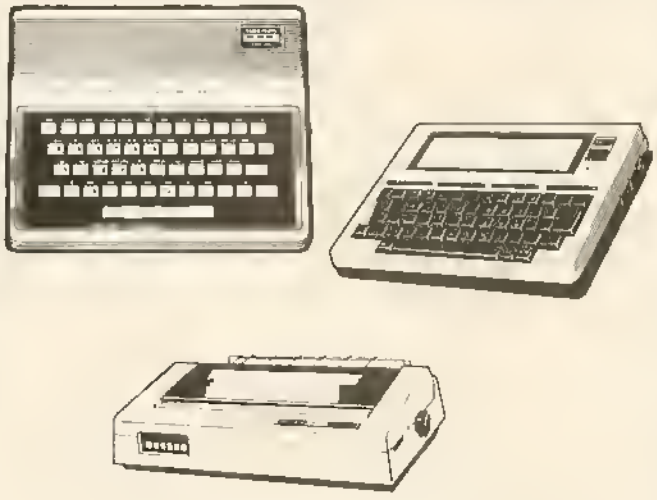

COLOR COMPUTERS

26-3026 16k color II	139.95
26-3027 16k ext color II	165.00
26-3127 64k color comp	210.00
26-3029 1st disk drive	299.95
26-3023 2nd disk drive	229.95

PRINTERS

26-1271 DMP-110	299.95
26-1254 DMP-200	510.00
26-1255 DMP-120	395.00
26-1257 DWP-210	620.00

MODEL 4 and 100's

26-1067 mod 4 16k	699.95
26-1068 mod 4 64k 1 dr.	1000.00
26-1069 mod 4 64k 2dr.	1289.95
26-1080 mod 4 p	1239.95
26-3801 mod 100 8k	525.00
26-3802 mod 100 24k	659.95

We Carry the Complete Line of TRS-80 Computer Products at Discount Prices

CALL FOR A FREE PRICE LIST 800-257-5556
IN N.J. CALL 609-769-0551

WOODSTOWN ELECTRONICS
Rt. 40 E. WOODSTOWN, N.J. 08098

HI — RESOLUTION SCREEN UTILITY

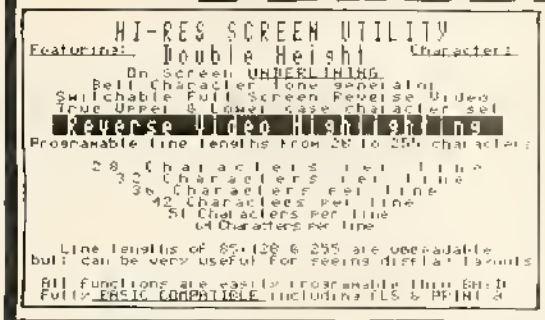

- FULLY BASIC COMPATIBLE
- DISPLAY FORMATS OF 28 to 255 CHARACTERS PER LINE
- FULL 96 UPPER LOWER CASE CHARACTERS
- MIXED GRAPHICS & TEXT OR SEPARATE GRAPHIC & TEXT SCREENS
- INDIVIDUAL CHARACTER HIGHLIGHTING
- REVERSE CHARACTER HIGHLIGHT MODE
- WRITTEN IN FAST MACHINE LANGUAGE
- AUTOMATIC RELOCATES TO TOP OF 16 32K
- AUTOMATICALLY SUPPORTS 64K of RAM WITH RESET CONTROL
- REVERSE SCREEN
- ON SCREEN UNDERLINE
- DOUBLE SIZE CHARACTERS
- ERASE TO END OF LINE
- ERASE TO END OF SCREEN
- HOME CURSOR
- BELL TONE CHARACTER
- HOME CURSOR & CLEAR SCREEN
- REQUIRES ONLY 2K OF RAM
- COMPATIBLE WITH ALL TAPE & DISK SYSTEMS

$19.95

Display Formats 28 to 255 x 24

INTRODUCING

TEXTPRO III

"The Professionals" Word Processing System

64K Support

- **9 Hi-Resolution Display Formats: from 28 to 255 Columns by 24 lines**
- **True Upper/Lower Case Display**
- **Three Programmable Headers**
- **Programmable Footer**
- **Automatic Footnote System**
- **Automatic Memory Sense 16-64K**
- **Up to 48K of Workspace on 64K**
- **10 Programmable Tab Stops**
- **7 Tab Function Commands**
- **Automatic Justification**
- **On Screen Underlining and Double Size Characters**
- **Change Formatting at Any Time**
- **Edit Files Larger Than Memory**
- **Compatible with All Printers**
- **Easily Imbed Any Number of Format and Control Codes**
- **Typist Friendly Line and Command Format Entry**
- **Automatic Key Repeat**

TEXTPRO III is the most advanced Text Editing and Word Processing System available for the Color Computer. One of the reasons for this is, Textpro works in a totally different way than the other Color Computer Word Processing programs. It uses simple 2 character abbreviations of words or phrases for commands. These commands are used at the beginning of a line and are preceeded by a "." period. Several commands can be chained together on the same line for ease of use. Thru these commands you tell the Word Processor how you want the margins set, line length, indenting information, and so on. You can change the way you want a document formatted at any point in the document. You also have the freedom to write without worrying about how long the line is or where the margins are and so on. The Word Processor automatically takes words from one line to the next and fills out the printed line to the desired length. You can even use the command to Input Text from the Keyboard while a document is being processed, and use that information to change the formatting or enter any other valid text Processor command. With this kind of flexibility and an extensive set of commands and functions available, its no wonder that TEXTPRO III is the most advanced Word Processing System.

Screen Formatting

Textpro III has 9 Hi-Resolution Upper/Lower case display formats available, from 28 to 255 characters per line by 24 lines. You also have advanced screen commands such as double size characters and on screen underlining. You can also use the standard 32 by 16 display for systems having lower case hardware kits installed. The display defaults to a 51 by 24 format that is easily switched to any other format available. Along with the Hi-Resolution screen we added automatic repeating keys "Typomatic." The rate is fully adjustable from ultra fast to super slow or can be turned off entirely for your convenience.

64K Support

Textpro III fully supports the use of 64K on the Color Computer. It has fast automatic memory sensing and configures itself accordingly. Textpro III does not require Extended Basic or Flex to take full advantage of a 64K RAM system. On a 64K Disk System there is over 64K of workspace available and files larger than memory are fully supported. Tape based systems have up to 48K available for workspace.

Text Editor

Textpro III has a full featured, line oriented screen editor. It supports single or multiple line copy and move, global or local search and replace of any character string, character insert and delete, block delete, adjustable speed automatic key repeat, single and automatic line edit, programmable underline and double width control codes, change screen background color and line lengths, automatic line numbering, line resequencer, and insert and delete line numbers.

Disk & Tape I/O

Textpro III uses fully compatible ASCII formatted files that do not have to be converted like some of the other Word Processing Systems. It will load, save and verify basic ASCII formatted tape files. The disk version supports Load, Save, Directory, Kill, Append, Text Process file from Disk, Roll part of file to disk and get next portion of file from disk.

DISK $59.95 **TAPE $49.95**

Standard Commands

Textpro III features a whole host of Document Formatting commands. The setup command section includes: Line Length, Top, Left, and Bottom Margins, Page Length, Page Numbering on/off and Automatic Word Fill and Justification on/off.

Some of the vertical control features include: test for number of lines left on the page, skip to next page, set page number, wait at top of page, single and multi line spacing, and skip blank lines.

Textpro III features 3 programmable header lines that can be centered, left or right justified. It also has one programmable footer line. 3 commands for continues, single and paragraph indenting, center text, underline and double width print commands.

Footnotes and Special Commands

Some of the special features allow imbedded control codes to access intelligent printer features like; superscript, subscript, change type font and even graphics. You can even imbed control codes within justified text. There is a command that automatically places footnotes at the bottom of the page, which can be very handy for term papers, etc. Another command allows you to display a message on the screen and input text from the keyboard. This text is then printed as if it has been part of the original text, thus you can produce things like a personalized form letter. There is also a repeat command that allows you to repeat an entire document or a part of one as many times as needed up to 255 times. This can be used to produce mailing labels or combined with the previous command to produce a selected number of personalized form letters.

Tab Functions

Textpro III features an elaborate system of tab commands for complete control over column formatting. There are 10 programmable tab stops that can be defined or re-defined at any time in the text file. They can be used with the following tab commands: Center Over Tab Column, Right Justify to Tab Column, Decimal Align Over Tab Column, Left Justify to Tab Column (Normal Tab) and Horizontal Tab. Tab functions may also be used with a numeric tab column position for maximum flexibility. You can also define the Tab Fill Character to any printable character to fill in the blanks with dots, dashes, etc.

CER COMP

(702) 452-0632

5566 Ricochet Avenue
Las Vegas, Nevada 89110

All Orders Shipped From Stock
Add $2.50 Postage

CGP115SD — A Screen Dump For The CGP-115

Doesn't everyone who has a CGP-115 printer want to have his own color picture of "Mario" fighting "the King" to carry in his wallet. After all, there has to be some practical use for all this hardware, especially the new CGP-115 printer that you just bought.

To obtain a printed copy of a CoCo screen display you need software called a "screen dump." This type of software is written to interface the graphics display with a specific printer. *CGP115SD* is a program designed to create screen dumps on the CGP-115.

Unfortunately, this review is rather unfavorable. You may decide to look around for other software to create your colored picture of "Mario."

I know that THE RAINBOW's review editor tries very hard to match reviews with people having the appropriate experience and interest in a specific subject. She hit the nail on the head with this graphics screen dump assignment. You see, in addition to having used a variety of screen dumps, I have written several of my own including a couple which work specifically with the CGP-115. Having gone through the exercise, I have a very good feel for what can be done with a software package like this.

CGP115SD is a simple program designed to reproduce color for color, dot for dot, a picture drawn on the graphics screen display of the Color Computer with the CGP-115. To reproduce a picture, it is first drawn on the screen or loaded into memory. Then, the screen dump software is loaded and run.

At start-up, there are a few simple questions to establish the color set, verify that the correct picture is in memory, etc. Then the dump to the printer starts. Up to this point everything is fine. From this point on, take your time coming back to check on the progress of the picture drawing. The screen dump takes a long, long time. Here is a quote directly from the instruction sheet provided with this program, "Depending on the complexity and the number of colors to be dumped, it will take one to three hours to dump one screen."

Working with the program, I will confirm this speed (or lack of), but I cannot agree with the next statement made in the instructions. "Because of the mechanics of the CGP-115 printer, this is as fast as it can be done." This is not an accurate statement. Although admittedly, the CGP-115 is not a fast printer, the problem with the lack of speed with this program is that it is written in BASIC. This is not the language of choice for a program requiring so much raw computation. A high resolution screen contains over 49,000 pixels to scan, the process takes a lot of time with BASIC. I ran a timing test on a solid color screen. To reproduce a single solid line the program takes twice as long to compute what is to be drawn as it takes to actually draw the line on the printer.

To add injury to insult, this program is overpriced. *CGP115SD* is selling for about twice the price of machine language screen dumps that are available for the Color Computer.

I think my bottom line is obvious from these observations. Don't bother with this program if you value your time and money. Life is too short to wait for three-hour screen dumps and a twenty dollar bill is still a lot of money to most people. The maturity level of Color Computer software is well beyond the sophistication of this BASIC program. Perhaps this would be a viable product if written in machine code and priced more competitively.

(Derby City Software, 3141 Doreen Way, Louisville, KY 40220, ECB cassette $19.95 plus $1.50 S/H)

— Tom Szlucha

Look into the depths of your CoCo with
SYSTEM SECRETS
Over 210 Peeks, Pokes, & Execs, with a
token table & easy-to-use memory map
For use with any Color Computer
All for the low, low price of $5.95
Add $1.50 for postage & handling
Washington residents add 40¢ tax
RC CREATIONS: 17251 Palatine N.,
Seattle, WA 98133 (206-546-5206)
RAINBOW

LOCKING DISKETTE STORAGE SYSTEM

HOLDS 70 MINI-DISKETTES
A LOCKING STORAGE SYSTEM FOR 5 1/4" DISKETTES. INCLUDES A HINGED LID, TWO BUILT-IN CARRYING HANDLES. COMPLETE WITH INTERIOR DIVIDERS, TWO KEYS. INJECTION MOLDED OF HIGH IMPACT PLASTIC.

~~$24.95~~ + $2.00 S/H
MARYLAND RESIDENTS ADD 5% SALES TAX

SUMMER SPECIAL $18.99

DISK-HAVEN PRODUCTS
P.O. BOX 443
COCKEYSVILLE, MD 21030

RAINBOW

PARALLEL PRINTER INTERFACE

WORKS WITH ALL STANDARD PARALLEL PRINTERS

$59.95

MODEL 1
(with modem connector and switch)

without power module-----$54.95

$49.95

MODEL 2
(without modem connector and switch)

without power module-----$45.95

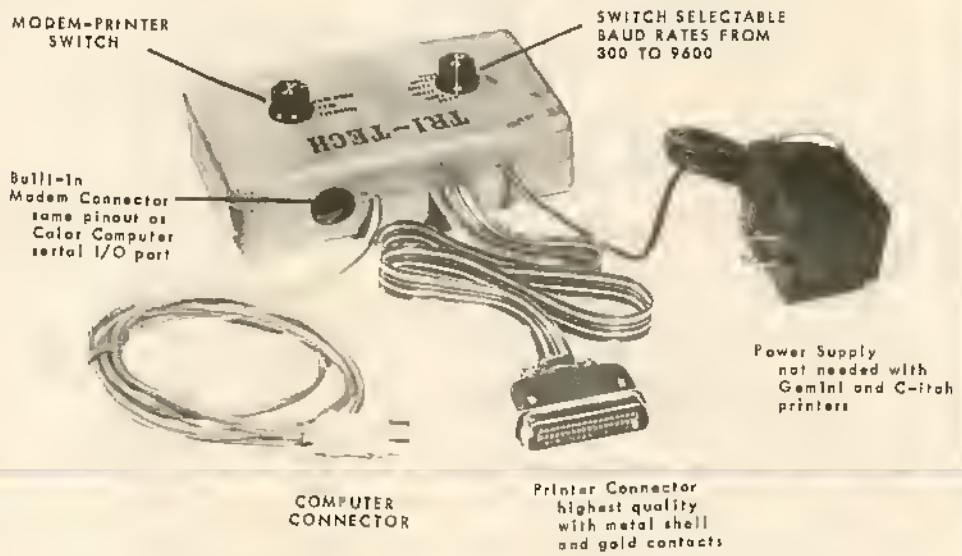

PRINTERS

- C-ITOH 8510AP PROWRITER-------$329
  10" carriage
- C-ITOH 1550P PROWRITER 2--------$510
  15" carriage
- C-ITOH 8510BPI----------$389
  switch selectable between IBM compatible or Prowriter compatible
- C-ITOH 8510SP----------$435
  new!! 180 cps.
- C-ITOH 8510SCP----------$499
  now!! 180 cps. color printer
- GEMINI 10X----------$275
- GEMINI 15X----------$399
- DELTA 10X----------$415

SPECIAL SYSTEM PRICE !!

When a printer and the TRI-TECH interface are purchased at the same time you may deduct $10 from the system price.

SPECIAL OF THE MONTH

PRINTER/INTERFACE SYSTEM

- C-ITOH PROWRITER-8510AP
  - 120 c.p.s.
  - Excellent print quality
  - 1-year warranty on parts and labor
- TRI-TECH PARALLEL INTERFACE MODEL 2

$359.95

with TRI-TECH parallel interface model 1

$369.95

EFFECTIVE THRU AUGUST 31, 1984

DISK DRIVES

TEAC FD54A DISK DRIVE----------$119
single sided, half height, 40 track, 180K bytes.

TEAC FD55B DISK DRIVE----------$189
double sided, half height, 40 track, 360K bytes.

TEAC FD55F DISK DRIVE----------$239
double sided, half height, 80 track, 720K bytes.

TANDON TM100-1 DISK DRIVE----$175
single sided, full size, 40 track, 180K bytes.

TANDON TM100-2 DISK DRIVE----$209
double sided, full size, 40 track, 360K bytes.

J&M DISK CONTROLLER----------$129
your choice: JDOS or RSDOS ROM (totally Radio Shack compatible with RSDOS ROM)

DUAL DRIVE CASE AND POWER SUPPLY----------$59

DUAL DRIVE CABLE----------$23

TRI-TECH ELECTRONICS

P.O. BOX 8100 ROCHESTER, MI. 48308

313 254-4242

Swiss Army Knife — A Sharp Disk Utility

Swiss Army Knife? Well, a catchy name, and appropriate. A Swiss army knife has many different blades to do many different things. The same with the program from The Dataman called *Swiss Army Knife*. It contains many different parts, each doing a specific function. *Swiss Army Knife* is a general disk utility program for the Color Computer written in position independent machine language code. It can be used with any Disk Extended BASIC formatted disk as well as some parts of a FLEX formatted disk. It is used to look at any byte on the disk and make changes if necessary.

Swiss Army Knife's commands allow the following: 'R'ead a sector from the disk; 'W'rite a sector to the disk; 'V'erify all or part of the sectors on the disk; 'M'odify the contents of any byte on the disk; change the number of the working 'D'rive if you have more than one disk drive (as well as change the number of tracks the program will recognize); display the 'H'exadecimal equivalents of the buffer used by *Swiss Army Knife* on the screen; 'S'ave the contents of the buffer being used into a secondary buffer for safekeeping; 'U'nsave the secondary buffer back to the primary buffer or display buffer; get the 'N'ext sector and read it into the display buffer; get the 'L'ast sector read and read it into the display buffer; and 'E'xit the program.

Read allows five different ways to read in a sector. A specific sector can be read in; a granule number can be entered, reading the first sector of the granule; a file name can be entered, reading the first sector of the filename, if it exists on the specified disk, and setting a special internal switch that allows the Next command to step through all the sectors of your filename; the first sector of the directory of the disk can be read in; or the file allocation table of the disk can be read in. The screen displays the ASCII representations of the bytes contained in the display buffer.

The program is easy to use if you are familiar with some of the workings of Disk Extended BASIC. For those not familiar, included in the manual is a tutorial on how the CoCo uses disks. It is well written and should be read by all users of this program. The rest of the manual is also well written and easy to follow.

When using the Verify command, the screen shows an ASCII dump of a sector on the top half of the screen (256 bytes) and the track and sector number, as well as an error code of the read operation on the bottom half. But the screen flashes with every sector read to rewrite all of the values shown on the screen. It would have been much nicer to leave the bottom half of the screen intact, updating only the appropriate numbers and changing the top half with every sector read. Also, it would have been nice to have used the BREAK key to exit commands back to the main menu in case a command was chosen in error.

The program is a nice utility but incomplete. For example, no hardcopy of anything is available. I have been in contact with the supplier, The Dataman, and they inform me that a new program is on the way that is much more extensive and includes the *Swiss Army Knife* program in its package.

Features versus cost make this program acceptable and a good utility to add to your library.

(The Dataman, 420 Ferguson Ave. N., Hamilton, Ontario, Canada, L8L 4Y9, $25.50 U.S., $29.95 Can.)

— Eldon Doucet

Disk-O-Tier

Holds 11 disks (5¼" or 8") securely in or out of their jackets. Organizes & protects, with labels clearly visible for fast, easy access. Ideal for temporary storage of disks while in daily use...
Available only w/purchase of D-O-T:
NASHUA brand 5¼" SS,DD disks
w/tyvek sleeves & labels 5 yr. warr.

DISK-O-TIER $9.00 each + $FREE S/H!
NASHUA disks $1.69 each * limit 20

Check or M.O.-U.S. Funds-Ohio residents add 6% tax.
Bulk discounts and outside U.S. S/H-send S.A.S.E..

EVANS ENTERPRISES
(513) 859-3529

609 APPLEHILL DR.
W.CARROLLTON,OH 45449

RAINBOW

6809 SYSTEM DEVELOPMENT

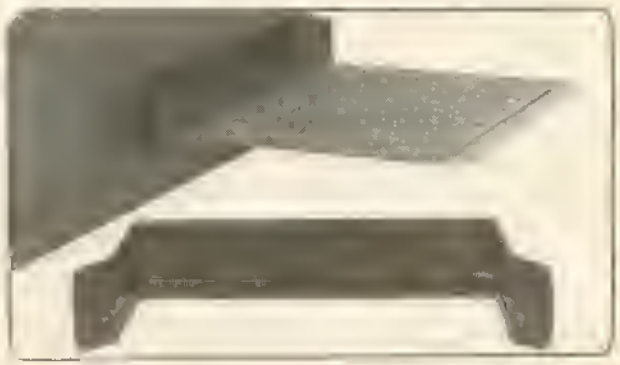

EXPANSION HARDWARE FOR THE TRS-80 COLOR COMPUTER

XPNDR1™

CoCo Expander Card

Gold edge connector plugs into the CoCo cartridge connector. Signals are labeled on the bottom (wire side) with ground and power buses; plated through holes. The 4.3 × 6.2 inch glass/epoxy card is drilled for ICs and components. The finest bare breadboard for your CoCo. Includes 8 page *Application Notes* to help you get started.

$19.95 each or 2 for $36

SuperGuide™

Precision molded plastic insert designed specifically to align and support printed circuit cards in the CoCo cartridge slot; an unbreakable removable card guide. Patent Pending.

$3.95 each

RAINBOW

Available now from:

ROBOTIC MICROSYSTEMS

BOX 30807 SEATTLE, WA 98103

Organize Your Time With *MSI Color Calendar*

When I first received *MSI Color Calendar* for review I was somewhat at a loss. A program to help keep track of appointments, birthdays, regular payments and such sounded like it could be very useful to most people, and as I had a couple of weeks to work with, the best way to test it would be to use it that way myself. The only trouble is that I am currently on vacation and I have few appointments to keep track of.

While pouring over a ground plan and complicated planting chart for the garden, the light dawned. An hour later the information was entered, and in the course of the next 20 plus days, the program proved to be a very useful planning tool.

MSI Color Calendar is designed to run on a 32K disk system with Extended BASIC. Using its own 42 x 32 screen display, it provides a clear and readable screen (of the sort we wish CoCo had). *Color Calendar* uses an interesting protection system as well, using a jack which plugs into the left joystick port. Internal circuitry, contained in a translucent block, gives a value to the joyport which is checked when the disk is loaded. If the jack is missing, the screen flashes and the loading sequence is interrupted. If you use joysticks, and have an installation such that it is difficult to get to the back of your CoCo, this might be a problem, but I had no difficulty and left the jack in for day-to-day operation.

A consequence of this form of protection is that Micro Services suggests making a backup of the program. A normal *BACKUP* routine provided a working copy and, except for a few initial entries, was the copy used for evaluation.

MSI Color Calendar comes with a well-written and complete, 10-sheet, 8½ x 11 instruction book. After the introduction page (which lists required equipment — 32K Extended BASIC, disk system, and optional printer — comes the main body of the text, which tells how to initialize the program on its first running, and gives a concise explanation of the calendar menu.

The main menu lets you choose from a number of options. The first is to INITIALIZE the calendar file; this must be done the first time the program is run and may be ignored thereafter.

LIST ALL ENTRIES gives the option to list all entries in the calendar, and to delete any that are no longer pertinent, or to return to the main menu.

DISPLAY CALENDAR puts a calendar on the screen for a month you designate, with a number on appropriate dates indicating the number of appointments for that day. The option is to print a hard copy, which has a listing of the appointments keyed to the calendar printed at its bottom. You may also return to the main menu.

ADD ENTRIES is the main menu option that allows entry of appointments by month, day and time, and provides for a 25-character comment line. To return to the main menu from here requires that an "EE" be entered as the first entry on a line.

DELETE ENTRY lists all entries and gives the option to delete any one by entering the sequence number specific to that entry.

Last, but perhaps most important, is the END CALENDAR PROGRAM option. This updates and closes the disk file which stores all entries.

MSI Color Calendar has proven to be easy and pleasant to use and, in the weeks I have been working with it, it has shown no bugs or flaws in its execution. As an excellent planning tool and daily reminder, it does all that is promised, and does it well — so well in fact, that prior to returning the package to my editor, I intend to run off my summer planting schedule for my file.

Now, when is that next square of radishes due for planting?

(Delker Electronics, P.O. Box 897, Dept. D, Smyrna, TN 37167, $19.95 plus $2.00 postage paid, or $3.50 C.O.D.; manufactured by Micro Services Inc.)

— Nevin J. Templin

BASIC COMPILER

Creats Machine Language Programs from Basic Programs

Thats right, with this powerful Integer Compiler, called INTBASIC, one can translate Basic programs to Machine Language. Those who do not want to learn Assembly Language can run this utility program to create those fast machine language programs every ambitious programmer dreams of creating. Even fully competent Assembly Language programmers will find INTBASIC a very valuable utility. INTBASIC was designed specifically to produce efficient 6809 machine code by utilizing the powerful instruction set available.

INTBASIC, developed by WASATCHWARE, features all standard Basic command words including two-dimensional arrays, multiple commands per line and strings. In addition, INTBASIC offers commands that are not available with Color or Extended Color Basic. All 64k of RAM can be used for program storage and/or variable storage, and all 32k of ROM can be accessed within the m.l. program. Compiled programs can be called from a Basic program, thus making interfacing easy.

INTBASIC has many features that some of the lower priced Basic Compilers can't offer. Here are just some of them:
-No Disk system is required, although it can run from disk
-Extended Color Basic is NOT required
-Enables the full 64k of RAM to be used
-16k machines run too INTBASIC

In addition, INTBASIC is written in Machine language, not Basic. This means that compile times are very short. How short? INTBASIC can compile a 10 thousand byte Machine Language program in as little as 30 seconds!

Some other reasons to try INTBASIC
-By converting Basic programs to machine language, program execution times are increased by a factor of 50!
-Machine Language programs can perform many things that a Basic program cannot do. Unlimited possibilities exist when using machine language.
-Variable storage in multiple-dimensioned, and therefore large arrays may be used. For example, the integer array A(30000) is allowable on 64k machines.
-More than one program can reside in memory at once. As opposed to Basic which only allows one program at a time in the computer.
-System utility software can be easily developed using INTBASIC.
-Machine language programs that take pages and pages of Assembly Language source to create, can be created with less than a page of a comparable Basic source, when compiled with INTBASIC.
-Versions for 16,32 and 64k computers are all included for the same low price.

DON'T HESITATE...BUY INTBASIC TODAY

Versions for the Color Computer II are available.
Please specify computer type (I or II).

TAPE- $39.95

Utah res. add 5% tax.

Add $3.00 Shipping & Handling
Checks or Money Orders (No C.O.D.)

RAINBOW CERTIFICATION SEAL

WASATCHWARE
7350 Nutree Drive
Salt Lake City, Utah
84121
Call (801) 943-6263

Send for our current list of other software available

the MEMO MINDER

RAINBOW CERTIFICATION SEAL

REQUIRES 16K ECB

Get organized · that's why you bought your CoCo. Type in memos, phone numbers, dates, reference notes, anything. Enter a phrase, keyword, even a few letters and locate a record · fast. It's an easy to use program and just right for odds and ends that won't "fit" in a structured data base.

$9.95 M.O. or Check · No Delay
Cassette includes
Tape & Disk Version

MERRICK & CO
P.O. Box 73
Conifer, CO 80433

You'll Get A Bang Out Of *The Gunfighter*

As the wagon clears out you suddenly realize you're being ambushed. You reach for your gun, but it's too late. The other cowboy has his six-shooter drawn already. He shoots and you die. No, you are not in an old, old west shootout, you're playing *The Gunfighter*, a new release from Jarb Software.

The Gunfighter is a high resolution, arcade-quality two-player game written for a 32K Extended BASIC Color Computer. Joysticks are required for this game.

The scenario is as follows. You are the top gun in the territory, and life is just great, until "the kid" rides into town. He challenges you to a shootout and you accept in fear. You have to outdraw and outshoot the kid. You also have to dodge his bullets.

After you begin play, you can fire your gun. You will have only six shots, as indicated by the large bullets at the bottom sides of the screen. If you and your opponent run out of bullets before someone gets killed you both reload and get six more bullets. Every time somebody gets killed, that person gets a point. The first player that gets 12 points dies and loses.

You will see many things on the game screen, such as cacti, rocks, skulls, and covered wagons. You can shoot through cacti, but you can't run through them. Rocks will ricochet your shots and obstruct your movement. Skulls and the wagon absorb your bullets and block your path.

During a game if you want to restart, just push the Reset button. If you are not satisfied with the present screen, push the BREAK key and the computer will transport you to a new screen.

The instructions to *The Gunfighter* are fairly good and tell you the primary objectives of the game.

I think *The Gunfighter* is an above average game and it deserves four out of five stars. Meanwhile, have fun in the old west, and remember to shoot first and ask questions later.

(Jarb Software, 1636 D Avenue, Suite C, National City, CA 92050, $19.95 tape, $24.95 disk/Amdisk)

— Pat Downard

Aurora Computing

49 Brookland Ave., Aurora, Ontario Canada L4G 2H6

PRESENTS: **TEACHER'S PET** - A must for every teacher. The features include: 40 students per file, 4 terms with up to 9 tests per term, alphabetical order, letter grades, numeric grades, averaging and weighting, class lists, term and year end reports, search, delete, add, screen and printer output, enter classes and grades any time of year, disk 1/0, and more in fast Machine Language. 32K Disk System.

..... $34.95

emerald computer services

NORTHWEST COLOR COMPUTER CENTER 206-778-8828*

•64K COLOR COMPUTER 2 $255 • DRAGON 64 $299
•DRIVE 0 $375-395 • DRIVE 0/1 DUAL $575-595
•AMDISK 0/1 DUAL $595 "CALL FOR SYSTEM CONFIGURATIONS"

PRINTERS + VIDEO MONITORS + DISKS

EPSON • Okidata • Mannesman Tally • Star Micronics •
Transtar • Comrex • NEC • Amdek • Qume • Tandon •
TEC • Teac • Panasonic • BMC • HJL • Hayes • Zenith •
Softlaw • Computerware • Elite • Moreton Bay •
C. Itoh • Mark Data • Homebase • Derringer •

SOFTWARE + COMPUTERS + MODEMS

COMMODORE

LEADING EDGE PC
"IBM Compatible"

MORROW DESIGNS
micro DECISION

IBM PCJR

23215 58th W.
*Plaza Center
Mountlake Terrace, Wa 98043*

Master Card
VISA

COMPLETE SUPPORT FOR HOME, PERSONAL & BUSINESS USERS!

Software Review

Flying Tigers — A High-Flying Space Odyssey

Flying Tigers is a very good copy of the Defenders arcade game that has been around for some time now. The game is available on tape or disk from Sugar Software, and the instructions include loading on non-Extended or Extended BASIC computers. *Flying Tigers* is written in machine language and requires 16K for cassette and 32K for disk-based systems. If you buy the cassette version now and upgrade to disk later, you can get a disk copy by returning the original tape along with $5 to cover handling.

The documentation is nicely done, and put into book form. The instructions are very precise and to the point. The player comes away with all the knowledge he needs to play the game. The documentation includes diagrams of the main game screen and the movements for the joystick on the backside of the cover. Off to the top right of the main screen is a long range scanner showing us a long distance view of all the aliens and all our downed comrades.

Flying Tigers has five skill levels: Flying Lessons, Easy Game, Difficult, Challenging, and Impossible. The Flying Lessons level isn't really a game; it helps the player learn the feel of how the ship moves and the general feel of the game.

The real fun starts in level two (Easy Game). Here you have some time to move around and destroy the aliens, and each level increases the speed of the aliens, giving you less time to think before you have to move. You have at your disposal three ships and three Deathrays. By holding down the fire button, the the Deathrays will destroy all aliens on the main screen. Any not seen on the main screen will not be destroyed. The object of the game is to survive and kill as many aliens as you can.

The game includes extras such as a pause mode (by hitting the BREAK key), and a Deathray. You can always go back to the main menu during the game by hitting the Space Bar —this also has the effect of resetting the game. Pressing the CLEAR key will exit to BASIC, and when the game has come to an end, hitting the fire button will restart the game at the same difficulty level you just played. If you would like to advance to another difficulty level at this time, hitting the ENTER key will return you to the main menu so you can move up. A bonus ship and an extra Deathray are awarded for every 10,000 points. Score is given for each surviving comrade and destroying each alien.

My friends and I found that *Flying Tigers* plays better with the new Radio Shack Deluxe Joystick, but a good score and play can be accomplished with either of the joysticks. I have no complaints with the game. The instructions did have a few spelling errors though.

Good luck, flyers, and may you never run short of Deathrays.

(Sugar Software, 2153 Leah Lane, Reynoldsburg, OH 43068, 16K tape $24.95, 32K disk $27.95)

— Stephen M. Hess

Hardware Review

A Well-Constructed Breadboard With XPNDR1 And SuperGuide

Attention, hardware hackers! Have you been contemplating an outboard ROM, or maybe an EPROM programmer? A nice looking, and well constructed, breadboard is available for your next project. Robotic Microsystems has introduced a product called the XPNDR1, a 5¾ x 4¼-inch breadboard that plugs into your ROM port. The unit is constructed of heavy fiberglass with plated-through hole construction and solder identification of bus signals. Gold plated connectors are used for connection to the CoCo.

A molded plastic guide, called the SuperGuide, assures perfect alignment when the XPNDR1 board is plugged into the ROM port. The SuperGuide is inserted into the ROM slot and holds the spring door open, preventing foreign objects from entering the ROM slot.

The board has several nice features. Each CoCo bus signal is extended to a plated-through hole that is labeled with its corresponding signal notation on the bottom of the board. Ample +5 volt and ground buses are provided on both sides of the board for Vcc and Gnd connections to the chips. Fourteen rows of .1-inch holes, 34 holes to a row, are available for mounting IC sockets and components.. A little elementary math produces the deduction that this is enough space for approximately 28 14-pin IC's. The rows are on .3-inch centers for standard socket mounting. Enough room is provided for any small projects we could envision.

For all of the good points there are corresponding drawbacks to the layout of the board. First of all, many holes do not have solder pads. This necessitates the use of wirewrap sockets for proper construction of circuits. By providing solder pads, alternate construction methods would have been feasible.

On the end of the board opposite the computer there are three rows of holes on .1-inch centers. This space was allocated for connectors for peripheral devices, etc. Other than the space I just referred to, space is limited on the board proper for "breadboarding." I suppose any components other than IC sockets would have to be wire-wrapped between the sockets.

Too much of the space on the board is allocated to bus expansion, as opposed to component mounting, in my opinion. Bus expansion occupies nearly 25 percent of the real estate. To the serious user, this is valuable space for components, more ICs, etc.

I would not recommend this unit for the above reasons. If the board were redesigned such that the above features were incorporated I think this would be an excellent product. As it is presently configured it makes construction tedious for some applications to say the least.

(Robotic Microsystems, Box 30807, Seattle, WA 98103, XPNDR1 $19.95 or two for $36, SuperGuide $3.95)

— Dan Downard

1983 unit sales	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total	Average	Best	Worst
Bach	136	139	119	161	130	104	84	121	95	115	75	161	1440		161	75
Chalone	120	170	152	170	182	102	89	157	162	129	64	158			182	64
Dolan	188	157	103	112	161	122	99	145	145	103					188	97
Feagan	105	94	127	115	157	97	61	132	113						174	61
Graham	135	135	183	116	151	104	86	149							183	63
Harpel	134	102	190	161	180	85										
Jordan	105	109	188	171	120											
Latour	112	128	124	129												
Lucido	158	110														
Phelps	167															
Prats																75
Schaeferle															193	78
Taylor														145	190	88
Torres					131								1620	135	177	105
Turner				127	131						75	178	1635	136	190	75
Wehlen			145	142	154			137	125	106	60	151	1495	125	154	60
	2312	2166	2387	2321	2401	1699	1439	2276	2242	2011	1318	2631	25203	2100		

DYNACALC® FOR CoCo DOS

NO OTHER OPERATING SYSTEM NEEDED!

THE BEST OF BOTH WORLDS!

available from

COMPUTER SYSTEMS CENTER
13461 Olive Blvd.
Chesterfield, MO 63017 USA
(314) 576-5020

CSC

or your local DYNACALC dealer

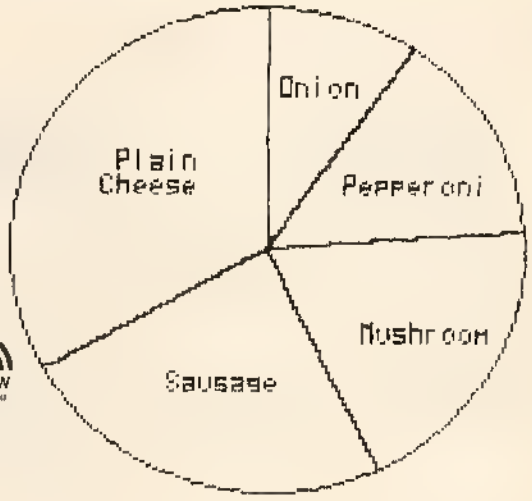

RAINBOW CERTIFICATION SEAL

Price $150 postpaid in US & Canada.
Outside North America add $10 postage.

DYNACALC Reg. U. S. Pat. Off.

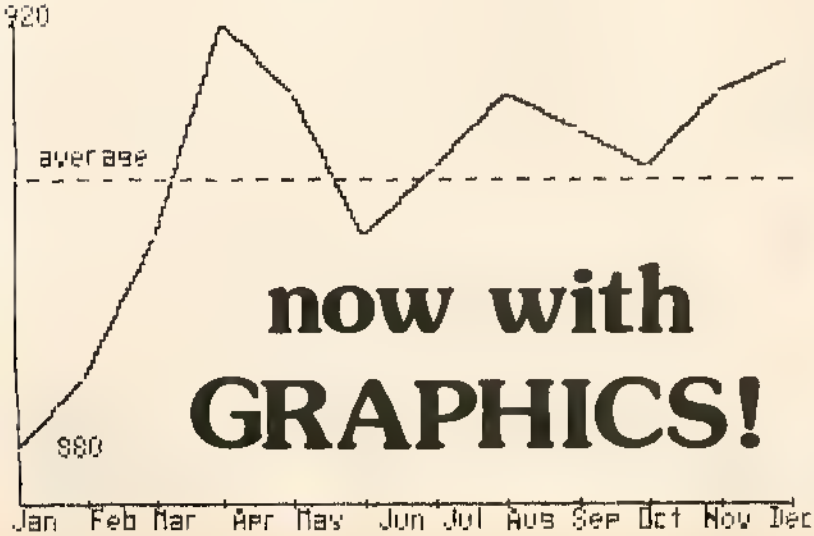

now with GRAPHICS!

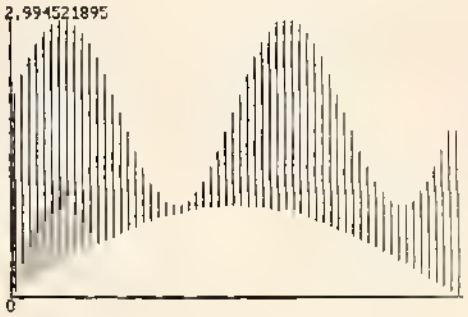

CANADA
MICRO R.G.S. INC.
751, CARRE VICTORIA, SUITE 403
MONTREAL, QUEBEC, CANADA, H2Y 2J3
Regular Tel. (514) 287-1563
Canadian Toll Free 800-361-5155

OWLS NEST
SOFTWARE
' WE GIVE A HOOT '

FREE PROGRAMS!!
We are having a Summer Sale! Now through August 31, 1984, buy any two programs at the regular price and take take a third program of your choice FREE.

FILE CABINET - Data Management System
With *FILE CABINET* you can create and maintain records on anything you choose. Recipes, coupons, household inventory, financial records - you name it. You create records containing up to five fields you define. You can search, sort, modify, delete, save on tape and display on the screen or send to the printer. The program is user friendly and user proof. Error trapping and prompting are extensive. A comparable program would cost you much more. Cassette 16K EXT - Postpaid $19.95

LABELIII (Reviewed in Nov. 83 Rainbow)
With LABELIII you can develop and maintain a mailing list. Display on screen or printer. Print lists or labels in your choice of 1, 2, or 3 wide. Supports 3 or 4 line addresses with phone optional. Fast machine language sort on last name, first name, or zip code.
Cassette 16K EXT - Postpaid $19.95

ATLANTIS ADVENTURE (Reviewed in May 84 Rainbow)
This one is tough! We challenge you to complete this in 30 days. If you can we will send you any cassette program we sell at no charge. (We will even pay the postage.) You start on a disabled sub, near the lost city of Atlantis. Your object is to get the sub and yourself safely to the surface.
Cassette 16K EXT - Postpaid $21.95

ADVENTURE STARTER (Reviewed in Feb. 84 Rainbow)
Learn to play those adventures the painless way. You start with a simple adventure and then move into an intermediate. We also include hints and tips on adventuring. Your 16K EXT cassette includes both "MYHOUSE" and "PIRATES" adventures. Finish this and you are ready for "ATLANTIS."
Cassette 16K EXT - Postpaid $17.95

FOUR MILE ISLAND (Reviewed in May 84 Rainbow)
You are trapped inside a disabled nuclear Power Plant. The reactor is running away. You must bring the reactor to a cold shutdown and prevent the "China Syndrome." Can you save the plant (and yourself)? It's not easy!
Cassette 16K EXT - Postpaid $17.95

ESPIONAGE ISLAND (Reviewed in June 84 Rainbow)
You have been dropped off on a deserted island by a submarine. You must recover a top secret microfilm and signal the sub to pick you up. Problems abound in this 32K text adventure.
Cassette 32K EXT - Postpaid $17.95

PROGRAM FILE (Reviewed in Oct. 83 Rainbow)
Organize your cassette programs. Let your computer find that program for you. Create and maintain a four field file. You can search, sort, modify, delete and display on screen or printer. Sorting may be done by name, type or location.
Cassette 16K EXT - Postpaid $14.95

KINGDOM OF BASHAN
Our most involved adventure to date. Bashan has a large vocabulary and some unique problems to solve. You must enter Bashan (not easy) collect the ten treasures of the kingdom while staying alive (even harder) and then return to the starting point with the treasures (even harder). If you can get the maximum 200 points in this you are an expert!
Cassette 32K EXT - Postpaid $17.95

*C.O.D. orders please add $1.50
*No delay for personal checks

IN A HURRY? CALL OUR HOOT LINE: (615) 238-9458

VISA* OWLS NEST SOFTWARE MasterCard

P.O. BOX 579, OOLTEWAH, TN 37363

Adventure Cracker — A Great Tool For Solving Those Hard Adventures

How many times have you encountered an Adventure game that just defied all logic? What about the time you hammered on the keys until 2 a.m. and were no closer to solving the challenge than when you had started six hours earlier.

It's kind of hard to read somebody's mind you've never met isn't it? What turns a lot of people off about Adventure games is that you have no way of knowing where an author is coming from sometimes.

The next day at work you silently curse the creator for ruining your nights while you try to remain invisible to the boss. You pretend to write rough drafts of memos but you are actually jotting down new commands to try when you get home, aren't you?

That night you make a little progress, but not enough to brag about. As the wee hours again approach, you throw up your hands in frustration and file the program, pledging someday when you have all the time in the world to get back to the Adventure.

Usually that time never arrives and the program sits in the file gathering dust. "Who needs that aggravation?" you ask yourself.

If this scenario is one you can identify with, you will greatly appreciate *Adventure Cracker*, a program created by Classical Computing of Chapel Hill, N.C., just for folks like us.

All you have to do is load (don't *EXEC* or *RUN*) it in the program you wish to examine. Then load in *Adventure Cracker* and type *EXEC 490*.

And whammo! All of the commands and responses are unveiled right before your widely stretched eyes. That's right, there is now hope for those old Adventure programs of which you can't even remember the names!

It's like the old saying about the weather in Kentucky: "If you wait long enough, you're likely to see anything." CoCo lovers are learning that the adage applies to them. There are just too many folks out there tinkering around for a problem to gather dust for long.

Adventure Cracker also is recommended for autoload games. The creators recommend that you try a *CLOADM" ", 500* command, loading the program 500 bytes beyond where it is intended to go. It works fine on most autoloads.

Thus far, however, there is no cracker for graphics Adventures. But that doesn't mean we won't be getting one soon.

From all of us who have suffered from Adventure-game depression in the past, a well-deserved "Thank You" goes to those considerate and creative folks at Classical Computing for *Adventure Cracker*.

(Classical Computing Inc., P. O. Box 3318, Chapel Hill, NC 27515, tape $14.98)

— Charles Springer

Free

SPELL 'N FIX II

SPELL 'N FIX II is not just for spelling mistakes — it catches typos too. Regardless of whose text processor you use, let SPELL 'N FIX II find and fix your spelling and typing mistakes, and your word processing output will look professional and be perfect. It finds mistakes even experienced proofreaders often miss.

SPELL 'N FIX II is easy to use. As it proofreads your text file, it displays it (in full upper and lower case) right on the screen for you to see. It looks up each word in the text in its own computerized dictionary file (which is compressed and indexed to save space on the disk and make access super fast) and tells you whenever it finds a word which is not in the dictionary. At this point, you have several options · let it be (if it's OK), add it to the dictionary (if it's a word you expect to use often), or change it (if it's wrong). If you decide to change it, then SPELL 'N FIX II even helps you find the correct spelling in the computerized dictionary, or you can use an entirely new word or phrase. If you make a change, SPELL 'N FIX II will look it up in the dictionary one more time to check up on your typing. Once you make a change, SPELL 'N FIX II will then remind you about it the next time it sees the same wrong word in your text.

Since the computerized dictionary is expandable, you can customize it with your own pet words or technical terms, and can even develop specialized dictionaries for special uses or foreign languages.

SPELL 'N FIX II is part of our Pass-the-Hat (tm) program. If you send us a disk and stamped mailer for it, we will send you a copy of SPELL 'N FIX II with a request that you send us a fair contribution after you have had a chance to evaluate the program.

SPELL 'N FIX II is available on disk only. For tape systems, order SPELL 'N FIX I at $49.39; CoCo version for Flex or STAR-DOS disk operating systems costs $89.29.

EARN $1 ... IF YOU CAN!

What do Absorbancy, Accidently, Solicarity, Pickpicketing, Technacalities, and Reprhasing have in common? They are all misspelled words in our competitors' dictionaries!

We've taken great pains to make sure the dictionary file of SPELL 'N FIX II has no mistakes. We're so confident about it that we will pay you $1 for every misspelled word you can find in it. I don't expect this offer to cost us a cent, but in case several people find the same word, the earliest postmark wins.

HUMBUG® — THE SUPER MONITOR

A complete monitor and debugging system which lets you input programs and data into memory, list memory contents, insert multiple breakpoints, single-step, test, checksum, and compare memory contents, find data in memory, start and stop programs, upload and download, save to tape, connect the Color Computer to a terminal, printer, or remote computer, and more. HUMBUG on disk or cassette costs just $39.95, special 64K version for FLEX or STAR-DOS 64 costs $59.95, MC-10 version $29.95.

STAR—DOS

A Disk Operating System specially designed for the Color Computer, STAR-DOS is fully compatible with your present Color Computer disk format — it reads disks written by Extended Disk Basic and vice versa. STAR-DOS for 16K through 64K systems costs $49.90. STAR—DOS Level I for 6809 SS-50 systems costs $75.

ALL-IN-ONE

Text editor, processor, and mailing list program combines three most used functions in one program. Requires STAR-DOS or FLEX. $50.

CHECK 'N TAX

Home accounting package combines checkbook maintenance and income tax data collection. Written in Basic for either RS Disk or Flex, $50.

REMOTERM

REMOTERM — makes your CoCo into a host computer, operated from a remote terminal. $19.95, disk or cassette.

COMMTERM

A terminal program for your CoCo or MC-10. Part of our Pass-the-Hat software program. Send a cassette and stamped envelope for your free copy.

NEWTALK

NEWTALK — a memory examine utility for machine language programmers which reads out memory contents through the TV set speaker. $20, disk or cassette.

SHRINK

SHRINK — our version of Eliza, in machine language and extremely fast. $15, disk or cassette.

EDUCATIONAL SOFTWARE

Introduction to Numerical Methods — college level course on computer math, $75.00, disk or cassette.

DOUBLE SIDED DISK SYSTEM

Complete disk system with double-sided drive, cabinet, power supply, cable, and controller, $400. A half-height drive in full size cabinet (has room for a second drive for future expansion) costs $25 extra. Either way, you get double the storage capacity · 320K on one disk.

We accept cash, check, COD, Visa, or Master Card. NY State residents please add appropriate sales tax. Add $3 to above price for AMDEK 3" disk versions.

(FLEX is a trademark of Technical Systems Consultants, Inc. Everything else in this ad is a trademark of Star-Kits.)

STAR-KITS
SOFTWARE SYSTEMS CORPORATION

PO BOX 209 R MT KISCO NY 10549 (914) 241-0287

MASTER DESIGN

(C) 1984 By Derringer Software, Inc.

DOES MORE THAN JUST DRAW PICTURES

IT'S A TEXT DESIGNER

Master Design has the ability to generate lettering in the graphics mode from sizes 2 to 32 and in a wide range of styles. Size 2 offers a 42 x 22 line format while size 32 creates letters that take up over half the screen. Letterine can be skinny, bold, textured, tall, drop shadow, raised shadow and in different thickness. There's nine different settings for thickness and nine different settings for creating open lettering.

IT'S A GRAPHICS EDITOR

Take full advantage of hi-res commands including GET, PUT, CIRCLE, PCOPY, PMODE, LINE, BOX, BOX FILL, PAINT and other special features available only with Master Design. Master Design utilizes a "two cursor" concept to allow quick formatting of boxes, lines and special patterns such as dot patterns for shading and diagonal, vertical or horizontal lines for creative backgrounds. You can create designs and use the TEXT designer to label areas or place titles. You can also create mirror images of the display.

COMES WITH A SCREEN PRINT ROUTINE

Master Design comes with a 7 bit and 8 bit version of a hi-res screen print routine so no matter what your printer is, we have it covered. Works in any pmode and can print normal or reversed images.

DISK and CASSETTE I/O

Save and load your creations to and from disk or cassette. You can even load hi-res displays created by other programs to make changes.

INTERFACES WITH TELEWRITER-64

Wouldn't it be nice if you could design your own letter head in hi-res graphics and then print it out while using Telewriter-64? Master Design offers just that capability! The Letter Head Utility will let you convert any hi-res display so that it can be accessed while using Telewriter-64! The BASIC program modules are provided with step by step instructions. These BASIC modules can also be used in your own BASIC programs for printing displays without having to use the graphic pages. You can have upto 88 pages of graphics linked together for printing!

DERRINGER SOFTWARE INC. TM

Send Check or Money Order to:
Derringer Software, Inc.,
P. O. Box 5300
Florence, S. C. 29502-2300

Visa/MC customers can call: (803) 665-5676 — 9:00 - 5:00 edt

Requires 32K with at least one disk drive
(Include $2.00 for shipping and handling)

Telewriter-64 (C) 1983 by Cognitec

The Black Sanctum — Excitement And Adventure In Every Byte

As most of you are aware, programmers of the CoCo are just now scratching the surface of spectacular graphics, for instance, Adventure games. Don't you wish that in addition to the plain old words there was a picture of the scene? Your dreams have come true with Mark Data's Adventure game, *The Black Sanctum*.

As far as playing Adventure games, no word-type games were really good enough to keep my interest for very long. When I played this Adventure game I was glued to my TV set for hours. From the cold outdoors to the library inside the monastery this is a great game.

The Black Sanctum is a 32K high resolution 100 percent machine language Adventure game. After you *CLOADM* the program (which automatically executes), you will see either a blue or a red screen. If the screen is red you must push the Reset button until the screen is blue. If the screen is blue you can press any key and continue with the program.

The object of *The Black Sanctum* is to kill all of the black magic that lurks in an old 18th century monastery. This is no easy task. Of all the Adventure games I've ever played, *The Black Sanctum* seems to be the hardest. Every instrument is used in this game, so don't anticipate that an object has little or no use. Some objects can even be used two or three times.

The commands are unlimited in this game. All commands are two words, a noun and a verb. It is good to have a thesaurus with you to see if there is another word with the same meaning as the word you are using. The directions in the game are pretty skimpy and do not tell you a whole lot about the game. At the same time, the game is very easy to understand and play.

In my opinion this is a great game and it should get all five stars (on my five-star scale). Every scene is chilling from the hallway to the bishop's coffin. I recommend this game highly and Adventure game fans should not be without it.

(Mark Data Products, 24001 Alicia Pkwy., #207 Mission Viejo, CA 92691, $24.95 tape, $27.95 disk)

— Pat Downard

16K ADVENTURE GENERATOR ..... TAPE $19.95
Create your own adventure with this program. Should be familiar with proper basic syntax to use. Writes adventure game directly to tape.

16K ADVENTURE STARTER PACKAGE ... TAPE $14.95
Three graduated adventure games designed to guide you from beginner to tackling the expert level adventure games with confidence.

SOFTECH
P.O. BOX 3330
Cheyenne, WY 82003

DMAGIC: A Disk Utility — Tomorrow We Gotta Get Organized

Remember when you were still playing with tape storage and dreaming of the day you might get a disk drive? When you really believed that all that wonderful storage space meant you probably wouldn't require more than one or two disks for all your programs?

And now, my friend? You say you've got 27 full disks and no real idea of what's on any of them? You say you really don't feel like typing DIR and then playing the famous CoCo game of *SHIFT-@*? You say you could *POKE* and then *PRINT* out all of those directories, but then you still would have to go through them one by one to find what you wanted because the CoCo disk directory isn't alphabetized? And, to top it all off, you need to run a bunch of the programs anyway because you don't even recognize the filenames anymore?

Well, what you need is a utility to help manage those disks. There are a lot of them on the market these days, each with its own features and emphases; and one of the newcomers is *DMAGIC*.

RUN the program, type 'N' (for "new disk"), and put in the first disk you want to whip into shape. Let's sort the DIR listing. Just type 'S' and *DMAGIC* not only sorts the disk directory but also rewrites it on the disk in alphabetical order.

Want to take a look through the directory now? Simply push the "up" or "down" arrow, and *DMAGIC* displays one filename at a time, forward or backward, allowing you at any time to *LOAD*, *KILL*, *COPY*, or *RENAME* the program on display. It also will give you the hexadecimal addresses for machine language programs, and permit you to change drives, change disks or exit to BASIC.

Want a quicker view of the directory? Type 'P' and *DMAGIC* displays up to 26 entries at a time, with a red graphic block appearing in front of the current active file. Typing 'R' at any point returns you to the main menu.

A copy of *DMAGIC* on each of your disks (using *DMAGIC* to put it there, of course!) can go a long way toward giving you substantial control over that multiplying disk collection. While I personally would like to see addition of a *PRINT* function (to allow easier updating of a directory printout for each disk sleeve), *DMAGIC* is a good, easy-to-use utility and may prove to be exactly what you need. Its instructions are clear and straightforward. Although it will work well enough with only 16K, the author indicates 32K will mean exchanging disks a lot less often when you use the *COPY* function; the program takes about 5.8K of RAM. Single and multiple drives are supported.

So what's keeping you? Let's get organized . . . tomorrow of course.

(Dorison House Publishers, Inc., 824 Park Square Building, Boston MA 02116, 16K+ disk, $21.95)

— Warren S. Napier

EVERYTHING
You've Always Wanted To Know About
The COLOR COMPUTER . . .
But Didn't Know WHERE To Ask.

The COCOINDX is now available! Find the information you need FAST, in this 73 page spiral bound Reference Guide.

- All COCO articles indexed from Jan. 1981 thru March 1984
- System requirements shown
- Nineteen types listed
  - Adventure
  - Education
  - Games
  - Utility programs
  - Hardware projects
  - Editorials
  - Ham Radio
  - & more
- 1800+ listed: Cross indexed
  - TYPE-DATE-MAGAZINE
  - DATE-MAGAZINE-PAGE
- Basic and Machine language
- Data Base: PRO-COLOR-FILE
- Flex, OS-9 highlighted
- Data segments available soon
- Update to be available

$19.95
PLUS $1.00 SHIPPING
AZ RESIDENTS ADD 6% TAX
DEALER INQUIRIES WELCOME

COCOINDX
P.O. BOX 23654
TEMPE, AZ. 85282
(602) 839-5169
AFTER 5 PM MST

MasterCard VISA

Nobody Does It Better In Speech or Music

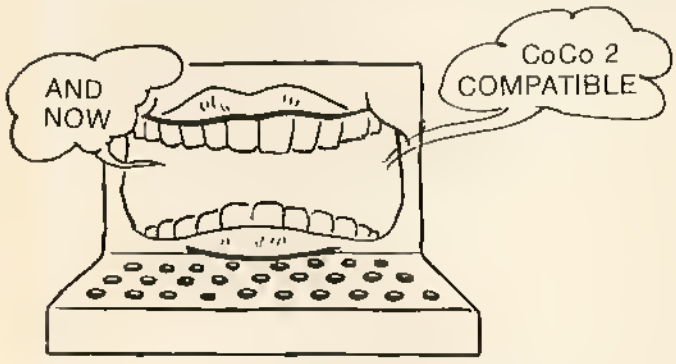

THE VOICE

You get CoCo's best hardware speech synthesizer using the VOTRAX SC-01, THE VOICE (was $119.95).

Included is a text to speech ML program FREE to allow any BASIC program to speak in minutes (was $29.95).

You also get 6 education and fun programs FREE (a $34.95 value).

You will have access to an ever growing library of software.

Disk owners don't despair, THE VOICE works in all multi-pac units including our own Y-CABLE.

You can find speech units for less and a lot for more, but you won't find any better.

All hardware and software (tape or disk) **$79.95**

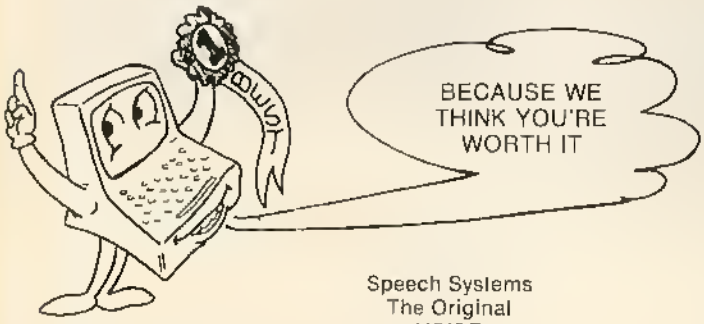

	Speech Systems The Original VOICE
Speech thru TV speaker	Yes
Speech thru external speaker	Yes
Volume control	Yes
Pitch control adjustment	Outside
Demo Programs	5
Phoneme Editor	Yes
Text-to-Speech program	Yes
Documentation	30 pages
Software	2 tapes
IC count	6
Case material	Aluminum
Case size	15/16 x 5½ x 4¼
CoCo 2 version	Yes
Expansion Unit Compatibility	
RS Multi-pak	Yes
BT-1000	Yes
Spectrum Switcher	Yes
Y-Pak	Yes
Y-Cable	Yes

NOTE: All software (except Termtalk) will work on either unit, so you can buy our software and their hardware or vice versa.

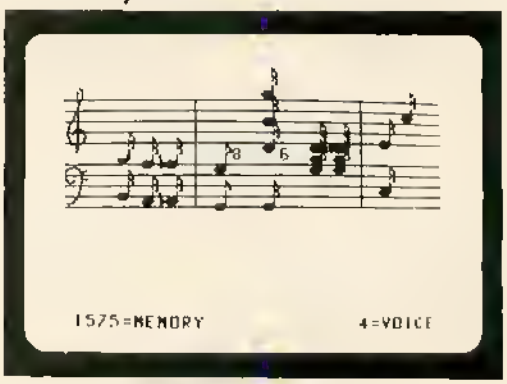

(Actual Photo)

MUSICA

4 Notes produced simultaneously.
Input notes from keyboard or joystick.
Develop your own unique sounding instruments.
Vary tempo as music plays.
Save or load music from tape or disk.
Call music from your own BASIC program.
Music produced in stereo when used with the STEREO COMPOSER.
All features are fast because it's all machine language. It doesn't get any better than this.

Tape **$34.95** (16K) (32K) Disk **$39.95**

MUSIC LIBRARY

Play these 4 part music selections without any additional software, or use as source for Musica. Over 100 tunes. Comes on tape, may be copied to disk. Ten or more tunes on each tape.

32K Ext Each **$9.95**

- Music from Stage, Screen and Television
- Pop Songs of the 70's
- Pop Songs of the 60's
- Pop Songs of the 50's
- Old Time Favorites
- Classical
- Christmas Music (Sacred)
- Christmas Music (Popular)
- Patriotic

STEREO COMPOSER

CoCo's one and only stereo music synthesizer. Plug it into the cartridge slot, connect to external speakers or your home stereo and you're ready for music realism. Comes with the COMPOSER 4 voice software. Separate left and right channel volume controls. Two 8 bit D to A's — for perfect reproduction. May be used with our best software "MUSICA." Disk owners may use any expansion unit or our Y-CABLE.

Tape or Disk **$69.95**

Dealer Inquiries Invited

If your dealer doesn't stock our products, ask for them.

We accept CASH, CHECK, COD, VISA, and MASTER CARD orders.
Shipping and handling US and Canada $2.00
Shipping and handling outside the US and Canada $5.00
COD charge $2.00
Illinois residents add 6¼% sales tax for the STEREO COMPOSER or THE VOICE.

Speech Systems

38W255 DEERPATH ROAD
BATAVIA, ILLINOIS 60510
(312) 879-6880 (24 HR. VOICE)
(312) 879-6811 (24 HR. BBS)

CALL ANY DAY, ANYTIME TO ORDER. ALSO ORDER BY MAIL OR BBS.
WE SHIP FROM STOCK WITHIN 48 HOURS.

Spectrum DOS: An Added Attraction For CoCo

By Ed Ellers

As soon as the hard-core computer nuts got hold of the Color Computer, the complaints started to fly. Some of them were even valid. "No error trapping!" "No lowercase!" "s-l-o-w disk I/O!" The CoCo's been around for nearly four years now, and Extended Color BASIC and disk drives have been with us for more than three years, so you can imagine that a lot of attempts have been made to fix what people saw as the machine's flaws. The number of lowercase boards, Hi-Res text drivers and other goodies on the market are testimony to this. *Spectrum DOS* is an attempt to provide many of the features desired by CoCo enthusiasts in a single program.

Spectrum DOS actually patches the Disk BASIC ROM program to add its new commands. For this you need a 64K Extended BASIC machine. The program can be supplied for whichever combination of ROMs your system has; the copy I used for test was set up for the "old" chips (1.1 Color BASIC and 1.0 Disk BASIC), and it caused a problem with the keyboard response on my machine (which has the 1.2 Color BASIC ROM). The DOS can also be burned into an EPROM, which will replace the Disk BASIC chip in the controller; the Hi-Res text feature and a few other commands will be lost unless you use a 16K EPROM (such as a 27128).

One of the strong points of *Spectrum DOS* is its ability to make use of faster disk drives as well as larger capacities. The Radio Shack (and TDP) disk drives used by most CoCo users have only 35 tracks, and are rated to go from track to track in 30 milliseconds (though they are actually capable of 20 ms operation). The drives that Radio Shack sells now (in white cases) are actually the same as the drives in the Model 4, and can use 40 tracks and step at 6 ms. Sadly, both the old and new Disk BASIC ROMs are stuck at 35 tracks and 30 ms operation.

Spectrum DOS has the ability to specify both step rate and number of tracks (35, 40 or 80), and you can use different settings for each drive. The system I'm using has one old Radio Shack drive and two Hitachi 3" compact floppy drives; these are 40-track and are rated by Hitachi to step at 3 ms(!). I have set up *Spectrum DOS* to run drive 0 at 35 tracks and 20 ms, and drives 1 and 2 at 40 tracks and 3 ms. The Radio Shack drive doesn't seem to be much faster, but, when the head has to move a great distance, it now does it in one smooth motion, so the grinding sound is pretty much gone. As for the Hitachi 3" drives, I had to guess at the correct setting for 3 ms operation (the manual only gives values down to 6 ms), and I don't know if they are actually going that fast; they do work well, though.

The setup procedure is done with a program called *SETUP/BAS*. This asks you how many drives are in your system, how many tracks for each drive, the step rate for each and the printer Baud rate you usually use. You can also select a prompt (the default is "READY" instead of the standard "OK") and a new cursor character. The cursor no longer changes colors, which should please quite a few people.

Spectrum DOS does have a good Hi-Res text driver, which gives your choice of 32, 51 or 64 characters per line (still 16 lines on the screen) and has a full ASCII character set with lowercase characters. The *PRINT@* command has been extended to the full numerical range of the mode you select. In *PMODE 4*, you can draw graphics over text and print text over graphics.

Another "key" feature is the programmable function keys. Any of the keys 1 through 9 can be set up to represent any desired command string. When you press the down-arrow key, an inverse 'F' will appear in the upper left corner of the screen; when you press a number key, the pre-programmed string is executed automatically.

The ERROR command lets you specify a line in the program where it should go in case of an error. For example, if you use an ERROR 1000 statement, any error (whether in the program or in an INPUT statement) will cause the program to go to 1000 instead of stopping. (On many other computers this is called ON ERROR GOTO.)

There are far too many other neat things in *Spectrum DOS* for me to describe in full; things like printer echoing, advanced BASIC line editing features, commands to boot OS-9 and FLEX directly and even a help screen! *Spectrum DOS* is certainly something to look into if you are getting tired of the constraints of Disk BASIC.

(Spectrum Projects, 93-15 86th Drive, Woodhaven, NY 11421 or Box 9866, San Jose, CA 95157, $49.95 plus $3 S/H)

FLY at MACH 2!

F-16 Instrument Flight Simulator

DON'T CHUG AROUND AT 90 KNOTS WITH OTHER SIMULATORS. F-16 FLYS MACH 2.6, IS FULLY AEROBATIC, VERY REALISTIC. $21.95

DESCENDERS

100% ML FOR RADIO SHACK® LPVII, DMP100, TDP-1, AND GORILLA® BANANA. $17.95

TSPOOL

100% ML SOFTWARE SPOOLER FOR TELEWRITER-64® ONLY. $24.95

TELEWRITER-64

THE BEST COCO WORD PROCESSOR AVAILABLE TODAY!
TAPE.....$49.95 DISK.....$59.95

We now handle all CoCoData Ent. programs:

GRAPHICS PROGRAM GENERATOR II $16.95
ELECTRICITY CONSUMPTION MONITOR $10.95
HOUSEHOLD BUDGET WORKSHEET .....$ 6.95
LLIST-RITE .....$ 5.95

CALL (813) 321-2840 FOR MORE INFORMATION.

MasterCard VISA

KRT Software, Inc.
P. O. Box 41395
St. Petersburg, Florida 33743

Shrink For Extra Bytes

Have you ever needed extra memory space or had a BASIC program that was just a little too big to fit into your available memory? If so, *Shrink* by Elite Software could help.

Shrink is a machine language utility that removes unnecessary spaces from BASIC programs. The resulting code is still legitimate BASIC, which can be edited, run and saved. Unnecessary spaces are, in general, spaces around BASIC tokens. A few examples of some common reductions are illustrated below:

A = 1	becomes	A=1
GOTO 10	becomes	GOTO10
NEXT I	becomes	NEXTI
PRINT "A B C"	becomes	PRINT"ABC"
IF P = 2 THEN RETURN	becomes	IFP=2THENRETURN

Note that *Shrink* does not operate on strings like "A B C" or on comments like *REM THIS IS A COMMENT*. Since it is written in machine language, *Shrink* requires less than 350 bytes of storage and can reduce a 12K program in about 15 seconds.

Running *Shrink* is simple. After *CLEAR*ing space at the top of memory, *Shrink* is loaded into store followed by the BASIC program to be shrunk. *EXEC*ing the utility causes all the unnecessary spaces to be removed and the modified program may then be edited, run or saved. Using *PRINT MEM* before and after running *Shrink* shows exactly how many bytes were gained.

Shrink worked as advertised on every BASIC program I tried, yielding an average space savings of 10 to 25 percent. Of course, the amount of savings you get depends on the amount of white space in your code. As a last resort, comments can also be removed from the BASIC source to free additional memory. If you write much BASIC code, *Shrink* is a useful tool to have.

(Elite Software, Box 11224, Pittsburgh, PA 15238, $14.95 tape, $17.95 disk)

— Gary E. Epple

Cocoindx — A Convenient Index To CoCo's Literature

Cocoindx is just what the title might lead you to believe — a rather complete printed index of articles which have been written for and about the Color Computer.

There are 70 pages of listings of articles about the CoCo in this spiral-bound book. The index covers 13 publications including: *68 Micro Journal*, *73*, *80 Micro*, *Hot Coco*, *80 U.S.*, *Basic Computing*, *Byte*, *The Color Computer Magazine*, *Color Computer News* (now defunct), *Computers and Electronics*, *CQ Magazine*, *Ham Radio Magazine* and THE RAINBOW.

At first I had some doubts about the usefulness of the product, but the day it came, I had a chance to use it for a good purpose. I wanted to go back to the source article for the program I have for printing custom statements. I knew it was in one of the pile of magazines in this CoCo-nest, but I did not know exactly where.

I looked in *Cocoindx* and *voila*! There was the listing of Ron Garrett's program on Page 36 of the index. Now, finding the November 1982 RAINBOW in this mess — that's another matter.

The index file is set up with fields for Type, Magazine, Article name, Author, Page, Language, System and Notes.

The notes are a brief key to what the article is about. The rest of the fields should be self-explanatory.

The type of article is an abbreviation for which there is no key printed. The types are easy to understand, but I was fooled at first by the name SPEC, which I thought referred to articles about Spectaculator. I now suspect it means "special."

I appreciate the work which Dean Norris put into this very useful book, but I think the price is high. I know the cost of printing. I know the effort which must have been made in the project, but I can't help thinking CoCo-nuts may not be willing to shell out $20 for an index.

(Cocoindx, P.O. Box 23654, Tempe, AZ 85282, $19.95)

— Howard Lee Ball

* * LOCAL * IN * LOS * ANGELES * LOCAL * IN * LOS * ANGELES * LOCAL * IN * LOS * ANGELES * *

LOS * ANGELES *

*** SOFTWARE ***

Bertamax, Inc. (Educational)
Cheshire Cat (Graphicom +)
Computerware (All)
Custom Software (No Disc.)
Frank Hogg Labs (OS-9 & Flex)
Key Color Software (Key 264K)
Tom Mix (All)
Petrocci Freelance (All)
Platinum Software (!)
Prickly Peor (All)
Silicon Rainbow (BBS's +)
Soft law (VIP & Colorquest)
Speech Systems (All)

*** E.D.C. INDUSTRIES ***
Software • Hardware • Support
Educational • Small Business • Games
CALL TO VISIT OFFICE
VOICE (213) 258-6593 10 A.M.-10 P.M.
BBS (213) 258-0640 24 HRS.
POST OFFICE BOX 42718
LOS ANGELES, CA. 90050

*** HARDWARE ***
GREAT DISCOUNTS ON:

Diskettes — *Printers*
Drives — *Modems*
Monitors — *Interfaces*

From:
Amdek — *J & M Systems*
Basic Tech. — *Gemini*
EMS — *Hayes*
Gorilla — *Novation*
Speech Systems — *PBH*
Zenith — *Many More*

CA Res. plus 6.5% Tax. Include $2.00 S & H for mail order.
CALL US LAST!

LOS * ANGELES *

* * LOCAL * IN * LOS * ANGELES * LOCAL * IN * LOS * ANGELES * LOCAL * IN * LOS * ANGELES * *

Sugar Software

Sugar Software

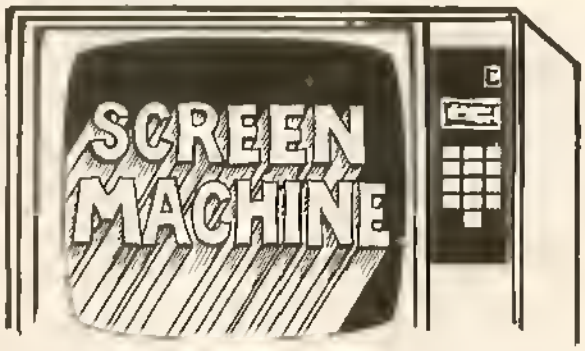

The Ultimate!

RAINBOW SCREEN MACHINE

SUPER SCREEN MACHINE

- **The Rolls Royce of graphics/text screen enhancers — more features than all others combined!**
- Add these features to your computer/program: ML extension of Basic loads on top of 16, 32, or 64K machines to enable easy mixture of **hi-res graphics and text** in your programs. Dense text or large lettering for children, visually impaired or VCR title screens with no programming!
- User definable 224 character set featuring lower case descenders, Greek, cars, tank, planes, etc., completely interfaced with all **keys, commands, and PMODES.** 12 sizes (most colored) from 16 x 8 to **64 x 24. PRINT @, TAB and comma fields are fully supported.**
- 2 distinct character sets automatically switch for sharpest lettering featuring **underline, subscript, superscript, reverse video, top and bottom scroll protect, double width, colored characters in PMODE 4, and help screen.**
- Simple 2-letter abbreviated commands inside your program or **control key** entry from keyboard, even during program execution!
- Includes demo program, **character generator** program and manual. 16K Ext. Basic required — 32K recommended. **$29.95 Tape; $32.95 Disk.**

Screen Machine can be used in games, word processors, utilities, etc. In addition, the custom graphics characters can be used to develop easy, effective hi-res character-graphics programs. The potential is truly unlimited.

Screen Machine can be used to directly create video recorder title screens or large lettering for children or the visually impaired simply by typing.

- **Revolutionary — heralded as the most useful, powerful and versatile state-of-the-art utility ever developed for the Color Computer!**
- All of the features of Screen Machine and more:
- Variable **SMOOTH Scroll** for professional displays, listings, business use.
- Variable volume **KEY Click** (factile feedback).
- **EDTASM+ command** for instant compatibility with disk EDTASM.
- **Superpatch+ command** for instant compatibility with disk EDTASM.
- True **Break key** disable and recognition.
- 10 User Definable commands used to activate your special drivers or subroutine.
- Dynamic **Screen Dump command** for use with Custom Software Engineering's Graphic Screen Print program for simple printer "Snapshots" of your screen even during program execution!
- **The new standard** — Upgradeable at any time from previous Rainbow-Writer or Screen Machine purchase. Return old program, manual, plus cost difference and $7.00 shipping and handling.
- Super Screen Machine **$44.95 Tape; $47.95 Disk.**

Screen Machine is fully interfaced with all keys and commands. Although some Basic programming knowledge is recommended just a few minutes spent studying and referencing your computer's Basic manuals will turn you on to the power of computing with Screen Machine.

Sugar Software No. _____
Gift Certificate
Pay to the order of _____ available in any amount! _____
Amount _____
Memo _____

A complete catalog of other sweet Sugar Software products is available.

SUGAR SOFTWARE
2153 Leah Lane
Reynoldsburg, Ohio 43068
(614) 861-0565

MasterCard VISA

Add $1.00 per tape for postage and handling. Ohioans add 5.5% sales tax. COD orders are welcome. CIS orders EMAIL to 70405, 1374. Dealer inquiries invited

CoCo Cookbook Deserves A Chef's Salute

It's nice when you discover a program that serves a useful purpose in addition to showing your computer's capabilities.

CoCo Cookbook, by Computerware, is such a program and it should be greeted with open arms by everyone who has spent hours fumbling through kitchen drawers, sorting index cards, and wondering what in the world could have happened to Aunt Bessie's age-old recipe for chocolate marble cake.

For those who collect recipes like some computer fanatics who seem to collect programs, *CoCo Cookbook* will be quite a catch, containing 50 delicious-sounding delectables that will be among the treasures in your collection. Are you ready for Oxtail with Herbs, Hunters Chicken Wings, and Deviled Beef Bones? Or, how about Lobster *a l'Americaine*?

I personally enjoyed Chocolate Devil's Food Cake, a traditional favorite that my wife prepared for the family using the recipe included in the program. It provided a definite twist from the normal review process.

Of course, the real value of *CoCo Cookbook* is the ability to store your own recipes, enabling you to once and for all rid yourself of that endless assortment of paper scraps that hinder the housekeeping process.

CoCo Cookbook will store up to 270 recipes on a single disk using a special compression technique with up to 3,040 characters per recipe, including title, ingredients and instructions — all in "free form" format. You don't have to take any shortcuts to conserve space either — thereby preserving those precious personal touches so necessary for the perfect dish. You can write and write and write, it seems.

The first 50 recipes in the program are provided by Computerware. You can keep them or delete them, but you'll probably want them.

You can access each recipe by title, number or by a special keyword search. You can list the ingredients to the screen or to the printer simply by using the Find Recipe option. There's also an automatic option that allows you to page through the recipe at your own pace.

Recipes also can be called up alphabetically or numerically, and you can keep a printed index file handy that lists them both ways should you forget how you entered a recipe, making it easy to retrieve the needed file.

Sorry, you folks without disk drives and with only 16K; *CoCo Cookbook* does require a disk and 32K.

The program is definitely user-friendly, making a complex filing job very easy. It also is fun, a real showpiece during parties, and very practical. If Mom still needs convincing about the value of your computer and its relevance to the home, *CoCo Cookbook* will do the job. The difficult part for her will be finding all the recipes she wants (or wants you) to file. Once you've got them all on disk, Mom's days of searching are over. A touch of a few keys will produce that priceless recipe in print in just a few seconds. Be warned, however, it's so easy you may wind up over the stove!

(Computerware, P.O. Box 668, 4403 Manchester Avenue, Suite 102, Encinitas, CA 92024, disk $27.95)

— Charles Springer

No Disk? No Printer?

- YOU CAN STILL HAVE A CUSTOM-BUILT FILING SYSTEM!

DISK & PRINTER ARE OPTIONAL IN THE SUPER-FRIENDLY DO-FILE SYSTEM: NEEDS ONLY TAPE, 32K & EXT. BASIC. ALL WORK DONE IN MEMORY. NO PROGRAMMING REQUIRED TO BUILD HOUSEHOLD INVENTORY, WINE LIST, ANY LIST. YOU DESIGN YOUR OWN RECORDS. AND - YOU DON'T HAVE TO GET IT RIGHT THE FIRST TIME. EXPAND ANY FIELD, ADD NEW FIELDS - WITHOUT LOSING ANY EXISTING DATA. CREATE, REMOVE AND CHANGE RECORDS - SEARCH, SORT, LIST AND TOTAL THEM - LOAD AND SAVE FILES USING CASSETTE OR DISK (OR BOTH). DISPLAY YOUR RECORDS ON THE SCREEN AND/OR PRINTER IN ORIGINAL OR SORTED SEQUENCE (OR BOTH). SELECT AND SORT (ASCENDING OR DESCENDING) RECORDS ON UP TO 3 FIELDS. YOUR FILES CAN BE AS BIG AS 16,500 CHARACTERS. DO-FILE HAS EASY, ONE-KEY COMMANDS AND A HELP MENU, TOO. IT IS EVEN DESIGNED TO PROTECT YOU FROM MAKING MISTAKES! DO-FILE IS EDUCATIONAL - YOU LEARN FILE MANAGEMENT USING A 35-PAGE TUTORIAL GUIDE & SAMPLE DATA FILE!

CALL FREE! 1-800-334-0854, EXT. 856, TO ORDER. OR, SEND $29.95 (CHECK OR MONEY ORDER) PLUS $2.00 FOR POSTAGE/HANDLING (PA RESIDENTS ADD $1.92 TAX), TO:

SOLID SOFTWARE

P.O. BOX 712 LEVITTOWN, PA ZIPCODE 19058

Hint . . .

Amazing Graphics

Here is a program your readers might enjoy:

```
0 DIMA(39,40):SCREEN1,1:GET(0,0)-(255,191),A,G
1 PUT(0,0)-(255,191),A,NOT:GOTO1
```

Before it is used, however, a picture must be on a Hi-Res screen. When it is in memory, type *NEW* and enter the program. Type *RUN*, ENTER and wait a few seconds. Amazing! The key to this program is the statement *not* in Line 1. If a point is *PSET*, it *PRESETS* it and *vice versa*. Try this: while the computer is *PUTting* it on the screen, press the Reset button in back. Now type *RUN* and ENTER again. What do you think will happen?

Mark Raphael
Englishtown, NJ

Ice Bird Is A Fun, Heart Warming Game

Every once in a while a game is introduced that, while not completely original in concept, generates a new kind of appeal.

Ice Bird, while very similar to another game called *Ice Master* but not as fast or difficult, easily overcomes anything resembling redundancy with its charmingly quaint graphics.

The hero of the situation is a cute little blue penguin, complete with vest, who desperately but slowly waddles about in his efforts to avoid being killed by menacing pursuers equipped with deadly stingers.

There is also an assortment of blocks of ice, which Ice Bird uses to defend himself against the stingers. The object of the game is to connect three diamond blocks in a row before running out of blocks of ice.

A quaint element of suspense is added as seemingly innocent blocks suddenly start flashing, just before being transformed into pursuers of our hero. To destroy a pursuer, Ice Bird must hit it with a sliding block of ice or crumble the flashing block before it hatches.

Strange thing about those pursuers: They seem to vary in intelligence so you really have to be on your toes. They will live up to their names.

Players earn 1,000 points when all diamonds are connected. If none of the diamonds are touching a wall, an additional 1,000 points are awarded. If they are in a straight line, another 1,000 points are yours. If both of the latter are true, there's an additional 1,000 points. You can earn as many as 4,000 points on one turn.

The remaining blocks of ice are worth 100 points each. A crumbled block is worth only 10 points, but crushing a flashing block is worth 400.

There are several maze levels, each unique in its design and level of difficulty. Every third maze is a bonus maze.

Ice Bird is so cute that you tend to identify strongly with this little character. You will find yourself pulling the toggle switch frantically in order to protect him from harm.

If things really get desperate, you can push the SHIFT '@' combination to "freeze" the action.

One or two players can play, and the scores, including the high total in the current series of games, are displayed at the top of the screen.

I really enjoyed *Ice Bird* and I believe the character is so likable that he could be put in a series of arcade challenges. That's one aspect of computer games that we have not seen and it could be a winning concept. If Bugs Bunny could be in 2,000 or 3,000 cartoons, why couldn't an Ice Bird or another character do the same thing?

(Crystal Software, 6591 Dawsey Road, Rock Creek, OH 44084, tape $24.95; disk $28.95)

— Charles Springer

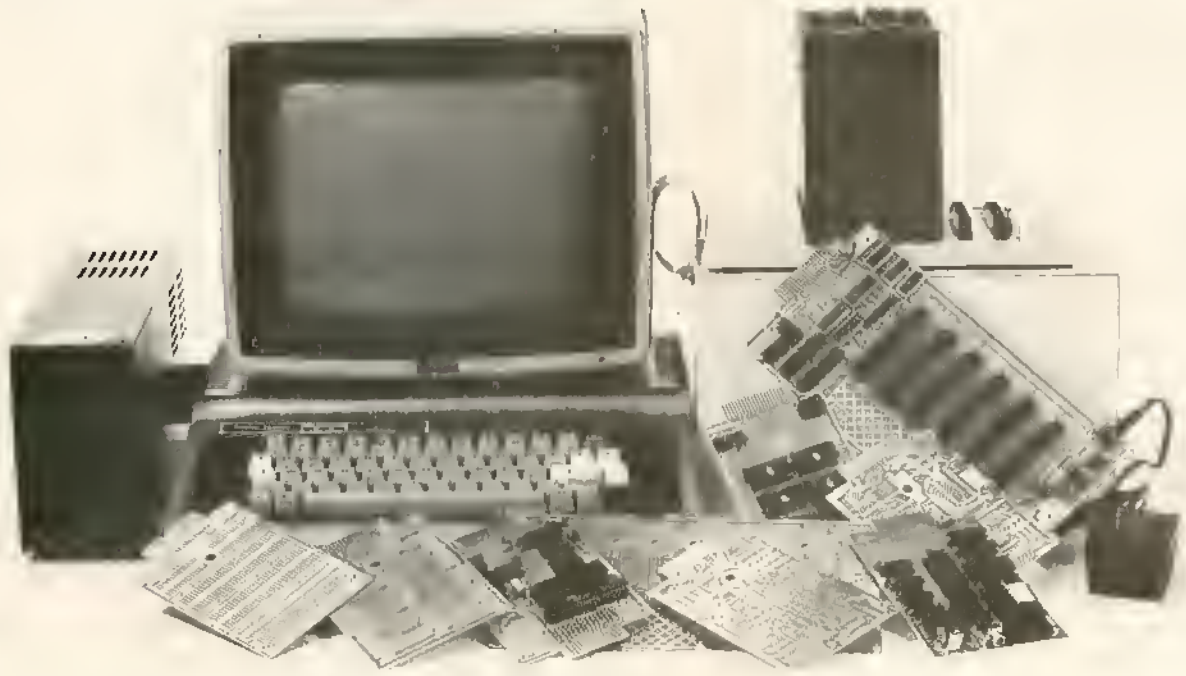

UNLIMITED EXPANSION

- 6 SLOT EXPANSION BUS
- PARALLEL PRINTER CARTRIDGE
- DUAL RS232 CARTRIDGE
- PROTOTYPING BOARD
- 80 COLUMN VIDEO CARTRIDGE
- REAL TIME CLOCK CARTRIDGE
- 16K RAM/ROM CARTRIDGE
- MORE TO COME

PJ inc.
P.O. BOX 813
N. Bergen, N.J. 07047
(201) 330-1698

WRITE OR CALL FOR OUR CATALOG

The Sector Inspector — Good Disk Utility With A 'Zap'

I think one of the most unusual terms in compiterese is "zapping" a disk. If someone out there knows the origin of this term I would sure enjoy hearing about it. As most of you are aware, we use the term "zapping" to mean altering the contents of a disk, on purpose of course. There are several programs on the market that perform an adequate job of zapping, including *The Sector Inspector*, by Sonburst Software.

The Sector Inspector is a disk maintenance utility that is menu driven and very user friendly. It is written in disk BASIC and machine language requiring no other equipment for proper operation. A 50-page instruction manual can be described as adequate. It contains a good explanation of all commands along with 21 examples of the program's uses. One section is devoted to common questions about disk systems in general. The programs are not protected and can be backed up for those who so desire. The original disk contains several copies of the main program in case of problems.

A BASIC loader program can be user modified for use with disk drives with faster step rates. Instructions are also given regarding the default printer Baud rate and how to add line feeds after carriage returns for those of us with printers requiring line feeds. My standard printer driver worked fine, though.

A main menu is invoked by *RUN"SI"*. Eight choices are available as follows:

D — Directory Menu
R — Rough Stuff Menu
O — Default Drive
M — Multiple Drives/One Drive
B — Change Printer Baud Rate
V — Verify On/Off
K — Key Click On/Off
C — Disk Backup

Directory Menu

The Directory Menu allows reading information from Track 17. Several different options are available in addition to just reading the directory. One command allows you to alphabetize your directory. This can be a real plus for a disk full of programs. No longer do you have to search through every program name to find that certain one you're looking for.

Two commands in this menu are the heart of the directory system. 'S' and 'R' save and retrieve the directory from Track 17 to/from Track 34. The more you use the CoCo disk system the more you realize that it is wise to back up your directory track. This takes care of the function automatically, or close to it.

Another nice feature is the 'T' command. This command tracks a file through the disk giving you a sequence of granules for that particular file. This is a necessity for file reconstruction.

Rough Stuff Menu

Why do they call it rough stuff? Well, there is nothing more dangerous than a novice programmer with a disk zapper. Entire disks have been known to disappear by the careless use of a disk write command.

In addition to the normal disk read/write commands, a disk scan command is included for verifying the integrity of a disk. This is the easiest way I know of to find a destroyed track on a disk. After finding the bad sector(s), you can attempt repairing them using the read/write commands.

Disk information can be dumped to a printer in several formats depending on whether the program is tokenized. This feature is also necessary for the serious disk zapper.

Comments

I think *The Sector Inspector* is a good utility for zappers and is reasonably priced for comparable programs. I suppose this is a moot point for normal programs, but it would be nice to be able to read more than 18 sectors on a track and 35 tracks. Sometimes there might be something there. You never know until you look.

(Sonburst Software, 233 E. Rogue River Hwy., Grants Pass, OR 97527, disk $29.95)

— Dan Downard

Hint . . .

Handy Label Printer

I simply got tired of seeing the hand written labels on my disks. Some were very sloppy, and some were in different colors of ink. The following is a short program that will print out a nice looking disk label. You can use gummed labels that will feed through your printer or simply print them out on regular paper and then cut them out and, using a "glue stick," stick them on your disks.

Edit the following lines:

50 enter your name
60 enter the date
70 enter the software manufacturer's name if the label is for a copyrighted program.

Format is for the Epson printer, and all *CHR$s* should be changed to your printer's needs.

```
10 POKE150,1 'SETS UP 900 BAUD RATE
20 CLS
40 PRINT@32,"ENTER FILE NAME/NUMBER"
:INPUTA$
50 B$="DISK OWNERS NAME"
60 C$="DATE DISK FORMATTED"
70 D$="SOFTWARE MFG'S TITLE"
80 PRINT#-2,CHR$(14); 'DOUBLE WIDTH
90 PRINT#-2,CHR$(27);"G"; 'DOUBLE STRIKE
MODE
100 PRINT#-2,CHR$(27);"E"; 'SETS EMPHASIZED
MODE
110 PRINT#-2,A$
120 PRINT#-2,D$
125 PRINT#-2,CHR$(27);"F"; 'CANCELS
EMPHASIZED MODE
130 PRINT#-2,CHR$(15); 'SETS CONDENSED
MODE
140 PRINT#-2,B$
150 PRINT#-2,C$
160 PRINT#-2,CHR$(27);"e";CHR$(1);CHR$(4); 'SET
HORIZONTAL/VERT TAB UNIT
165 PRINT#-2,CHR$(11) 'VERTICAL TAB MODE
170 CLS:GOTO40
```

Barry L. Baker
Pacific Beach, CA

Grobot An Education Game That Grows On You

Grobot, by Children's Computer Workshop, at first glance appears to have little or no educational benefit; it plays like a game, it looks like a game, and it sounds like a game. Kids think it is a game, but it is supposed to be educational. This is the best part of this program. The game is intended for children 10 to 13 and requires careful planning to attain high scores.

This program is very professional and very well thought out from start to finish. First the documentation is clear and concise with color and illustrations that really look like the computer screen. It covers everything from turning on the computer to thought-provoking questions in the back of the book to aid the child in realizing what the game is all about.

The game loads and runs with no hitches and there is a backup on side two of the tape. The game itself starts out by asking the player to pick four plants to grow and supplies a weather forecast. The planet of Kaldasian on which our farm is located has four different climates. The climate determines which plants grow best and the point value for each. There are 16 different plants to choose from, each with its own good and bad qualities. We are aided in making this decision by an almanac in the rear of the book. This is a simple cross reference chart of point values for each plant in each climate. To further complicate things, some of the point values are missing and must be obtained by the player during game play.

Once the crops are chosen, all that is left is harvesting in our harvester, right? Wrong! As with any farm, there are pests to be disposed of. The farming is done on the CoCo's Hi-Res graphics screen using one joystick. As the fun begins the Grobot is hovering above his field in his harvester. Soon the crops begin sprouting and making their way up the screen. The object is to wait until the plant blooms and pick the bloom to score points. As the plants get taller, below the ground's surface the Verms begin to appear and munch on the plants. You must make the Grobot jump out of the harvester and chase them away so you can go back to the harvester and pick blooms.

The action starts out slowly and builds with the points. As the plants start to bloom, they attract flying insects called gnats, which go straight to the blooms and must be chased away by moving the harvester to the plant. To pick blooms, move the harvester to the plant and push the fire button. The bloom only lasts a short time, so you must be fast. When the power runs out, the game ends. The game begins again with another weather forecast and the chance to select new crops.

Overall this is an excellent educational game, just what I would expect of a subsidiary of Children's Television Workshop. This game keeps the attention of the children and allows them to develop their skills at planning and problem solving. It is the best educational program I have seen so far.

(Radio Shack stores nationwide, Cat. No. 26-2527, 16K ECB, tape $19.95)

— James McCracken

KEEP—TRAK
HAVE YOU HEARD OF US?

Every advertiser compares their product to "THE OTHER GUY'S." WHY IS THAT? It's because we make the best product for the best price. Other companies claim their general ledgers will handle at least 500 accounts and 1000 data entries on a 64k system. Look and compare "KEEP-TRAK" with it's 16k version which holds 740 entries. Our 32k version handles 900 accounts with over 2400 entries. (Disk Only)

THEIR PRICE $79 and UP — OUR PRICE $14.95

NEW THIS MONTH "O M E G A F I L E"

Omega File is a very fine, simple to use, data base for anything and everything. "OMEGA FILE" is limited only by your disk storage space. You may define any number of fields up to 16, with field length being up to 255 characters. (Total record length, if you wish, at 4080 characters) Sort, match, and print any field. (Disk Only)

THEIR PRICE $69 and UP — OUR PRICE $14.95

ALSO NEW THIS MONTH — "G R A D E E A S Y"

Grade Easy is simply the best educators data base available! Keep complete student profiles (I.D. no., name, address, telephone, age, birthday and S.S. no.) Grade Easy allows for weighted grades or true grades. Fully menu driven, very simple to use. (Disk Only)

A BARGAIN AT $70 — NOW ONLY $29.95

THE ONE AND ONLY "A M T"

AMT starts where everyone else ends. AMT calculates almost any sales or purchase automobile. Total interest, total principle, total payment are all figured. AMT is not just an amortization scheduling program, but a cash forecasting and prediction program. Useful to anyone who plans to sell or buy something with interest. (Disk Only) — $14.95

"PI FILE" — Personal Information File $14.95

This program stores names, addresses, phone numbers and brief notes. PI File is for client lists, church groups, Scouting, clubs, user groups or any other similar use. Prints mailing labels. Sorts on any field. (Disk Only)

"Home Inventory" $14.95 - "Memo File" $14.95 - "Billing File" $14.95

COMPARE FEATURES AND PRICE, then buy
"THE OTHER GUY'S SOFTware!"
ALL PRICES ARE FOR A LIMITED TIME ONLY!

(add $1.50 for postage and handling)
Send check or money order, US funds to:
THE OTHER GUY'S SOFTware • 875 S. Main • Logan, UT 84321
Phone: (801) 753-7620

Meet the direct-connect
Signalman MODEM

Meet the direct-connect SIGNALMAN MODEM designed for use with RS-232C type interface ..the smallest, lightest, most compact modem available today. Its long life 9-volt internal battery and exclusive audible Carrier Detect Signal allow you to install the SIGNALMAN anywhere ..out of the way, and out of sight! Now, there's no need for messy cables, and no need to look at a LED to verify carrier.

Anchor's SIGNALMAN is designed to operate only with modular telephones having plug-in handsets. Bell TRIMLINE™ type telephones which combine handset and dial are not suitable.

Your SIGNALMAN transmits both voice and data over all common telephone lines, and is fully compatible with Bell 103 modems – putting your computer in instant communications with thousands of other computers. And when you're in the data position, your SIGNALMAN automatically changes from ORIGINATE to ANSWER and back again as the need arises - erasing all that confusion.

Anchor Automation has taken the fuss out of communications. For business or fun, SIGNALMAN is the ideal modem.

$59.95 A.C. Adapter $8.95

FREE... with each modem $100. VALUE Subscription to The SOURCE + One Hour Hook-Up Time.

COLORCOM/E
SMART TERMINAL PACKAGE

- Complete Upload and Download Support
- Online Cassette/Disk Read and Write
- 110 300 600 or 1200 Baud
- Full or Half Duplex
- Preenter Data Before Going Online
- Offline and Online Scrolling
- ROM Pack or Disk

- Automatic Capture of Text
- Send All 128 ASCII Characters From Keyboard
- Word Mode (Transmits Full Words)
- 1 or 2 Data Bits (Including Graphics Support)
- Filename Data Storage 1-116 Sectors in Memory
- 600% Compatible w/Radio Shack Connection RS-232 p
- Disk Version Also Includes Assignment Overlay

COLORCOM/E $49.95

COLOR TERM + PLUS+
$29.95 Now even more + PLUS! - features than before!!! New and Improved!
(TAPE) An Intelligent Terminal Program For The Color Computer or TDP 100.

SOFTWARE PLUS
6201 C Greenback Lane
Citrus Heights, CA 95610
Phone (916) 726-8793

OS-9®
SOLUTIONS for your CoCo!

For more information or to place an order, contact:

Dept. RB 10
The JBM Group, Inc.
Continental Business Center
Front & Ford Streets
Bridgeport, PA USA 19405
TEL: 215-337-3138
TWX: 510-660-3999

the JBM group

VISA/MASTERCHARGE accepted. PA res. add 6% sales tax.
US orders, add $5.00 postage and handling.

' OS9 is a registered trademark of Microware Corp.

- *powerful problem solvers*
- *mainframe computing for your micro*
- *total systems support*

Plotting Your Highs And Lows With *Super Color Biorhythms*

Super Color Biorhythms, from Armadillo International Software, is a small program written in Extended BASIC with a machine language graphing routine.

Some claim biorhythms are "biological rhythms" that begin at birth and continue regularly through life. I am not going to make any statements in this respect. I have been asked to review this program and I will restrict my comments to the performance of the program and the documentation that accompanies it. Incidentally, Armadillo International Software also makes a disclaimer in this respect.

Super Color Biorhythms is very easy to use. The package, on cassette tape, actually consists of two programs. The first one, called *Biorhythm*, is an Extended BASIC program which is loaded in the usual way. After running *Biorhythm*, a machine language routine called *Graf* automatically positions itself in memory, and everything is ready to go.

The first screen requests the basic information required for the program; that is, your birthdate, the beginning date for the chart and the number of days desired.

The plotting consists of three sinusoidal wave functions with periods of 23, 28 and 33 days in three colors; yellow, blue and red. The curves are labeled with color lettering at the bottom of the graph. The high resolution sine curves are plotted on a grid, representing days. At the top of the chart the date changes as the curves are drawn. You can halt the disply with SHIFT"@", and pressing any key will resume the plotting.

The program will display graphs for periods ranging from one day to 1,500 days, with the screen holding the plots corresponding to 14 days simultaneously. As the curves reach the right edge of the grid, the display scrolls to the left, permitting subsequent days to be plotted. This is a very nice touch.

The documentation is adequate. The four-page booklet contains all the necessary information to run the program and includes some explanation on the interpretation of the plots, something I said I wasn't going to touch. If you think biorhythms have any validity, this program will nicely plot your "cycles" for you.

(Armadillo International Software, P.O. Box 7661, Austin, TX 78712, tape $10.95)

— Dr. Carlos Calle

See You At
RAINBOWfest Princeton
September 28–30, 1984

AVAILABLE NOW

DRAGON USER

To make the most of your new Dragon microcomputer from Dragon-Tano, you need *Dragon User* — the international, independent magazine for Dragon owners.

Each issue of *Dragon User* contains:
- reviews of the latest software
- programming advice for beginners
- hardware projects
- program listings covering games and utilities
- reviews of Dragon peripherals and add-ons
- technical advisory service
- programming articles for users

The Dragon microcomputer was launched in the UK last year. Since then we have developed a knowledge and mastery of the machine's abilities. You can benefit from our experience by subscribing to *Dragon User*, which is expanding its coverage to include all US developments.

To make sure that you receive a copy of *Dragon User* regularly, subscribe direct to us. This costs only $29.95 for 12 issues airspeeded to you — or take advantage of our special offer to long-term subscribers. Individual copies of the magazine can be obtained from your Dragon dealer.

Subscription order form. Receive a free book and save money by taking out a long-term subscription — a two-year subscription saves 10%, a three-year subscription saves 20%. In addition, long-term subscribers will receive a free copy of either ☐ *The Working Dragon* or ☐ *Dragon Games Master*. Please send a check, made payable to *Dragon User*, with this form.
Start my subscription from the following issue .....
Name .....
Address .....
.....
Signed ..... Date .....
Subscription rates US and Canada airspeeded ☐ US$29.95 for 12 issues/1 year ☐ US$53.90 for 24 issues ☐ US$71.90 for 36 issues. Send this form to *Dragon User*, % Business Press International, 205 E. 42nd St., New York, NY 10017.

Lancer Is A Contest Of Avian Agility

You are in the middle of a fierce combat in the skies. Your steed pivots, climbs and dives to meet the enemy and to better him. You use an outcropping of rock to hide from the enemy above and to position yourself to drop on an unsuspecting foe. You dive and nail your opponent only to have several of his comrades drop on you. This is just one of many possible outcomes in this Joust-type arcade game.

Lancer plays much like the description above. Your player is a knight with lance mounted upon some large bird of prey. Flying your mount is accomplished by hitting the fire button of your joystick. The faster you hit the fire button the faster your bird flies. Your opponents are equally armed and mounted. Your purpose is to stand and defeat all oncomers as wave after wave of enemies are sent after you. To kill the other riders you must run into them from a higher level of flight, or get the drop on them so to speak. If you attack the enemy from below, your knight will be killed even if you think you are on the offensive. When you dismount an enemy, his life force will be transformed into a white ball which will drop to the ground. If left alone, the life force balls will be reincarnated into new riders and new mounts will come and pick them up. The reincarnated riders are smarter and more agile fighters, so it's better to take care of them before they hatch. The white balls can be disposed of by running into them from any direction. The field of combat is composed of several "floating islands" or rocky outcrops. These are good both for maneuvering around and resting on when your trigger finger gets tired. Part way into the game the bottom of the screen turns into a lava pit, which is definitely not a place to land. Finally, to make the array of obstacles complete, there is the dragon — an almost unbeatable foe.

Most of the types of scoring in *Lancer* are covered above. You get points for dismounting your opponents, for disposing of the life energy balls and for defeating the dragon. In addition to this, you can get bonus points for survival in the single player game and for player cooperation in the two-player game. *Lancer* has 16 increasingly difficult levels from zero to 15. In the lower levels your mount moves slower and the other riders are slower and less aggressive, also the dragon doesn't appear quite as often. The change in difficulty between any two close levels, such as level six through eight is hardly noticeable. The difference becomes much more apparent if you jump from the lower five levels to the higher five. The game, at all levels, is divided up into waves. A wave starts with a title and a message announcing what bonus points are available, then the enemy riders start appearing. A wave ends when all present enemies have been destroyed. As *Lancer* progresses, more riders are sent with each wave. The dragon also appears more frequently in later waves of a game.

Lancer rates high in "playability" as an arcade graphics game for several reasons. It can be played as a two-player game. Each can fly their mounts at the same time. Both have the option of cooperating against the common foe or fighting against each other. *Lancer* provides incentives, in terms of bonus points, for both of these strategies at different times of a game. The speed of the game is good, though this is not at first apparent. The players are a little slow in responding to the controls, both for flying and running along the ground. This means you have to flap your wings harder to get going. Once you get going, however, you move along at a pretty good rate. It also takes an equal amount of work to slow down once you get going. This slight slowness in response doesn't really detract from the game, instead, it adds more to the strategy as you have to think ahead of what you are doing.

There are only a few things I didn't like about *Lancer*. In later game waves as more riders are sent at you there is a noticeable slowdown in the action. This is not all that common an occurrence, so I don't see it as a very serious problem. The only thing that really bothered me about *Lancer* is that there is no squealing brakes sound as the mounts are pulled to a halt. This is more a problem with me than with *Lancer*, as I'm used to the arcade game that *Lancer* is based on.

The graphics in *Lancer* are some of the best I've seen in a machine language arcade game. Shape movement is very smooth with little or no detectable flickering. The animation of the birds flapping their wings is also handled well — the players and riders looked like they are flying. The shape of the player and enemy riders is such that they actually appear to be knights mounted on large birds. The sound generated with *Lancer* is not spectacular, but is adequate and well suited to the game.

The documentation received with *Lancer* is short, but more than adequate. The documentation includes loading instructions, a short description of how to play *Lancer*, and how to contact Spectral Associates if you have any problems. *Lancer* is provided on copy-protected media. Replacement tapes and disks are available at a reasonable price.

Lancer is a high quality machine language game. This unique style of game has been one of my favorites in the arcade. Compared to games of equal quality, *Lancer* is competitively priced. I would recommend this game as a good addition to any serious video gamers software library.

(Spectral Associates, 3418 South 90th Street, Tacoma, WA 98409, 32K RAM, joysticks, Extended BASIC *not* required, $24.95 cassette, $28.95 disk)

— Richard D. Uglum

SO. CALIFORNIA SHINES

RESIDENTS & VISITORS—WE ARE THE COLOR COMPUTER SPECIALISTS IN **LOS ANGELES.** SOFTWARE, MODEMS, BOOKS, PRINTERS, MONITORS, ACCESSORIES

POLYGON CO.

1316 Wilshire Blvd. • Suite 206 • Los Angeles, CA 90017
(213) 483-8388

Victory Is Sweet With *Candy Co.*

Ever wonder what it would be like to work in a candy factory? The aroma alone would have to be among the employee benefits, especially if a lot of different kinds of goodies were produced there.

The down side of the equation would be coming home from work all sticky faced and a few pounds heavier every day if you couldn't resist sampling the delicacies.

After a few weeks or months, however, you would risk getting burned out on so much sugar intake, start taking your diet seriously and yearn for some other distractions.

That's exactly what you get in *Candy Co.*, a recent release from Intracolor that turns the factory into chaos as a bunch of bad guys invade trying to kidnap Q.P. Doll, your partner in this mouth-watering escapade. As Candy Dan, you've got to rescue Q.P. while keeping productivity levels up to meet the demands of your customers.

There are seven different types of candy that you must pick up on constantly moving conveyor belts, which move horizontally and vertically across the screen. If you pick up all the candy without losing a "thinking cap," your current frame (there are 1,000 frames of increasing difficulty in the game), number is multiplied by the level of difficulty (from one to 10) and then added to 100 to compute bonus points.

Individual point values for collecting jelly beans, bubble gum, candy canes, lollipops, chocolate bars, soda pops, and double dip cones.

Look out, though, because you could accidentally pick up a cherry bomb, which probably has been placed on one of the conveyor belts by one of the three bad guys—Phoodin Drog, Korprut Spy, or Pyro Wurx.

Drog is there to steal greedy units, the really sticky stuff. He will try to knock you off the conveyor belts.

Mr. Spy's mission is to steal the secret formula for an Invent Oid, a device that gives you and Q.P. Doll super powers.

Wurx is around to help out the other villains and the most likely suspect to have planted the cherry bombs.

There also are a couple of fellow workers, Doc D. Kay and M.C. Squared, but they are not much help, just riding around on conveyor belts. Doc is the designer of the greedy units. M.C.'s contribution is the invention of the Invent Oil, which enables you to knock the bad guys off the conveyor belts.

Of course, you and Q.P. Doll are never safe in *Candy Co.* because the object of the game, as in many arcade-type challenges, is to collect as many points as possible. If you are doing exceptionally well and want to take a break, you can pause by pressing the Space Bar.

The opening of the game includes some nice graphics effects and even a vocal announcement of the upcoming game. Unfortunately, you have one of those "If the square is red, press the Reset button until it is blue" nuisances that will try your patience because it sometimes takes several attempts to get the right colors.

The game also includes the ability to save high scores, which you almost expect these days, but there's already an incredibly high total on the board that will require a lot of games over several days to surpass.

I personally found the game a little monotonous, but my eight-year-old son seemed to be fascinated with it. Of course, there are several years separating our appreciation of arcade games. It definitely offers a high level of continuing challenge and if that's your bag, you'll probably enjoy it.

(Intracolor Communications, P.O. Box 1035, East Lansing, MI 48823, tape $34.95, disk $34.95.)

— Charles Springer

FLORIDA SEARCH NO LONGER!

The Software Connection of Fort Lauderdale is your one stop source for your Color Computer Software, Peripherals, Books, Magazines & Repairs

THE SOFTWARE CONNECTION, INC.

4301 N. State Rd. 7
Lauderdale Lakes, FL 33319
(305) 484-7547

THE SOFT SHOP

"For all your personal computer needs"

64K Ram Chip Set	$ 55.95
Super Pro Keyboard Kit	65.95
Prowriter Printer (8510A)	365.95
Drive #0	359.95

-- ARCADE ACTION --

		TAPE	DISK
Zaxxon (Datasoft)	(32K)	29.95	32.95
Pooyan (Datasoft)	(32K)	27.95	30.95
CU*BER (Tom Mix)	(32K)	26.95	29.95
Color OUthouse (Computer Shack)	(32K)	26.95	29.95
Calixto Island (Mark Data)	(32K)	23.95	26.95

*** SUMMER SPECIAL * FREE SHIPPING ON ANY GAME ***

**** For the serious Coco user ****

		TAPE	DISK
BasicO9 (Req. OS-9)	(64K)	--	89.95
Dynastar/Dynaform (Req. OS-9)	(64K)	--	95.99
VIP Writer (Softlaw Corp.)	(32K)	**	55.95
VIP Terminal (Softlaw Corp.)	(16K)	**	45.95
VIP CALC (Softlaw Corp.)	(32K)	**	55.95

****Tape Version Included ****

Call or write for a catalog
Call our BBS on-line from 10 p.m. to 7 a.m. EDT!
Phone (803) 288-0613

Terms: Money Orders and Personal checks welcome (Please allow an additional 2 weeks for personal checks).
Shipping: $3.00 for Software, 3% for Hardware.
C.O.D.: Please add $3.00, Blue label add $3.00 - S.C. residents add 4% sales tax.
Handling: Handling Charges will be added to orders outside the continental U.S.

VISA and MASTERCARD ACCEPTED.

THE SOFT SHOP

P.O. Box 878 Mauldin, S.C. 29662
10 a.m. (803) 297-1067 8 p.m.

Custom Software Engineering, Inc.

807 Minutemen Causeway (D-2), Cocoa Beach, Florida 32931
(305) 783-1083 For information or technical support, please call between 5:30 and 8:30 P.M. Eastern time

DISK DATA HANDLER - 64K

Provides the growth capability needed for your increasingly sophisticated applications.

- Designed to use the full 64K RAM . . . may also be configured for 32K.
- Uses standard ROM's . . . No special operating system required!
- Allows you to design disk data files for your specific needs. You define a basic record of up to 14 fields and 246 characters.
- Provides fast selection and sorting based on any field or combination of fields in this record.
- Powerful in-screen input and update.
- User defined output of reports to screen, printer, or disk files which may be read by your BASIC programs for any computational or special formatting requirements.
- Printer reports allow headings, page breaks and page numbering, and let you pass control codes to drive your printer's special features.
- Maximum number of records you may work with at one time will depend on RAM configuration and record size . . . 64K (32K) 1850 (500) - 21 char records . . . 179 (49) - 246 char records.
- An optional Extended record linked to the basic record may also be defined. Size of this Extended record is not a factor in determining maximum number of records.
- NOW . . . also includes DDH DIRECTORY FILE BUILDER . . . a listing of a short program to read directory information from your disks and produce a combined file index.

$54.95 in BASIC with Machine Language subroutines.

That's INTEREST-ing

Let your computer do some REAL computation!

- Helps you solve problems dealing with time, money, and INTEREST!
- Amortization tables any way YOU want them . . . even lets you change any terms mid-schedule!
- Calculates Present Value, Future Value, Capital Recovery for any combination of payments you specify.
- Rate of Return computation predicts how hard your money will be working for you!
- Computes Bond yields . . . current and to redemption.
- All answers available on screen or printer.

$29.95 in BASIC

DATE-O-BASE CALENDAR

Puts YOU in charge of your schedule!

- Graphically displays any monthly calendar between 1700 and 2099. You put in up to twelve 28 character memos per day . . . calendar shows where the memos are . . . call up of day shows details.
- Use for appointments or a log of past activity.
- Search capability allows you to list or print all memos between two specified dates or only ones meeting key-word criteria.
- Date computation shows elapsed time between two dates in days, weeks, months and years.
- Requires 32K in BASIC

TAPE DATE-O-BASE CALENDAR - $16.95 (max. 400 memos/tape file)

DISK DATE-O-BASE CALENDAR - $19.95 (over 4000 memos/disk . . . max. 300 memos/month)

DISK DOUBLE ENTRY

If you have spent hours trying to balance your Debits and Credits, this program is for you!

- Designed for small business, club and personal use.
- Enter transactions in a journal type format. Program will maintain current account balances, produce Trial Balance, Income, and Balance Sheet reports and complete Account Ledgers.
- Will handle up to 300 accounts including report headings and totals.
- Up to 1400 average transactions on a diskette.
- Summary reports and four levels of subtotals available.
- Requires 32K and an understanding of standard double entry accounting concepts.

$44.95 in BASIC with Machine Language subroutines.

★ ★ ★ ★ ★ ★ ★ ★ ★

STATEMENT WRITER

For use with (and requires) Disk Double Entry

- Produces statements suitable for billing from your Receivables accounts.
- Provides mailing labels to use with your statements and account summaries.
- Designed and documented to allow you to change formats to accommodate your own special needs.

$34.95

COMMAND STREAM PROCESSOR

Powerful, versatile utility adds a new dimension to your Color Computer.

- A program to run your other programs!
- Will allow you to prepackage a stream of direct system commands as well as INPUT and LINE INPUT to your BASIC program. This results in a totally automated stream of activity.
- If you understand your computer and the flow of activity required for your total operation, you are ready for the *power* of COMMAND STREAM PROCESSOR!

$19.95 Completely relocatable . . . Machine Language

GRAPHIC SCREEN PRINT PROGRAM

Works in all PMODES and lets you shift screen image anywhere on the printed page.

- Relocatable code lets you use all of your 16K or 32K machine.
- Available for Color Basic 1.0 and 1.1/1.2. Use EXEC 41175 to see which you have and SPECIFY WITH ORDER.
- SPECIFY PRINTER TYPE . . . In Machine Language

$7.95 - TRS-80® LP-VII/VIII & DMP 100/200/400/420

$9.95 - Epson GRAFTRAX®, NEC® PC8023 A-C, IDS 440/445, Paper Tiger® 460/560, Micro Prism® 480, Prism® 80/132 (with dot plotting), TRS-80® DMP-120, TDP-1, PROWRITER® Centronics 739, Microline® 82A/83A (with Okigraph 1) /84/92/93, Star Micronics, Inc. GEMINI 10/10X/15 and Gorilla Banana.

(Trademarks of Tandy Corp., Epson America, Inc., C-Itoh, NEC America, Okidata Corp., Integral Data Systems, Inc.)

★ ★ ★ ★ ★ ★ ★ ★ ★

ALPHA-DRAW

Works great with GRAPHIC SCREEN PRINT PROGRAM!

- Subroutine designed to let you add any keyboard character to your graphic displays.
- You define X and Y coordinates and a string variable of one or more characters . . . ALPHA-DRAW does the rest!
- BONUS - includes instructions for a true line-numbered merge of tape files.

$8.95 in BASIC

RAINBOW CERTIFICATION SEAL
ALL LISTED PROGRAMS

ALL PROGRAMS require Extended Color Basic and are delivered on cassette. All, except Tape Date-O-Base Calendar, are DISK System compatible.

U.S. and CANADA add $1.00 per order for shipping. Overseas $2.50 per order. All prices in U.S. dollars. Florida residents add 5% sales tax. Return within two weeks if not completely satisfied.

MasterCard

For VISA and Master Card orders:
Include type, account number, expiration date, signature and phone number.
Sorry! No COD's.

VISA

Chopper Strike
A Bit Too Rough

Only minutes into my first session with this game, I knew that I was going to have trouble with the review and I've had trouble with it ever since. I've come to see how inherently impossible it is to write an objective review on a program that is strictly entertainment. The facts are few and not very informative; the rest has got to be very subjective opinion. And, as we can all attest, different opinions in this world will often range light-years apart. So with this very important fact tucked away, we can now see what MichTron's arcade-graphics game, *Chopper Strike*, has to offer.

Chopper Strike is a helicopter attack-style game (obviously enough) that requires one joystick and either 16K or 32K of RAM. Both versions of the program are available on disk and cassette and are — as usual — copy protected. MichTron claims there are 105 different screens in the 32K version. Frankly, I lost count.

Chopper Strike is what I think of as an "endless loop" game: one where the action is continuous, the screen changes are subtle, and there is never a pause in sight. As you fly through enemy territory, your targets are oil tanks, gun turrets and ICBM launchpads. The oil tanks make nice easy targets, but the guns and the ICBMs shoot back. Among the enemy emplacements your own men can be seen, waving their arms to be picked up. When you rescue 20 of them by coming in contact with them, you gain 10,000 bonus points and another ship. But if you accidentally shoot one of them, you destroy yourself as well.

After you reach the 5,000 and 10,000 point marks in the game, horizontally flying missiles begin trying to blast you out of the sky. These cannot be destroyed, only avoided. And by this time you will have entered the underground fortress screens where your men can be seen between the same enemy emplacements, but now in underground caverns with wall clearance only pixels beyond your chopper blades. There can be no doubt about this game being challenging.

In order to form a better opinion about this game, I pulled three of the other popular chopper games from the archives and gave them a whirl. I have to say that I found *Chopper Strike* vastly superior to two of them and at least modestly superior to the other. That, by no means, means that it's perfect though. It could well be only a reflection on the others.

An aggravating thing that I found while playing *Chopper Strike* is the manner in which the screen scrolls. As it scrolls from right to left, it jerks across the screen, and I can see no reason for it. It affects not only the terrain, but control of the chopper as well. If it was done for effect, then someone must have been *very* misguided into believing that the terrain jerks by when you're in a helicopter. In truth, the choppy motion and the continuous choppy sound tend to turn 30 minutes of *Chopper Strike* into a three Excedrin headache.

Another forgettable feature of *Chopper Strike* is the two monitor fields in the upper-right corner of the screen. One is a three-position indicator that shows which direction your gun is currently pointed and the other is a field that flashes a representation of whatever it is that happens to blast you out of the sky. Both border on being totally useless. You know what direction your gun is pointed because your ship will be traveling in that direction and you would have to fall asleep at the stick not to notice what hit you. Gadgets and gauges don't hold the interest very long if they don't accomplish anything useful.

And, conveniently speaking of interest, that brings me to my last observation about *Chopper Strike* — I simply didn't find it very interesting. Nor did the others that I spoke to who had tried it. But the truth is, I found the other three chopper games that I tried to be uninteresting as well.

Luckily, *this* loop is not endless and the end is in sight. What I've tried to convey is that the appeal of entertainment such as a computer game is purely personal. I know *Chopper Strike* is a game that will be enjoyed by thousands of people *even though I didn't*. If you're a die-hard fan of chopper attack games, then you've got a winner for your collection here. If you're not, I suggest that you take a hard look at this one before you lay your money down.

(MichTron, 6655 Highland Road, Pontiac, MI 48054, 16K/32K cassette $27.95, disk $29.95, plus $3 S/H)

— Kevin Nickols

DOUBLE BUSTER

(C) 1984 by Derringer Software, Inc.

No more fighting over who gets to play next! Double Buster lets two play this classic game at the same time. Players compete against each other and against the clock. Single player action is also available. Four levels of play allows beginners to have fun at slow speed and the more advanced players at high speed! Score is based on the amount of "bustin' out" you can accomplish within the allocated time. Scores kept for singles and doubles game in all levels.

DOUBLES SINGLES

Requires joysticks and can be played on 16K Extended tape or disk systems! Please indicate tape or disk when you order. Send check or money order to: Derringer Software, Inc, P. O. Box 5300, Florence, S.C. 29502-2300. Visa or Master Card customers can call (803) 665-5676 9:00am to 5:00pm Mon-Fri. Please include $2.00 for shipping and handling — No COD's.

★ See the ad for AT WITS END also ★

Fractions And *Percents* — Two Low-Cost Teacher Aids

Fractions and *Percents* are two small BASIC programs from Shamrock Software that generate worksheets for elementary school students.

Fractions provides problems in addition, subtraction, multiplication, and division of fractions. You can generate as many worksheets as you want with up to 60 problems per page. The problems are numbered, and answers are provided along the right side of the paper. The teacher would have to cut the answers off the worksheets before they are given to the students, and then either let them use the answers to check their work or use them as an answer key for grading. Since the program is written in BASIC, the output could easily be modified to suit your needs. This option, however, is not provided with the program, and the teacher who doesn't know BASIC would be at a loss trying to adapt the program.

The second program, *Percents*, is very similar to *Fractions*.

Both programs are very simple and remind me of the public domain programs that are available for the Commodore computers. These programs have not been available in large enough quantities for the Color Computer, however. On the other hand, the author of these programs thinks he deserves some remuneration for his work and is trying to make an honest buck, and you can't blame him for that. And at $9.95 each, you could almost think of them as free. For a teacher with a need of worksheets for the students, these programs could be of some help.

(Shamrock Software, 4382 Norton Road, Radnor, OH 43066, $9.95 each)

— Dr. Carlos Calle

RS-232 Switcher A Big Help

A lot of CoCo owners have more than one RS-232 driven device (such as a printer or a modem), and it gets tiring to have to keep pulling the plugs every time you want to go from one to the other. It's certainly easy enough to make a switch to select between two or more devices (all you need is a three-pole switch with the appropriate number of positions), but the Metric Industries Model 102 switch box includes a number of "bells and whistles" that make it a very nice unit.

The Model 102's main feature is the set of indicator lights for each position (the 102 handles up to three peripherals). These lights are red, yellow and green, and light up anytime the corresponding RS-232 jack is selected with the computer switched on (so they serve as pilot lights as well). The three jacks are labeled with red, yellow and green dots, and a set of stickers in the three colors is provided to label your equipment.

Aside from that, the 102 is no better or worse than an ordinary RS-232 switch. It is well constructed in an aluminum case with an attractive blue finish. The cable going to the computer is only about a foot long, so the switch will have to sit very close to the CoCo (this may be a benefit if you have a lot of cables — and who doesn't?).

If you don't mind paying a little extra for special features and durability, the Metric Industries Model 102 may be your best choice.

(Metric Industries, Dept. R, Box 42396, Cincinnati, OH 45242, $35.95 plus $3 S/H)

— Ed Ellers

"ROOTS" GENEALOGY PROGRAM KEEPS FAMILY TREE DATA, FOR 7-8 GENERATIONS (MEM DEP), PEOPLE, ANIMALS. ASSEMBLES ORGANIZES, PHOTOREADY PRINTS. 32K EXT TAP/DSK $20.00
"INVENTORY ONE" (ALAN ROUSE) EFFICIENT FOR BUSINESS, HOME, CLUB. 32K TAPE = 148 RECORDS, DSK FAR MORE. CAN PRINT STATUS, REORDER REPORTS. 16K EXT TAP/DSK $30.00
"KWIK GRAF" 80-COLUMN PRINTER WITH TRS-80 MODE BLOCK GRAPHICS PRINTS PHOTOREADY BARGRAPHS. NO SCREENPRINT PROGRAM REQUIRED. EXCEPTIONAL! 16K EXT TAPE $20.00
"ADDRESS ONE" ADDRESS FILE DATABASE. SEARCH, PRINT, VIEW 1-UP LABELS. OTHER DATA. 16K EXT TAP/DSK $20.00
"FILE ONE" SHOULD BE 1ST PROGRAM IN YOUR LIBRARY. IS DATABASE FOR FILES, RECORDS, INVENTORY, MEDICAL DATA, ADDRESSES, COLLECTIONS, OTHER. 16K EXT DISK $20.00

"SPEED MATH" (T. GRAY) LEARNING GAME FOR PARENTS AND CHILDREN, TEACHERS. MAKES MATH FUN FOR ALL AGES. GAME SCORING AND SKILL LEVELS. PROVEN. 16K EXT TAPE $ 8.00

"CAVE OF ALLAH" YOUR RESPONSE TO MARKET TEST NOW LETS US REDUCE PRICE. HIGH RESOLUTION GRAPHICS ADVENTURE. ONLY MINDPOWER CAN HELP YOU FIND THE TREASURE, ESCAPE THE VALLEY OF MYSTERY. MINDPOWER! 32K EXT TP/DK $15.00

WEST BAY COMPANY
ROUTE 1, BOX 666
WHITE STONE, VIRGINIA 22578

POSTPAID. VA ADD 4% TAX. SEND SASE FOR PROGRAMS LIST

The Disk To Tape Transfer . . . Track By Track

By Wayne H. Duncan

Most of my diskettes were backed up with other diskettes so nothing major would be lost. Somewhere along the way came the idea, why waste 50 percent of my diskettes? Why not use tapes as backup?

After a little programming time, now my important diskettes are on tape. To speed up the fairly slow process, machine code is used to transfer the data to and from buffer. *Dump/Restore* may be modified to load all or part of the tape. By loading just track 17, the directory may be restored. Be careful not to start a restore to a good diskette since the program assumes it to be initialized and blank.

Dump/Restore dumps a diskette to cassette one track at a time. The command *DSKI$* is executed against track 17 cylinder two to read the directory. Only those tracks which have a used granule are read by the *DSKI$* and copied to a buffer area. A *VARPTR* is used to locate the two variables of the *DSKI$* and machine code then copies the data serially into the buffer. After one track is in the buffer a *CSAVEM* is made to move the data to cassette. Almost the reverse is done to move the data to diskette. Lines 300 to 370 do the *EXEC* to move the data and Lines 500 to 560 are the machine code to move the data from or to buffer. The restore may be started at any program on the tape to restore one or more tracks since the programs on tape are named for the corresponding track.

(Wayne Duncan has been in the computer field for 18 years, doing everything from repair to programming, and is now a field manager for a major computer company.)



The listing:

```
1 'DUMP/RESTORE
2 'BY WAYNE H. DUNCAN
5 CLS:PCLEAR1:CLEAR2000,9240
6 PRINT"DUMP/RESTORE - ENTER (D/
R)":INPUTZ$:IF Z$="R"THEN 200 EL
SE IF Z$="D" THEN 7 ELSE 2
7 CLS:PRINT"STARTING DUMP - ENTE
R WHEN TAPE IS READY TO RECORD A
ND DISKETTE IS READY":INPUTZZ$:D
SKI$ 0,17,2,C$,D$
8 CLS:FOR Z=1TO67 STEP2:C=ASC(MI
D$(C$,Z,1)):C1=ASC(MID$(C$,(Z+1)
,1)):IF C=255 AND C1=255  THEN N
EXTZ ELSE Y=INT(Z/2)
9 M=10240:POKE9242,40:POKE9243,0
:PRINT@32,"SECTOR":PRINT@43,"TRA
CK"
10 IF Z>67 THEN 40
11 FORX=1TO1B
20 DSKI$ 0,Y,X,A$,B$
22 GOSUB300
25 PRINT@65,X:PRINT@76,Y
30 NEXTX:POKE&HFF40,0:CSAVEM STR
$(Y),10240,M,M:IF Z<68 THENNEXTZ
40 CSAVEM"END",10240,10250,10240
:PRINT"DUMP COMPLETE":STOP
200 'RESTORE
205 CLS:PRINT"STARTING RESTORE"
210 PRINT"MAKE RESTORE TAPE READ
Y AND     FORMATTED DISK READY":
INPUTZ1$
215 FORY=0TO34:N$=""
220 CLOADM:POKE9242,40:POKE9243,
0:M=10240:FORL=0TO7:N$=N$+CHR$(P
EEK(475+L)):NEXTL:Y=VAL(N$)
225 IF LEFT$(N$,2)="NO" THEN CLS
:PRINT"RESTORE COMPLETE":STOP
230 A$=STRING$(128,65):B$=A$:CLS
:PRINT@32,"SECTOR":PRINT@43,"TRA
CK"
240 FORX=1TO1B
250 GOSUB300:DSKO$ 0,Y,X,A$,B$
255 PRINT@65,X:PRINT@76,Y
260 NEXT X:POKE&HFF40,0:NEXTY:ST
OP
300 'MOVE - VARIABLE TO STORAGE
OR STORAGE TO VARIABLE
305 IF PEEK(9244)<>190 THEN GOSU
```

```
B5ØØ
31Ø A=VARPTR(A$):POKE924Ø,PEEK(A
+2):POKE9241,PEEK(A+3)
32Ø IF Z$="D" THEN EXEC9244 ELSE
 IF Z$="R" THEN EXEC9344
34Ø A=VARPTR(B$):POKE924Ø,PEEK(A
+2):POKE9241,PEEK(A+3)
35Ø IF Z$="D" THEN EXEC9244 ELSE
 IF Z$="R" THEN EXEC9344
36Ø M=M+256
37Ø RETURN
5ØØ FORR=ØTO22:READD:POKE(R+9244
),D
51Ø NEXTR
52Ø FORR=ØTO22:READD:POKE(R+9344
),D
53Ø NEXTR
54Ø RETURN
55Ø DATA 19Ø,36,24,16,19Ø,36,26,
198,Ø,166,128,167,16Ø,92,193,128
,38,247,16,191,36,26,57
56Ø DATA 19Ø,36,24,16,19Ø,36,26,
198,Ø,166,16Ø,167,128,92,193,128
,38,247,16,191,36,26,57
```

Submitting Material To THE RAINBOW

Contributions to THE RAINBOW are welcome from everyone. We like to run a variety of programs which will be useful/helpful/fun for other CoCo owners.

Program submissions must be on tape or disk and it is best to make several saves, at least one of them in ASCII format. We're sorry, but we do not have time to key in programs. All programs should be supported by some editorial commentary, explaining how the program works. We're much more interested in how your submission works and runs than how you developed it. Programs should be learning experiences.

We do pay for submissions, based on a number of criteria. Those wishing remuneration should *so state* when making submissions.

For the benefit of those who wish more detailed information on making submissions, please send a SASE to: Submissions Editor, THE RAINBOW, P.O. Box 209, Prospect, KY 40059. We will send you some more comprehensive guidelines.

Please do not submit programs or articles currently submitted to another publication.

OS-9™ SOFTWARE FOR COCO

SDISK — Standard disk driver module allows the use of 35, 40, or 80 track single and double sided drives with CoCo OS-9 plus you gain the ability to read/write/format the standard OS-9 single and double density disk formats used on other OS-9 systems. $29.95

BOOTFIX — To make bootable double-sided disks $9.95

SDISK + BOOTFIX — when ordered together $35.95

FILTER KIT #1 — Eleven utilities used as filters (with pipes) to give you "wild card" directory lists, copies, deletes, moves, lists, pagination, etc. $29.95

HACKER'S KIT #1 — Disassembler and memory dump/fill utilities allow you to disassemble OS-9 assembly code from disk or memory. $24.95

Send SASE for current catalog.
Terms: Prepaid check, MO, Visa, Mastercard or COD.
Add $1 S&H, (COD $3 extra).

D.P. Johnson, 7655 S.W. Cedarcrest St.
Portland, OR 97223 (503) 244-8152
(We appreciate your calling between 9-11 AM Pacific Time.)

OS-9 is a trademark of Microware and Motorola Inc.

ENHANCED 1248-EP EPROM PROGRAMMER

Directly compatible with EPROMs 2508, 2716, 2532, 2732, 68732-0-1, 68764 & 54766. No personality modules required. Adapter extends capability for 2564. Menu driven, the 1248-EP is suitable for both experienced and novice operators.

Functions include: 1) ERASURE VERIFICATION; 2) COMPARE EPROM TO REFERENCE; 3) BLOCK PROGRAMMING; 4) BYTE PROGRAMMING; 5) DUMP EPROM TO RAM, 6) JUMP; 7) RETURN TO EPROM MENU.

Other features: 1) Error detection & location; 2) Intelligent algorithm reduces programming time; 3) Textool ZIF socket. 4) On-board programming supply; 5) Extra PIA port supports parallel communications with handshake; 6) Firmware in on-board EPROM.

Comes with complete documentation.

Price is $129.95

A/D-80C ANALOG TO DIGITAL CONVERTER

- 16 A/D channels
- 8 or 10 bit resolution.
- 9K conversions/second
- Auto-ranging or sample/hold
- Large wirewrap area for custom signal conditioning & growth.
- On-board PIA provides user control of stimulus.
- On-board EPROM location for user software
- Documentation includes: data sheets on key parts, BASIC and machine language programming examples, and signal conditioning circuit diagrams.

Price is $149.95

2-PORT EXPANSION INTERFACE

- Buffered expansion interface.
- Splits $FF40-$FF5F area in half.
- Disc port uses $FF40-$FF4F.
- Second port uses $FF50-$FF5F.
- Enables simultaneous use of disc & other devices, e.g., the 1248-EP or the A/D-80C.

Price is $69.95

ORDERING INFORMATION

U.S. residents add $3.00, Canadians add $10.00 for shipping/handling. Arizona residents add 5% sales tax. Make checks/money orders payable to:

COMPUTER ACCESSORIES OF ARIZONA
5801 E. VOLTAIRE DRIVE
SCOTTSDALE, ARIZONA 85254
(602) 998-7569

Witches' Knight Will Cast A Spell On You

I, Sir Gallant Gallant, have once again returned from another great Adventure. With nothing but my wits to aid me (well, almost nothing), I have traveled through many damp and dreary forests and have bested (almost) every foe in sight.

After returning from battle, I found my homeland to be enchanted by an evil sorceress. Being terribly alarmed, I began my struggle to try to rid the land of the evil witch while returning my brother, Sir Noble (our family names tend to be on the modest side) to his rightful throne (he has been turned into a frog).

I have been playing an Adventure called *Witches' Knight*, by PAL Creations. The game, you may have guessed, is a text Adventure game set in the medieval age.

The game requires practically every byte of the 32K machine, so you are going to have to unplug that disk drive. The game was supplied to me on cassette and I experienced some difficulty in loading the tape. Fortunately, it is recorded on both sides, so after a short struggle, I was off to Adventureland.

After the program is loaded you are greeted with a song and a short poem. Shortly, you are greeted with a list of verbs — a nice feature because you don't have to guess what strange sort of dialect some Adventure authors seem to have concerning verbs. After a quick look at the verbs, the actual Adventure begins.

When starting out, you begin in a forest that is somewhat confusing, but seems to be a fairly standard practice in Adventures: the directions seem to be constantly scrambled, so you never are really sure which way anything is. In other words, you may be standing by a rock. Suppose you decide to go west. You are now standing by a tree. Sounds easy enough. (That's what you think.) Feeling adventurous, you decide to go west again. Suddenly you are standing by that same rock. If this confuses you, you ought to try navigating through it when all directions carry equal consistency. Actually, this is supposedly a spell the witch has cast on the area to make you lose your sense of direction; and is to give the player a sense that the program is different every time; but it really seems to be more of a nuisance than anything else.

The Adventure does, however, offer lots of variety, and everything that is required will come fairly logically. (For example, if you find a door, you would not think of submerging it in the tuna salad, you should open it.) The Adventure allows the brave (?) Adventurer to bargain with creatures, to fly across the sky magically, to become a fish to help discover the pond, and to climb a beanstalk. As you can tell, the game is never dull.

The next item brings me to the one thing I am a real stickler for — documentation. Although the game does include some documentation, I do not really consider it ample enough, especially for a beginning Adventurer. The only documentation takes the form of one side of a 9½ x 11-inch sheet with loading directions and a few brief notes on how to play.

Sir Gallant can wholeheartedly recommend this program to any semi-experienced Adventurer who likes a good challenge. Fortunately, this is not a "solve-it-in-one-day-Adventure," and will take a great deal of time before it is completely solved. If the documentation were improved, and the seemingly random movement was changed, I would rank this one of the best Adventures available for the Color Computer. (Sir Gallant also notes that for the price it is a great deal).

Happy Adventuring and good luck! (You'll need it.)

(PAL Creations, 10456 Amantha Avenue, San Diego, CA 92126, $14.95)

— Eric W. Oherle

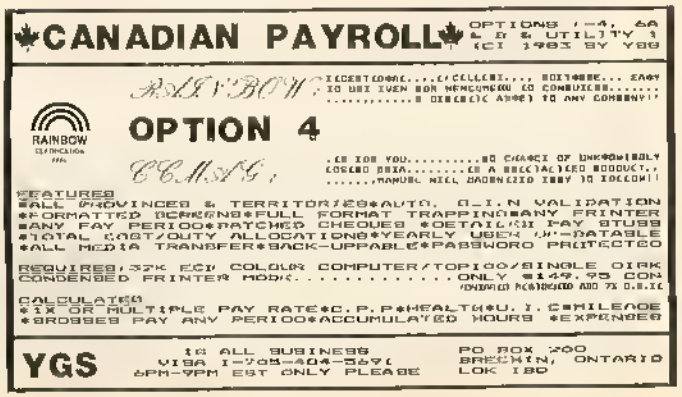

About Your Subscription

Your copy of THE RAINBOW is sent second class mail and, for subscribers in the United States, the date of mailing is printed on the label. If you do not receive your copy by the 25th of any month, send us a card and we will mail another immediately via first class mail.

You must notify us of a new address when you move. Notification should reach us no later than the 15th of the month prior to the month in which you change your address. Sorry, we cannot be responsible for sending another copy when you fail to notify us.

Your mailing label also shows an "account number" and the subscription expiration date. Please indicate this account number when renewing or corresponding with us. It will help us help you better and faster.

For Canadian and other non-U.S. subscribers, there may be a mailing address shown that is different from our editorial office address. Do not send any correspondence to that mailing address. Send it to our editorial offices at P.O. Box 209, Prospect, KY 40059. This applies to everyone *except* those whose subscriptions are through our distributor in Australia.

Setting The Scene

By George Firedrake and Art Canfil

Hi, We're Back

Yes, following the May 1984 issue, "GameMaster's Apprentice" took a vacation. Back in May we said Art Canfil would join us and so he has. From now on, your "GMA" authors will be George Firedrake (You probably know that he is an alter ego of Bob Albrecht — the dragon who lives within) and Art Canfil. Well, as you might suspect, a new person means new directions. Here are some things we *might* do. What we actually do depends somewhat on feedback from you, our readers.

— Art Canfil, Karl Albrecht, and Jim McClenahan have recently completed book and software called *TAIPAN: A Game in Context*, to be published by Hayden Book Company. Karl is 15, Jim is 16, and Art is somewhat older. We will share with you our ideas on contextual game design, beginning this time.

— In 15 years of writing how-to-do-it computer books, George Firedrake never got around to writing about disk files. In fact, George and Bob never really learned how to use disk files. So, we'll start a slow tutorial on disk files soon.

— We suspect many of you have never played a fantasy role playing game such as *Dungeons & Dragons* or *RuneQuest*. So we'll start including some beginner's stuff on how to play. We'll use excerpts from *Adventurer's Handbook: A Guide to Role Playing Games*, mentioned elsewhere in this article.

Surely, but slowly, we'll build software tools to help GameMasters and players play a role playing game. This will be software to help manage "worlds of IF": software to store, retrieve, manage, and use information; software to help you design, and even optimize characters to play in games.

— Is anyone interested in a series of tutorials on how to write *computer* Adventure games? We'll consider doing this — of course, it means *we* will have to learn how to do it! If we do, we will focus on games that feature story-telling, problem-solving, and exploration, *not* on "kill monster, get treasure." We will be especially interested in designing games that parents and quite young children can play together as an enjoyable family learning experience.

"We will be especially interested in designing games that parents and quite young children can play together as an enjoyable family learning experience."

(George Firedrake, a.k.a. Bob Albrecht, is one of the most prolific authors in the microcomputer world today. A specialist in writing for beginners, he is author of numerous books including TRS-80 Color BASIC. *Art Canfil enjoys designing games and writing. He is co-author of* Taipan: A Game In Context.*)*

TAIPAN: A Game in Context

What is a contextual game? Home computers make possible a type of electronic game less based on exercising the reflexive speed of a person's brain stem than on your exercising the wonderful gray matter with which humans think. Some of the best of such games are those in which a complex environment is simulated by the program, and the player interacts in a "lifelike" manner with the game environment. We call these contextual computer games, or games in context. In *TAIPAN: A Game in Context* we want to give the CoCo user three things:

1) an understanding of some fundamental principles of game design;

2) a historical background of a particular game context, the turbulent China trade of the 1800's;

3) a step-by-step approach to actually writing a game in CoCo Extended BASIC.

We hope to make an enjoyable game that will provide many hours of challenging entertainment. We also hope to spark an interest in the historical background, the context in which the game is set.

Next time, we will set the scene: Hong Kong in the mid-1800's. In the meantime, we suggest you read *Tai-pan* by James Clavell and *Dynasty* by Robert S. Elegant. May you live in interesting times.

FANTASY ROLE PLAYING GAMES

Millions of young people, and many not-so-young, play fantasy role playing games. A role playing game is a game in which one or more players create and control characters (adventurers) who live their imaginary lives in a specially made game world. The game world is created, managed, and operated by a GameMaster (GM), also called a referee, or dungeon master (DM).

Most people who play role playing games use a formal rule system. Some of the best known are listed below.

Champions. *From Hero Games, 92A 21st Avenue, San Mateo, CA 94402.*

Dungeons & Dragons. *From TSR, P.O. Box 756, Lake Geneva, WI 53147.*

RuneQuest (RQ). *From Chaosium, P.O. Box 6302, Albany, CA 94706.*

Tunnels & Trolls (T&T). *From Blade, Box 1467, Scottsdale, AZ 85252.*

Beginners beware! The rule books are formidable. If you are a beginner, we suggest you start with the following books, both from Reston Publishing Company, 11480 Sunset Hills Road, Reston, VA 22090.

Adventurer's Handbook: A Guide to Role Playing Games *by Bob Albrecht & Greg Stafford.*

Through Dungeons Deep *by Robert Plamondon.*

Copyright © 1984 by DragonQuest, P.O. Box 310, Menlo Park, CA 94026.

QUALITY SOFTWARE AND PERIPHERALS FOR YOUR COMPUTER

Skyline MARKETING CORP

$60 Software Bonus With Memory Upgrade

That's right—Skyline's famous 64K Upgrade is an even better deal than before! 8 guaranteed 200 n.s. 64K memory chips, solderless installation instructions (one solder connection required on Color Computer 2), Skyline's 64K BOOT and PAGER programs, PLUS the Wizard 64 adventure game, PLUS a handy new utility, SETUP 64 (allows you to configure your tape or disk system in a myriad of ways!) Still only $59.95. Order now—this offer may be withdrawn at any time!

Skyline Software

Super Stats	$29.95
Page Plus (improved doc) tape	$27.95
Page Plus disk	$29.95
Structured Macros	$19.95
C.C. Three	$49.95
SETUP 64	$19.95
MDISK (source code included)	$27.95
MDISK disk	$29.95

Skyline Software

ROMBACK	$16.95
Mystic Mansion (disk)	$29.95
QUICKSORT (cassette)	$12.95
64K BOOT/Pager	$19.95
Wizard's Tomb	$12.95
Wizard 64 tape	$21.95
Wizard 64 disk	$23.95
Simplex	$29.95
C.C. Mailer	$19.95

Call for the latest prices on:

- ***monitors*** by AMDEK & NEC
- ***printers*** by STAR, NEC, OKIDATA TELEVIDEO, JUKI & TRANSTAR
- ***modems*** by HAYES & NEC
- ***disk drives*** by AMDEK and more...

Money orders, Visa and Master Card and UPS C.O.D. orders gladly accepted, $2.00 additional.

MODEM ORDER LINE: 312 • 286-9015
Dealer inquiries invited

Skyline Marketing Corp.
4510 W. Irving Park Rd.
Chicago, IL 60641
312 • 286-0762

Learning*Leisure:

THE QUIZ MAKER
for Students and Teachers
by David Stanley

Now be able to create a test for any purpose. You choose the subject area and control the format. The many options of this program make studying interesting rather than tedious. You may have a question presented and you must type in the answer. You may have the answer flash on the screen, and you must type in the question. You may have a mixture of the above two formats. You may choose the flashcard feature that allows you to study before taking the test. You may add or change questions and answers. You may use short answer, fill-in, true/false, or multiple choice test. You may change the time limit for questions. Many more features, too. The printing command allows you to obtain hard copy of the entire test, or questions only, with space allowed for manual fill-in of the answer. This feature permits teachers to create exams or homework assignments. All tests may be saved and reloaded for future use. A program that does it all! Available in 32K E.B. $27.95 disk or $24.95 cassette.



NEW

The Factory: FROM SUNBURST
Strategies in Problem Solving

Grades 4-adult. Winner 1983 Learning Software Award. Recommended in Classroom Computer Learning, Courseware Report Card and Electronic Learning Unique three-level program challenges students to create geometric "products" on a simulated machine assembly line which the student designs. In the first part of the program, students learn how the available machines work. In the second part, they design their own assembly lines. In the third part, the computer challenges students to design an assembly line that will produce the product displayed on the screen. Three levels of difficulty develop inductive thinking, integrate skills such as visual discrimination and spatial perception, and promote an understanding of sequence, logic and efficiency. Diskette for 32K TRS-80 Color Computer with Extended Color BASIC. $39.95

Computer Island

(212) 948-2748

KING AUTHOR'S TALES
by Steve Blyn

The creative writing tool you've been waiting for! This innovative program allows children in grades 2 to 6 to write compositions, book reports, or short stories and save them to files. The material can be reviewed, corrected, rewritten, saved, and reloaded at any time. It can then be changed over and over again, if desired. Included, as well, is a question and answer optional feature. The user may write a question and answer for each page of text. When the story is run, the question will appear after each page. The user types in the answer and the program responds, "Correct" or "Incorrect". Teachers may use this feature to create reading comprehension material for their classes. The child also has the option of creating a title page picture on the screen for each story. The drawing section has automatic key repeat for line drawing and allows for change of line colors. Pictures may also be saved. We have included a selection of stories and pictures with each program. King Author's Tales is available in 32K E.B. disk or 16 K E.B. cassette at $29.95 for either version. Printer is optional, but recommended.
Now available — Talking King Author, a version made especially to work with Spectrum's and Speech Systems Voice Pak. You'll hear your story, too! Same great features at the same price.

Ed. Programs For
THE SPECTRUM SPEAKER
TALKING MATH DRILL
TALKING SPELLING TESTER
TALKING FOREIGN LANGUAGES
TALKING POETRY CREATOR
TALKING SHORT STORY MAKER
$9.95 each, any 3 for $24.95

MATH TUTOR SERIES DIAGNOSTIC DISKS
By Ed Guy

NEW

These disks contain program series to give students practice in various mathematical operations and to give the teacher feedback on their progress. The feedback will give a "number right" report and also a diagnostic listing of where the student made an error, and how many times he used the "HELP" command featured in each program. Each student may do up to 10 examples, with at least 30 class sesesions per disk. A password system prevents students from seeing the reports of others in the class. Results may be printed out on screen or line printer. The Arithmetic Diagnostic Disk provides practice in division, multiplication, factor operations and algebraic evaluation (primarily intended to teach the hierarchy of operations). The Fractions Diagnostic Disk provides practice in addition, subtraction, multiplication, and division of fractions. All problems lead students step by step through examples and contain many "HELP" commands. ARITHMETIC DIAGNOSTIC DISK — 32K E.B. — $49.95. FRACTIONS DIAGNOSTIC DISK — 32K E.B. - $49.95 DISK ONLY.

NEW

The Pond: FROM SUNBURST
Strategies in Problem Solving

Grades 2-adult. Winner 1983 Learning Software Award. Recommended in Classroom Computer Learing. A small green frog, lost in a pond of lily pads, helps students recognize and articulate patterns, generalize from raw data and think logically. In the practice option, students choose from six levels of difficulty, in which lily pads are displayed in increasingly complex patterns. The student must determine a pattern that will get the frog across the pond. In the game, students collect points by directing their frogs through as many ponds as possible in the fewest number of moves. Diskette for 32K TRS-80 Color Computer with Extended Color BASIC. $39.95

The best in software for kids!

THE MONEY SERIES
BY STEVE BLYN

DOLLARS & SENSE 16K ECB $14.95
Player buys familiar items using dollars and coins to practice using money correctly.

McCBCO's MENU 16K ECB $14.95
Learn to buy and add up your purchases from a typical fast-food restaurant menu.

MONEY-PAK 32K ECB $22.95
A combined and menu driven version of the above programs. Includes play money. Reviewed - Rainbow 7/83

CROCODILE MATH 16K ECB
E.B. $17.95

An animated math game using hi-res graphics. A fish containing a problem moves toward a crocodile containing a possible answer. If the answer is true, open the crocodile's mouth with the joystick to eat the fish. If false, keep his mouth closed. Addition, subtraction, and multiplication examples on 3 levels, 3 speeds. Tape only. By Art Provost

COLORGRADE 32K ECB $29.95
A great aid to teachers. Records and calculates grades for up to 6 classes of up to 40 students each. Uses number or letter grades, named or numerical periods and gives a weighted average. Easy to use. Full directions. DISK ONLY. By David Lengyel.

BEYOND WORDS 32K ECB $19.95 Each
These Language Arts programs cover common misspellings, and synonyms/-antonyms on each level. Additionally, Level 1 tests contractions and abbreviations, Level 2 tests homonyms, and Level 3 tests analogies. Each program has 3 parts and contains over 400 questions and uses over 800 words. All tests are grade appropriate. User modifiable (directions included). Printer option.
Level 1 Grades 3-5
Level 2 Grades 6-8
Level 3 Grades 9-12
DISK VERSION Each $23.95

THE MATH TUTOR SERIES 16K Ext.
These tutorials take the child through each step of the example. All programs include HELP tables, cursor and graphic aids. All allow user to create the example, or let the computer choose. Multi-level. Great teaching programs. By Ed Guy.

LONG DIVISION TUTOR	$14.95
MULTIPLICATION TUTOR	$14.95
FACTORS TUTOR	$19.95
FRACTIONS TUTOR (Addition)	$19.95
FRACTIONS TUTOR (Subtraction)	$19.95
FRACTIONS TUTOR (Multiplication)	$19.95
Any 2 FRACTIONS programs	$29.95

EQUATIONS TUTOR 32K EB $19.95

NEW

ARROW GAMES by Penny Bryan
32K EB. tape $21.95 disk $24.95
Six menu driven games for young children (ages 3-6) to teach directions. All games involve using the arrow keys. Games include LADYBUG, BUTTERFLY, ARROW MATCH, KALEIDOSCOPE, RABBIT, and DOODLE. Colorful graphics.

FIRST GAMES by Penny Bryan
32K EB. tape $24.95 disk $27.95
First Games contains 6 menu-driven programs to delight and teach your early learners (ages 3-6). These games enrich the learning of colors, numbers, lower-case letters, shapes, memory, visual discrimination and counting.

MATH INVADERS by David Steele
16K EB. $17.95
A multi-level 'Space Invaders' type game to reinforce the 4 basic math operations (addition, subtraction, multiplication and division). Problems become more difficult as you progress. Hi-res. graphics, joystick required.
TAPE ONLY

MORE LEARNINGWARE
(ALL PROGRAMS IN 16-K EXTENDED EXCEPT WHERE NOTED)

CONTEXT CLUES - by Steve Blyn - Multiple choice reading programs. Specify grade 4,5,6 or 7. each $17.95

VOCABULARY BUILDERS - 32K - Great for test preparations. 200 questions, multiple choice, modifiable, printer option. I (grades 3-5), II (6-8) or III (9-12) each $19.95

READING AIDS 4-PAK - Child creates own reading material. $19.95

GRAPH-IT - by D.Steele - Graph sets of algebraic equations. $14.95

HISTORY GAME - 32K - by J. Keeling - "Jeopardy" type US facts game $14.95

KNOW YOUR STATES - 32K - by J.Keeling - Name all hi-res. states $19.95

MUSIC DRILL - by D.Steele - Identify notes of many scales. $19.95

GRAPH TUTOR - 32K - by C. Phillips - Create, use line, bar, pie pictographs. Hi-res $19.95

PRESCHOOL SERIES - By J. Kolar. each $11.95
Pre. 1-Counting, number recognition; Pre. 2 - Simple Addition; Pre. 3 - Alphabet Recognition.

FRENCH OR SPANISH BASEBALL - By S. Blyn each $11.95
Vocabulary practice. 200 words. Modifiable. Specify language. Also in 32K (500 words) $19.95

HEBREW BULLETIN BOARD - by I.Kolar - utility to print words. $15.95

HEBREW ALPHABET - Learn the letters of this alphabet. $11.95

*****A BYTE OF COLOR BASIC** - Beginner's manual & exercises $ 4.95

FUN and GAMES
(ALL PROGRAMS IN 16-K EXTENDED EXCEPT WHERE NOTED)

CIRCUS ADVENTURE - by Steve Blyn 16K - Kids adventure game. $11.95

SCHOOL MAZE - by Steve Blyn 16K - Kids graphic adventure. $11.95

HAMSTER HUNT - by L&D Weston 32K - Beautiful graphics in this charming new kids adventure game. $19.95

MR. COCOHEAD - by Steve Blyn - Create over 10,000 funny faces. Surprise commands. Very creative. $16.95

NAME THAT SONG I - 72 kid's songs to guess. $14.95

NAME THAT SONG II - 72 adult hits from the past 30 years. $14.95

HORSERACE - by R&P Armstrong - Hi-res. race for all ages. $11.95

ALL PAYMENTS IN U.S. FUNDS. OVERSEAS ORDERS PLEASE ADD $5.00 FOR SHIPPING

SOFTWARE NOW AVAILABLE IN AUSTRALIA FROM
SOFTWARE SPECTRUM, GPO BOX 2101, ADELAIDE, SA 5001

RAINBOW CERTIFICATION SEAL

Dealers Inquiries Invited.

Computer Island

FOR YOUR CONVENIENCE

Blank Cassettes with Labels	3 For $ 2.00
Popular Brand Diskettes	3 For $10.00
Disk Head Cleaner Kit	each $25.00
Looseleaf Diskette File (hold 4)	2 For $ 3.00

VISA

(212) 948-2748
Dept. R 227 Hampton Green, Staten Island, N.Y. 10312

Send for catalog with complete descriptions.
Please add $1.00 per order for postage. N.Y. residents, please add proper tax. FREE set of BINARY DICE, including full directions, with orders of 2 or more items
Authors: We are seeking quality children's software for leisure or learning. Write for details. Top Royalties.
TRS-80 Color Computer. TDPSystem 100.

A new beginner's assembly language tutorial column

Covering The Bases With Assembly Language

By R. Bartly Betts
with Programs by Chris Bone

You and I are going to try something different. "What is new about an assembly language tutorial?" you ask. Assembly language tutorial columns are not new. There have been lots of them and I have always had difficulty following the concepts they teach. Perhaps it is because the authors knew too darn much about their subject. They weren't writing on my level. Things they thought were too basic to need explaining just didn't exist in my repertoire. Although I have done a bit of research since then, I am very much in the beginner's stage and still have most of my beginner's questions.

"What is a beginner doing writing a column in a reputable magazine?" you exclaim! Well, when the RAINBOW asked me if I felt qualified to write a column on assembly language, I was just too excited to say no.

"A piece of cake," I told them, while trying to wash away a tell-tale green from around my assembly language ears. Anyway, I figured, if the problem with other assembly language tutorials was too much knowledge on the part of the author, I was super-qualified, in the reverse direction.

So, if you are an assembly language beginner, or want to be, then stay tuned; we speak the same language. For those who are further advanced, well, don't turn us off yet. I can guarantee that, with the help of my friend, Chris Bone, who is an assembly language wiz, this column is going to have some pretty useful programs.

(Bartly Betts is a former reporter and magazine editor now operating a retail store and custom leather shop in Brooks, Alberta, Canada. He has owned and operated a Color Computer for over three years and is presently taking an electronics and computer course by correspondence. Chris Bone is a college computer science major and has been programming for more than three years. He averages between six and nine hours a day on the CoCo.)

What It Takes

If your first questions have to do with what it takes to begin assembly language programming and how much trouble it is to learn, then here are your first answers:

You will need time and the desire to learn. In some ways assembly language is easier to learn than BASIC and in some ways it is harder. I counted 72 commands in the *EDTASM+* instruction manual but, because they are mnemonic (i.e., designed to represent actual English equivalents), they are easy to learn. There are also a few editor commands, assembler commands and switches, ZBUG commands, pseudo codes and error messages to learn. They are all easy to remember once you begin working with them. The hard part comes when you have to manipulate bits and bytes and accumulators and registers and stacks and pointers. However, in case you're feeling discouraged, take my assurance, you can do it — if I can, anyone can. I do want you to realize that there is pain with the gain and you will have to put in a long-term effort to become proficient.

You will need an editor assembler to write and edit the code. It would be difficult to provide instructions for more than one, so we will be using Radio Shack's *EDTASM+*. I have the ROM Pak version converted to run on disk.

It would be handy to have at least one good book on 6809 assembly language. I am using Lance A. Leventhal's *6809 Assembly Language Programming*, published by Osborne/McGraw-Hill. Pretty well any large computer store would carry it or could order the book for you. Radio Shack also has come out with a 6809 assembly language instruction book that I understand is quite good.

Having a calculator on hand can be quite useful for some of the conversions you will be wanting to do, but they can all be done by hand or on the computer. In fact *EDTASM+++* has a ZBUG calculator built in that is very useful.

Of course, you must have at least a minimum of a 16K Color BASIC Computer.

Getting On Second

One thing that kept me confused about assembly language for a long time was the difference between it and machine language. The two terms are often used interchangeably. Assembly language, like BASIC, FORTRAN or PASCAL, is a language. It is not code that the computer can understand without interpretation. The product of an assembly language program is called source code. The computer must translate this code into machine language, the code which directs the computer on the paths that accomplish a particular job. Pure machine code is in binary. That is, in a numbering system of base two.

Despite what some authors have said, an understanding of binary and hexadecimal (base 16) numbering systems is essential to assembly language programming.

Binary Is Easy

The secret to any numbering system is memorizing what each number column represents. You are most familiar with a base 10 system. That is, from left to right, the first column represents ones, the second column tens, the third hundreds, the forth thousands, the fifth ten thousands, etc. The number 12345, when put under the appropriate column looks like this:

ten thousands	thousands	hundreds	tens	ones
1	2	3	4	5

The actual calculation would look like this: (1 x 10,000)+(2 x 1000)+(3 x 100)+(4 x 10)+(5 x 1).

Another way of looking at the value of the columns is to realize that the rightmost column is 10 to the power of zero. The next column is 10 to the power of one, the third 10 to the power of two, the forth is 10 to the power of three, etc.

When using binary numbers (remember that they are a base two) you can read them exactly the same way except the columns represent different values. The binary columns look like this:

128	64	32	16	8	4	2	1

The rightmost column has a value of one, the next a value of two, the next a value of four, etc. An easy way to remember the values is to note that, from right to left, each column has double the value of the preceding column.

Now, with this in mind, let's look at the binary number of 11010011. Put under its columns it would look like this:

128	64	32	16	8	4	2	1
1	1	0	1	0	0	1	1

Thus you have (1 x 128)+(1 x 64)++(0 x 32)+(1 x 16)+(0 x 8)+(0 x 4)+(1 x 2)+(1 x 1), or 128+64+0+16+0+0+2+1 totaling 211 in the decimal numbering system we are most familiar with. As you can see, the rightmost column is two to the power of zero, the next column is two to the power of one, the next is two to the power of two, etc.

And this is the numeric language that almost all computers understand. These columns are like switches in the computer and each switch has only two positions, off or on. Each switch is called a bit and a gang of eight switches is called a byte. If you split a byte in half, the two four-bit sections become a nibble. A computer's memory is divided into memory units of bytes, each with a specific numeric location. Thus, in BASIC, when you poke a number into a memory location (each memory location consists of eight bits), the computer converts the decimal number into binary code and each of the eight bits is turned either off or on. Those eight bits, or each byte, represents either an instruction to the computer or is an actual number to be used by an instruction.

This is what assembly language is all about — putting instruction codes into memory along with the necessary numeric data that the instructions will act upon. For instance, the binary code 10001011 tells the 6809 microprocessor in your computer to add a number to accumulator A.

A Hex On Hexadecimal

"Ah," you say. "Now I am ready to learn how to put those instructions into the computer."

"But, not quite yet," I say. "There is still hexadecimal to contend with."

"And what the blazes is hexadecimal?" you ask.

"To explain such mysteries is what I am here for," says I.

Hexadecimal is just another numbering system; this time, to the base of 16. Put into its columns, it looks like this:

4096	256	16	1

As with the other numbering systems, each column is a power of 16 . . . 16 to the power of zero, 16 to the power of one, 16 to the power of two, etc. But, there is one other little problem. Whereas base 10 numbers are represented by the single-digit symbols zero through nine, hexadecimal needs single-digit symbols for the numbers zero through 15. What can be used for numbers after nine? Whether for good or bad, the symbols for 10 through 15 have been chosen as A, B, C, D, E and F. Thus the count of zero through 15 in hexadecimal is 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F. In hexadecimal, the number 11 would be written 'B'.

"If hexadecimal has to look that bad, why use it?" you might ask. Personally, I hated the whole concept until I actually started trying to do some assembly language programming. Then it comes in mighty handy, but I still don't like it. The conversion between Hex and decimal is time consuming and I just can't get a mental picture of a number represented in Hex. Like, what the heck does AB6C mean in real life?

But Hex and binary are bosom buddies and that is why you need Hex, even if you can't love it. Hex to binary and binary to Hex conversion is a snap, and seeing as binary to decimal and decimal to binary isn't too difficult, knowing all three makes transitions much easier.

The hard way of converting decimal to Hex is by division. Let's take the decimal number 121 and convert it to Hex: The highest Hex column that will divide into 121 is 16 . . . 121 divided by 16 equals 7 with a remainder of nine. The seven now goes into the 16's column of the Hex number as illustrated and we are left with a remainder of 9 which is too small to be divided by anything larger than the one's column. Thus the nine will go into the one's column of the

Hex number and the resulting Hex number is 79; decimal 121 = Hex 79.

```
4096   256   16   1

==========

  0     0    7    9
```

That looked quite easy, too easy in fact, so lets try another one . . . how about 2755? The process looks like this: The decimal number 2755 is divided by 256 and the result is 10 in decimal or A in Hex. So A goes into the 256 column. There is a remainder of 195 which is divided by 16 and equals 12 in decimal or C in Hex with a remainder of three. The Hex C goes into the 16's column and, as there is no more division possible, the three goes into the one's column. Thus 2755 in decimal equals AC3 in Hex.

```
4096   256   16   1

==========

  0     A    C    3
```

By now you are probably screaming that your computer can do all this slick as a whistle using *HEX$*. You are right, but often your computer is tied up doing other things and is not available.

Third Base And Going Home

So, how do they all tie together? Well, you will be using all three when you do assembly language. For, instance, suppose you want to display some graphics at memory location 4112 decimal, (this is graphics memory in the first *PMODE 4* page) and you want to turn on the first three pixels or dots in that memory location.

Can you guess why it is desirable to know binary and Hex? I'll bet you got it. Turning on the first three bits in a byte will require a binary number of 11100000. In binary, one equals "on" and zero equals "off." But how do you get that binary number in graphics screen memory location 4112? Here is where Hex comes in handy.

First, break the binary number into two nibbles of 1110 and 0000. Binary 1110 is converted to decimal 14. Of course binary 0000 in decimal is zero. To convert the entire binary number to decimal takes a bit more work, but not so for Hex. In Hex the decimal 14 becomes 'E' and the decimal zero is still zero. Binary 11100000 is E0 in Hex. Now, turn on your computer and type in and *RUN*:

```
10 PMODE 4,1
20 SCREEN 1,1
30 PCLS
40 POKE 4112,&HE0
50 GOTO 50
```

If you look closely at the screen you should see three little dots. Hit BREAK and change the Hex number. How about a dot pattern like this (.. .. ..)? In binary that is 11011011. Converted to two nibbles you have 1101 and 1011. That is 13 and 11 in decimal, or DB in Hex. Put *&HDB* in Line 40 instead of *&HE0*.

Now you realize that this is the second way of converting decimal to Hex. First convert the decimal to binary and then convert the binary to Hex. For most of us it is a lot quicker than the divisinn method.

Perhaps you would like to do something a little more impressive. Listing 3 is a short BASIC program to create the letter 'A' on the graphic screen in the same manner described above, (Listing 1 must be in memory for it to work). Line 110 contains the data for the dot pattern of the letter 'A'. This pattern is then poked into the graphic screen memory and there it is. If you would like to have an illustration of how the bytes are formatted to form the character, *ENTER* and *RUN* Listing 3.

Where Does It Lead?

Now you are operating in all three numeric bases and, hopefully, you are doing so with ease. If I have been successful, I have transferred several months of searching on my part into just a few minutes reading on your part. I have also introduced a concept we will be using to provide a neat utility that when complete will allow you to run your BASIC programs on a 51-column screen with upper- and lowercase letters. That is the assembly language program that we will be leading up to in the next two or three columns. At the same time we plan to provide you with lots of sample programs and routines.

Next month we will be looking into the actual use of the editor/assembler program and the operation of the assembly code. You now have the background to get into the real meat of things. In the course of this column, I plan to explain all of the assembly language or "op codes," how and where they are used and how they operate. I will assume you have no previous knowledge and will keep things as simple as I can make them. This will mean that, if you are going ahead on your own, the column might seem a bit slow at times. For this reason I will also try to provide some information at a higher level.

Decimal, Binary and Hex Hardcopy

To make life easier in your conversions, running Listings 1 and 2 will produce a decimal, binary and Hex conversion printout over a selected range from zero to 255. The assembly language source code is well commented so those who are already into assembly language programming can follow its logic. Even if you are a beginner, study your *EDTASM+* manual and learn how to enter and assemble it. Then *CLOADM* or *LOADM* the resultant machine language program. *CLOAD* or *LOAD* the BASIC program in Listing 2 and *RUN* it. You will get a printout of the 256 numbers in all three bases.

We Would Like To Hear From You

Both Chris and I would be very interested in your comments. If you have any reactions you would like to share with us please communicate by letter or phone. If you call, make it in the evenings between 7 and 10 p.m. (but not collect, please). Chris's number is (403) 362-5650 and my number is (403) 378-4550. You can write to me at P.O. Box 184, Rosemary, Alberta, Canada, T0J 2W0. We welcome comments, both good or bad and would be pleased to answer any questions we can. If they are assembly language questions call Chris. I will field the comments. Chris says to be kind though, he is a temperamental artist.

Listing 1:

```
00010 **************************
00020 * PRINT AN 8 BIT NUMBER *
00030 * CALLED WITH: A=USR0(X)*
00040 * WHERE X=VALUE TO BE   *
```

```
                    00050 * PRINTED (0-255)       *
                    00060 *************************
0000 BD   B3ED      00070 START  JSR    $B3ED   *GET ARGUMENT *>D
0003 86   08        00080        LDA    #8      *8 BITS/BYTE
0005 34   02        00090 LOOP   PSHS   A       *SAVE CURRENT BIT COUNT
0007 58             00100        ASLB           *MOVE BIT 7 OF B => C FLAG OF CC
0008 24   04        00110        BCC    ZERO    *IF C FLAG=0 BRANCH
000A 86   31        00120        LDA    #'1     *PUT ASCII CODE FOR 1 =>A
000C 20   02        00130        BRA    PRINT   *GO OUPUT
000E 86   30        00140 ZERO   LDA    #'0     *PUT ASCII CODE FOR 0 =>A
0010 AD   9F A002   00150 PRINT  JSR    [$A002] *OUTPUT CHR$(A)
0014 35   02        00160        PULS   A       *GET CURRENT BIT COUNT
0016 4A             00170        DECA           *A=A-1
0017 26   EC        00180        BNE    LOOP    *IF A<>0 GOTO LOOP
0019 39             00190        RTS            *RETURN TO BASIC
          0000      00200        END
00000 TOTAL ERRORS
```

```
1 CLEAR 200,&H3EFF
10 ' SAMPLE USE OF ROUTINE TO PR
INT A TABLE OF VALUES
20 INPUT"SCREEN TO PRINTER (S/P)
";SP$
21 INPUT"RANGE (0-255)-(0-255)";
R1,R2
30 IF SP$="S"THEN S1=0:S2=0ELSES
1=-2:S2=254
40 DEFUSR0=&H3F00
50 FOR X=R1 TO R2
60 PRINT#S1,X;TAB(6);
70 POKE&H6F,S2:A=USR0(X)
80 PRINT#S1,TAB(16)HEX$(X)
90 NEXT
100 GOTO 20
```

Listing 3:

```
10 ' POKE THE LETTER A INTO GRAP
HICS MEMORY
20 ' LINE 60 CHANGES THE CODE TO
 PRINT A 0 TO A SPACE
30 ' THIS ALLOWS EASIER VIEWING
OF THE PRINTED OUTPUT
40 INPUT"DO YOU WANT TO SEE THE
GRAPHICS OR BINARY OUTPUT (G/B)"
;BG$
50 DEFUSR0=&H3F00
60 POKE&H700F,32
70 PMODE4,1:PCLS:SCREEN1,1
80 FOR X=1 TO 10
90 READ A
100 IF BG$="B" THENA=USR0(A):PRI
NT
110 POKE&H1010+32*X,A
120 NEXT
130 GOTO130
140 DATA 16,40,68,130
150 DATA 130,130,254,130
160 DATA 130,130
```


The Companion

Expansion Interface Units

Basic Technology offers you the most features and best quality for the money!

Compare these features:

	BT COMPANION	TRS-80 Multi-Pak
• Power ON Indicator Light	YES	NO
• Cold Start Reset	YES	NO
• Gold Socket Connectors	YES	NO
• Sockeled Integrated Circuits	YES	NO
• Manual Cartridge Selector	Pushbutton	Slide Switch
• Keyboard/Program Selection	YES	NO
• Cartridge ON Indicator	YES	NO
• Extension Cable	YES	NO
• Warranty	180 days	90 days
• User's Manual w/schematics, parts layouts and parts lists	YES	NO

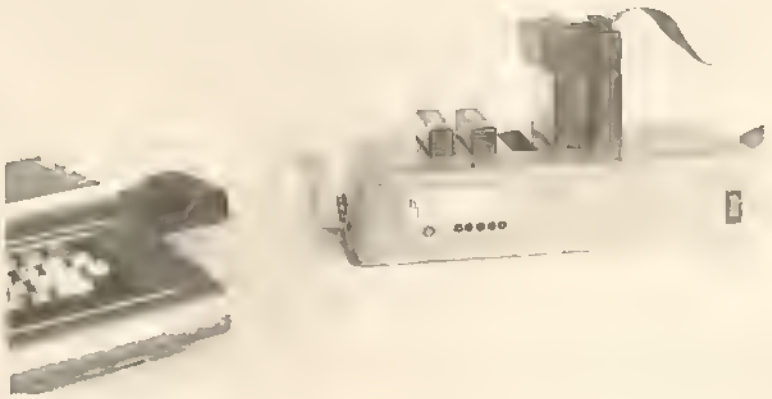

Also for the Color Computer:
BT-1010 Parallel Printer Interface ... $ 79.95
BT-1020 Real Time Clock/Calendar . $109.00
BT-1030 Versatile Interface Port..... $ 69.95

Add $5 shipping and handling. Check, money order, VISA, MC (Account # and expiration date). COD charge $2 (req certified check or M.O.). Michigan residents add 4% sales tax

RAINBOW

The Companion — New Price . . $225.00
BT-1000 . . . . . $250.00
with 8K RAM $275.00

VISA MasterCard

ORDER TODAY OR SEND FOR FREE BROCHURE!

basic TECHNOLOGY

Dept. Q P.O. Box 511 Ortonville, MI 48462

(313) 627-6146

Sure, You Can Swap Keyboards — Maybe

By Ed Ellers
Rainbow Technical Writer

• *Recently I purchased a new keyboard for my CoCo and set the old keyboard aside. I now find myself purchasing a 16K CoCo 2 with a changed keyboard. Instead of buying another keyboard, I decided I would try to install the keyboard from my old CoCo (which I purchased in 1982) into the CoCo 2. Is this possible?*

Eric Wilson
Peterborough, NH

You can stick an old CoCo keyboard in the CoCo 2 if the older machine is an NC board (otherwise known as ET, 285 and F). The C, D and E version machines used a pair of matching headers (one on the main board, the other on the keyboard ribbon cable) to connect the two; the NC board and the CoCo 2 have a flexible printed circuit in the keyboard, and it extends via a pigtail to plug into an edge connector on the main board. All CoCo keyboards rest on the mounting posts in the same way, so the old keyboard will fit properly in the case. Be very careful in handling the ribbon cable pigtail, as it is somewhat delicate. You may also have some problems with RF interference; the CoCo 2 depends on a metal plate on the bottom of the keyboard to cut down on RFI radiated by the keyboard, but the old keyboard won't have this plate.

(Ed Ellers, a RAINBOW *and* PCM *staff member, is a self-confessed electronics fanatic whose other interests include science fiction.)*

A Missing Bit

• *I have an old CoCo with the 1.0 Color* BASIC *ROM. This ROM only sends seven bits to the printer instead of eight. Because of this I can't get the MSB to work on my Epson MX-80 printer when trying to generate dot patterns. I plan to get my machine upgraded soon. Will this solve my problem with the MSB?*

Tory Lyon
Morrison, CO

Depends on which upgrade you want to do. The 1.0 ROM's two flaws were that it used seven-bit ASCII, rather than eight-bit, for printer output (to match the old Quick Printer II) and that it could not initialize the SAM chip's addressing for 64K RAM chips. If you have Radio Shack put in the 64K upgrade, they will install a newer BASIC ROM at no extra charge to make it work. Getting the ROM by itself may be a problem; I don't know if they will stick a new ROM in simply on request (or how much they might charge). If you had bought a Radio Shack printer (current models require eight-bit output), they would install the new ROM for you to make your printer work, but whether they will do it for someone who bought "somebody else's" printer is another matter. Radio Shack also offered at one time an eight-bit driver patch program (part number 700-2013); this may still be available.

Preserving Memories

• *I was wondering if it is possible to make a small device which can be fitted to the CoCo which will keep the memory powered while the rest of the computer is switched off?*

Richard Goodman
College Station, TX

Sadly, it isn't as easy as that. The CoCo (as with most other microcomputers) uses "dynamic" memory chips, rather than the more expensive "static" RAMs. A static memory system will hold its data as long as power is going into the chips, but with dynamic memory you have to constantly "refresh" the memory; in the CoCo it's done simply by accessing the memory every few milliseconds, and the job is handled nicely by the SAM chip. To keep dynamic RAMs running while the system is shut down, you would need to keep the refresh cycles going in same way, and you would have to keep your circuit from interfering with the SAM chip's operation. One false move in the transition from one to the other and you'll lose your data faster than you can say "6883!"

Higher Resolution

• *There are a few boards on the market (like WordPak by PBJ) that give an 80-column display for a monitor. The way I understand it, a different video generator chip is used. This gives more pixels to form characters with. Could this higher resolution be used in the graphics pages?*

David Moulton
Cody, WY

If you're talking about addressing the external system the way you would the CoCo's own 6847 video chip, forget it. These boards are very different from the CoCo's video circuitry, and all the ones I've heard of are designed for high-density text display only.

Byting the Apple

• *I'm looking for someone who has a program to read Apple II disks on a CoCo using either Disk BASIC or OS-9.*

Larry Owen
Phoenix, AZ

I haven't heard of any, and there's a very good reason why it isn't done routinely. The CoCo and most other personal computers use a special disk controller chip, and these are usually designed to use a standard format developed by IBM some 10 years ago (although there are many variations and two different encoding schemes used now). The Apple II uses a rather ingenious circuit that Apple co-founder Steve Wozniak designed using readily available chips; it has stood the test of time so well that an improved single-chip version is used in the new Apple IIe and Macintosh, but it doesn't seem to be compatible with the "standard" disk controllers! (I'm sure that some of the more intrepid hackers among us will take this as a dare rather than a fact of life; I'd like to see somebody bridge this gap.)

CoCo Meets Model I

• *Another teacher and I have personal Color Computers. Our school has three Model I cassette systems. Next fall, these will be transferred from the "computer room" to the library and the other teacher's classroom. We are very anxious to be able to use CoCo and Model I programs interchangeably.*

We are able to write and convert BASIC programs, if not too complex, but cannot handle machine language and hardware adaptations ourselves. What do we need to accomplish our purpose?

Barbara Hess
Fallsburg, NY

About the only things the Model I and the CoCo have in common are that they are both made by Radio Shack and both use Microsoft BASIC. "Converting" machine-language programs from one to the other will actually mean writing an entirely new program, because the CoCo's 6809 processor just isn't compatible with the Z80 used in the Model I, III and 4. There is a program from Spectral Associates called *Magic Box* that will allow Model I (BASIC only) cassettes to be loaded directly into the CoCo.

Snow — in New Mexico — in August?

• *I have a D board CoCo with 32K "piggyback" RAM. My problem is that I cannot use the upper 16K for Hi-Res video display; all I get when I try it is a lot of snow. This has kept me from using a lot of programs. Is there anything I can do to fix this? Would the same thing happen if I go to 64K?*

Michael Kromeke
Albuquerque, NM

You seem to have a better idea of the problem than many others I've heard this complaint from. The problem is that the usual "piggyback" modification doesn't make the right connections for video RAM access. When you try to use a Hi-Res screen placed in the upper bank, the plotting takes place in the upper bank, but the CoCo's video chip displays what's in the the corresponding area in the lower 16K bank. Some hardware nuts have tried to fix this problem, with varying degrees of success; with 64K RAM chips priced at $40 or so a set, I'd suggest a 64K upgrade as a better solution, as Hi-Res displays work fine in the full 32K available in BASIC.

Who's On First?

• *People talk of CoCo third-party software companies. Radio Shack is obviously the CoCo's first-party software company. Where can I go to buy some second-party software?*

Confused in California

You don't! Look at it this way, Bob. Radio Shack has the computer to sell; that makes them the first party in the transaction. You buy it; that makes you second. When you go to someone else for software, that makes them the third party. Obviously, second-party software is stuff you write yourself!

Packing It In

• *When I type in a program line, I can only make it 249 characters long. After the 249th character, the keyboard will not respond to anything except ENTER. If this is not a problem with my machine but a characteristic of the CoCo's design, why do you print programs in your magazine that contain lines longer than 249 characters (such as Line 75 of "Para-Jumper" on Page 179 of the December 1983 Rainbow)? If it is a problem, can you help me?*

Steve Bernstein
Union Grove, WI

Although the normal limit is 249 characters, the *EDIT* mode will let you pack a few more characters on the end of a line, to a certain limit. Unfortunately, in a few extreme cases, packing too many extra characters into a line will prevent the "detokenizing" routine in BASIC from doing its job completely, and *LLISTings* and ASCII saves of the program will be missing a few characters. Those who are submitting programs for publication in THE RAINBOW should avoid any temptation to pack the program lines. Packing is done for two reasons: to reduce the minimum memory requirements and to speed up execution of the program. In reality, it has only a minimal effect in this respect and holds the potential for causing considerable problems. "Stripping" utilities, programs especially designed to pack lines and remove unneeded spaces should be used with caution, as programs can be "overpacked," resulting in characters being left out of screen *LISTs* and *LLISTings* — even though the characters, or commands, are actually in the program and workable. When someone tries to type in a listing that has been overpacked, he will miss those few characters that are dropped from the tail end of overpacked lines.

In Search of Artifacts II

• *I often see programs for artificial colors in PMODE 4, but I can't get them. A program I wrote to draw vertical lines in every other dot column (to create solid colors) will only produce vertical yellow/blue, mixed with black, stripes, etc. What is the reason for this? Is it possible it is because my TV is for the PAL system? Or because my CoCo is the European version? If there are differences for Europe, I would like to know them.*

Cornelius Caesar
Hofheim, West Germany

The problem you're having is due primarily to the difference between the German PAL system and the American NTSC (National Television Systems Committee, an industry group) system. PAL stands for Phase Alternation Line, and it is a modification to the NTSC system to keep the various stages in the transmission chain from altering the colors of TV pictures (something most Americans will tell you happens all too often here). The artifact colors of red and blue, as I discussed in a previous column, are caused by the dots produced by the CoCo being locked to the color signal; in the PAL CoCo this is no longer so because of the phase alternation, and the colors produced (the yellow and blue) change from line to line. Most European sets have a delay line to complete the PAL error-cancellation process; the delay line is filtering out most of the false colors, as the comb filter in some American sets (based on the same type of delay line) does on broadcast signals (but not CoCo displays).

★★★★★★★★★★ SELECTED SOFTWARE ★★★★★★★★★★
FOR THE COLOR COMPUTER

UPGRADE YOUR COLOR COMPUTER!

Complete solderless kits with easy-to-follow instructions.

4K-16K FOR ALL BOARDS $19.95
4K-32K FOR ALL BOARDS $54.95
[illegible] $31.95
64K For E & F BOARDS & COCO 2 ..... $59.95
*IF POSSIBLE, PLEASE SPECIFY BOARD REVISION WITH ORDER.

NOTE: All ICs used in our kits are first quality 200NS Prime Chips and carry one full year warranty.

★★★★★★★★★★★★

SPECIAL OF THE MONTH

JUNIOR'S REVENGE (32K)
TAPE ONLY $21.50

THE HJL-57 KEYBOARD

WITH FREE SOFTWARE FOR FOUR FUNCTION KEYS
$79.95
* Please specify model (original, F version or COCO 2)

VOLKSMODEM

300 baud, direct connect, originanswer automatically selected. Comes with all COCO cables and battery.
$74.95

DISKETTE CAROUSEL

- Precision Rotary
- With 72 color-coded envelopes.

$29.95

BOOKS

Color Basic Unravelled	$19.95
Extended Basic Unravelled	$19.95
Disk Basic Unravelled	$19.95
ALL 3 BOOKS	ONLY $49.95

MONITORS AND INTERFACE

Zenith ZVM-123 Green	$129.95
Zenith ZVM-122 Amber	$149.95
BMC 9191 U + medium res. w/sound	$289.95
$5 OFF Monitor with Video Plus purchased.	
VIDEO PLUS Color or monochrome for COCO	$24.95
VIDEO PLUS II C Color for COCO 2	$39.95
VIDEO PLUS II M Monochrome for COCO 2	$26.95

'REAL TALKER'

With enhanced software on Tape and User's Manual
Cartridge $59.95

'REAL TALKER II'

Same as above for COCO 2
$69.95

Y-BRANCHING CABLE

For Disk System $25.95

STAR PRINTERS

Gemini 10X	120 cps	$279
Gemini 15X		$399
Delta 10	160 cps & 8K buffer	$415
Delta 15		$549
Radix 10	200 cps & 16K buffer	$615
Radix 15		$715
[illegible]		[illegible]

PBH Serial to Parallel switch selectable printer and modem interface $79.95
Purchased with Printer $59.95

TAKE 20% OFF ANY SOFTWARE ORDER

All games are in 16K machine language unless noted.

TOM MIX SOFTWARE

	TAPE	DISK
* **ORACONIAN** (32K) Will you be the next victim?	$27.95	$30.95
** **SKRAMBLE** Challenging destroy mission.	$24.95	$27.95
* **CRASH** (32K) Mario is back again!	$24.95	$27.95
* **WORLDS OF FLIGHT** (32K) Super realistic.	$29.95	$32.95
* **SR-71** (32K Ext. Basic) A must for the adventurous.	$28.95	$31.95
* **TOUCHSTONE** (32K) Excellent graphics.	$27.95	$30.95
* **BUZZARD BAIT** (32K) Just outstanding!	$27.95	$30.95
* **TRAP FALL** Just like Pitfalls.	$27.95	$30.95
* **THE KING** (32K) Just outstanding!	$26.95	$29.95

SPECTRAL ASSOCIATES

* **GALAGON** (32K) Truly state-of-the-art.	$24.95	$28.95
* **COLOR PANIC** (32K) Excellent.	$24.95	$28.95
* **CUBIX** (32K) Outstanding with 16 skill levels.	$24.95	$28.95
** **FROGGIE** (32K) The best of its type.	$24.95	$28.95
* **LUNAR-ROVER PATROL** (32K) Just outstanding.	$24.95	$28.95
GEOGRAPHY PAC Excellent learning tool with 4 color hi-res. maps. Extended Basic required.	$32.95	—
* **LANCER** (32K) Excellent Joust-type game.	$24.95	$28.95
* **MS. GOBBLER** (32K) Outstanding with 4 different mazes and 16 skill levels.	$24.95	$28.95
* **WHIRLYBIRD RUN** Excellent.	$24.95	$28.95
* **GHOST GOBBLER** Highly rated Pac Man-type with 16 skill levels and lots of action.	$21.95	—

INTRACOLOR

** **INTRACOLOR GRAND PRIX** Exciting racing game.	$34.95	$34.95
** **WILLY'S WAREHOUSE** (32K) Excellent graphics & sound.	$34.95	$34.95
** **CANDY CO.** (32K) Can you save O.P. Doll? Over 1000 frames.	$34.95	$34.95
** **COLORPEDE** Just like the arcade.	$29.95	$34.95
* **ROBOTTACK** Just like the arcade.	$24.95	$27.95

DATA SOFT

* **ZAXXON** (32K) Sega's official version.	$39.95	$39.95
** **POOYAN** (32K) Konami's official version. Tape & disk included.	$29.95	
** **MOON SHUTTLE** Nichibutsu's official version. Tape and disk included.	$29.95	

COMPUTERWARE

	TAPE	DISK
* **JUNIOR'S REVENGE** (32K) Exciting!	$28.95	$31.95
* **GRAN PRIX** (32K) Challanging race.	$21.95	$24.95
* **DOODLE BUG** Just like Ladybug.	$26.95	$29.95

ANTECO SOFTWARE
ROMPAK ONLY

* **8-BALL** For the pool-table lover.	$29.95
* **GHOST GOBBLER** by Spectral Associates	$26.95
* **WHIRLYBIRD RUN** by Spectral Associates	$26.95

ADVENTURE INTERNATIONAL

SAIGON: THE FINAL DAYS The most truly unique adventure ever.	$24.95	—
ADVENTURELAND Wander through an enchanted realm and try to recover the 13 lost treasures.	$19.95	—
EARTHQUAKE You will fear for more than your own life.	$24.95	—
** **SEA DRAGON** (32K) Outstanding underwater thrills and chills.	$34.95	—

UTILITIES AND APPLICATIONS

RAINBOW SCREEN MACHINE	$29.95	$32.95
SUPER SCREEN MACHINE	$44.95	$47.95
TELEWRITER-64	$49.95	$59.95
MASTER DESIGN	—	$34.95
PRO-COLOR-FILE *ENHANCED*	—	$79.95
COLORCOM/E Rompak or Disk	$49.95	
CCEAD	$ 6.95	—
64K DISK UTILITY	—	$21.95
TAPE UTILITY	$24.95	$24.95
MULTIPAK CRACK	—	$24.95
HOME BASE	—	$49.95
WORK BASE I	—	$64.95
WORK BASE II	—	$79.95

*Requires Joystick **Joystick Optional

WE PAY POSTAGE on all orders in the United States & Canada. Overseas please add $3.00. (MN Res. add 6% sales tax.)
We accept Visa, Mastercard, check or money order. U.S. funds only for foreign orders. C.O.D. please add $2.00
Send to: SELECTED SOFTWARE, P.O. Box 32228, Fridley, MN 55432

24 HOUR ORDER LINE
(612) 757-2439

RAINBOWTECH

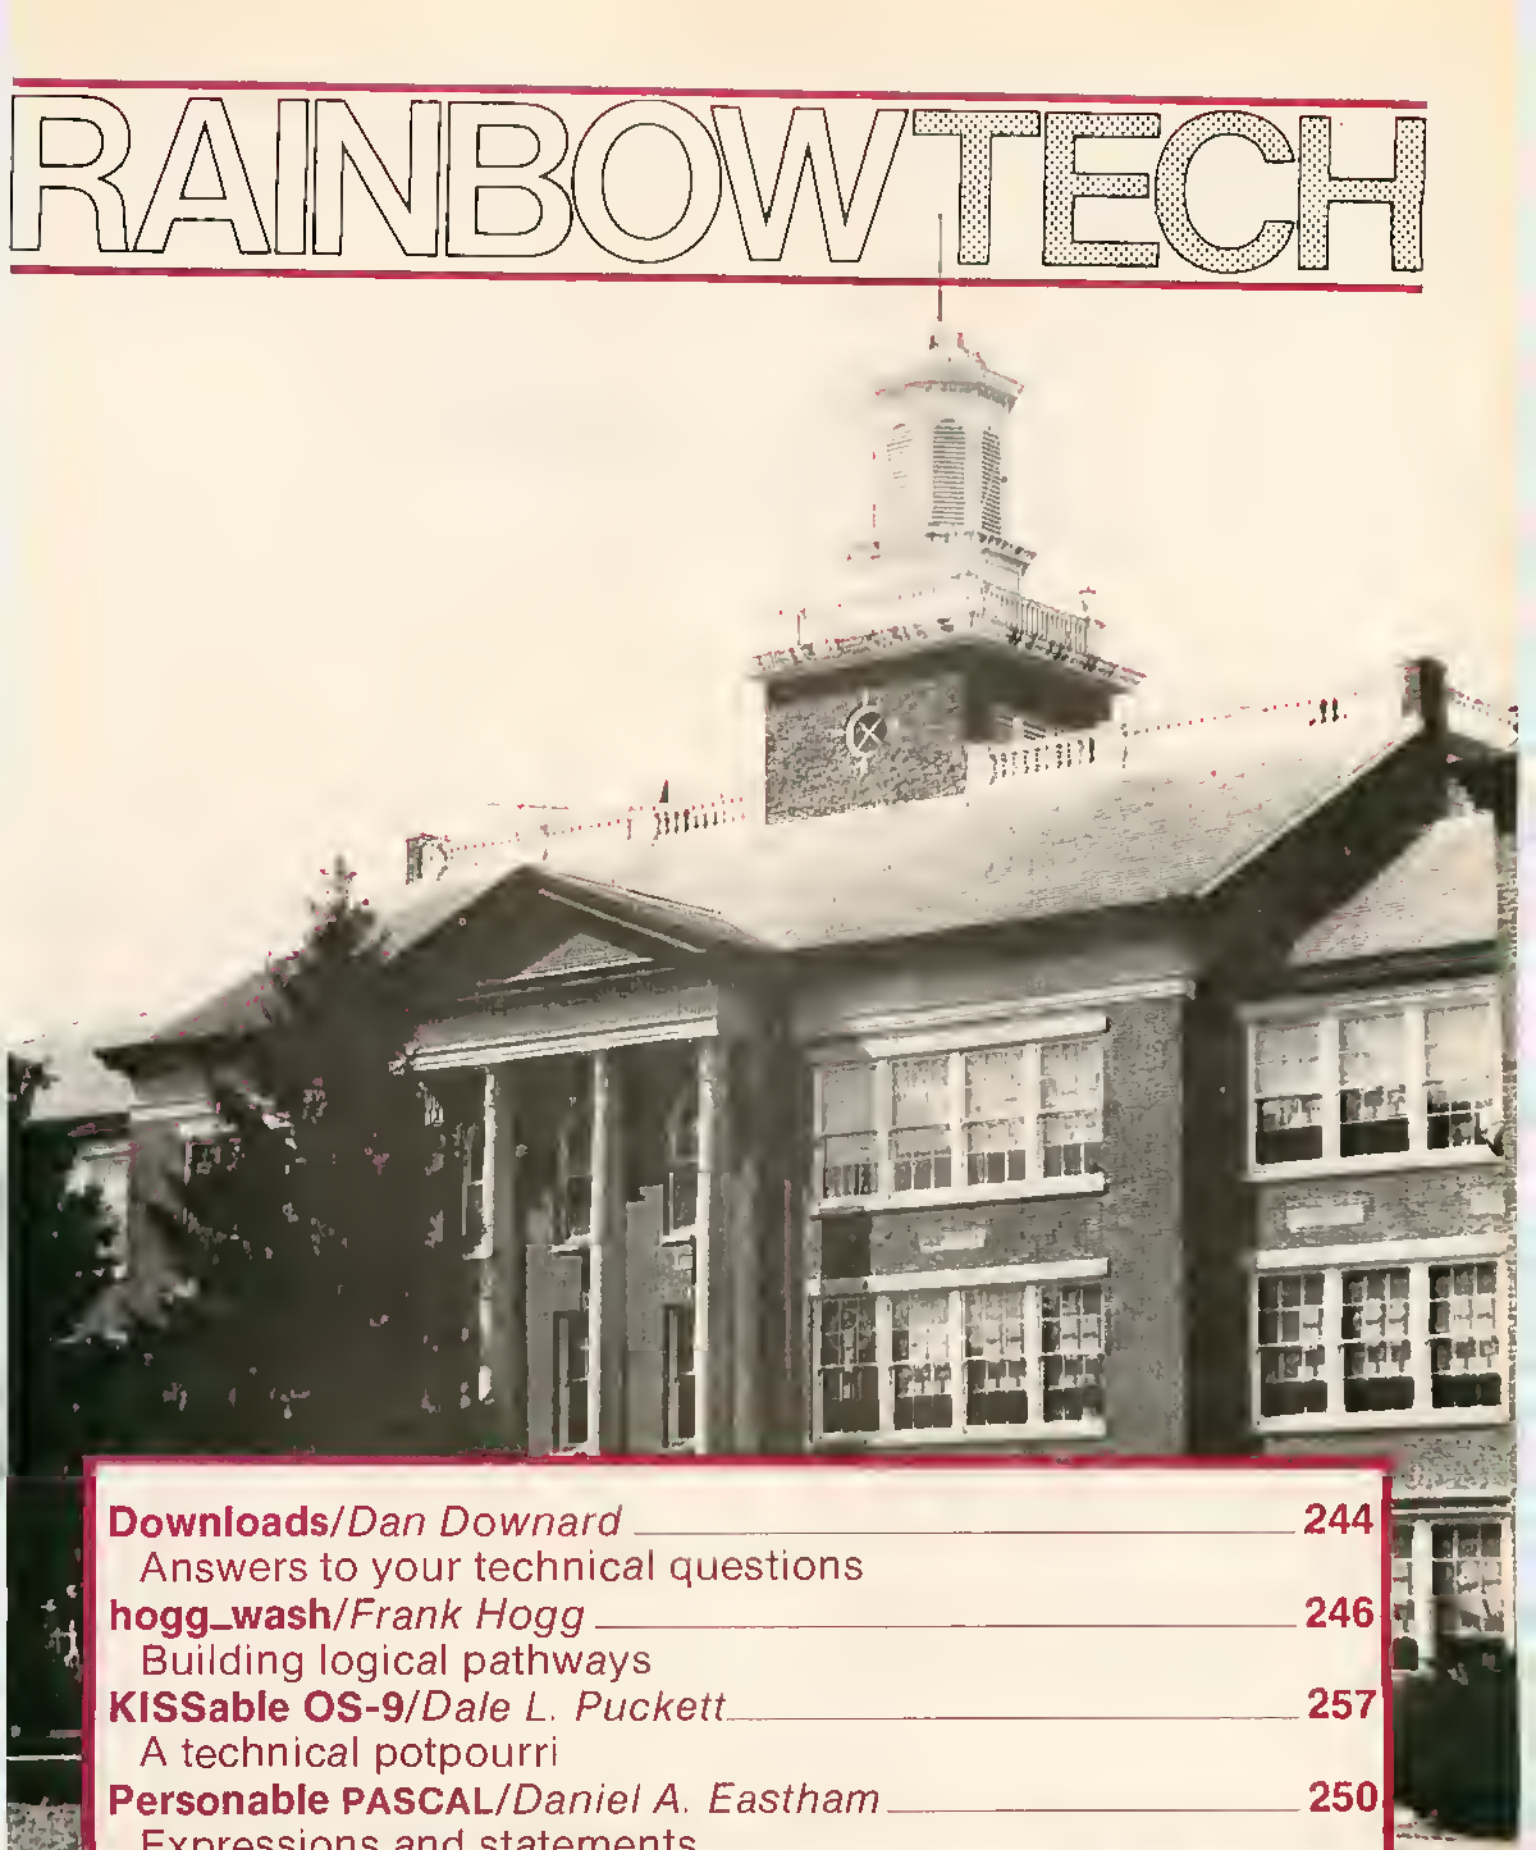

Downloads/*Dan Downard* ____ 244
Answers to your technical questions
hogg_wash/*Frank Hogg* ____ 246
Building logical pathways
KISSable OS-9/*Dale L. Puckett* ____ 257
A technical potpourri
Personable PASCAL/*Daniel A. Eastham* ____ 250
Expressions and statements

A Little Understanding Goes A Long Way

By Dan Downard
Rainbow Technical Editor

• *I like your articles and I hope you will be able to help me with a problem I am having with a machine language program. The program is the* BWDUMP/BIN *that Radio Shack sells to dump a graphic screen to a printer.*

BWDUMP/BIN *was originally on a tape. I used the start address (14848) of the program and I chose an end address of 16127 to use with the* SAVEM *command to store it on my disk. I actually saved a few extra memory locations. I wanted to be sure that I collected the entire program from memory. Now I run are the* LOADM *command to reload the program, but I have to use an offset of 16384 to load the program in the upper part of RAM on my 64K CoCo 2. Radio Shack had originally loaded it at address 14848 and I guess they expected it to be used only with a 16K machine?*

The program as is, does run with the offset added. It fits nicely at location 30783 out of the way of my BASIC *programs. I have made a number of attempts to relocate the machine code, and when I relocate the program to any other address it locks up the computer. I have to do a cold start to recover. I have* EDTASM+ *and I have disassembled the machine code. I hope you can help. The solution is not obvious to me. My question is this:*

1) Why can I load the program with the offset of the LOADM *command which works okay, but I am unable to relocate the machine code? Yes, I know I can use it this way, but the lazy side of me would like to be able to just type* LOADM "BWDUMP" *and be done with it.*

2) What exactly does the offset portion of the LOADM *command do that makes it possible to run this program in the new location?*

3) The manual doesn't say much about the SAVEM *command. So as long as I have your attention, will you also include a more detailed explanation of this command.*

Terry E. Blake
Dayton, OH

Sounds like you're on the right track, Terry, but need a little understanding of the *SAVEM* command. The following format must be used:

SAVEM"file name", start address, end address, execute address

You didn't mention the value of the execution address. You can find this address with the following direct command after loading your tape program:

?PEEK(487)*256+PEEK(488)

This will be your "exec address." Write this value down and do the following:

1) CLOAD"BWDUMP",16384
2) SAVEM"BWDUMP",31232,32511, exec address+16384

See if that doesn't cure your problem. When you offset load a program the computer just increments every byte of your program by the amount of the offset. Since *BWDUMP* is written in PIC (Position Independent Code), it will run anywhere in memory. Well, anywhere there is free RAM space in the case of your CoCo.

(Dan Downard is an electrical engineer and has been involved in electronics for 24 years through ham radio [K4KWT]. His interest in computers began about five years ago and he has built several 68XX systems.)

Normal Procedure

• *I think I have a problem with one of my disk drives. First, I own a 64K CoCo (Rev. E), with Color* BASIC *1.1, Extended Color* BASIC *1.0 and Disk Extended* BASIC *1.0. I also own one disk drive from Radio Shack and one from MPI; Model 51S, S/N S661337, manufactured April, 1983. I purchased the 5¼ SSDD floppy disk drive at* RAINBOWfest *in New Brunswick, NJ.*

When I access drive 1 the disk starts spinning, the 'LED' goes on and my file is loaded. But when I access drive 0, not only does drive 0 find my file but drive 1 just spins until drive 0 has found the file.

Jon D. Abbott
Norwalk, CT

This is the normal way that CoCo disks operate, Jon. There is only one motor "on" line going to your drives. When you turn on one drive, you turn all of them on.

Hardware Problem

• *I have a 16K "E" board that I upgraded to 64K, using 4164's. I want to purchase a disk drive and upon the advice of my local Radio*

Shack Computer store representative, I had them install a 1.2 Color BASIC ROM, because he told me that I would be able to use the new CoCo 2 disk drive and run OS-9. I have heard horror stories from CoCo owners that have plugged in the wrong disk drive. HELP, which drive do I buy, the gray case or the white case? I saved the 1.1 ROM, just in case.

Larry B. Evans
Key West, FL

Larry, the 1.2 BASIC ROM has nothing to do with OS-9, or your disk drive selection. The problem of compatibility with disk drives is a hardware problem. Radio Shack redesigned the newer disk controller (white case) so that 12 volts is no longer required for operation, since the CoCo 2 no longer has 12 volts at the ROM port. The older disk controller (gray case) required 12 volts for operation. In a nutshell this means you can use the new disk controllers with the old CoCos but not vice versa. There is a way around this problem, though. If you purchase a Multi-Pak Interface for your CoCo 2 you can use the old disk controller since the Multi-Pak Interface supplies the 12 volts necessary for proper operation.

Tidying Up

• *Last month, Jack Thompson wrote about a disk problem and you suggested a head alignment kit. I have a similar problem on my one-disk system. I have no trouble with programs that are written on my drive, but every program I buy will not load. They start to load, then hang up with the motor running and the keyboard dead. If I can manage to get one loaded, and it's not copy protected, I can save it and then load it with no more trouble. But most will just not load. Where can such a kit be found? I have not seen one in the mlr, and Radio Shack doesn't carry one. Better still, has an article been published which gives the procedure? I have test equipment and technical experience, but I need information.*

Mickey Kaylor
Cleveland, TN

Mickey, we have received several requests similar to yours. The head alignment kit we referred to is actually a head alignment disk. Several companies manufacture them. Radio Shack specifications are based on a "CAT'S-EYE" diskette.

These disks have a 125 kHz signal precisely recorded on tracks 00 and 34. By using an oscilloscope connected to the electronics in your disk drive you can measure the phase of the read head and "align" your heads. We do not recommend this for amateurs. If you're still game, obtain a copy of *Radio Shack Service Manual* #26-3022/3023. This is the floppy disk drive service manual and gives complete alignment procedures.

The only normal maintenance that should be necessary for your drive is cleaning your heads. Remove all of the accumulated oxide and dirt with a lint-free cloth using isopropyl alcohol. Be careful not to touch the head. Another method of cleaning your heads is by use of a head cleaning disk available from Radio Shack.

A Simple Solution

• *I just bought the DMP-100 Printer to add to my 64K CoCo and one disk drive.*

Would you please help me. How can I print whatever is on the TV screen without including a PRINT#-2, *in the program. I noticed that this can be done on other larger computers like the Model 4.*

M.B. Havada
Kailua, HI

You need a screen dump program such as *BWDUMP* from Radio Shack.

Fill 'Er Up

• *I have a problem that may or may not be of interest to the readers of* RAINBOW. *I am having a great problem saving programs on tape. The tape that I am using may be the problem. I need a program that will fill the tape with a program. It should give the start and then run till the computer is shut off. This way I could load the tape, then using* SKIPF"X" *verify that the tape had no bad spots in it.*

It seems that this could be done, but I have not been able to do it.

Robert Lister, Jr.
Aston, PA

Robert, try the following BASIC program:

```
10 FOR X=1TO1000
20 CSAVE"TEST"
30 NEXT X
```

This should record the program *TEST* 1,000 times on your tape. By using *SKIPF"X"*, after rewinding the tape, you should be able to check for bad tapes. There is one problem with this method. It doesn't check the part of the tape between programs. I would also recommend bulk erasing the tape before further use.

Getting A Running Start

• *I am writing a menu program for the Color Computer disk system. I have everything in the program finished except one thing. I cannot tell the CoCo to run a variable* (RUNF$). *You can* LOAD,SAVE, LOADM, *and* SAVEM *a variable but not* RUN. *How can I do this?*

Andy Dater
Medford, OR

If your program name is *F3* Andy try:

```
LOAD"F3",R
```

Index Addressing

• *I am a frustrated programmer. I have done fairly well with* BASIC *programming and have jumped off the deep end into the world of assembly language. With my trusty* Assembly Language Book *by William Barden, Jr., I have entered a quest of sleepless nights and much frustration.*

I wrote a simple BASIC *program that uses Graphics Pages one through seven to draw a panoramic scene. Then I displayed Page eight with Page four memory transferred to Page eight memory location; thus, Page four is on the screen. With the left or right arrow keys, I can pan from left to right and see all the landscape. But, I have to wait 15 seconds for the screen to shift, even with* POKE 65495,0. *Thus, to give the program realism, I decided to make this my initial project for using assembly language. I have learned that:*

LDA #55 Load 'A' register with the number 55 (decimal)
LDA #$55 Load 'A' register with the hexadecimal number 55 (85 decimal)
LDA $55 Load 'A' register with contents of memory location $55 (decimal 85)

Suppose I have a value that starts in a register (let's say 'X'), the value is used in calculations and the result is returned to the 'X' register. I now want the value of the contents located at the memory location in the 'X' register. How do I do it? If I store 'X', STX $3000, then I have a value stored in a specific memory. But, I want, not the value at $3000 but the value of the location indicated by the value at $3000. If you can help, I sure would appreciate it.

Clyde R. Vasey III
Durant, OK

You must use indexed adddressing, Clyde. If I'm reading you correctly, you want to store the value in, let's say, the 'A' register at the memory location indicated by the 'X' register. The assembly mnemonic for this step would be STA A,X.

Since you gave me a hint about what you are up to, you may try the following assembly source for moving any memory to another location.

```
      LDX   #$xxxx xxxx="from"address
      LDY   #$yyyy yyyy="to"address
LOOP  LDD   ,X++
      STD   ,Y++
      CMPD  #$zzzz zzzz="end" address
      BNE   LOOP
```

This method will work as long as the two areas of memory do not overlap.

Your technical questions are welcomed. Please address them to: Downloads, THE RAINBOW, P.O. Box 209, Prospect, KY 40059. We reserve the right to publish only questions of general interest and to edit for space and clarity.

hogg_wash

Structure Out Of Chaos: Building Logical Pathways

By Frank Hogg
Rainbow Contributing Editor

58,752 sectors free

I would bet that you would like to have this many sectors available when you use your computer. On our office system this is the number of sectors available for our use, plus another 19,584 on the removable hard disk that is used for backup. Of course, I am talking about the Gimix III and a 19 meg hard disk. Now you can even get 47 and 72 meg hard disks. The 47 gives you something like 130,000 free and the 72 about 240,000 free. That is an incredible amount of space. This all seems wonderful until you consider what happens when a dozen different people use the system at the same time with directories helter-skelter and files all over the place. Pretty soon you have thousands of files in hundreds of directories and nobody but nobody knows where anything is!

This is the situation I found myself in a few months ago. We bought our Gimix III in January of 1983 and started using it right away. I had never had much experience with a multiuser system before so I didn't have any clear idea how to set up the disk for use other than giving everyone a directory of their own and letting them have a go at it. Chaos soon prevailed when, after about 10 months we started losing files on the disk. You knew you put it somewhere but you couldn't remember where or what name you used when you saved it. It was like trying to find a needle in a haystack.

About 14 months from day one, I embarked on the project of organizing this mess before it got totally out of hand. I started cleaning the disk of files that didn't need to be where they were. At the time I started there were almost 3,000 files in about 80 directories. When I finished there were a little over 1,000 files in only 65 directories. I did most of this by organizing the files into separate logical directories and then archiving some of those off to floppy disks. I also removed old files that were not needed anymore.

Since it was quite a task and it took a long time to complete, I didn't want to have to do it again so I worked on a structure to keep the disk organized and make it easier to both backup the disk and to properly archive the files from the disk. That would also make it easier to find things on the disk.

I started off with some basic rules, then I tried not to break them wherever possible. However, sometimes that was not always practical.

The rules:

1) The "root" directory should only have other directories, not files in it. This is a pretty solid rule.
2) Directories of a like type should be grouped in master directories. For instance, the users' directory contains directories of each user.
3) Master directories should be treated like root directories and not have files in them. The idea is to make each directory reasonably small so that it will be easy to find things by following a logical path.
4) Groups of files of like type should be in directories of their own.
5) Whenever there are more files than can be displayed on the screen at one time with dir, it is time to consider breaking the directory up into smaller directories.

Here is an example of the root directory of the hard disk: Master directories have a '*' after them.

directory of / H0 23:41:52

(Frank Hogg is the president of Frank Hogg Laboratory, one of the world's largest suppliers of software for 6809 based computers. He and his wife, Linda, live in Syracuse, N.Y.)

```
CMDS        DEFS        SYS         SYSTEM*
USERS*      INVOICE*    MAILING*    MINT*
STY         LIB         SPELL       MISC
```

The "CMDS," "DEFS" and "SYS" directories are familiar to OS-9 users because all OS-9 systems have them. The CMDS directory has all the user commands in it. The DEFS directory has the system definitions in it and the SYS directory has things like the system password and other system stuff in it. SYS is for OS-9 system files such as "password" and "motd."

SYSTEM is the superuser's master directory. USERS is a master directory and contains a directory for each logged-on user type which I will also explain later. The INVOICE, MAILING and MINT directories are our business directories. INVOICE is the series of business programs for our office. MAILING is our mailing list and MINT is for our dental office package that is under development. STY is a directory that is needed by the *Stylo* word processor. They should have put it in the SYS directory which would have made my disk neater. LIB is used by the C programming language. SPELL is for the *DynaSpell* spelling checker and, like *Stylo* should be in the SYS directory. MISC is a catchall to prevent things from being dumped into the root directory when someone is in a hurry.

Here is a "dir" of the SYSTEM directory:

```
directory of SYSTEM 23:41:55

STAGING   SOURCE    BOOT      ARCHIVE
BACKUP
```

STAGING is a directory used to dump new software in preparation for installing it on the system. Once installed, it would then be deleted from STAGING. SOURCE is a directory of system source code. BOOT is the directory of files that are used to create a new OS-9 Boot. As new versions of OS-9 are released they can be installed from this directory.

ARCHIVE is a directory of files or commands that we want to remove from the system but are not quite sure we should. This would be where we would put a copy of an old program when we install a new version. In case the new one doesn't work we can retrieve the old one from ARCHIVE. Files in this directory should be deleted on a regular basis.

BACKUP is a directory that is logged into by other than the superuser. Special programs let any user do a major backup of the system as the superuser, but under program control to prevent damage. This was done so that I would not have to be stuck with backing up the system. A user logs in as "backup" and he/she is presented with a menu and instructions on what to do to run the backup procedures.

This is a directory of the USERS directory:
(Note: *all* of these are "master" directories.)

```
directory of USERS 23:41:57

FRANK     JERI      CAROL     JIMI
DEB       DAVE      COLET     LETTERS
FLEX      MANUALS   SOFTNEWS  RICH
```

To be in this directory, a directory has to be one that is logged into. By that I mean that these are the default data directory upon login. The names of the directories follow the actual users' names until you get to LETTERS.

LETTERS contains answers to customers' letters in a special *DynaStar* mail/merge format. FLEX is the directory for O-Flex. MANUALS contains directories of the various manuals that we are working on. SOFTNEWS contains directories of each issue of our new *SoftNews* publication.

This is an example of a users' directory:

```
directory of USERS/FRANK 23:41:59

MISC        ARCHIVE     DOC
```

MISC is a "catchall" to prevent garbage cluttering up the master directory. ARCHIVE is used to hold files previous to deleting them. DOC is for various documents such as letters, memos, etc. The individual may and should use other directories to prevent clutter from obscuring what is in his/her directory.

All users except the superuser log on into the user directory under the name they logged on as. The superuser logs on into the SYSTEM directory as user zero. The exception is the "backup" user who logs on into SYSTEM/BACKUP as the superuser for backup purposes.

System protection prevents anybody except the superuser from accessing the SYSTEM directory.

Here is a map of the system disk.

```
CMDS.....f
DEFS.....f                    | STAGING....f
SYS......f                    | SOURCE.....f
SYSTEM*.......................+BOOT.......f
USERS*.............+           | ARCHIVE....f
INVOICE*.....D    |           | BACKUP.....f
MAILING*.....D    |                       | MISC.......f
MINT*........D    | FRANK*.............+ARCHIVE..f
STY..........f    | JERI*..........D  | DOC........f
LIB..........f    | CAROL*.........D
SPELL........f    | JIMI*..........D
MISC.........f    | DEB*...........D
                  | DAVE*..........D
                  | COLET*.........D
                  | LETTERS*.....D
                  | FLEX*..........D
                  | MANUALS*....D
                  | SOFTNEWS*...D
                  | RICH*..........D
```

--D infers that the directory has other directories in it.
--f infers that the directory has only files in it.

We have been using this system for about a month and so far it is working very well. I hope that in a year from now I will be able to find this file without too much trouble. Let's see, I put it under MISC, or was it in the SOFTNEWS directory? Well, you can see that it is not going to be easy to keep track of files, even with this setup.

Put a filter in your pipe

OS-9 has a neat feature where you can redirect the output of a program somewhere else. Gee, that's nice, but what can be done with it? You can, of course, direct it to a printer or a file, but you can also direct it through a filter before going to

the printer or anywhere else for that matter. This is called "piping" and is similar to a regular pipe if you think of the data as water in the pipe and the filter program as a filter in the pipe that will do something to the water as it passes through. Got the idea? Suppose you wanted to remove all the line feeds ($0A) from a text file before going to the printer. Normally you would write a program to read in the file, remove the line feeds, then write it out to another file. With OS-9 you could use the same program without the files and do the same thing.

Standard input and standard output

When programs refer to using these two things it means that I/O (input/output) can be redirected and used in a pipe. "List" is one of these commands as well as "build." Try this, first build a file with build like so:

```
OS9:build junk
? junk
? junk
? junk
?
```

Then do this:

```
OS9:list junk ! build test
????
OS9:list test
junk
junk
junk
```

Wasn't that an interesting and useful thing to do? Here is what happened. First we created a file called appropriately "junk," then we listed that file through a pipe (!) to "build" which created a file called "test" that had what "junk" had in it. The "?" appeared on the screen because we did not change the output of "build," it still went to standard output (the screen). If you typed this:

```
OS9:list junk ! build test >test1
```

the same thing would have happened except that the "????" would end up in the file called "test1." If you have "UtiliX" which has a utility called "wc" that counts words then you could have typed:

```
OS9:list junk ! build test ! wc
```

and "wc" would have reported that you had 8 characters and 4 words with 0 lines from the "?"s.

All of the above is quite useless of course but it is just an example of how pipes work and how I/O redirection can be used to do some fun things.

Thank you all for writing in suggestions and please keep them coming. I will get into the letters next month.

Stylograph III and WordPak are "*United*" by Color OS9

to provide a dazzling display of Word Processing Power

Stylo III has many enhanced features

- Printer configuration program
- Continuous overwrite mode
- Programming mode
- Enhanced cursor control

WordPak adds a new dimension to the overall performance of the Color Computer.

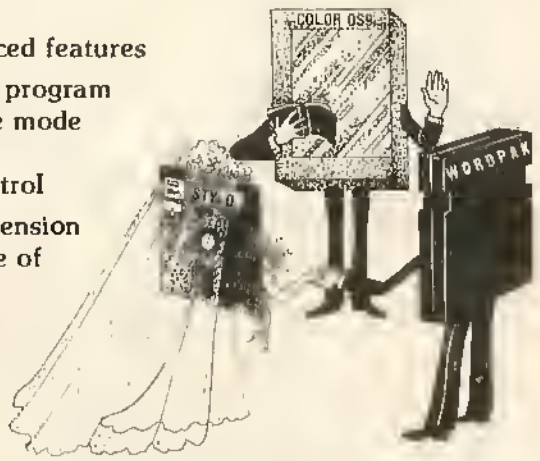

Stylograph III + WordPak $239.95
Stylograph III + WordPak $359.95
(Stylograph III + Mail Merger + Spell Checker)

Send for catalog
Flex Versions also available

Great Plains Computer, Inc.
P.O. Box 916
Idaho Falls, Idaho 83402
208-529-3210

The Color Computer is transformed into a quality professional work station when you put the right combination together.

OS9 is a trademark of Microware WordPak is a trademark of PBJ, Inc. Flex is a trademark of TSC, Inc.

Get the most out of BASIC09

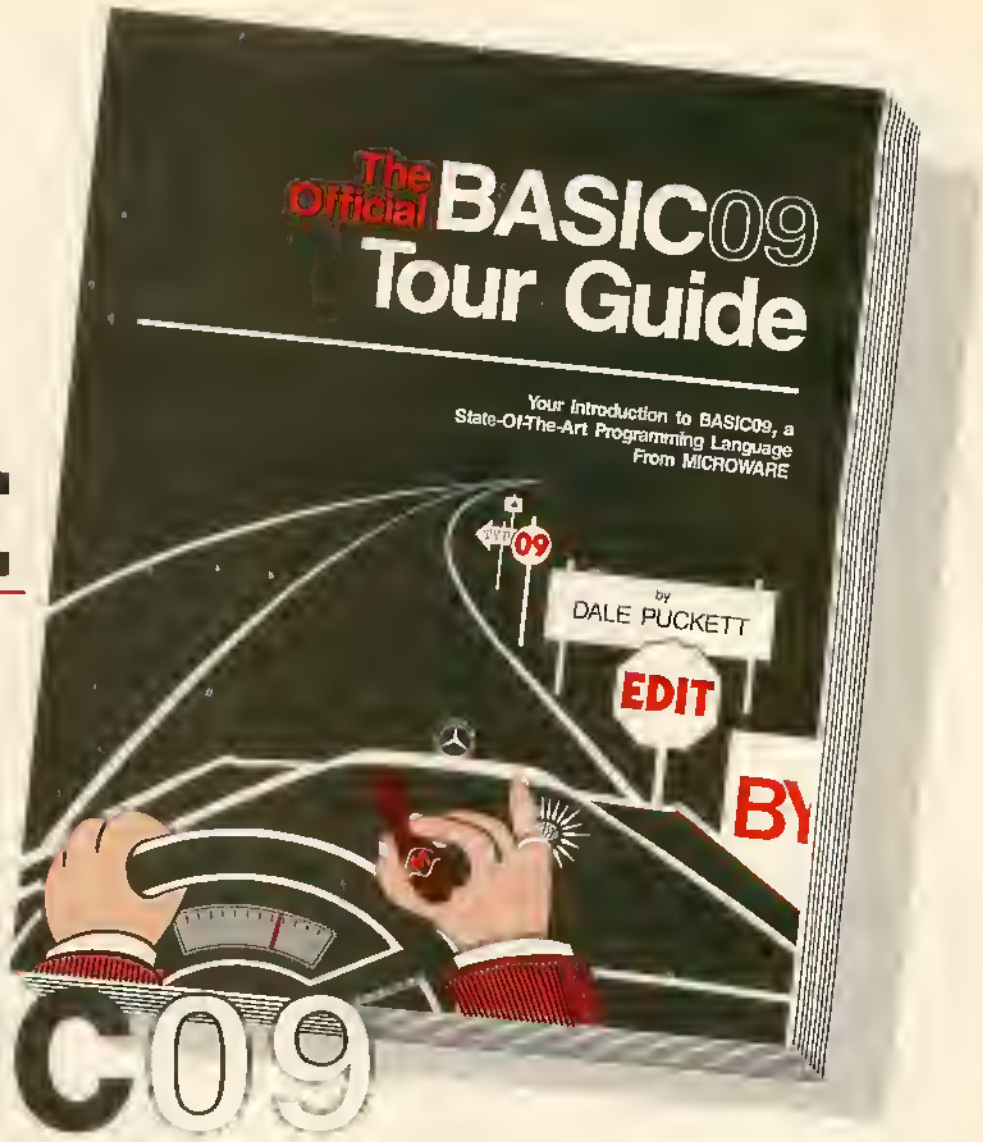

The **OFFICIAL BASIC09 TOUR GUIDE** is skillfully written in a friendly and easy-to-read style. Just perfect for those new to computers and to BASIC09. It's also a *valuable reference book* for programmers, engineers, students and hobbyists, providing an in-depth look at BASIC09 plus an overview of the OS-9 operating system. Comprehensive reference sections on BASIC09 and OS-9 commands are also included.

The book "maps" out your route through the Mercedes of Basics . . . BASIC09 and puts you in the driver's seat in no time. Fasten your seatbelt, sit back and enjoy the ride to perfecting your programming skills.

MICROWARE . . .

The **OFFICIAL BASIC09 TOUR GUIDE** comes from the people who wrote BASIC09. As the leader in 6809 system software, we at MICROWARE care about our users and want to help you get the most from our products.

It's Easy to Order.

Phone orders are accepted from MasterCard or VISA cardholders or for COD shipment. You can also order by mail using the coupon below. Quantity discounts are available to educational organizations and dealers. For further information contact Microware.

Microware Systems Corporation
1866 N.W. 114th Street
Des Moines, Iowa 50322
Telephone 515/224-1929
Telex 910-520-2535

Please send _____ copies of the **Basic09 Tour Guide** book at $18.95 each. Add $2.00 for UPS shipping in the U.S. or $5.00 for overseas air mail per book. Iowa residents add 4% sales tax.

Name _____

Address _____

City _____

State _____ Zip _____

☐ I have enclosed a check

☐ Charge to my bank card:
MasterCard ☐ VISA ☐
Card Number _____
Expiration _____

Microware®

Specialists in system software for 68-family microprocessors since 1977.

OS-9 and BASIC09 are trademarks of Microware and Motorola.

Expressions And Statements

By Daniel Adams Eastham
Rainbow Contributing Editor

For many programmers, the real "beef" of a program is in its executable statements. These statements direct the computer to actually perform a task. Without them, the program (and computer) would be useless. PASCAL has many different types of executable statements and a powerful expression syntax for use within these statements.

In the last column, we saw that a PASCAL program is divided into two major sections:

```
PROGRAM (header);
  (declaration statements)
BEGIN
  (executable statements)
END.
```

We also learned about some of the fundamental statements for declaring data and operating on it. As you can see above, the executable statements are those between the BEGIN and END. They are executed sequentially beginning with the statement immediately following the BEGIN and continue until the END statement is reached.

One statement that every programming language has is an assignment statement. For example:

```
Sum := Amount + 5;
```

This statement contains a variable (Sum) which is to receive a new value, an assignment operator (:=) and an expression (Amount + 5) which represents the value to be assigned.

(Daniel Adams Eastham holds a B.S. degree in computer science and has 13 years experience in systems and communications programming, including work on the original Telenet packet switching network. He is the author of the DEFT PASCAL Workbench *and is currently president of DEFT Systems, Inc.)*

Expressing Yourself

Expressions in PASCAL are similar to those in BASIC. However, the rules of precedence are not the same, and in many situations you need parentheses in PASCAL where you do not need them in BASIC. The following is a list of operators in order of precedence (highest is first) for Real, Integer and Boolean expressions:

Unary Operator:

NOT	Boolean Logical Negate

Multiplying Operators:

*	Multiply, Real or Integer
/	Real Divide
DIV	Integer Divide, Quotient
MOD	Integer Divide, Remainder
AND	Boolean Logical And

Addition Operators

+	Addition, Real or Integer
-	Subtraction, Real or Integer
OR	Boolean Logical Or

Relational Operators

=	Equals
<	Less Than
>	Greater Than
<>	Not Equals
<=	Less Than or Equal
>=	Greater Than or Equal

Note that not all the operators can be used with the different data types. For example, AND, OR, and NOT can only be used with Boolean data (or expressions), DIV and MOD operators are only allowed with Integer data and '/' always produces a Real result even if either or both operands are Integer. All relational operators can be used with any

simple data type and produce a Boolean result.

As a result of all these rules, we can see some similarities and differences with BASIC. For example:

```
R + 13 / 2
```

The Integer constants 13 and two (Real constants have decimal points in them, i.e., 13) are converted to Real, divided, and the quotient is added to R. The following legal BASIC expression:

```
R=3.5 AND I=2
```

is *not* a legal PASCAL expression. This is because the AND operator has a higher level of precedence in PASCAL than it does in BASIC implying that the Real constant 3.5 should be ANDed with the Integer variable I before the first = comparison is done. To make this expression legal, we must add some parentheses:

```
(R=3.5) AND (I=2)
```

This forces the = comparisons to be completed first, providing two Boolean results which can then be ANDed together. In the following Boolean expression:

```
B1 OR B2 AND NOT B3
```

The Unary operation NOT is performed first followed by the AND and finally the OR operation.

In addition to these, there is also the relational operator IN for Sets. We will learn about Sets in a future column.

Compounding The Problem

In the last column we saw that the IF statement in PASCAL looks like this:

```
IF (Boolean expression) THEN (statement)
  [ ELSE (statement) ]
```

The only problem with this is that many times you want to execute *many* statements as the result of a test in an IF statement. In BASIC, you can do this by making a long line and separating the statements with colons. In PASCAL, you use the BEGIN statement:

```
BEGIN
  (statement);
      .
      .
      .
  (statement)
END
```

This is called a *compound* statement and allows you to insert many statements into the program at any point that a single statement is allowed. All the statements inside the BEGIN END are sequentially executed. Although standard PASCAL syntax does not allow a semicolon following the last statement, most PASCAL implements a *null* statement which allows you to include the last semicolon.

In our IF statement, we can therefore do the following:

```
IF (R=3.5) AND (I>=2) THEN BEGIN
  Sum := Amount + 5;
  IF Sum = 200 THEN Amount := 3;
  END
ELSE Sum := Amount - 5;
```

The Boolean expression (R=3.5) AND (I>=2) is evaluated and if True the compound statement following the THEN is executed. If the Boolean expression is False then the statement following the ELSE is executed. This ELSE immediately follows the END of the compound statement.

Inside the compound statement you see another IF statement. This ability to allow any number of any type of statement at any point in your program is one of three major constructs in the PASCAL language that makes writing structured programs easy.

Easy Loops

The second major structured programming construct of PASCAL is its looping statements (the third construct is Procedures/Functions which will be described in a future column). In addition to the standard FOR statement which we talked about last time, PASCAL has two conditional looping constructs:

```
WHILE (Boolean expression) DO (statement)
REPEAT (statement ; . . . ; (statement) UNTIL (Boolean
  expression)
```

The WHILE statement repetitively executes the statement following the DO as long as the value of the Boolean expression is true. An equivalent IF and GOTO setup would look like this:

```
100: IF (Boolean expression) THEN BEGIN
       (statement);
       GOTO 100;
       END;
```

The REPEAT statement repetitively executes the statements between the REPEAT and UNTIL, until the Boolean expression is False. An equivalent IF and GOTO setup for the REPEAT looks like this:

```
100: (statement);
            .
            .
            .
     (statement);
     IF NOT (Boolean expression) THEN GOTO 100;
```

The primary difference between the two statements is when the Boolean expression is evaluated. Because it is evaluated first in the WHILE statement, the statement following the DO may never be executed (much like the THEN part of an IF statement). Whereas in the REPEAT statement, the statements between the REPEAT and UNTIL are guaranteed to execute *at least once* since the Boolean expression is not evaluated until the end of the loop. For example:

```
WHILE R > 3 DO R := R - 2;
REPEAT R := R - 2 UNTIL R <= 3;
```

You will notice that if R has an initial value of three going into each of the above loops, it will come out with a different value three in the WHILE and one in the REPEAT.

Multiple Choice

Making a comparison and choosing between two courses of action is what the IF statement is all about. But sometimes you need to choose between more than two courses of action. This is where the CASE statement comes in:

```
CASE (ordinal expression) OF
  (constant),...,(constant) : (statement);
                .
                .
                .
  (constant),...,(constant) : (statement)
  END
```

In this statement, the ordinal expression (cannot be a Real type) is evaluated and then compared with each of the constants. If a match is found, then only the statement corresponding to the constant is executed and control then falls through to the statement following the CASE. In standard PASCAL, if none of the constants are equal to the value of the expression, the result of the CASE is undefined. However, in most PASCALs the result is that no statement is executed.

Many PASCAL compilers extend the CASE statement with an ELSE or OTHERWISE clause:

```
CASE (ordinal expression) OF
  (constant),...,(constant) : (statement);
                .
                .
                .
  (constant),....(constant) : (statement)
  ELSE (statement)
  END
```

When the ELSE (or OTHERWISE) clause is present and the expression does not equal any of the constants, then the statement following the ELSE is executed. For example:

```
CASE Ch OF
  'A','E','I','O','U' : I := 1;
  'Y' : I := 3
  ELSE I := 4
  END
```

In this example, Ch is a Char type variable and we want to know if it is vowel, a 'Y' or a consonant and the value of the variable 'I' is set accordingly.

Example Program

This example program finds the prime factors of an integer. First it prompts you for the number to be factored and then checks to see if the number is negative. If so, it negates it (makes it positive) and displays a factor of -1. Then it begins trying all the prime numbers (and some that are not prime numbers) up to the square root of the number. Each time that it finds a factor that will divide evenly into the number, it divides the number by that factor (more than once if possible) and displays that factor as well as the number of occurrences of that factor.

This continues until a factor is picked which is greater than the square root of the remaining number. If the remaining number is greater than one, then it is the last prime factor.

In the next column we will begin learning about the many ways that PASCAL lets you represent information.

STOP PLAYING GAMES

GET A GRIP ON **REAL** SAVINGS

25% OFF RETAIL
Games by:
Computerware
Colorquest
Spectral
Tom Mix
Prickly Pear
Mishtron

20% OFF RETAIL
All business programs
VIP library $210.00
VIP business library $139.95
Elite library $150.00
All utilities and programming aids

ARIZONA DISCOUNT SOFTWARE
310 EAST DUNLAP #103 • PHOENIX, ARIZONA 85020

Price and availability subject to change without notice

Prices effective through August 15, 1984

TO ORDER

24 Hour Order Line:
800-221-9280 Ext. 988 (Orders Only)
Inquiries, Arizona Orders (602) 943-2602
Phone answered personally
9:00 a.m. to 1:00 p.m. MST

Please note new address and phone number

We accept Master Charge and Visa, Money Orders and personal checks welcome. No delay. Continental U.S. orders please include $2.00 postage and handling except VIP orders which are $2.00 per piece. All international orders please add 10% shipping and handling fee. Arizona residents add 6% sales tax.

MasterCard VISA

The listing:

```
DEFT PASCAL V3.0                (C) 1984 DEFT SYSTEMS, INC.      PAGE   1
Prime Factors Program


00 0000   (*  This program factors an integer  *)
00 0000   (*  into its prime components.       *)
00 0000
00 0000   PROGRAM PrimeFactor (Input, Output);
00 0000
00 0000   VAR Number, Factor, Exponent : INTEGER;
00 0000
00 0000   BEGIN
01 0006     PAGE;
01 0012     WRITELN;
01 001A     WRITELN;
01 0022     WRITELN ('FIND PRIME FACTORS');
01 0046     WRITELN;
01 004E
01 004E     WRITE ('ENTER NUMBER: ');
01 006D     READLN (Number);
01 0081
01 0081     IF Number < 0 THEN BEGIN
02 008E       Number := -Number;
02 0097       WRITELN (-1)
02 00AE       END;
01 00B1
01 00B1     Factor := 2;
01 00B6     WHILE Factor <= Number DIV Factor DO BEGIN
02 00D0
02 00D0       IF Number MOD Factor = 0 THEN BEGIN
03 00EA         WRITE (Factor);
03 00FD         Exponent := 0;
03 0101
03 0101         REPEAT
03 0101           Number := Number DIV Factor;
03 0112           Exponent := Exponent + 1
03 0119         UNTIL Number MOD Factor <> 0;
03 0135
03 0135         CASE Exponent OF
03 0137           1 : WRITELN;
03 014A           2 : WRITELN (' SQUARED')
03 0169           ELSE WRITELN (' ** ',Exponent)
03 018E           END;
03 0191
03 0191         END;
02 0191       IF Factor = 2 THEN Factor := 3 ELSE Factor := Factor + 2
02 01AE       END;
01 01B5
01 01B5     IF Number > 1 THEN WRITELN (Number)
01 01D4     END.

SYMBOL       CLASS      STRUCT ALLOC       DATA TYPE     VALUE    LOW  HIGH  SIZE

EXPONENT     VARIABLE          AUTOMATIC   INTEGER         -10 -32768 32767     2
FACTOR       VARIABLE          AUTOMATIC   INTEGER          -8 -32768 32767     2
NUMBER       VARIABLE          AUTOMATIC   INTEGER          -6 -32768 32767     2

STACK REQUIREMENTS:    28

CODE SIZE            475
UNUSED STACK       33406
MAX SYMBOLS           99
TOTAL ERRORS           0
SOURCE FILE: FACTOR:1
OBJECT FILE: FACTOR:1
```

LETS GET SERIOUS

ABOUT SOFTWARE FOR FLEX AND OS-9

A—BASIC COMPILER

This BASIC compiler generates pure, fast efficient 6809 machine code from easy to write BASIC source programs. Uses ultra fast integer math, (no floating point), extended string functions, boolean operators and run-time operations. Output is ROMable and RUNS WITHOUT ANY RUN-TIME PACKAGE. Supports IF-THEN-ELSE structure and random access.

OS-9 or FLEX OBJECT ONLY $75.00

UTILIX

A UNIX-like utility package for RS OS-9. It consists of fifteen different utilities that aid you in manipulating your text files. Most of the utilities are designed to utilize the pipe and filter capabilities of OS-9 which offers many powerful alternatives to file handling. Utilix includes the following utilities: CAT, CODE, CRYPT, DIFF, DISPLAY, GREP, LOWER/UPPER, PACK/UNPACK, PR, SORT, TAIL, TIME, WC.

RS OS-9 $49.95

eFORTH

NEW eFORTH conforms closely to the FORTH 1983 standard to give you a simpler, more powerful set of words that behave more consistently, hundreds of definitions provided in source code, easy redirection of input and output and much more!

FLEX, CCFLEX, and RS DOS $79.95

TSC PASCAL

A true native code compiler, based on the Jensen and Wirth User Manual, which produces assembly language mnemonics. Both integer and double precision floating point math are supported with the standard trigonometric, exponential and square root functions and a random number generator. Records, arrays, sets, pointers, dynamic storage, file I/O with GET and PUT, and calling another Pascal program from a Pascal program are all implemented. FLEX version supports only sequential file access. The user may pass parameters, such as file names and options, from the command line to the user's Pascal program. Note that both the operating system and run-time library must be resident to execute a user's program. The FLEX version of Pascal requires a 56K system in order to function, and the minifloppy version requires two diskettes.

6809 FLEX Pascal $200

TSC Extended BASIC

Ideal for business or advanced scientific applications where extended math precision and formatting capabilities are essential. Supports standard BASIC statements and functions and provides strings which are fully dynamic and unrestricted in size. Provides a floating point math package precise up to 16.8 digits plus many more features too numerous to mention here.

FLEX $100.00

PL/9

PL/9 is a complete co-resident Editor/Compiler/Trace Debugger for 6809 FLEX. It features a built in EDITOR which loads and saves files, finds and changes strings, appends comments, inserts and deletes lines, prints selected lines on the terminal or printer, passes commands to FLEX and calls the co-resident single pass Compiler and Debugger; a TRUE COMPILER that produces pure 6809 machine code and does not require a run-time interpreter; a TRACE DEBUGGER allows you to single step or breakpoint a PL/9 program a source line at a time examining variables as you go: plus many more powerful aspects too numerous to list here.

FLEX $198.00

SDISK

Use 40 or 80 track, single or double sided disk drives with RS OS-9. Programmable head step rates are allowed. Read, write, and format any of the standard OS-9 single or double density disk formats used by other OS-9 systems.

RS OS-9 $29.95
w/BOOTFIX $35.95 (Required if you plan to use double sided 40 or 80T drives, it allows you to create bootable DS disks.

CRASMB

CRASMB is a cross assembler which allows the user to cross-assemble source code to machine code for the various cpu's listed: 6800-2-8, 6801-3, 6804, 6805, 6809, 6811, 6502, 1802, 8048, 8051, 8080-5, Z-8, Z-80, 7000.

OS-9 or FLEX $399.00

FHL FRANK HOGG LABORATORY

THE REGENCY TOWER • SUITE 215 • 770 JAMES ST. • SYRACUSE, NY 13203 • PHONE(315)474-7856

LETS GET SERIOUS

ABOUT SOFTWARE FOR FLEX AND OS-9

FHL Color FLEX

Licensed from Technical Systems Consultants, Inc. by FHL, Color FLEX is an enhanced version of their FLEX Disk Operating System for the Radio Shack TRS-80 Color Computer. FHL Color FLEX allows the Color Computer to be used with a wide array of hardware and software products, far beyond the capabilities of the basic system as supplied by Radio Shack.

FHL Color FLEX $69.95

DBASIC

A command for the FHL implementation of FLEX for the Radio Shack TRS-80 Color Computer. It allows the use of the standard Disk Extended Color BASIC under FLEX.

FHL Color FLEX w/DBASIC $99.95

DYNASPELL

Check your text against three separate dictionaries comprising over 22,000 words: the dictionary based on a major publication, the dictionary unique to your profession and the common word dictionary. Dynaspell is thorough and fast, so if you want the security and confidence of knowing you have each and every word spelled as it should be, you can not afford to be without it.

Standard FLEX or OS-9 $134.95
(includes LOOKUP)
CCFLEX or OS-9 $ 59.95
w/LOOKUP $94.95

CRUNCH COBOL

Supports a large subset of the ANSII Level I COBOL with many of the useful Level II features included.

FLEX INTRODUCTORY PRICE
$100.00

DYNA-C

A new small-C derivative which produces compact, ROMable, position independent, re-entrant, optimized code that runs circles around anything in its price class.

OS-9 (including RS OS-9) $59.95
FLEX (including CCFLEX) $59.95

DYNASTAR

Dynastar is a powerful, menu driven screen editor equally suited to the tasks of program preparation and document processing. With the addition of the optional Dynaform print formatter/mail merge program it is a complete word processing package for your OS-9/FLEX system.

Standard FLEX or OS-9	
Dynastar	$149.95
Dynaform	$149.95
Package	$275.00
CoCo FLEX or OS-9	
Dynastar	$49.95
Dynaform	$49.95
Package	$99.90

Requires O-Pak.

O-Pak

O-Pak is a three part utility package. It is designed to enhance the OS-9 Operating System of the TRS-80 Color Computer.

O-Pak consists of HIRES, CSEdit, and four "X" commands. HIRES provides a higher resolution screen display than the standard 32 by 16 characters supplied by Radio Shack. CSEdit is the character set editor designed to make modification of your character sets simple and fun.

If you wish to transfer some data files from a disk BASIC or FLEX-formatted disk to an OS-9 disk, the four "X" commands will assist you.

RS OS-9 $34.95

DYNASOFT PASCAL

A portable p-code implementation of a PASCAL subset which includes the control structures of standard PASCAL and supports the data types INTEGER, CHAR, BOOLEAN, scalar (enumerated), subrange, pointer, and ARRAY, along with the dynamic memory management functions NEW, MARK, and RELEASE. Dynasoft PASCAL is COMPLETE. It includes a fast one-pass compiler, a p-code interpreter, a supervisor program and program SAVE, and LOAD routines.

STANDARD OS-9 or FLEX	$59.95
COCO OS-9 or FLEX	$59.95
w/runtime source	$89.95

FRANK HOGG LABORATORY

THE REGENCY TOWER • 770 JAMES ST. • SUITE 215 • SYRACUSE, NY 13203 • PHONE (315) 474-7856

COLOR COMPUTER
MAILLIST
FOR
RENT OR TRADE

★ OVER 12,000 OWNERS AVAILABLE
★ AVAILABLE ON LABELS OR DISKETTES
★ MINIMUM ORDER - 1000 NAMES
★ WE TRADE 1 FOR 1 (ON DISK PLEASE)
★ ZIP SORTED LIST
★ C.O.D. ORDERS AVAILABLE
★ WE WELCOME YOUR BUSINESS CHECK

PRESSURE SENSITIVE LABELS .... $40.00 per 1,000
COCO FORMATTED DISKS ..... $70.00 per 1,000

USE ORDER FORM BELOW

I HAVE SOMETHING TO SAY!

For as little as 46 cents a program you can enjoy great games like **FROGJUMP, FRENZY, CATERPILLAR CAVE, SHOOTIN GALLERY,** and great adventures. Use powerful home management programs such as **BUDGET, STOCK MARKET, BARTENDER, TINY CALC,** and **COST OF LIVING.** Also, enjoy the use of powerful programming utilities such as **COCO MONITOR, GRAPHIC SCREEN PRINT, RAM TEST, HIGH RESOLUTION TEXT,** and **SINGLE DISK COPY.** Increase your knowledge with educational programs such as **BASIC SPEED UP TUTORIAL, FLASH CARD, TRIGONOMETRY TUTOR,** and our **8 PART SERIES ON MACHINE LANGUAGE.**

Many programs use machine language!

Every month you will receive a cassette tape with 10 ready to run documented programs.

16 K Extended Required

ORDERS SENT SAME DAY!
FIRST CLASS SHIPPING!
Back Issues Available from July 1982
Call or write for our free catalog
Dealer Inquiries Invited

PRICES

1 YR (12 ISSUES)	$55.00
6 MO (6 ISSUES)	$30.00
SINGLE COPIES	$ 6.00

MICHIGAN RESIDENTS ADD 4% TO ORDER
OVERSEAS ADD $11.00 TO SUBSCRIPTION AND $1.00 TO SINGLE COPIES

NO CHARGE ON SHIPPING
PLEASE USE ORDER FORM BELOW

PERSONAL CHECKS WELCOMED!

Bulk Diskettes!

AS LOW AS $1.25 EACH!

★ 5¼ Single Sided Double Density
★ Meet All Industry Specifications
★ Dynomog! 100% Error Free!

Quantity	Price	Shipping
1-15	$1.60	$1.75
16-35	1.50	2.00
36-75	1.45	2.25
76-199	1.40	3.00
200-499	1.35	3.75
500-?	1.25	5.00

ADD 10¢ EACH FOR BLANK SLEEVES

COMPUTER CASSETTES

★★ FREE PROGRAMS ★★

on any order of 20 or more tapes, you will receive two color computer programs of the above product!

★ 5 Screw Shell
★ Error Free Tape
★ Computer Grade
★ Lowest Prices Around

	1-29	30-59	60-?
C-10's	$.55	$.50	$.45
C-20's	.65	.60	.55
C-60's	.80	.75	.70
C-90's	.90	.85	.80
Cases	.18	.16	.15
Shipping	2.00	3.00	4.00

BLANK LABELS ADD 3¢ EACH

MAIL TO:

T & D Computer Products
P.O. BOX 256-C
HOLLAND, MI 49423
Phone: 616-396-7577

MasterCard
VISA
C.O.D.'s
PERSONAL CHECKS WELCOME
'IMMEDIATE SHIPPING' Specify UPS or PARCEL POST

NAME _____
ADDRESS _____
CREDIT CARD/EXP. _____

ITEM	PRICE	QUAN	TOTAL

Subtotal
Outside U.S.A. Double Shipping — Shipping
U.S.A. Funds ONLY — MI Res 4%
TOTAL

KISSABLE OS-9

Genius, Assembly Tips And A Bilingual Benchmark

Dale Puckett
Rainbow Contributing Editor

There's a genius lurking around every corner, at least it seemed that way during the past month. Dr. Bud Pass, noted 68XX author and owner of Computer Systems Consultants gave us a call with some suggestions for improving Ivan Helmrich's interrupt driven replacement for the CoCo OS-9 RS-232 module. Then, not more than 30 minutes after we returned from a two week vacation in Kansas, Brian Lantz called from Tampa, Fla. Wait till you see what he's been up to. UNIX systems, look out!

Additionally this month we'll pass along some assembly language tips and a mathematical benchmark written in both BASIC09 and C. That should keep you busy for one month.

(Dale L. Puckett is a free-lance writer and programmer who has worked with the Motorola family of microprocessors since 1976. He just completed his first book, The Official BASIC09 Tour Guide, *this summer. It has been published by Microware and was debuted at the Chicago* RAINBOWfest. *He is the author of* DynaSpell, Readtest, Esther *and* Help, *which are available from Frank Hogg Laboratories. He serves on the* Info World Software Review Board *and is a Chief Warrant Officer in the U.S. Coast Guard.)*

"Ser" Improvements

Dr. Pass noted that the new RS-232 module worked, but he thought you would be interested in these improvements. First, he feels the Baud rate constant for 600 Baud needs to be changed to $DF. To make that change, substitute the new line below for the old:

```
Old: B600 SET $DF
New: B600 SET $D8
```

A syntax error slipped into the listing that ASM did not catch. You would notice the problem if you tried to run a terminal that requires the X-ON and X-OFF protocol. Again substitute the New for the Old.

```
Old: LDA #$XONC
     LDB #$XOFFC
New: LDA #XONC
     LDB #XOFFC
```

In the routine named SLEEP, you should check for the task being killed. Bud added the check by inserting the following code after the call to F$SLEEP.

```
     LDX D.PROC
     LDB P$SIGNAL,X
     BEQ SLEEP90
     CMPB #$INTRPT
     BLS SLERR
SLEEP90 CLRA
     LDA P$STATE,X
     BITA #CONDEM
     BNE SLERR
     PULS D,X,PC
SLERR LEAS 6,X
     COMA
     RTS
```

When Helmrich coded the original GETSTA routine, he set it up so that OS-9 would always return a "ready" indicator, whether or not the queue had any characters in it. Bud needed a valid ready indication to work with a terminal program he was getting ready for the market so he added five lines of code to GETSTA. Here's the new version:

```
GETSTA CMPA #1
     BNE BR12
     LDB INCNT,U Check Ready
     BNE BR13
     LDB #$E6       Not Ready
     ORCC #1
     RTS
BR13 CLRB
     RTS
```

Bud also pointed out that operation could be improved by checking to see if a NULL has been received. If so, the checks for the keyboard interrupt, keyboard abort and keyboard pause characters may be bypassed. Insert the following two lines between the first and second line of the routine SR1RQ0.

```
    TSTA
    BEQ SR!RQ!
```

Finally, Bud gave me some information about an undocumented change in some OS-9 serial drivers. He says that if there are characters in an input queue, the carry bit is cleared in response to a GETSTAT call. But, the B-register contains the number of characters in the queue, not zero, as specified in the manuals.

Computer Systems Consultants, 1454 Latta Lane, Conyers, GA 30207 hopes to have released their intelligent terminal program for CoCo OS-9 by the time you read this. I understand it will even give you the ability to reliably upload and download programs from the popular bulletin boards that use the CP/M XMODEM protocol. Thanks for the tips, Bud.

Assembly Language Tips

We have received many letters asking us to give some assembly language tips to beginners. To do this, I cut some pieces out of *DynaSpell*. We'll look at a routine at a time and see if we can help clear up a few of your questions regarding assembly language programs for OS-9. We assume that you have looked over the Radio Shack manuals and have a general idea of how the system works. We'll start at the beginning of a program. Fair enough?

```
    NAM SPELL
    IFP1
    USE /D0/DEFS/os9defs
    USE /D0/DEFS/li.equates
    ENDC

    TTL An OS-9 Utility to find miss-
pelled words

prog MOD SPLEND,SPLNAM,PRG
RM+OBJCT,REENT+1,SPELL,SPL
MEM
    USE DPEQUATES

prvbuf rmb 32
lkbuf rmb 32
    rmb 255 room for stack
SPLMEM equ .

SPLNAM FCS /SPELL/
COMF1 FCS '/d0/spell/common.dat'
mywf1 fcs '/d0/spell/MYWORDS.
    DAT'
DICTF1 FCS '/D0/spell/DICTION
    ARY.DAT'
shlstr fcs 'shell'
dirstr fcc /dir/
    fcb $0D
    USE SPELL.STRINGS
    EMOD

SPLEND EQU *
```

The first line above tells ASM the name of the program. Several lines later, the pseudo operator TTL gives it some more information to print in the header of your listing.

Make special note of the lines that say, IFP1 ... ENDC. The IFP1 conditional tells ASM to use the lines between it and the ENDC if the assembler is on its first pass. That's why you don't see the "USE /D0/DEFS/OS9DEFS" line in listings that are output from ASM. The actual listing of the program is done during ASM's second pass.

The line with the label PROG is used to tell ASM how to set up the module header in your program. If you read a lot of OS-9 programs you'll notice that the MOD line in all programs is almost the same. Usually, only the name of the program you are reading has been changed. In a nutshell, SPLEND causes ASM to form a double byte equal to the length of the program. It's actually the offset from the beginning of the module to the label SPLEND. Remember, OS-9 programs always start at zero.

Marshmallows for your CoCo

ED — THE SUPERIOR PROGRAMMER'S EDITOR for OS-9 or FLEX $49

A combination screen/line editor which addresses specific lines by line number.

ASM — 6809 STANDARD MACRO ASSEMBLER for OS-9 or FLEX $49

OSM — 6809 EXTENDED MACRO ASSEMBLER for OS-9 or FLEX $99

CRASMB — 8 BIT MACRO CROSS ASSEMBLER for OS-9 or FLEX $399

Cross assembles these CPU types:

6800-2-8	6801-3	6804	6805
6809	6811	6502	1802
8048	8080-5	Z-8	Z-80

CRASMB 16.32 — 16 and/or 32 BIT CROSS ASSEMBLER for OS-9 or FLEX $249

Exclusively supports the 68,000 CPU.

DO — SHELL COMMAND LANGUAGE for OS-9 . . . . . $69

Intended to be used for batch processing. Similar appearance to BASIC, with nine string and 26 number variables for parameter passing.

K-BASIC — BASIC LANGUAGE COMPILER . . . . . LEVEL I for OS-9 or FLEX (Available 1/84) . . . $199

A BASIC to Machine Language compiler. Level I supports sequential files, floating point, three sizes of integers, string variables, and arrays. Includes 6809 run time package and OSM assembler.

....PLEASE SPECIFY OS-9 OR FLEX, AND INDICATE DISK SIZE....

LLOYD I/O 19535 NE GLISAN PORTLAND, OR 97230 (503) 666-1097

GRAFPLOT

DRAWS A PICTURE WORTH 1000 WORDS



RAINBOW
-"Very impressed."
-"Equally useful in the home and office."
-"Meticulous, handholding documentation."
-"Very easy to use."
- RAINBOW, July '83

(Actual output)
(Shown reduced)

Unconditional Money Back Guarantee

GRAFPLOT 1.1 includes everything you need to go effortlessly from raw data to professional-quality printed graphs in minutes. Perfect for business, personal, educational, scientific and engineering applications. Free screenprint for R/S printers.

* Automatically scales and draws graph for best appearance.
* Full ASCII upper and lower case in 4 on-screen labels.
* Two fully labeled Y-axes, 200 or more data points per axis.
* 9 graphing symbols with unlimited overlay of data.
* Full function data editing: add, change, delete and sort.
* Universal Screenprint Loader- Automatically interfaces ANY screenprint program for non-Radio Shack printers.
* Graphs and data output to screen, printer, tape or disk.
* Plots user-defined functions: projections, regressions, etc.
* Calculates moving averages (binomial smoothing), cumulative totals and integrals of data or user-defined functions.
* Saves completed graphs for instant reloading.
* Menu driven with complete error trapping and auto-prompting.
* Comprehensive manual w/ tutorials and sample data.
* Disk Only; display or print directory, kill or rename files.
* Many other labor-saving and time-saving features.

GRAFPLOT is available for 16K E.C.B. ($35.00) and 32K E.C.B. ($40.00) on cassette and for 32K disk ($45.00) (U.S.). Send check or money order to: HAWKES RESEARCH SERVICES, 1442 Sixth St., Berkeley, CA, 94710. Manual available separately for $10.00 + shipping, refundable with purchase. Include $3.00 shipping on all orders. California residents add sales tax.

ATTENTION DEALERS!! 40% DISCOUNTS AVAILABLE !!

Continuing across the line, SPLNAM forms two bytes holding the offset from the start of the module to the label, SPLNAM. A few single bytes follow that tell OS-9 what type of program it is, i.e., 6809 object code, BASIC09 I-code, etc.

Finally, at the end of the MOD line you'll see the labels SPELL and SPLMEM. SPELL causes ASM to form a double byte that contains the offset from the beginning of the module to the start of the executable code in the module and SPLMEM tells OS-9 how much memory the program needs to run.

Notice that with OS-9 you always use two memory areas when you run a program. One area contains the program, the other the data used by the program. Nothing in the program area can change during execution. That is why all variables must be defined and stored in the data area. The line, "SPLMEM EQU ." tells ASM that this is the end of the data area.

Lines containing the USE pseudo operator tell ASM to insert the code contained in the file named in place of the line. USE follows all standard OS-9 rules, i.e., if a filename only is given, it is assumed to be located in the user's current data directory. If a full pathlist is given, it will read the file using that pathlist.

Notice that since the DEFS files are most always located in the DEFS directory on device /D0, you usually need to use a full path list to reach them. The other USE lines in the code above are filenames only, therefore they are read from the current data directory. The source code to *DynaSpell* contains more than a dozen USE files.

Finally, notice the line containing the EMOD operator. It tells OS-9 that this is the end of the program and automatically generates the modules CRC and inserts it at this point in the object code. Let's look at some more code:

```
*
*CHARACTER EQUATES
*
BELL EQU 7
LF EQU $A
CR EQU $D
SPACE EQU $20
NULL EQU 0
```

This code is contained in a USE file I called DPEQUATES. The file holds the names and locations of all constants and variables in *DynaSpell*. This means that I can go into this one file and edit a single constant instead of editing the same constant everywhere it appears in a program.

After it has read the lines above, ASM will substitute the decimal number 7 every time it sees the word BELL. Likewise, it will put the value 10 decimal or A hexadecimal in the object code everytime it sees the word LF. Moving right along.

```
RDICST FDB RDILEN
       FCB CR,LF,LF
       FCC /DynaSpell is looking for
       your words in its dictionary./
RDILEN EQU *-RDICST-2
```

The code above shows you a handy way to define a string using ASM. The label RDICST marks the beginning of a string definition. When printed, it will display the words between the slashes on your terminal. The trick can be found at the label RDILEN. It computes the length of the string by subtracting the location of the beginning of the string and two additional bytes from its location. Notice also that this value is stored by the assembler at the label RDICST by the FDB pseudo operator. Okay, you say, but how do we print this string?

```
pstr pshs a,y
   ldy ,x++
   lda opath
   os9 I$writ
   lbcs error
   puls a,y,pc
```

This routine does the job. We call it with the 6809's X-register pointing to the location of the length of the string, RDICST in this case. Then, we must push the value of the A-register and Y-register on to the stack. We're going to need them later.

This done, we can load the Y-register with the length of the string. We do this by loading it with the value stored at an offset of zero from the X-register. Remember, we entered this routine with the X-register pointing to — or containing — the location of RDICST, the string length.

Notice now that when we loaded the length of the string in the Y-register we also incremented the X-register twice. This means that it is now pointing to the first character in our string. In this case that character is a carriage return.

We now load the OS-9 path number into the A-register and make a call to the operating system with the line, "OS9

The RAINBOW

Back Issue Availability

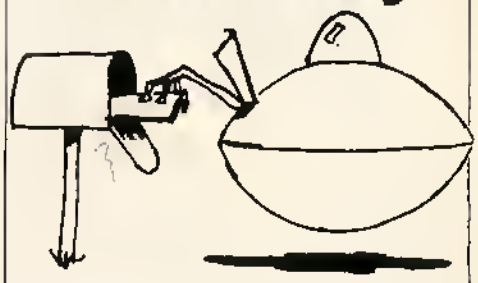

Back copies of many issues of **THE RAINBOW** are still available.

All back issues sell for the single issue cover price. In addition, there is a $3.50 charge for the first issue, plus 50 cents for each additional issue, for postage and handling if sent by United Parcel Service and $6 for orders sent U.S. Mail. UPS *will not* deliver to a post office box or to another country. This charge applies whether you want one back issue or all of them.

Issues July 1981 through June 1982 are available on white paper in a reprint form. All others are in regular magazine form. VISA, MasterCard and American Express accepted. Kentucky residents please add 5 percent state sales tax. We do not bill and no C.O.D. orders accepted.

Due to heavy demand, we suggest you order back issues you want now while supplies last.

To order, just fill out the form on the next page and mail it with your payment to:

THE RAINBOW
9529 U.S. Highway 42
P.O. Box 385
Prospect, KY 40059

BACK ISSUE ORDER FORM

☐ Please send me the following back issues:
(Payment must accompany back issue orders.)

NO.	MONTH YEAR		PRICE	
		VOLUME 1		
1	JULY '81	PREMIER ISSUE	$2.00	☐
2	AUG. '81		$2.00	☐
3	SEPT. '81	EDUCATION	$2.00	☐
4	OCT. '81	PRINTER	$2.00	☐
5	NOV. '81		$2.00	☐
6	DEC. '81	HOLIDAY	$2.00	☐
7	JAN. '82		$2.00	☐
8	FEB. '82		$2.00	☐
9	MAR. '82		$2.50	☐
10	APR. '82		$2.50	☐
12	JUNE '82		$2.50	☐
		VOLUME 2		
8	FEB. '83	BUSINESS	$2.95	☐
9	MAR. '83	NUCLEAR	$2.95	☐
10	APR. '83	SIMULATIONS	$2.95	☐
11	JUNE '83	PRINTERS	$2.95	☐
12	JULY '83	ANNIVERSARY	$2.95	☐
		VOLUME 3		
1	AUG. '83	GAMES	$2.95	☐
2	SEPT. '83	EDUCATION	$2.95	☐
3	OCT. '83	GRAPHICS	$3.95	☐
4	NOV. '83	DATA COMM.	$3.95	☐
5	DEC. '83	HOLIDAY	$3.95	☐
6	JAN. '84	BEGINNERS	$3.95	☐
7	FEB. '84	ADVENTURE	$3.95	☐
8	MAR. '84	BUSINESS	$3.95	☐
9	APR. '84	GAMING	$3.95	☐
10	MAY. '84	PRINTER	$3.95	☐
11	JUNE '84	MUSIC	$3.95	☐
12	JULY '84	ANNIVERSARY	$3.95	☐
		VOLUME 4		
1	AUG. '84	GAMES	$3.95	☐
		RAINBOW INDEX	$2.50	☐

TOTAL _____
SHIPPING & HANDLING
U.P.S. CHARGE _____
U.S. MAIL $6.00 _____
KY RESIDENTS ONLY
ADD 5% _____
TOTAL AMOUNT ENCLOSED _____

Name _____ Address _____ City _____ State _____ ZIP _____ ☐ VISA ☐ MC ☐ AE CARD # _____ EXPIRATION DATE _____ PHONE # _____

I$WRIT. If there is an error, OS-9 will return with the carry set and we go worry about it. Otherwise, we simply return by pulling the values of the two registers we stored and the program counter off the stack. The string will have been printed to the output path named in opath.

How do we get a single character from the standard input path — keyboard? How do we print a single character, a carriage return and line feed or, even a decimal number? Read on.

```
keyin pshs x,y,b,u
   bsr getchr
   pshs a
   puls x,y,b,a,u,pc

getchr pshs x,y
   leax chrbuf,u
   lda #0 standard input only
   ldy #1
   os9 I$read
   lbcs error
   lda chrbuf
   puls x,y,pc
```

First, to get a character we call the routine "keyin." It saves the required 6809 registers on the stack, gets a character from the routine "getchr," puts that character on the stack and returns by pulling all the registers including the program counter. The character is in the 6809's A-register when we return from "keyin."

"Getchr" shows how you set up a routine to get a single character from the standard input path. Remember, most of the time you can equate standard input path with keyboard. When you use the OS9 I$READ call, the X-register must point to a buffer in memory where you are going to store the character. The A-register must contain the path number.

Remember, the standard input path is always zero. Notice also that I$READ leaves the character stored at "chrbuf" so we must load it into the A-register before we return.

When you get a chance, check the description of the I$READ call in the manual — the Blue one — and you'll find that you can read any number of characters at a time. The number is put in the Y-register before the call. "Getchr" is a special case that reads only one character.

You can speed up your programs by reading or writing more than one character at a time. Let's take a look at a routine that puts out a single character.

```
* routine to output just one
* character to the standard output path

putchr pshs a,x,y
   leax chrbuf,u
   sta chrbuf
   lda opath
   ldy #1
   os9 i$writ
   lbcs error
   puls a,x,y,pc

perlf lda #cr
   lbsr putchr
   lda #lf
   lbra putchr hidden rts
```

The output routines are almost the direct opposite of the getchr routine. The only difference — they use the OS9 I$WRIT call instead of I$READ. "Perlf" gives you an easy way to output a carriage return and linefeed to the standard output path. The names of these routines should be familiar to FLEX programmers. Effectively they are OS-9 routines to emulate the equivalent FLEX subroutine calls. Here's a bonus for the month, a routine to put out a decimal number.

```
* Routine to output a decimal
* number from the d-register

outdec pshs a,b,x
   leax dectab,pcr
   clr ,-s
   clr ,-s
dec3 clr ,s
dec2 inc ,s
   subd ,x
   blo dec2
   addd ,x++
   pshs a,b
   lda 2,s
   deca
   tfr a,b
   orb 3,s
   stb 3,s
   beq dec4
   adda #'0
   bsr putchr
dec4 puls a,b
   tst 1,x
   bne dec3
   leas 2,s
   puls a,b,x,pc

dectab fdb 10000,1000,100,10,1,0
```

Sometimes you will want to change the status of a device descriptor from within your assembly language program. For example, you may want to turn off the pause feature. Here's one way to do it.

DSL UTILITY BELT ALL THREE ONLY $49.95

SUPER DISK ZAP
by G. EGGART
FORMAT ANY TRACK
COMPLETE MASTER DIRECTORY
MODIFY ANY TRACK/SECTOR
MULTI DRIVE COMPATABLE
COPY BY FILE OR TRACK/SECTOR
....AND MORE.
NEW LOW PRICE $19.95

COCO SCREEN EDITOR
by J. PORKKA
FULL SCREEN EDITOR FOR THE COCO, GLOBAL EDITOR OF BASIC PROGRAMS.
AUTOMATIC LINE NUMBERING WITH UP TO 30 CHARACTER KEYWORD INPUT. FORWARD AND REVERSE LISTING ABILITY. 16-64K
.....AND MORE. **$19.95**

SUPER TAPE/DISK UTILITY
by A. HUBBELL
AUTOMATICLLY MOVES TAPE PROGRAMS TO DISK, APPENDS RELOCATION ROUTINE IF NEEDED
DISK TO BUFFER/TAPE OPTION
SAVE BUFFER TO DISK
$19.95

GAMES

TRAPFALL		27.95 (C)
AIR TRAFFIC CONTROLLER		28.95 (C)
GRABBER		27.95(C)
WORLDS OF FLIGHT		29.95(C)
DEVIL ASSAULT		27.95 (C)
BUZZARD BAIT		27.95 (C)
THE KING		26.95 (C)
DOODLEBUG		24.95 (C)
DEATH PLANET ADVENTURE		19.95 (C)
ROBOTTACK		24.94 (C)
THE FROG	30.95 (D)	27.95 (C)
COLORPEDE		29.95 (C)
BIRD ATTACK		21.95 (C)
STELLAR SEARCH		24.95 (C)
STELLAR SEARCR		27.95 (D)
AIRLINE		24.95 (C)
STORM		24.95 (C)
INATAK		24.95
CASHMAN		27.95 (C)
OUTHOUSE		27.95 (C)
AREX		34.95 (C)
ZAXXON		39.95 (C)
MOON SHUTTLE		29.95 (C/D)
CHOPPER STRIKE		27.95 (C)
DEMON SEED		27.95 (C)
ELEC●TRON		24.95 (C)
WORLD OF FLIGHT	32.95 D	29.95 C
BLOC HEAD		26.95 (C)
HYPER ZONE		26.95 (C)
JUNIORS REVENGE		28.95 (C)
BUMPERS		24.95 (C)

HI - RES ADVENTURES

SHENANIGANS	24.94
CALIXTO ISLAND	24.95
BLACK SANCTUM	24.95
TOUCHSTONE	27.95
TIME BANDIT	27.95
KING TUT	29.95
SEA QUEST	24.95

UTILITIES

PRINTER SPOOLER 64K	9.95
COLOR GRAPHIC EDITOR	19.95 (C)
SUPER SCREEN	29.95 (C)
GRAPHIC SCREEN PRINT	
EPSON	9.95 (C)
OKIDATA	9.95 (C)
GEMINI	9.95 (C)
PROWRITER	9.95 (C)
LP VII/RS	7.95(C)
EDTASM +	49.95(R)
TAPE DIRECTORY	14.95 C

ACCESSORIES

EPSON RIBBONS	7.49
BLACK, BLUE, RED, BROWN, GREEN GEMINI RIBBONS	2.95
DISK MAILERS	.95
10 PACK	8.95
LP VII, DMP100 RIBBONS	4.95
DISKS	
SENTENIAL SS/SD	19.95
SENTENIAL SS/OD	22.95
VERBATIM	34.95
GRANO SLAM 64K KIT	75.00
16-32K RAM SLAM	49.95
2 WAY RS232 SWITCHER	29.95
3 WAY RS 232 SWITCHER	39.95
COCO REPLACEMENT KEYBOARD	39.00
CASSETTE CABLE	5.95
64K RAM EMBLEM	2.95
BOTEK INTERFACE	59.95
FOR EPSON	69.95
HJL-57 KEYBOARD	79.95
MARK DATA KEYBOARD	69.95

COLORED NYLON RIBBONS
FOR THE GEMINI OR OKIDATA
RED, BLUE, GREEN, PURPLE OR BROWN.
$4.95 EACH
OR ONE OF EACH COLOR
$19.95
BLACK RIBBONS FOR GEMINI STILL ONLY
$2.95

APPLICATION

COLOR FINANCE	59.95 (D)
ELITE CALC	59.95
ELITE-CALC	59.95
ELITE WORD	59.95
ELITE-FILE	74..50
VIP WRITER	59.95
VIP DATABASE	59.95
VIP SPELLER	39.95
VIP TERMINAL	49.95
VIP DISK ZAP	39.95
SPELL N FIX	59.29
DISK MAILER	24.95
TELEWRITER	TAPE 49.95
TELEWRITER	DISK 59.95
VIP CALC	59.95

TALKING PROGRAMS

SPECTRUM VOICE PAK	69.95
TALKING TERM	39.95
COLOR SCORE EZ	24.95(C/D)
FOREIGN LANGUAGE	24.95(C)
ULTRA-CONTESTOR	39.95 (C)

DSL COMPUTER PRODUCTS INC.

313-582-8930

P.O. BOX 1176 DEARBORN, MI 48121

MasterCard VISA

Michigan Residents Add 4% Sales Tax to Order. Please include $2.00 for S. & H.

!!! FREE !!!

Published Monthly by Computer Publishing Inc., Hixson, TN.

$1.95

Bulk Rate
U.S. Postage
PAID
Chattanooga, TN
Permit No. 357

Color Micro Journal

The Color Computer Monthly Magazine $1.95 per issue Vol. 1, Issue 2 October, 1983

THIS 'N THAT

The BIG NEWS this month is that OS-9 has finally arrived for the Color Computer. The ASTOUNDING part of the Radio Shack OS-9 Package, besides the price, is the DOCUMENTATION. You 'Old Time Radio Shack Followers' will not believe what you see. Jon Shirley has been telling us that the main reason for the "lack" of documentation with a lot of their products was the restrictions placed on releasing that information by Microsoft; I

OS-9 on the COLOR COMPUTER

One of the "Operating Systems of the Future" is now available for the "little old Color Computer"; OS-9. Freely translated, OS-9 means "Operating System for the 6809" (OS-9 is now being written for the 68000, also). Since it is fairly obvions that UNIX and "UNIX-Type" Operating Systems will be running on just about every computer to come out in the next few years, a whole new language is beginning to appear on the horizon.

Color Computer OS-9; the Package

We had been running a preliminary release of OS-9 on the Color Computer for a few weeks, and received the "Official Radio Shack" version for Review a couple of days ago. To put it mildly, this package is IMPRESSIVE! For $69.95 (Radio Shack Catalog Number 26-3030), you receive a 9 1/2" x 7 5/8" x 2" package containing 4

FREE SAMPLE ISSUE

1-800-338 6800

MON.-FRI. 9-5 E.S.T.

USA-$12.50 per year. Canada& Mexico-$19.50 per year

Surface Foreign-$24.50 per year. Airmail Foreign-$48.50 per year

Color Micro Journal™

TM Color Micro Journal is a trademark of Computer Publishing Inc.

5900 Cassandra Smith Rd. Hixson,TN. 37343

```
* get status packet
* and set -pause and -lf
   clra
   clrb
   leax stapak,u
   os9 i$gstt
   lbcs error
   lda 7,x get pause condition
   sta pausav
   clr 7,x set no pause
   lda 5,x get lf condition
   sta lfsav
   clr 5,x set no auto line feeds
   clra path number
   clrb write status packet
   os9 i$sstt setstat call
   lbcs error
```

The routine above uses OS-9's get status call to retrieve the table in memory that holds device descriptor data. You must tell it where to save the information. We put it in a buffer named stapak,u. Once we have the information stored in a buffer we can modify it.

First, we retrieved the pause condition and saved it so that we could restore everything to the same condition when we exit our program. We knew it was located at an offset of seven from the beginning of the table from reading the blue book.

Then, we set the pause location to -pause, or zero, with the "clr 7,x" instruction and did the same with the "lf" location. After storing the condition we wanted in our table we copied that table back into OS-9's table by setting up and issuing the I$sstt, or set status call.

That takes care of the initial table change. When we leave the program we must put everything back the way it was. Here's the way we did it during a normal exit from the program. Of course, we used a similar routine when we needed to exit because of an error.

```
done lbsr clrscn clear screen before
leaving
   leax stapak,u return pause
   lda lfsav and lf to prior
   sta 5,x condition before exiting
   lda pausav
   sta 7,x
   clra
   clrb
   os9 i$sstt do it!
   lbcs error
   clrb report no errors
   os9 f$exit
```

Have you ever wondered how you can call another program, i.e., start another OS-9 process from within one of your own assembly language programs? Study this routine.

```
* now do dir
   leax shlstr,pcr "shell"
   ldy #4 size
   leau dirstr,pcr "dir"
   lda #1 object code
   clrb
   os9 f$fork
   lbcs error
   os9 f$wait
```

The code above sets up a call to a shell that runs the OS-9 dir utility. DIR must be in memory or in your current execution directory when the code runs. The instructions that load the registers show how you tell OS-9's F$FORK what process you want to start. "Leax shlstr,pcr" points to a string in memory that holds the characters: s-h-e-l-l. The eighth bit is set on the last "l". This is how OS-9 knows that it is at the end of the name.

By the same token we point the U-register to the location of our parameter string — the name of the program we want our new shell to execute. In this case the string contains the letters, d-i-r, followed by a carriage return. You can find the actual strings in the first assembly code in this tutorial.

After we make the F$FORK call we tell *DynaSpell* to go to sleep and wait for our new shell to die. We do this with the OS9 F$WAIT call. Here's how it works. When the DIR command is finished the shell that ran it will die and send a signal to OS-9 to wake up the process that called it.

As we wrap up our assembly language tutorial we'll give you three more routines to ponder. Hopefully you'll learn how to check for and handle an end-of-file condition, open a file so you can write information to it and make simple menu selections.

```
eofchk cmpb #e$eof end of file?
   lbne error no, go
   lda ipath yes, close read file
   os9 i$clos
   lbcs error
   lda opath standard output?
   cmpa #1
   beq eofc1 yes, go
   os9 i$clos no, close it
   lbcs error
   lda #1 and set up for
   sta opath standard output
eofc1 deca and standard input
   sta ipath
   orcc #1 set carry to indicate
   puls x,pc exit,needed

* Open a file for write
writon clr reflag
   leax filnam,u open file
   lda #read.
   os9 i$open
   sta ipath
writ1 leax temstr,pcr now open "temp"
   ldd #write.*256+npdat.+pread.+
pwrit.
   os9 i$crea
   bcs wtemchk
   sta opath

* A small segment from a menu selec-
    tion
* decision tree

chkff cmpa #'f want formatted read?
   bne chku no, is character a "u"
   lbsr reasty yes, do formatted read
   lbra query and go back to main
menu
chku cmpa #'u want to use another
    dictionary?
   bne chko no, see if want to quit
   lbsr use yes, go to it
   lbra query and return to main menu
chko cmpa #'o want to go back to oper-
ating system?
   bne chkfb no, want to save accepted
    words?
   lbra done back to OS-9 yes, go back
chkfb cmpa #'b build new dictionary list
   bne chkfw
   lbsr savwrd
   lbra query and the beat goes on
```

More Benchmarks

The following procedures show you the similarity between a BASIC09 program and a C program. They also show you the speed difference between two programs running on the same machine.

Since BASIC09 is interactive it is a handy tool to use to develop an algorithm. Once the program flows smoothly, you can recode it in C and pick up the speed, etc.

The routines came from Tim Grovac who rewrote them from a *Byte* magazine published last year. First, let's look at the run times. The BASIC09 procedure below takes 86 seconds to run on a Color Computer, 39 seconds on a GIMIX Level II system running at two megahertz. The C code executed in 33 seconds on my Color Computer. It took only 15 seconds on the GIMIX.

How do we stack up to the CP/M crowd? When Tim ran the same procedure on a four megahertz Compustar

The Rainbow's Second Annual SIMULATION CONTEST

Because of the immense popularity of Simulations and the superior quality of the programs submitted in last year's competition, THE RAINBOW has announced plans for the Second Annual Simulation Contest.

Last year, our contest judges relived the Civil War, traveled to the moon, to Mars and beyond, went bankrupt running a restaurant, made a million bucks as a manufacturer, survived a flood, lobbied for bills in Congress, assumed responsibility for mid-air collisions as an air-traffic controller, drowned while learning to sail, experienced the thrill of victory in the seventh game of baseball's World Series, and made it big with our own software business. (Many of the entries in the 1983 contest are featured in a book on Simulations, which THE RAINBOW plans to publish in early fall.)

We're looking for an even greater variety of situations this year and expecting to see great improvements in graphics presentations because of the advancements in programming tools and knowledge since the first contest.

Many of THE RAINBOW's generous advertisers will be donating some exciting prizes as they did last year (and in our recent Adventure contest) when our winners carted off Radio Shack disk drives, an Epson printer, and dozens of other prizes that included a wide variety of peripherals and high quality software. Among those companies donating prizes:

Cancoco Sottware
CoCo Indx
Cognitec
Color Connection Software
D. P. Johnson
DSL Computer Products
Dugger's Growing Systems
E.D.C. Industries
Elite Sottware
Emerald Computer Services
EVS Engineering
Great Plains Computer Company, Inc.
Hawkes Research Services
Kage Engineering
Lloyd I/O
Mark Data Products
Merrick & Co.
Metro Electronics
Tom Mix Software
REM Industries
Robotic Microsystems
SOFTECH
Sonburst Software
Speech Systems
Sugar Software
Syntactics
Vidtron
Wasatchware
York-10

Contest submissions must be on tape or disk and it is best to make several saves, at least one of them in ASCII format. We really do not have the time to key in programs, obviously. All entries should be supported by some editorial commentary, explaining how the program works and loads. Please do not submit entries that are currently submitted to another publication.

Your entry must be received by THE RAINBOW no later than September 1, 1984, to be eligible for the competition.

This promises to be the THE RAINBOW's most exciting contest yet, and, as usual, the winning entries will be published when we announce the results in an upcoming issue.

RULES: All programs must be original works, no "conversions." Entries must be postmarked by September 1, 1984, and become the property of Falsoft, Inc., publisher of THE RAINBOW. Decision of the judges is final. Duplicate prizes will be awarded in the case of ties. Winning programs to be featured in a special RAINBOW Simulation issue. Mark entries "Simulation Contest Editor" and send to THE RAINBOW, P.O. Box 385, Prospect, KY 40059.

Z80 CPU it took 33 seconds. The same machine ran a JRT PASCAL version in 131 seconds. There's something you can talk about at your next computer club meeting. Here is the code:

```
PROCEDURE benchmark

0000  (* A short Math Benchmark routine *)
0024  DIM x,j,k: INTEGER
0033  FOR x=1 TO 10000
0044    j=240
004B    k=15
0052    j=k*(j/k)
0062    j=k*(j/k)
0072    j=k+k+k+k+k+k+k+k+k+k+k+k+k+k+k+k
00B6    j=j-k-k-k-k-k-k-k-k-k-k-k-k-k-k
00FA  NEXT x
0105  END
```

And, in C,

```
/* Math Benchmark routine in "C" */
int j,k,i;
main()
  {
  for (i=1; i<10000; i++)  }
   j=240;
   k=15;
   j=k*(j/k);
   j=k*(j/k);
   j=k+k+k+k+k+k+k+k+k+k+k+k+
     k+k+k+k+k;
   k=j-k-k-k-k-k-k-k-k-k-k-k-k-k;
    }
  }
```

NineCom Update

Here's an update on *NineCom*. Ken tells me that this program is designed to run on the new deluxe Color Computer that should be in your local Radio Shack by the time you read this column. Reportedly, the new CoCo has a 6551 ACIA port built in and *NineCom* uses it. *NineCom* will not run on the original RS-232 port. The drivers for the new ACIA port will be in a new release of OS-9 to hit the stands soon.

UNIX Look Out!

We've saved the best for last. We mentioned at the beginning of this column that Brian Lantz was a genius. Now, we'll prove it. First, his strategy.

Brian examined all the OS-9 toolkits that had been released earlier in the year. Then, he checked the list of standard UNIX utilities. He decided that there was really no need to reinvent the wheel so he struck out to break new ground and fill the gap between utilities available on UNIX and OS-9.

In the past several months he has moved us 36 utilities closer. Ken Kaplan should put him on the payroll. About a dozen of the utilities will be marketed by Paul Searby at Computerware. The remainder will be added to the FHL lineup soon.

We won't be able to go into a lot of detail this month because we're still testing and we're out of space, but in a nutshell, Brian's programs all obey the UNIX conventions. Each one of his OS-9 utilities uses the same command line and does the same thing as its UNIX equivalent. He did them in assembly language so they are also an order of magnitude shorter than the UNIX versions which are written in C.

These tools recognize the meta characters and regular expressions we wrote about the toolkit from Microware. In fact, Brian has added a utility called META that preprocesses meta characters for commands that don't recognize them. For example, you use these command lines:

```
OS9: meta del test* <ENTER>
OS9: meta list /d0/LISTINGS/e* <ENTER>
```

If you type meta <ENTER> you enter a meta shell.

Here's a listing of some of the others. We'll try to add more details and a review in a future column.

AT	set up a procedure file AT a future date and time
ATRUN	run a procedure file set up by AT
CAL	print a calendar of any year
CAT	copy input from stdin, concatenate it to stdout
CHECK MAIL	tells you when you have mail
CHMOD	changes attributes of file or directory
CHOWN	changes ownership of a file
COMM	compares two files
CONFERENCE	stdin goes to selected users on line
CRON	run tasks periodically
CRYPT	encrypt standard input to standard output
DU	check usage of disk space
ERROR	list error message
EXPAND	add input from stdin to a "pathname"
FGREP	Fast Grep to find strings in a file
FINGER	find information about users on line
HEAD	print first few lines of file
LOGIN	similar to Microware's, checks for mail
LOWER	convert UPPER case letters to lower
LS	Lists filenames, accepts meta characters
MAIL	Send and receive mail from user to user
MAN	On line system manual
META	expands meta characters from command line
MV	moves file
PACK	compresses spaces in file
PASSWD	change and encrypt login password
PR	format stdin to standard output
QSORT	quick sort, requests memory when needed
RPL	replaces one string with another
SND	output tone on CoCo speaker
SOUND	same as SND
SU	Switch Users without LOGIN
TAIL	display last NUM lines of a file
TEE	UNIX equivalent, overwrites existing file
TIME	execute and time a command
TR	substitute, compress and delete characters
TTY	Display name of standard input device
UDATE	display current date and time, UNIX format
UNIQ	reduce multiple, consecutive lines to one unique line
UNPACK	puts spaces PACKed back in
UPPER	converts lower case letters to UPPER case
UPS	Repeatedly process a command
VIS	display non printing characters as /nnn
VOICE	adds system call for SOUND
WALL	write file to all users on system
WC	word count utility
WHO	tells who is on system and where they are logged on
WRITE	write message to a specific user

RAINBOW

Give us your best: Join the ranks of these courageous CoCoists in showing the Color Computer world your high score at your favorite micro-diversion. We want to put your best effort on record in THE RAINBOW's Scoreboard column. All entries must be received by the first of the month to be eligible for the following month's Scoreboard. They must include your *full* name, address, game title, company name and, of course, your high score. Each individual is limited to three score entries per month. Send your entries to Scoreboard, c/o THE RAINBOW.

★ New Number One • Last Month's Number One

ADVENTURE *(Flex)*
65 ★Bryan Teel, Martinlown, Ontario

ALCATRAZ II *(Spectral Associates)*
16,230 ★Steve Menderschied, Cincinnati, OH

ASTRO BLAST *(Mark Data)*
158,000 ★Larry Plaxton, Medley, Alberta
157,000 Scott Drake, Pine City, NY
104,484 Jim Baker, Florissant, MO
98,000 Tim Warr, Bellingham, WA
97,000 Bernard Parent, Ste-Foy, Quebec

BAG-IT-MAN *(Aardvark)*
101,400 ★Daniel Belisle, Montreal, Quebec

BASEBALL *(Radio Shack)*
169-0 ★Rene Belisle, Montreal, Quebec
118-0 Jerry Morgan, Independence, MO
108-0 Kevin Sobiski, Dyer, IN
107-0 Glenn Wesson, Castleton, NY
100-0 Glen Giacomelli, Woodbridge, Ontario
45-0 Brian Zywicke, Mishicot, WI
39-0 Steve Lowry, Waterford, MI
38-0 John Maicogliese, Eastchester, NY

BEAM RIDER *(Spectral Associates)*
178,270 ★David Lazar, Englishtown, NJ

BERSERK *(Mark Data)*
24,500 ★Chip Lilley, Finleyville, PA
8,500 Mark Wooge, Omaha, NE
7,900 Martin Careau, Quebec City, Quebec
7,650 David Gelozzo, Morrisville, PA
7,100 Scott Calberg, Hilton, NY

BLACKJACK *(Radio Shack)*
39,450 ★Michael Rosenberg, Prestonsburg, KY
11,820 •Woody Farmer, Acme, Alberta

BLOC HEAD *(Computerware)*
1,006,200 ★Lindi Woll, Fairbanks, AK
999,825 Brian Spek, Keswick, Ontario
819,425 Keith Denhoed, Coalhurst, Alberta
781,350 Joe Golkosky, Portage, MI
395,175 Jeff Roberg, Winfield, KS

BUSTDUT *(Radio Shack)*
42,000 ★Derrick Kardos, Colonia, NJ
42,000 ★Martin Klein, Skokie, IL
34,700 Sara Hennessey, Golden Valley, MN
28,720 Perry Denton, New Baden, IL
27,880 Mike Wells, Pittsburgh, PA

BUZZARD BAIT *(Tom Mix)*
2,902,700 ★Michael Popovich, Nashua, NH
2,087,650 Edmund Greene, Nashua, NH
1,134,600 Richard Bullermore, Grand Rapids, MI
756,550 Andrew Truesdale, Ferguson, MO
688,550 David Castelson, Livermore, CA
612,650 James Whill, Gonzales, TX
480,300 Blossom Mayor, E. Greenbush, NY
139,050 Nick Ruggeri, Wenonah, NJ

CANDY CO. *(Intracolor)*
418,325 ★Randall Edwards, Dunlap, KS

CANYON CLIMBER *(Radio Shack)*
8,990,000 ★Glen Giacomelli, Woodbridge, Ontario
1,571,300 Jeff Weaver, Gordonville, PA
1,400,200 James Stevenson, Marshall, TX
999,900 Andre Wagner, Bangor, PA
615,500 Randy Hankins, Tabor, FL
212,800 Mike Trisel, Wiltshire, OH
126,500 Matt Corwine, Michigan Valley, KS

CASHMAN *(MichTron)*
$19,650 ★Perry Denton, New Baden, IL
$16,000 Scott Oberholtzer, Lexington, MA
$11,130 Ricky Suslaik, Grand Island, NY
$10,000 Tim Brown, Clio, MI

CAVERN COPTER *(THE RAINBOW)*
747 ★Susan Ballinger, Uxbridge, Ontario

CHAMELEON *(Computerware)*
15,100 ★Janell Shoshane, Ashland, WI

CHOPPER STRIKE *(MichTron)*
67,900 ★Matt McCann, Louisville, KY
63,000 Andrew Figel, Saidis, OH
47,400 David Figel, Saidis, OH
42,100 Bilen Peterson, Muskegon, MI

CLOWNS & BALLOONS *(Radio Shack)*
110,475 ★Andrew Truesdale, Ferguson, MO
104,270 Ken Bird, Delawere, OH
92,480 Martin Careau, Quebec City, Quebec
89,430 Perry Denton, New Baden, IL
88,900 Cheryl Prall, Moab, UT

COCO TREK *(Chromaselle)*
2,500,000 ★Ted Warren, Morgan, ID

COLOR OUTHOUSE *(MichTron)*
528,694 ★Benjamin Hebb, Bridgewater, Nova Scotia
160,200 David Lazar, Englishtown, NJ
101,650 Davey Devlin, Clyde, NC
69,848 Phillip Laurell, Lansing, MI
48,663 Bruce March, Barrie, Ontario
42,182 Bernd Pruelling, Scheibenherdt, West Germany

COLORPEDE *(Intracolor)*
10,001,051 ★Mark Smith, Santa Ana, CA
3,355,248 Scott Drake, Pine City, NY
2,614,230 Jerry Pelkash, Warren, MI
2,547,299 Rich McGervey, Morgantown, WV
2,471,342 Vincent Lok, Ontario, Canada
1,054,348 Randall Edwards, Dunlap, KS
295,789 Jon Kioll, Greendale, WI
224,450 Ellen Ballinger, Uxbridge, Ontario

CRASH *(Tom Mix)*
155,000 ★David Lazar, Englishtown, NJ

CU*BER *(Tom Mix)*
196,090 ★Randall F. Edwards, Dunlap, KS
94,940 Martin C. Klein, Skokie, IL
49,510 Doug Kierr, Grand Rapids, MI
42,850 Mike Schwartz, Otsego, MI
38,180 Kevin Schwartz, Otsego, MI
36,960 Blossom Mayor, E. Greenbush, NY

CUBIX *(Spectral Associates)*
67,400 ★Patricia Lau, York, PA
45,056 Bonnie Kreischmer, Oxford, OH
38,500 Randall Edwards, Dunlap, KS
28,760 Michael Rosenberg, Prestonsburg, KY
27,780 Brill Landrum, Pensacola, FL

DANGER RANGER *(Med Systems Software)*
1,962 ★Michael Rosenberg, Prestonsburg, KY
1,890 Fred Thompson, Saugus, MA

DEFENSE *(Spectral Associates)*
103,650 ★Mary A. Brickles, Allen Park, MI

DESERT GOLF *(Spectral Associates)*
31 ★Kenton Fifield, Fort Francis, Ontario

DEVIL ASSAULT *(Tom Mix)*
1,762,980 ★Michael Rosenberg, Prestonsburg, KY
1,284,300 •John Statham, Strathroy, Ontario
625,000 Simon Dickson, Bangor, N. Ireland
318,550 Kanti Dinda, Kingston, Ontario
294,300 Chip Lilley, Finleyville, PA
289,300 Michael Rosenberg, Prestonsburg, KY
271,106 Peter Nressen, Carlisle, MA

DDDDLE BUG *(Computerware)*
3,149,330 ★Elko Cary, National City, CA
2,577,515 •Tim Brown, Clio, MI
1,767,630 Perry Denton, New Baden, IL
109,650 Byron Albertson, Williams Lake, British Columbia

DDUBLE BACK *(Radio Shack)*
1,125,000 ★Mark Hurst, Sheridan, OR
1,080,000 Philippe Duplantie, St. Jerome, Quebec
605,890 Peter Sherbuina, Highland, CA
474,040 Paul Moritz, Butte, MT
435,570 Philippe Morsan, St. Jerome, Quebec

DRACONIAN *(Tom Mix)*
71,930 ★Michael Corman, W. Layfayette, IN

DUNKEY MUNKEY *(Intellecitronics)*
1,015,000 ★Kyle Keller, Overland Park, KS

EL BANDITO *(Mark Data)*
855 ★Michael Rosenburg, Prestonsburg, KY

ELECTRON *(Tom Mix)*
45,510 ★John Sandberg, Concord, CA
41,750 Michael Rosenberg, Prestonsburg, KY
22,990 Alan Morris, Chicopee, MA
19,500 Bobby Presson, Florissant, MO

FIRE COPTER *(Adventure International)*
97,390 ★Sam Hughes, Colton, CA
78,860 •Woody Farmer, Acme, Alberta

FLYBY *(Chromaselle)*
104,980 ★David Finberg, Annandale, VA
28,910 Ron Suedersky, Universal City, TX
20,110 Rick Mansell, Calgary, Alberta
16,670 Michael Rhalligan, Cary, NC
4,830 Jeff Roberg, Winfield, KS

FOOTBALL *(Radio Shack)*
217-0 ★Glen Giacomelli, Woodbridge, Ontario

THE FROG *(Tom Mix)*
452,800 ★James Baker, Salt Lake City, UT
118,200 Ray Boyko, Whitby, Ontario
109,500 Pat Craddick, Jenesville, WI
95,790 Erleen Kaskee, Royal Oak, MI
68,850 Scott Kubola, Whitby, Ontario

FROGGIE *(Spectral Associates)*
84,440 ★Bill Ide, Newark, DE
74,050 Mike Gelozzo, Morrisville, PA
68,680 Carmen Thew, Surrey, British Columbia

GALAGON *(Spectral Associates)*
286,741 ★Rod Moore, Fork Union, VA
188,130 Daryl Judd, Nampe, ID
136,510 Mike Ashworth, Huntington, WV
113,900 Graham Bald, York Haven, PA
95,800 Kyle Keller, Overland Park, KS

GALAX ATTAX *(Spectral Associates)*
253,900 ★Shawn McAlpin, Louisville, KY
113,650 Darin Filand, WA
104,550 Mitch Heyden, Univ. of Minn.
82,850 Steve Hargis, Tucson, AZ
74,550 John Gosselin, Campbell River, British Columbia

GHOST GOBBLER *(Spectral Associates)*
1,007,430 ★Todd Brannam, Charleston Hts., SC
525,250 Randy Gerber, Wilmette, IL
423,390 Rich McGervey, Morgantown, WV
255,000 John Osborne, Kincardine, Ontario
228,290 Patricia Lau, York, PA
51,750 Wendy Weinschenk, Wickenburg, AZ

GONE FISHING *(THE RAINBOW)*
8 ★Jeffrey Kocks, Grove City, OH

GRABBER *(Tom Mix)*
129,100 ★Blossom Mayor, E. Greenbush, NY
70,600 Michael Corman, Lafayette, IN

HEIST *(THE RAINBOW)*
1,500 ★Andy Daler, Medford, OR
1,300 •Richard King, Houston, TX

INTERGALACTIC FORCE *(Microdeal)*
254,650 ★Christopher T. Grey, Hollywood, CA
113,600 Alex Taylor, Manchester, England

JUNIOR'S REVENGE *(Computerware)*
3,007,000 ★Tim Brown, Clio, MI
2,154,900 Scott Kubola, Whitby, Ontario
2,099,300 Shawn McAlpin, Louisville, KY
1,115,300 Ryan Van Manen, Grand Rapids, MI
1,081,700 Bruce March, Barrie, Ontario
223,900 Patrick Kochaniec, Windsor, Ontario

KATERPILLAR ATTACK *(Tom Mix)*
31,672 ★Scott Fairfield, Williamstown, MA
25,949 James A. Lafare, Williamstown, MA
18,949 Vadim Golovsky, Toronto, Ontario
15,821 Alex Golovsky, Toronto, Ontario
5,426 Russ Rosen, Cardiff, CA

SCOREBOARD

KEYS OF THE WIZARD *(Spectral Associates)*
662 ★Susan Ballinger, Uxbridge, Ontario
662 ★Pegi Tindla, Soquel, CA
662 ★Ellen Ballinger, Uxbridge, Ontario

THE KING *(Tom Mix)*
10,000,100 ★Mark Smith, Santa Ana, CA
4,040,300 Andy Truesdale, Ferguson, MO
3,343,000 Corey Friedman, Minnetonka, MN
2,410,200 Candy Hardan, Birmingham, AL
2,367,900 Richard Lacharita, Sherbrooke, Quebec
198,100 Simon Dickson, Bangor, N Ireland
134,700 Blossom Mayor, E. Greenbush, NY

KLENDATHU *(Radio Shack)*
1,245,821 ★John Sandberg, Concord, CA
1,152,885 David L. Ferris, Shickshinny, PA
770,521 Ellen Ballinger, Uxbridge, Ontario

KRON *(Oregon Color Computers)*
224,080 ★Steve & Scott Schneider, OR
73,530 Christopher Porter, Naranja Lakes, FL

LADY BUGGY
38,980 ★Tony Cummings, Abington, MA

LANCER *(Spectral Associates)*
2,797,450 ★Randall Edwards, Dunlap, KS
2,354,000 Alex Siala, Las Vegas, NV
875,130 Larry Capen, Folsom, CA
738,250 Sharon Castan, Folsom, CA
617,500 Donna Willoughby, Brookfield, IL

LASERWORM & FIREFLY *(THE RAINBOW)*
94,748 ★Brian Chalin, Weyers Cave, VA
54,672 ●Michael Rosenberg, Prestonsburg, KY
43,420 Eric Morrell, Sayreville, PA
37,250 Rene Balisle, Montreal, Quebec
29,872 Theodore Latham Jr., Rich Square, NC

LUNAR ROVER PATROL *(Spectral Associates)*
162,100 ★Sara Aliff, Northeast, MD
154,650 Tom Aliff Jr., Northeast, MD
98,500 Ima Wong, Williamstown, WV
66,900 Wayne Johansen, Rosenville, Saskatchewan
66,850 Randall Edwards, Dunlap, KS
44,100 Jefferson Hatch, West Chester, PA

MADNESS & THE MINDTAUR *(Radio Shack)*
240 ★Pegi Tindla, Soquel, CA

MARATHON *(THE RAINBOW)*
101,520 ★David Daan, West Mansfield, OH
71,550 Larry Evans, Elk Grove Village, IL
55,110 Michael Rhatigan, Cory, NC

MEGA-BUG *(Radio Shack)*
60,000 ★Robin Wolthem, Milwaukee, WI
18,902 John Tiffany, Washington, DC
15,999 Ed Mitchell, Ragged Mountain, CO
14,297 Aleisha Hamphill, Los Angeles, CA
11,894 Paschal Wilson, Kenwood, LA
5,493 Brian Chalin, Weyers Cave, VA

MEGAPEDE *(Computerware)*
72,937 ★Joe Sannucci, Elizabeth, NJ

METEORS *(Spectral Associates)*
26,580 ★Kevin Endlich, Perry Hall, MD
14,200 Craig Dutton, Goose Bay, Labrador

MONSTER MAZE *(Radio Shack)*
650,530 ★Bruce March, Barrie, Ontario
533,450 John Hankerd, Gaines, MI
495,850 Andrew Mitchell, Melbourne, Australia
300,000 James Stevenson, Marshall, TX

MOON SHUTTLE *(Datasoft)*
113,642 ★Rod Moore, Fork Union, VA

MR. DIG *(Computerware)*
223,600 ★Tommy Wald, Minneapolis, MN
207,600 Phillip Laurell, Lansing, MI
40,350 Barney A. Sadler, Northwood, ND

MS. GOBBLER *(Spectral Associates)*
22,580 ★Oliver Banta, Lincoln, NE

MUDPIES *(MirchTron)*
156,800 ★Glenn Wasson, Castleton, NY
147,400 Chris Hafey, Auburn, CA
124,400 Bernd Pruelting, Schelbenhardt, West Germany
15,500 Steve Springel, Louisville, KY

NINJA WARRIOR *(Progiemmer's Guild)*
106,300 ★Bud Selbel, Tumbler Ridge, British Columbia
102,400 Christopher Galowitz, Claresholm, Alberta
75,300 Brad Gauchar, Hinton, Alberta
46,400 Daniel Milbrath, Ann Arbor, MI
36,800 Greg Lowry, Davisburg, MI

PAC-ATTACK II *(Computerware)*
214,210 ★Ray Boyko, Whitby, Ontario
189,350 Scott Kubota, Whitby, Ontario
56,014 Lisa Welle, Baxter, TN
30,150 Jaff Waavar, Gordonville, PA

PAC 'EM *(THE RAINBOW)*
1,934 ★Dr. James Paterson, Radcliff, KY
1,870 Steve Olson, Calgary, Alberta
1,572 Kenneth Bergenham, Lawton, MI
1,556 Rupert Young, Shellfield, MA
669 Jeff Loeb, Mobile, AL
429 Susan Ballingar, Uxbridge, Ontario

PAC-TAC *(Tom Mix)*
129,770 ★Andrew Lehiola, Mound, MN
100,630 David Dean, West Mansfield, OH
61,025 John Tyson, Superior, WI

PHANTOM SLAYER *(Mad Systems Software)*
2,668 ★Michael Brooks, Glade Spring, VA
2,488 Troy Masser, Joplin, MO
1,852 Curtis Boyle, Saskatoon, Saskatchewan
1,306 Marc Hassler, Gainesville, FL
1,126 Gille Giroux, North Bay, Ontario
858 Susan Ballingar, Uxbridge, Ontario

PINBALL
2,800,090 ★Glan Ewing, Brooklin, Ontario

PIPELINE *(THE RAINBOW)*
1,110 ★Roger Buzard, Lima, OH
1,062 Kent Prehn, Carol Stream, IL
1,030 Anita Howa, Jackson, NJ
838 Johnny Frilsch, Whitehall, PA
793 Bill Frilsch, Whitehall, PA

PLANET INVASION *(Spectral Associates)*
177,900 ★Russ Rosen, Cardiff, CA

POLARIS *(Radio Shack)*
63,053 ★Paschal Wilson, Kenwood, LA

POOYAN *(Datasoft)*
890,850 ★Jarry Morgan, Independence, MO
480,430 Bernd Pruelling, Schaibanhardt, West Germany
279,450 ●Chip Lilley, Finleyville, PA
273,450 Davey Davlin, Clyde, NC
249,900 Erika Oldale, Athabasca, Alberta
220,850 Daniel Belisle, Montreal, Quebec
216,200 Templar Baston, Colaman, Alberta
167,150 Fred Thompson, Saugus, MA
98,000 Andy Deter, Medford, OR

PDPCDRN *(Radio Shack)*
43,970 ★Jeff Weaver, Gordonville, PA
39,470 Nicole Freadman, Wellesley, MA
36,210 Brad Gray, Olive Branch, MS
33,910 Wendy Weinschenk, Wickenburg, AZ
32,000 Lisa Wells, Baxter, TN
12,000 Brian Chafin, Weyers Cave, VA

PRDJECT NEBULA *(Radio Shack)*
1,120 ★John Hopkins, Greenville, SC
1,065 William Daley, Biloxi, MS
1,065 Dan Healer, Cortland, OH
995 Dan Bovey, Wheaton, IL
960 Ian Clark, Albion, MI

PYRAMID *(Radio Shack)*
220/147 ★Ssg. Daniel Pierce, APO San Francisco, CA
220/224 Tony & Hazel Rye, Ingleside, Ontario
220/236 Pat McWhinney, Key Largo, FL
220/289 Douglas G. Oxenreider, Montevideo, MN
220 Jerome Galbe Jr., Rochester, MI
200 Dale Roman, Bellaire, OH

O-NERD *(THE RAINBOW)*
27,800 ★Richard King, Houston, TX
3,740 Theodore Latham Jr., Rich Square, NC
2,380 Jeff Loeb, Mobile, AL

RAAKA-TU *(Radio Shack)*
40 ★David Joyner, Raleigh, NC

RAINBOW ROACH *(THE RAINBOW)*
124,800 ★Cheryl Endlich, Perry Hall, MD
113,500 Andrew Smith, Columbia, SC
102,000 John Statham, Strathroy, Ontario
69,600 Bill Grubbs, Columbus, IN
49,000 Catherine Collingwood, Greenville, SC

REACTOIDS *(Radio Shack)*
931,395 ★Linda Mobbs, Ft. Huron, MI
203,800 Andraw Lahiola, Mound, MN
88,615 Robbie Anderson, Monrovia, CA
41,100 Jaff Loab, Mobile, AL

RETURN OF THE JET-I *(ThundarVision)*
372,782 ★Roger Buzard, Lima, OH
148,112 Mell Griffiths, Sirlwell, KS
135,306 Peter Nlassen, Carlisle, MA

RDBOTTACK *(Intrecolor)*
2,216,950 ★Randy Hankins, Tabor, IA
1,922,200 Eirk Merz, Noblesville, IN
1,512,200 Robert Kiser, Monticello, MS
1,424,300 John Osborne, Kincardine, Ontario
1,219,810 Steva Skrzynierz, Tacoma, WA

SANDS OF EGYPT *(Radio Shack)*
82 ★Shawn Hobbs, Hutchinson, KS
82 ★John Allocca, Yonkers, NY
87 Kim Van Camp, State Center, IA
106 Sean Haynes, Naples, ME

SCARFMAN *(Cornsoft)*
412,050 ★Michael Caramr, Springfield, VA
253,920 ●Scott Boulangor, Columbus, OH

SEA DRAGON *(Advanture International)*
430,200 ★David Lazar, Englishtown, NJ
137,500 Peter Niessen, Carlisle, MA
75,750 Steve Schweitzer, Sewell, NJ
60,430 Steve Skrzyniarz, Tacoma, WA
56,760 Alan Morris, Chicopee, MA

SEA OUEST *(Mark Data)*
140 ★Shawn Hobbs, Hutchinson, KS
230 Casay Stein, Binghamton, NY

SHARK TREASURE *(Computerware)*
245,000 ★Manon Bertrand, Haulerive, Quabec
175,000 Maurica Boyle, Saskatoon, Saskatchewan

SHOOTING GALLERY *(Radio Shack)*
120,640 ★Robert J. Wallaca, Waldorf, MD
59,520 Vernell Peterson, Radcliff, KY
44,870 Mark Nichols, Birsay, Saskatchewan
44,480 R. Ouguay, St. Bruno, Quabec
31,340 Marlin Peterson, Lynchburg, VA

SKIING *(Radio Shack)*
1205 ★Kelly Karl, Wentzville, MO
1373 Janell Stroshane, Ashland, WI
2135 Jaan-Claude Talrena, Brossard, Canada
2952 Andrew Truesdale, Ferguson, MO
4402 Brad Gaucher, Hinton, Albarta

SLAY THE NEREIS *(Radio Shack)*
328,521 ★Edward Mayar, Vancouver, British Columbia

SNAIL'S REVENGE *(THE RAINBOW)*
34,860 ★Michael Rosanburg, Prestonsburg, KY
11,380 Varunee Turner, Kamloops, British Columbia
9,230 Jose Cacho, Ft. Knox, KY
6,880 Rupert Young, Shellfield, MA
6,150 Alan Sadler, Northwood, ND

SOLO POKER *(Radio Shack)*
910 ★Carol O. Fitzgerald, Moscow, ID
850 Granville Bonyata, Tallahasse, FL
740 Allan Mercurio, Portsmouth, RI

SPACE ASSAULT *(Radio Shack)*
1,632,450 ★Walter Brokx, Granisla, British Columbia
537,200 Martin Careau, Quebec City, Quebec
358,660 Mike Snelgrove, Oshawa, Ontario
354,860 Bruce Madariaga, College Park, MD
236,580 John Cola, King City, Ontario

SPACE INVADERS *(Spectral Associates)*
4,862,040 ★F.U. Ingham, Clyde, WI
38,960 Sean Dutton, Goose Bay, Labrador
12,760 John McJillon, Houston, TX

SPACE RACE *(Spectral Associates)*
60,125 ★Mark Nelson, Kent, WA
37,600 Michael Rosenberg Prestonsburg, KY

MORE... RAINBOW SCOREBOARD

SPACE SHUTTLE *(Tom Mix)*

595	★Steve Schweitzer, Sewell, NJ
585	Kenton Frifeld, Fort Francis, Ontario
585	Randall F. Edwards, Dunlap, KS
576	David J. Banks, Greendale, British Columbia
575	Fred Weissman, Brookline, MA

SPACE WAR *(Spectral Associates)*

400,190	★Mark Felps, Bedford, TX
365,550	Randall Edwards, Dunlap, KS
116,000	Peter Niessen, Carlisle, MA
52,380	Jim Baker, Florissant, MO
15,420	Mark Nelson, Kent, WA

SR-71 *(Tom Mix)*

4,443	★Jay Jehnsen, Puyallup, WA
2,570	Dominique Hall, Williamstown, WV

STARBLAZE *(Radio Shack)*

10,000	★Dan Burner, Fowler, IL
9,050	Judith Simen, Warrendale, PA
8,000	Lee Van Dyke, Lansing, MI
7,350	James Hawerbier, Elmhurst, IL
6,850	Jonathan Judge, Oconto, WI

STAR TREK *(Adventure International)*

95	★Granville Bonyata, Tallahassee, FL
94	John Brackett, Chicago, IL

STORM ARROWS *(Spectral Associates)*

168,000	★Steven Ohsie, Deer Park, TX
136,650	Brian Specht, Rochester, NY
68,400	Jim Irvine, Sudbury, Ontario

TIME BANDIT *(MichTron)*

243,620	★Mark Wooge, Omaha, NE
129,240	■Brian Larson, Fridley, MN
110,220	Sally Naumann, Hailey, ID
106,720	Glen Heidebrecht, Topeka, KS
66,700	Fred Naumann, Hailey, ID
21,570	Andy Van Dijk, Barrie, Ontario
15,340	Rose Maria Paparis, Williamsburg, VA
8,640	Demetra Palantzas, Williamsburg, VA

TRAILIN' TAIL *(THE RAINBOW)*

76,275	★Michael Rosenberg, Prestensburg, KY
33,454	Kenneth Bergenham, Lawton, MI
26,840	Dr. James Peterson, Radcliff, KY
24,415	Kenleng Filield, Fort Frances, Ontario

TRAPFALL *(Tom Mix)*

114,322	★David Jeyner, Raleigh, NC
113,408	■Rich Trawick, N. Adams, MI
112,596	Kanti Dinda, Kingston, Ontario
112,404	Russ Rosen, Cardill, CA
106,620	Simon Dicksen, Bangor, N. Ireland
106,296	Brennan Baybeck, Traverse City, MI
104,458	Robert Cattral, Ollawa, Ontario
104,368	John Osborne, Kincardine, Ontario

TRIPLE YAHTZEE *(Software Factory)*

2,319	★Betty Gable, Peulsbe, WA

TUBE FRENZY *(Aardvark)*

544,560	★Perry Denton, New Baden, IL
240,060	Randall Edwards, Dunlap, KS
230,000	Ken Felix, Crystal Lake, IL
101,650	Lloyd Albertson, Williams Lake, British Columbia

TUT'S TOMB *(Mark Data)*

158,000	★Chris Russo, Miami, FL
106,460	Eileen Kaakee, Royal Oak, MI
104,360	Gary Marshall, Layton, UT
98,600	George Kaakee, Royal Oak, MI
84,420	Oliver Banta, Lincoln, NE
84,320	Mickey McCafferly, Oceanside, CA
82,000	Allen Bilane
78,280	Richard Shelton, Bakersfield, CA
71,160	Paul Rumrill, Gales Ferry, CT
41,060	Guy Silirman, High Bridge, NJ

VENTURER *(Aardvark)*

6,718,200	★Kyle Keller, Overland Park, KS
4,126,200	Greg Scott, Orlando, FL
2,657,350	Brian Panepinto, Spencerport, NY
2,291,100	Mike Silzer, Roslyn, NY
1,769,400	Todd Hauschildt, Red Wing, MN

WACKY FOOD *(Arcade Animation)*

105,100	★Stephane Asselin, Haulerive, Quebec

WHIRLYBIRD RUN *(Spectral Associates)*

516,450	★Dan Shargel, Arroyo Grande, CA
283,100	Nathan Russell, Mince, OK
157,000	Hughens Bien-Aime, Montreal, Quebec
103,900	Dann Fabian, Crestview, FL
98,400	Dave Lubnow, Sussex, NJ
91,850	David Jeyner, Raleigh, NC
64,000	Russ Rosen, Cardiff, CA

WILDCATTING *(Radre Shack)*

110,579	★Nicholas Siclair, Staten Island, NY
63,723	Mrchael Rosenberg, Prestonsburg, KY
48,682	David Rodgers, Carbendale, IL
38,318	Ellen Ballinger, Uxbridge, Ontario
34,828	Kerri Dullon, Goose Bay, Labredor

ZAKSUND *(Elite Software)*

1,256,000	★Rebert Conyar, Willmgboro, NJ
1,128,050	Richard Minton, West Frankfert, IL
1,008,100	Andy Mickelson, Granville, OH
950,500	Michael Rothman, Selon, OH
910,000	Steve Schweitzer, Sewell, NJ

ZAXXON *(Datasoft)*

1,510,000	★James Quadrella, Brooklyn, NY
401,900	Mike Hughey, King George, VA
370,400	Chris Ceyle, Selden, NY
260,500	Roger Buzard, Lima, OH
235,200	Rich McGervey, Morgantown, WV
140,200	Matthew Connely, Merrick, NY
116,100	Billy Connoly, Merrick, NY
115,500	Mrchael Cerami, Springfield, VA
113,900	Paul Elchlepp, U.S.S. Enterprise
104,600	Jimmy Connoly, Merrick, NY

ZEUS *(Aardvark)*

89,100	★Mike Schwartz, Otsego, MI
69,900	Kevin Schwartz, Otsego, MI
62,800	Brian Schwartz, Otsego, MI

— Kevin Nickols

SCOREBOARD POINTERS

In conjunction with THE RAINBOW's Scoreboard, we offer this column of pointers for our game-playing readers' benefit. If you have some interesting hints and tips, we encourage you to share them by sending them to the Scoreboard, c/o THE RAINBOW.

HISTORY LESSON

Scoreboard:

Lately it seems that there are more and more letters printed concerning the game *Pyramid*. I, too, have reached the 220 mark in this game and I think that I know a few things that your readers might find interesting. No, not more hints; this time let's talk about history.

The game *Pyramid* is taken almost word for word from the original Adventure game called, appropriately enough, *Adventure*. *Adventure* was written by Will Crowther and Don Woods in FORTRAN and placed into the public domain in 1975. The game spread to many universities through ARPAnet, one of the first computer networks. It became so popular and was taking up so much time on some university computers that it was banned or restricted.

Since then, scores of versions of the original have appeared in many different languages and for many different computers. *Pyramid* only contains about half of the rooms of the original (which takes approximately 48K), but it still incorporates most of the game's toughest puzzles (with the sad exception of the friendly bear).

CoCo users who have enjoyed *Pyramid* might want to check with users groups for a complete version of *Adventure*. Those with 64K and CP/M can get a copy from The Software Toolworks, from whom I got much of this information.

Steve Hicks
Raleigh, NC

Scoreboard:

I am having a little trouble on the Adventure game *Pyramid*. I can only get the following treasures: an emerald, a jewel-encrusted key, a gold nugget, a few diamonds, a few silver bars, precious jewelry and a nest full of golden eggs for a total of 160 points. If anyone has any hints or clues on finding the rest of the treasures or how to open the sarcophagus, please send them to me at 55 Joanne Road, 02072.

Scott Nelson
Stoughton, MA

Scoreboard:

I have scored 220 in 236 turns in *Pyramid* by Radio Shack and I thought I would send in a hint. If you carry two treasures and let the mummy take them, you can carry many treasures after that, which lessens your trips back to the entrance. When you find the chest in the maze, the other two treasures will be there.

I need some help in draining the pool in *Sands of Egypt*. If you can help, write me at 809 S. Emerald Dr., 33037.

Pat McWhinnie
Key Largo, FL

DON'T GET BURNED

THE COLOR BURNER FROM GREEN MOUNTAIN MICRO

Lately I've been hearing that you want to program erasable read-only memories (EPROMs). It seems you want to create your own program cartridges, or make changes to your Basic ROMs, or turn your CoCo into some different animal.

The problem is, most EPROM programmers cost over $100, and $100 is big dues to pay. You want to burn EPROMs, not get burned in price — or quality.

So, I've put together the Color Burner, an EPROM programmer that will burn all the "27" family — 2716, 2732, 2764, 27128. Yes, it will also burn 68764 replacements for your Basic ROMs and, no, it won't break your budget.

Although my Color Burner doesn't cost a whole lot, you won't get burned over quality. I don't cut corners in hardware. I use the best fiberglass boards, with gold edges, protective solder masking and silk-screened legends. Before I send you a Color Burner, I test it by actually programming an EPROM.

So how can it be good if it's so inexpensive? First of all, you can only get a Color Burner from Green Mountain Micro. No dealers are adding to its price. Second, it isn't fancy. No high-tech power supplies are in sight. You've got to add three homely, low-tech 9-volt batteries to get it going. Finally, it won't set new standards of complexity. It's simple, hardworking and reliable.

You can get your Color Burner complete or *a la carte*: try an assembled and tested unit, a kit, or just a bare board. Order it with or without programming software. Both kits and assembled units come with over 40 pages of documentation, complete program listings, and schematics. Nothing is hidden.

You'll burn those EPROMs, you won't get burned, and my technical support staff will keep you from getting burned up if you have a question or need help.

You Won't Get Burned with The Color Burner

- Assembled/tested with software, $69.95.
- Assembled/tested only, $64.95.
- Complete kit with software, $56.95.
- Complete kit only, $49.95.
- Board/documentation with software, $30
- Board/documentation, $23
- Bare board only, $20
- ColorPack 8/16K ROM/RAM cartridge kit, $19.95.
- 2716 and 2732 EPROMs available.

Specifications:

Programs 24/28-pin EPROMs, providing 21/25-volt programming pulses under software control. Includes unwired personality module. Requires three 9-volt batteries (not included). Tape software supports 2716 through 27128 and 6876-1/66 EPROM families, and requires 32/64K Extended Color Basic.

ALSO AVAILABLE FROM GREEN MOUNTAIN MICRO

Lowerkit II*, $79.95 /$49.95 kit

64K Color memory upgrade kit, $49.95

MC-10 added 4K upgrade kit, $19.95

CoCoPort interface, $49.95 /$39.95 kit

RAM/ROM pack, $29.95 /$19.95 kit

Scroll-A-Roll software video text display, $24.95

TV Buff II*, improved to handle virtually all monitors, $14.95

Color Quaver, Software Music Synthesizer, $19.95

(Add $2.50 shipping and handling)
**Specify Color Computer or CoCo II*

The Micro Language Lab Presents
"Learning the 6809"

- Authored by TRS-80® Color Computer columnist Dennis Bathory Kitsz
- 24 half-hour lessons on twelve cassettes
- 236 pages of text and complete dox for all the smart chips, including 6809E, 6821, 6847, and 6883
- 35 sample programs ready to load, list, and run
- 1,500 programmed question and answer system
- Learn not only how to put a dot on a screen, but also where and why.

$99.00 (plus $3.50 shipping and handling).
Dealer and club inquiries invited.
Not sure? Request our sample page and table of contents.

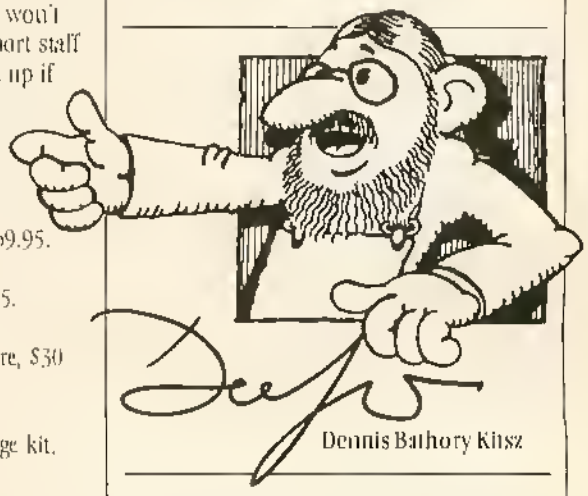

Dennis Bathory Kitsz

Green Mountain Micro
Bathory Road, Box R
Roxbury, Vermont 05669
802-485-6112

Hours: 9am-5pm, Monday-Friday
COD/VISA/MASTERCARD
TRS-80 is a trademark of Tandy Corporation

THESE FINE STORES CARRY THE RAINBOW

The retail stores listed below carry THE RAINBOW on a regular basis and may have other products of interest to Color Computer users. We suggest you patronize those in your area.

ALABAMA
- Birmingham — Jefferson News Co.
- Florence — Anderson News Co
- Gardendale — The Fine Line
- Huntsville — Endicott Software
- Madison — Madison Books
- Montgomery — Trade 'N' Books

ALASKA
- Fairbanks — Electronic World

ARIZONA
- Glendale — Road Runner Computer Products
- Mesa — Personal Computer Place
  Software Center
- Phoenix — Home Brew Computers
  The Computer Shop
  Tri-Teck Computers
- Scottsdale — Data Concepts
  Softwareland Corp
- Tempe — All Systems Go
  Books Etc.
  Computer Library
- Tucson — Anderson News Co
- Yuma — Soft Shop

ARKANSAS
- Little Rock — Anderson News Co

CALIFORNIA
- Atwater — Electrobrain
- Citrus Heights — Software Plus
- Downey — The Floppi Disk
- El Cajon — Radio Shack
- Exton — Software City
- Fortuna — R&V Sound
- Gretna — The Computer Supply Store
- Half Moon Bay — Strawflower Electronics
- Hesperia — Dessert Sound, Inc.
- Hollywood — Levity Distributors
- Livermore — Software Galeria
- Lompoc — L&H Electronics Emporium
- Los Angeles — OPAMP Technical Books
- Modesto — Software Mart
- National City — JARB Software
  Willy's Electronics
- Pacific Beach — Pro Am Electronics
- Palo Alto — Printers, Inc
- Sacramento — Software Center
  Tower Magazine
- San Diego — Computer Dimension
  The Computer Store
  Cost Plus Software
  Dimensional Software
  Disney's Electronics
  Radio Shack
- San Francisco — News On 24
- Santa Rosa — Software 1st
- Southgate — Color Computing
- Stockton — Hardings Way News
- Sunnyvale — Computer Literacy
- Torrance — Software Centre Int.

COLORADO
- Aurora — Aurora Newsland
- Colorado Springs — Hathaway's Magazines
- Westminster — Software City

CONNECTICUT
- Danbury — Computer Serv of Danbury
- Hartford — The Aetna Life Club Store
- Monroe — Mackey's
- Orange — Software City

DELAWARE
- Wilmington — Normat, Inc —The Smoke Shop

DISTRICT OF COLUMBIA
- The Program Store

FLORIDA
- Clearwater — The Avid Reader
  Soenen & Wilmoth Books
- Cocoa — Village Book Shop
- Coconut Creek — Data Base
- Davie — Software Plus More
- Ft Lauderdale — Mike's Electronics Distributor
  Software Connection
- Jacksonville — The Book Nook
- Kissimmee — Radio Shack & Elec. Hut
- Longwood — Adventure International Store
- Melbourne — City Newsstand
  The Little Store
- Miami — Micro Byte
  The News Rack
- Orange Park — Software City
- Orlando — The Alamo
  Software Unlimited
- Panama City — Computer Systems Group
  Boyd-Eberl Corp.
- Pensacola — Anderson News Co
- Sarasota — Family Computers
- South Pasadena — Poring Place
- Stuart — Caribbean Engineering Corp
- Tallahassee — Anderson News Co
- Tampa — Fine Print Bookstore
  Software Store
  Sound Trador & Computer Center

GEORGIA
- Atlanta — Chips, Inc
  Guild News Agency
  Software City
- Columbus — Muscogee News Co
  Software City
- Cummings — Kent Radio Shack
- Jesup — Kannon Music
  Radio Shack
- Marietta — Act One Video
- Toccoa — Martin Music Radio Shack

IDAHO
- Blackfoot — F/M Systems Electronics
- Boise — Magnum Computer Products
- Moscow — Johnson News Agency

ILLINOIS
- Aurora — Kroch's & Brentano's
- Champorgn — Book Market
- Chicago — B Dalton Booksellers
  N Walbash St
  West Jackson St
  Bob's In Newtown
  Bob's News Emporium
  Bob's Rogers Park
  Book Market
  East Cedar
  North Cicero
  West Diversey
  E B Garcia & Associates
  Guild Books & Periodicals
  Kroch's & Brentano's
  South Walbash
  West Jackson
  516 N Michigan
  835 N Michigan
  Parkway Drugs
  Parkwest Books
  Sandmeyer's Bookstore
  Univ of Chicago Bookstore
  Univ of Illinois Bookstore
  Videomat, Inc
- Danville — Book Market
- DeKalb — Appletree Computers
- Evanston — Chicago-Main News
- Geneseo — B & J Supply
- Lisle — Book Nook
- Newton — Bits TV Radio Shack
- Oak Block — Kroch's & Brentano's
- Oak Park — B I E S Systems
  Kroch's & Brentano's
- Peoria — Book Market
  Illinois News Service
- Schaumberg — Data Domain
  Kroch's & Brentano's
- Skokie — Kroch's & Brentano's
- S Holland — Abacus Computers
- West Frankfort — Paper Place
- Wheeling — North Shore Distributors
- Wood Dale — Pace-Micro Software Centers

INDIANA
- Berne — White Cottage Electronics
- Garrett — Finn News Agency
- Greenwood — The Computer Experience
- Indianapolis — Bookland, Inc.
  Game Preserve
  Indiana News
- Jasper — Computer Store
  Elex Mart
- Lawrenceburg — Bauer Electronics
- Madison — Arcs Office Supplies
- Martinsville — Radio Shack
- Mishawaka — Carrico's Radio Shack
- New Haven — Advanced Color Software
- Scottsburg — Radio Shack of Scottsburg
- Wabash — Mitting's Electronics

IOWA
- Ames — Myers' TV & Stereo Repair
- Bettendorf — Cosmos Computers
- Davenport — Interstate Book Store
  Software City

KANSAS
- Junction City — Ill H's Stereo
- Topeka — Palmer News, Inc.
  Town Crier of Topeka, Inc.
- Wichita — Amateur Radio Equipment Co
  Lloyd's Radio

KENTUCKY
- Hopkinsville — Hobby Shop
- Louisville — The Computer Store
- Maysville — Radio Shack
- Paducah — Radio Shack
- Paintsville — Gus-Stan Enterprises
- Pikeville — Gus-Stan Enterprises
- Radcliff — Bluebird Computers

LOUISIANA
- Baton Rouge — Acme Book Co
- Crowley — Acadiana Newsstand
- Shreveport — Computer SOS
- Slidell — Radio Shack 7161

MAINE
- Brockton — Voyager Bookstore
- E Wilton — O'brian's Electronic Svc. Ctr
- Lewiston — Computer Software & Education Centers
- South Portland — Portland News Co
- Waterboro — Radio Shack

MARYLAND
- Baltimore — The Program Store
- Kensington — The Program Store
- Lexington Park — Books, Etc
  Bowes Books

MASSACHUSETTS
- Brockton — Voyager Bookstore
- Cambridge — Ninis Corner, Inc
  Out Of Town News
  The Program Store
- Danvers — Microcon Computer & Software Store
- Farmingham — Program Store
- Fitchburg — Comets Book Shop
- Ipswich — Ipswich News
- Littleton — Computer Plus
- Lynn — North Shore News Co
- Mansfield — Software Shop
- Woburn — Microcon Softwarecenters

MICHIGAN
- Allen Park — Book Nook, Inc
- Ann Arbor — Community News Center
  Software City
- Brooklyn — Weatherwax Radio Shack
- Charlotte — Computer Options
- Dearborn — DSL Computer Products
- Durand — Robbins Electronics
- Fenton — Tri-County Electronics Radio Shack
- Flint — "I-O"
- Greenville — Robbins Electronics
- Kalamazoo — John Rallins
- Lapeer — Computer Corner
  User Friendly
- Lowell — Curt's Sound & Home Arcade Center
- Mt Morris — Shop And Save
- Muskegon — The Eight Bit Corner

Novi	MI Software Dist., Inc.
Okemos	Software City
Owosso	C/C Computer Systems
	Hi-Fi Audio Co.
Perry	Perry Computers
	Perry Oil & Gas
Pontiac	Computer Shack
Roseville	New Horizons
Royal Oak	Software City
St Johns	Clinton Electronics
Southfield	Software City
Sterling Heights	Sterling Book Center
Utica	Byte By Byte
Wyoming	Gerry's Book Co.

MINNESOTA

Minneapolis	Read-More News

MISSISSIPPI

Grenada	Stereo Store of Grenada, Inc
Gulfport	Computerland

MISSOURI

Kansas City	Midwest CoCo Systems
St Louis	Magic World
	Software Centre
	Computer Xchange
University City	Final Edition

MONTANA

Sydney	Tomalino's Electronics

NEBRASKA

Lincoln	Hobby town
Omaha	Computers & Components

NEVADA

Las Vegas	Hurley Electronics

NEW HAMPSHIRE

Peterborough	Radio Shack
Portsmouth	Portsmouth Computers
West Lebanon	Verham News Corp

NEW JERSEY

Bergenfield	Software City
Cedar Knolls	Village Computer & Software
Cherry Hill	Software City
Clinton	Micro World II
Eatontown	The Program Store
Lawrenceville	Micro Con Software Center
Linwood	Software City
Marmora	Outpost Radio Shack
Montvale	Software City
Morristown	Software City
Nahwah	Computer Discount of N.J
Pennsville	Dave's Elect. Radio Shack
Pinebrook	Software City
River Edge	Software City
Rockaway	Software Station
Summit	Software City
Teaneck	Software City
Wayne	Wayne Software

NEW MEXICO

Albuquerque	East West Enterprises
	Page One Newsstand
	Salt of the Earth
Los Alamos	Sound Center — Radio Shack

NEW YORK

Brockport	Lift Bridge Book Shop, Inc
East Syracuse	The Data'Phile Co.
Fairport	Software City
Hudson Falls	G A West & Co
Johnson City	Unicorn Electronics
Melville	Imperial News
Mt. Kisco	Software City
New York	Barnes & Noble—Sales Annex
	Coliseum Books
	Eastern Newsstand
	Grand Central Station, Track 37
	200 Park Ave. (Pan Am #1)
	55 Water Street
	World Trade Center #2
	First Stop News
	Idle Hours Bookstore
	International Smoke Shop
	Joni Smoke
	Penn Book
	State News
	Usercom Systems, Inc
	Walden Books
	World Wide Media Services
N. White Plains	Software City
Plattsburg	Adirondack Computer Supplies
Rochester	Village Green
	World Wide News
Syracuse	Programs Plus
Woodhaven	Spectrum Projects

NORTH CAROLINA

Aberdeen	King Electronics
	Radio Shack
Cary	It's Just For You, Inc
Charlotte	Software City
	Newsstand Int'l
	Papers & Paperback
Havlock	Computer Concerns
Hickory	C² Books & Comics
Marion	Boomers Rhythm Center
Raleigh	D.J.'s Book and News
	Softmart
Winston-Salem	K & S News Stand

NORTH DAKOTA

Fargo	Computer Associates

OHIO

Canton	Little Professor Book Center
	Software Centre International
Cincinnati	Cinsoft
Cleveland	Jerry's Computer
Columbus	The Program Store
Coshocton	Utopia Software
Dayton	Wilke News
Fairborn	News-Readers
Kent	The News Shop
Kenton	I W Hogan & Associates
Lakewood	Lakewood International News
Lima	Brunner News Agency
	Edu-Caterers
Lorain	Computer Network
Mansfield	PCLEAR 80
Mayfield Heights	Programs Unlimited
	Software City
Miamisburg	Wilke News
Niles	Computer Showcase
Rocky River	Programs Unlimited
Toledo	Leo's Book & Wine Shop
	Reitz Electronics
Westerville	Home Computer Store

OKLAHOMA

Duncan	Computers 'N' Stuff
Muskogee	Radio Shack
Oklahoma City	Merit Micro Software
Stillwater	D Data
Tulsa	The Computer Store

OREGON

Aloha	B. Color Computer and Software
Hermiston	Lee's TV & Radio Clinic
Medford	John's News Stand
Portland	80-Plus

PENNSYLVANIA

Allison Park	Software City
Altoona	Newborn Enterprises
Greensburg	The Program Store
Harrisburg	Harrisburg News Co.
Malvern	Personal Software
Philadelphia	City Software Center
	Newsy
Phoenixville	Stevens Radio Shack
Pittsburgh	All-Pro Souveniers
Pleasant Hills	PIH Computer & Software
Plymouth Meeting	The Program Store
Pottstown	Video Programming, Inc.
Shippensburg	Rainbow Adventure
Tunkhannock	The Donna Comm. Co.
Warrington	Software—N—Stuff
Whitehall	Software City
Williamsport	Shade Tree
York	The Computer Center of York

RHODE ISLAND

Newport	Kelly's Variety
Warwick	Software Connection

SOUTH CAROLINA

Charleston Hts	SoftwareHaus, Inc
Beaufort	Data Byte Computer Center
Greenville	Palmetto News Co.
Hilton Head	Megatron Corporation
Spartanburg	Software City
Union	Fleming's Electronics

TENNESSEE

Chattanooga	Anderson News Co.
Dickson	Highland Electronics
Knoxville	Anderson News Co
	First Byte Computer Co
Memphis	Computer Center
	Software, Inc
	Tobacco Corner Newsroom
Nashville	Campus Computer Corp.
	Mills Book Store
	Maska's Book Store
Smyrna	Delker Electronics

TEXAS

Austin	Austin News Agency, Inc.
	Capital Microcomputers
Beeville	Bee Electronics
Conroe	Crouchet Electronics
Dallas	Dallas Computer Center
	Software Concepts
Elgin	The Homing Pigeon
Ft Worth	Byteworks, Inc.
	RFI Electronics
	Software Terminal
Houston	Compu Kit
	MicroSolutions
Irving	Software Access
Paris	Software Solutions
San Antonio	Coles Computer Center

UTAH

Murray	Deseret Book
Ogden	Computer City
Salt Lake City	Quality Technology

VIRGINIA

Alexandria	Alonso Book & Periodical
Falls Church	The Program Store
Gaston	Electronics Marketing
Norfolk	I-O Computers
Richmond	Software City

WASHINGTON

Bellevue	Software City
Mount Lake Terrace	Emerald Computer Services
Renton	Data Borne
Seattle	Adams News Co., Inc
Spokane	Bits, Bytes & Nibbles
Tacoma	Nybbles 'N Bytes

WEST VIRGINIA

Logan	Stan's Electronics & Radio Shack
Parkersburg	Valley News Service

WISCONSIN

Appleton	Badger Periodicals
Cudahy	Cudahy News & Hobby
Janesville	Book World
Ladysmith	Electronics, Etc
Milwaukee	Book Tree
	Booked Solid
	Booked Solid II
	Harvey Schwartz Bookshop
	Univ. of Wiscans n Bookshop

WYOMING

Casper	the Computer Store

AUSTRALIA:
SYDNEY

Kingsford	Paris Radio Electronics

CANADA:
ALBERTA

Athabasca	McLeans Ltd
Barrhead	Barrhead Sound 1982 Ltd
Brooks	Double "D" A.S.C. Radio Shack
Calgary	Imperial Computer Ltd
Camrose	Radio Shack Associated Stores
Claresholm	Radio Shack Associated Stores
Coaldale	Coaldale Sight & Sound
Drayton Valley	Langard Electronics
Edmonton	CMD Micro
	Kelly Software Distributors
Edson	Radio Shack
Fairview	D.N.R. Furniture & TV
Fox Creek	Fox City Color & Sound
Ft. Macleod	Radio Shack
Grande Cache	the Stereo Hut
Grande Centre	The Book Nook
Grande Prairie	Northern Computer Service
Hanna	Technics TV Ltd
Leduc	Radio Shack Associated Stores
Lloydminster	Radio Shack Associated Stores
Peace River	Radio Shack Associated Stores
Pincher Creek	Thornton & Son's
Red Deer	Computerworld
St. Paul	Tele-Logic
Taber	Pynewood Sight & Sound
Valleyview	Don's Radio Shop
Vermilion	Photocraft Vermilion Ltd
Wetaskiwin	Radio Shack

BRITISH COLUMBIA

Burnaby	Compufil
Ft. St. John	Ken Dawson
N. Vancouver	Microwest Distributors
Victoria	International Software

MANITOBA

Winnipeg	J & J Electronics Ltd

NOVA SCOTIA

Dartmouth	Sector Software
Halifax	Atlantic News

ONTARIO

Bowmanville	Bowmanville Audio Visian LTD
Etobicoke	MEPCOM
Hamilton	Galts Book World
Kincardine	Prism Software
Kingston	T.M. Computers
London	Multi-Mag
Ottawa	National News Co., Ltd

QUEBEC

LaSalle	Messageries de Presse Benjamin Enr
Sherbrooke	Soc. De Loc

SASKATCHEWAN

Regina	George Glass
Saskatoon	Computertime

YUKON

Whitehorse	Big Byte Computer Services
	H & H Electronics

PUERTO RICO

San Juan	Software City

Also available at all Waldenbooks, Coles and selected B. Dalton Bookseller stores in the United States and Canada.

ADVERTISER'S INDEX

We encourage you to patronize our advertisers — all of whom support the TRS-80 Color and TDP System-100 computers. We will appreciate your mentioning THE RAINBOW when you contact these firms.

A & P Software 49
Analog Micro Systems 121
Arizona Discount Software ... 252
Ark Royal Games 24
Armadillo International Software 150
Aurora Software 112, 207
B & B Software 57
B5 Software 114
Basic Technology 239
Botek Instruments 101
Calc-Soft 136
Carnival House 7
Cer-Comp 202
Challenger Software 21
Chromatic 188
CoCoINDX 213
CoCo Warehouse 62
Cognitec 13
Color Connection Software 10
Color Micro Journal 262
Color Power Unlimited, Inc. 9
Color Software Services 43
Colorware 26, 27
CompuKit 48
Computer Accessories of Arizona 230
Computer Island 234, 235
Computer Plus 3
Computer Systems Center 95, 209
Computerware 58, 59
Computize, Inc. 273
Cosmos Computer Services, Inc. 110
Counterpoint Software, Inc. 8
Custom Computer Products ... 40
Custom Software Engineering 226
Data-Comp 151
Dataman 189
Dayton Associates Of W.R. Hall, Inc. 192
Deft Systems, Inc. 41
Delker Electronics 93
Derringer Software 97, 108, 212, 227
DISK-HAVEN PRODUCTS 203
Dorison House Publishers, Inc. 195
Dorsett 28
Double Density Software 82,83
Dragon User 223
DSL Computer Products 261
DSS Pheripherals Corporation 132
Dugger's Growing Systems 64
E.D.C. INDUSTRIES 216
EAP Co. 165
Eaton Computer Products 100
Elite Software 30, 31
Emerald Computer Service ... 207
Endicott Software 85
B. Erickson 114
Evans Enterprises 205
EVS 11
External Events Software Co. 173
Federal Hill Software 137
GIMIX 274
Great Plains Computer Company, Inc. 248
Green Mountain Micro 269
Harvard Design 56
Hawkes Research Services ... 258
HJL 113
Frank Hogg Laboratory 254, 255
Howard Medical 34
Incentive Software 198
Intracolor 54
JARB Software 17, 68
The JBM Group, Inc. 222
D.P. Johnson 230
Kelly Software Distributors ... 100
Key Color Software 180
KRT Software 215
Lloyd I/O 258
Mark Data Products 66, 87, 182, 183
Marymac Industries 181
Merrick & Co. 206
Metric Industries 44
Metro Electronics 117
MichTron 33, 35, 37
Micro Computer Systems 20
Micro Magic 72
Micro R.G.S., Inc. 77
The Micro Works 15
Microcom Software 29
Microware Systems Corporation 191, 249
Tom Mix Software ..... IFC, 166, 167, 168, 169
Morelon Bay 79
Nelson Software Systems 45, 46, 47
Oelrich Publications 60
The Other Guys Software..... 221
Owl's Nest Software 210
Owl-Ware 69
P.B.H. 89
Pal Creations 106
Parsons Software 50
PBJ, Inc. 219
Perry Computers 111
Petrocci Freelance Associates 98
Polygon Co. 224
Dr. Preble's Programs ..... IBC
Prickly-Pear Software 129
PXE Computing 55
QCS (Quality Christian Software) 86
Radio Shack 146, 147
Rainbow Simulation Contest 264
RAINBOW ON TAPE 126
RAINBOWfest 199
Ram Publications 14
RC Creations 203
Reitz Electronics 186
REM Industries 104
Robotic MicroSystems 205
Saguaro Software 197
Selected Software 242
Six-Pack Ribbons 16
Skyline Marketing 233
The Soft Shop 225
SOFTECH 212
Softlaw Corporation 45, 46, 47
Software Connection 225
Software Plus 221
Software Support, Inc. ... 178, 179
Solid Software 218
Sonburst Software 88
Spectral Associates ..... BC
Spectrum Projects ..... 153, 154 ..... 155, 157, 161, 162, 163
Speech Systems 214
Star-Kits 211
Sugar Software 70, 71, 217
Syntactics 177
T & D Software 256
TCE Programs, Inc. 103
Tri-Tech Electronics 204
True Data Products 149
Vidtron 20, 21
Wasatchware 206
The West Bay Company 228
Woodstown Electronics 201
Workbase Data Systems 105
YGS 231
York-10 ..... 124, 125

GIMIX STATE OF THE ART 6809 SYSTEMS FOR THE SERIOUS USER.

GIMIX has 19MB or high performance 47MB Winchester Drive Systems and/or Floppy Disk Drive Systems.

For the user who appreciates the need for a bus structured system using STATIC RAM and powered by a ferro resonant constant voltage transformer.

GIMIX has single user systems that can run both FLEX and OS-9 or Multi user systems for use with UniFLEX or OS-9.

GIMIX versions of OS9 and UniFLEX include maintenance and support by Microware (90 days) and TSC (1 year). Maintenance and support after this period are available at extra cost.

(NOTE: this support and maintenance is only for use with approved GIMIX hardware)

For the ultimate in performance, the Unique GMX 6809 CPUIII, using either OS-9-GMXIII or UniFLEX GMXIII (available shortly), gives protection to the system and other users from crashes caused by defective user programs. e.g. During program development, a programmer who crashes goes back to the shell or the debugger, while the other users are not even aware anything occurred.

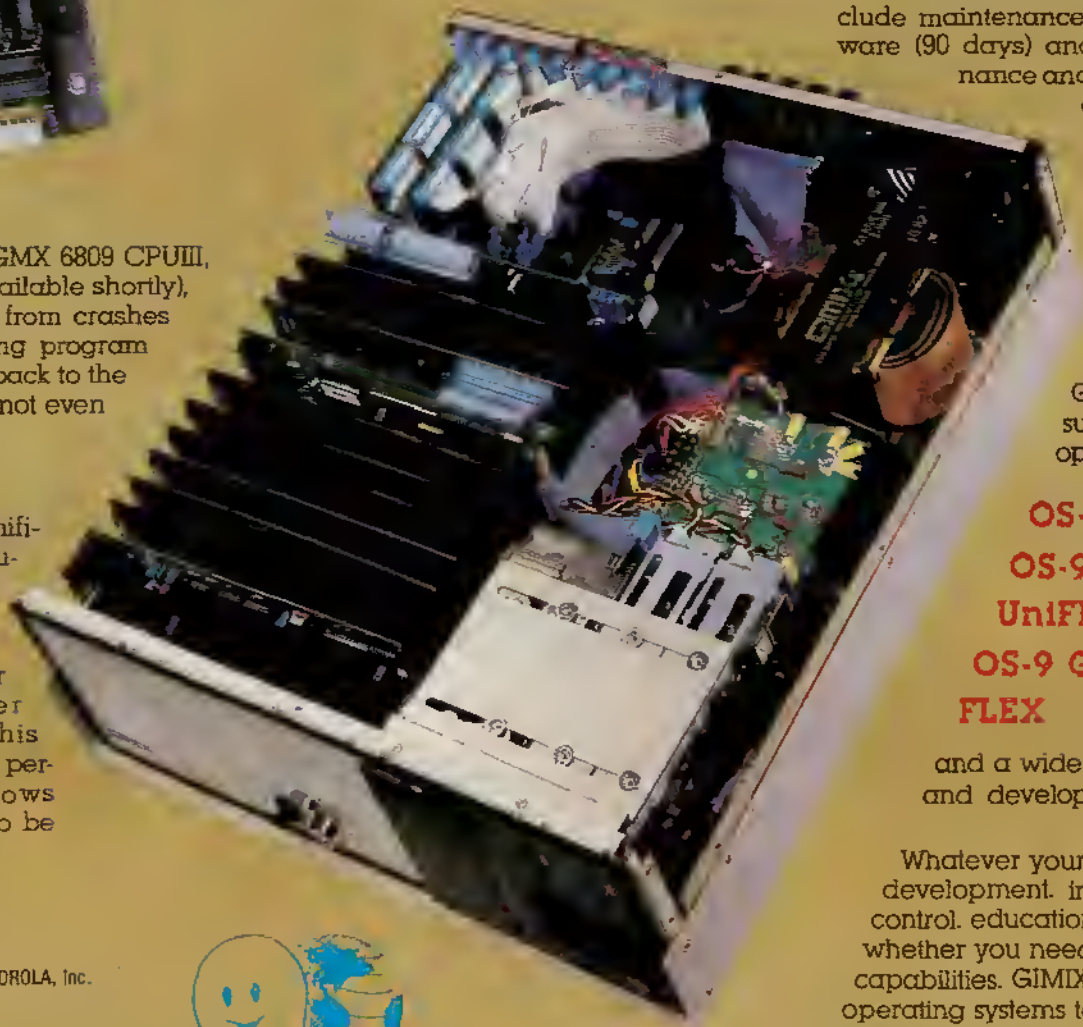

The intelligent serial I/O processor boards significantly reduce system overhead by handling routine I/O functions, thereby freeing up the host CPU for running user programs. This speeds up system performance and allows multiple terminals to be used at 19.2K baud.

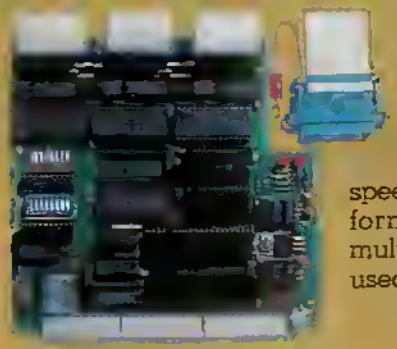

GIMIX 6809 systems support five predominant operating systems:

OS-9 GMX III,
OS-9 GMX II,
UniFLEX,
OS-9 GMX I,
FLEX

and a wide variety of languages and development software.

Whatever your application: software development, instrumentation, process control, educational, scientific or business, whether you need single or multi-user capabilities, GIMIX has hardware and the operating systems to get the job done reliably.

Please phone or write if you need further information.

BASIC-09 and OS-9 are trademarks of Microware Systems Corp. and MOTOROLA, Inc.
FLEX and UniFLEX are trademarks of Technical Systems Consultants, Inc.
GIMIX, GHOST, GMX, CLASSY CHASSIS, are trademarks of GIMIX, Inc.

GIMIX inc.

BACK IT UP!

SUPER BACK-UP UTILITY*

„WITH S.B.U. FROM COMPUTIZE · YOU'LL NEVER NEED ANOTHER BACK-UP UTILITY FOR YOUR COCO!!!

SUPER BACK-UP UTILITY WILL PERFORM ALL OF THE FOLLOWING FUNCTIONS:

1. **TAPE TO TAPE** (Regardless of most protection schemes!)
2. **TAPE TO DISK** (Move Cassette programs to Disk!)
3. **AUTO RELOCATE** (For those Cassette programs that conflict WITH Disk operating systems.)
4. **DISK TO TAPE** (Place Disk programs onto Cassette!
5. **DISK TO DISK** (Our powerful Spit-N-Image Program, Regardless of protection schemes!)

- **MENU DRIVEN!**
- **REQUIRES 32K EXTENDED COCO**
- **REQUIRES 1 OR 2 DRIVES** (For Disk Functions)
- **ALL MACHINE LANGUAGE!!!**

COMPARE WITH OTHER INDIVIDUAL PROGRAMS COSTING IN EXCESS OF $100.00 OR MORE!!!

★★★ONLY $49.95!★★★
(SUPPLIED ON DISK)

GRAPHICOM

Simply stated - the finest graphics program written for the COCO (or any other computer)!

FEATURES

RAINBOW

- U·S·E·R F·R·I·E·N·D·L·Y!
- 4 Modes (Including Hi-Res Artilac!)
- Animatic Mode
- Color Palate with over 15 color patterns for use with Hi-Res Artilac!
- Send/Receive pictures over standard modem at 300, 600 or 1200 baud.
- Supplied utility allows capturing Hi-Res Screens from most COCO arcade type games (Even protected ones)
- Multiple Hi-Res character fonts (user changable & definable)
- Supplied utility for transforming graphicom screens to basic or other M/L Programs
- Supplied utility for loading screens from basic or other sources
- Built in Screen print (Pre-defined for Epson, C-Itoh, RS LP VII, LP VIII, DMP 100, DMP 200, DMP 120, GCP 115, GEMINI 10, and OKI) 110 to 9600 baud
- Slow scan television send/receive options
- Many additional features, operating hints, hardware mods and suggestions, etc. etc!

★ EASY TO LEARN GRAPHIC MENU ★

REQUIRES 64K COCO - 1 DRIVE - JOYSTICKS

$24.95

DPRINT*

Transfers to your printer the ASCII and Hexidecimal contents of a disk by entire file, individual sectors or granules

Use for De-Bugging or as an Educational Tool.

REQUIRES 32K EXT. COCO, 1 OR MORE DRIVES, & PRINTER

SUPPLIED ON CASSETTE - $19.95

SPIT-N-IMAGE (C)

M/L Disk Back-Up Utility

RAINBOW

There is no need to suffer the heartbreak of crashed disks any longer. Spit-N-Image will create a mirror image of your valuable disk programs which do not respond to normal back-up functions. Will also initialize and back-up in one pass. Data processing experts always insist on having a back-up – it's good practice – Don't wait!

REQUIRES 32K CC AND 1 OR MORE DRIVES

CASSETTE $29.95 DISKETTE $34.95

T.T.U. – TRIPLE TRANSFER UTILITY (C)

M/L For Cassette & Disk Program Transfer

Transfer contents of disk to tape · Transfer contents of tape to disk · "Select" or "All" Option · Will automatically relocate those cassette programs that conflict with the disk operating system · Will display machine language program address · Copies ASCII Basic & Machine Language Programs · All contained in 1 menu driven program!!!

RAINBOW

REQUIRES 32K CC EXT.

Cassette $19.95 Disk $24.95

OS-9 ★★★★★ "CONVERT" ★★★★★

New - From Compelize

This high quality M/L Utility will CONVERT Standard OS-9 Formatted Files/Disks (5¼") to Radio Shack OS-9 to run on your COCO. Will also convert 40 track to 35 track if you require. Runs under COCO OS-9

REQUIRES 64K COCO AND 2 DRIVES

SUPPLIED ON DISK ONLY $49.95

THE PEEPER

A Unique Interrupt-Based Program Tracer
From Spectro Systems

Imagine being able to monitor the operation of a machine-language program While It Is Running. To display any portion of memory in any of Coco's 26 documented display modes and to move through memory using the arrow keys. To slow the action to a crawl or freeze it all will instantly switch between watching the output of your program and watching Peeper dynamically display (on screen or printer) the contents of the 6809's registers and stack, showing changes as they are happening. In the slowest speed mode, Peeper provides continuous single-stepping, faster modes give a constant trace. Or hit the action-and single-step by repeatedly pressing the space bar. Peeper supports breakpoints, memory examine/change and more. Think how much easier it would be to modify someone else's M/L software if you could determine what routines were being executed at any given point!

For fun (and this requires no M/L experience) use Peeper with arcade games, watching the fine details of the animation effects in slow motion. See how the game looks and plays in other graphics modes. Or watch what is happening on "hidden screens" you never see. (Makes a superb demonstration.)

REQUIRES 16K COCO
ON CASSETTE (COPYABLE TO DISK)
WITH *ASSEMBLER LISTING*

$24.95

New! **G.C.U.**

GRAPHICOM UTILITY

- * MULTI DRIVE - COPY PICTURE FROM ONE DISK TO ANOTHER.
- * KILL (BLANK OUT) INDIVIDUAL PICTURES ON A PIX DISK.
- * EASILY LOAD BINARY FILE TO PICTURE LOCATION.
- * DISPLAY INDIVIDUAL PICTURE.

Disk $19.95

Send for your
GRAPHICOM
Picture Disk Catalog

TAPE SPOOLER*

- Re-direct printer output to cassette for later printing or archival
- Uses 310 byte machine language driver which is appended to basic programs
- After 1 call, all print #-2 basic statements reduced all printer output to cassette
- Can be turned on and off while your basic program is running
- Can write to cassette and printer at same time
- Absolutely no change to printer formats
- All control codes normally sent to printer will be captured to the cassette with printed data
- Supplied utility will print from tape, convert the tape to a disk file, print the converted disk file and print multiple copies of either the tape or disk (multiple copy function cannot process files greater than 14 790 characters)
- Great for generating 2 seperate reports from the same file on a single pass
- Use as a "printing press" for generating multiple copies of meeting notices, ads, circulars, your name it!
- Share a printer!! Take your "Saved Printout" on tape to a friend that has a printer!

REQUIRES 32K EXT. COCO & CASSETTE
(DISK · PRINTER OPTIONAL)

CASSETTE $21.95

FUJI FILM FLOPPY DISK

MD1D

One sided Double Density

Soft-Sectored, With Hub Ring

Box of 10 — $26.95

Check or M.O. MasterCard VISA

Add $2.00 Shipping
PA Res. add 6% sales tax

P.O. BOX 207
LANGHORNE, PA 19047

215-946-7260

COMPUTIZE, INC

Help Us Battle the High Cost of Disk Drives

Un-DISK Drives $49.95?

You Bet! There are empty spaces in your 32K and 64K CoCo. The Preble VDOS Un-DISK helps you fill them up with PROGRAMS!

- Un-DISK uses your computer's extra memory like a fast disk drive.
- Un-DISK can store BASIC and MACHINE LANGUAGE programs.
- Un-DISK is INVISIBLE. Yup! Un-DISK does not interfere with normal Color Computer Operation.
- Un-DISK appears only when you type the magic word VDOS.
- Un-DISK comes with comprehensive instructions which you may not need because:
- Un-DISK is self-prompting and easy to use!
- Un-DISK is provided on cassette.
- Un-DISK is faster than a slow clumsy DISK DRIVE and best of all . . .
- Un-DISK is CHEAPER than a DISK DRIVE!
- Un-DISK will work even if you already own a disk but WHY BUY A DISK AT ALL?
- Un-DISK should be in the library of every serious CoCo user even if you own a disk says Frank J. Esser, independent reviewer for RAINBOW Magazine!

OK sure, disk drives ARE NICE. I own one. But if your finances are limited, the Un-DISK can give you much of the power of the mechanical drive. Even if you already own a disk the Un-DISK can work like a super fast extra disk.

EXTRA . . . EXTRA . . . EXTRA . . . EXTRA . . .
Additional Power For $14.95

Only with VDUMP for the Un-DISK!

- VDUMP lets you make a cassette backup copy of everything stored in the Un-DISK.
- VDUMP lets you save 5, 10, 15 or more programs on a single cassette tape file.
- VDUMP lets you switch Un-DISKs. With a single load operation replace a group of financial programs with a set of children's programs. (The new VDUMP tape overwrites the old.)
- VDUMP can allow you to save a whole lot of RAINBOW ON TAPE in a SINGLE file.
- VDUMP is the perfect companion to the Preble VDOS Un-DISK.

Available from Doctor Preble's Programs, naturally! Bringing you fine Color Computer Products Since 1983!

The Preble VDOS Un-DISK $49.95
The Preble VDUMP $14.95
Shipping & handling
U.S. and Canada $1.50
or $5.00 to other foreign points

VISA and MasterCard accepted

DR. PREBLE'S PROGRAMS SINCE 1983

Order From:
Dr. Preble's Programs
6540 Outer Loop
Louisville, KY 40228
(502) 966-8281
Canadians may order from Kelly Software

SPECTRAL ASSOCIATES 3416 SOUTH 90th, TACOMA, WASHINGTON 98409 (206) 581-6938

COLOR BASIC UNRAVELLED

COLOR BASIC UNRAVELED

Have you ever wondered how Color Basic does all of those wonderful tricks it does?

- How does it multiply & divide so fast?
- How can it paint the screen so fast?
- How does it know where to GOTO or GOSUB?
- How does it turn all of those graphic dots on and off?
- How does it get information on and off of that little diskette?

Now you can find out for yourself.

Color Basic is a set of three books that will provide you with a COMPLETE COMMENTED SOURCE LISTING OF TRS-80 COLOR, EXTENDED and DISK BASIC.

The listing will enable you to determine exactly how Basic works. An explanation of the Color Basic Interpreter is included.

ORDERS ONLY
1-800-426-1830
EXCEPT WA,AK,HI

"Color BASIC 1.2/Ext. BASIC 1.1/ Disk BASIC 1.1"

- FULLY COMMENTED - NO HOLES
- ALL FCBs, FDBs and FCCs defined.
- COMPLETE MEMORY MAP - no missing spaces, everything is defined.
- PROGRAMMING TRICKS EXPLAINED
- EASY TO UNDERSTAND
- MOST RECENT ROM VERSIONS

COLOR BASIC UNRAVELED	$19.95
EXTENDED BASIC UNRAVELED	$19.95
DISK BASIC UNRAVELED	$19.95
	All 3 for $49.95

BUSINESS OFFICE HOURS
MONDAY - FRIDAY
8:30 - 4:30 P.D.T.
(206) 581-6938